

Prep Standard - Chemical Standard Summary**Order ID :** N6070**Test :** VOCMS Group3**Prepbatch ID :****Sequence ID/Qc Batch ID:** vx121522,**Standard ID :**

VP113990,VP115359,VP115432,VP115433,VP116911,VP117244,VP117471,VP117542,VP117544,VP117545,

Chemical ID :

V10601,V11274,V11275,V12010,V12080,V12224,V12411,V12412,V12684,V12685,V12757,V12766,V12779,V12780,V12865,V12866,V12867,V12886,V12889,V13016,V13049,V13051,V13052,V13077,V13078,V13187,V13189,V13213,V13214,V13224,V13363,V13371,V13372,V13373,V13374,W2606,

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
719	8260 Working STD (BCM)-First source, 400PPM	VP113990	07/28/2022	01/28/2023	Semsettin Yesilyurt	None	None	Mahesh Dadoda 07/29/2022
<u>FROM</u> 1.00000ml of V12757 + 1.00000ml of V12766 + 1.00000ml of V12865 + 1.00000ml of V12866 + 1.00000ml of V12867 + 20.00000ml of V13016 = Final Quantity: 25.000 ml								

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
1810	8260 Working Std(2-CVE)-800ppm	VP115359	09/14/2022	03/14/2023	Semsettin Yesilyurt	None	None	Mahesh Dadoda 09/14/2022
<u>FROM</u> 1.00000ml of V11274 + 1.00000ml of V11275 + 1.00000ml of V12779 + 1.00000ml of V12780 + 46.00000ml of V13224 = Final Quantity: 50.000 ml								

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

VOC STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
247	8260 Internal Standard, 250PPM	VP115432	09/16/2022	01/15/2023	Semsettin Yesilyurt	None	None	Maresh Dadoda
09/19/2022								

FROM 0.25000ml of V12080 + 24.75000ml of V13224 = Final Quantity: 25.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
617	8260 Surrogate, 400PPM	VP115433	09/16/2022	03/14/2023	Semsettin Yesilyurt	None	None	Maresh Dadoda
09/19/2022								

FROM 0.40000ml of V12010 + 24.60000ml of V13224 = Final Quantity: 25.000 ml

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

VOC STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
257	8260 Calibration Working STD Mix-First source, 160PPM	VP116911	11/15/2022	12/19/2022	Semsettin Yesilyurt	None	None	Mahesh Dadoda 11/16/2022

FROM 0.40000ml of V12224 + 1.00000ml of V12411 + 1.00000ml of V12412 + 1.00000ml of V12684 + 1.00000ml of V12685 +
 1.00000ml of V12886 + 1.00000ml of V12889 + 1.00000ml of V13077 + 1.00000ml of V13078 + 1.00000ml of V13187 +
 1.00000ml of V13189 + 1.30000ml of V13051 + 1.30000ml of V13052 + 1.40000ml of V13049 + 10.60000ml of V13213 = Final
 Quantity: 25.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
51	8260 Working STD (Acrolein) -first source, 800PPM	VP117244	11/30/2022	12/28/2022	Semsettin Yesilyurt	None	None	Mahesh Dadoda 12/02/2022
<u>FROM</u>	0.40000ml of V13374 + 1.20000ml of V13371 + 1.20000ml of V13372 + 1.20000ml of V13373 + 21.00000ml of V13363 = Final Quantity: 25.000 ml							

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

VOC STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
218	BFB, 25PPM	VP117471	12/12/2022	06/12/2023	Semsettin Yesilyurt	None	None	Krupa Patel
								12/14/2022

FROM 0.25000ml of V10601 + 24.75000ml of V13214 = Final Quantity: 25.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
589	BFB TUNE CHECK	VP117542	12/15/2022	12/16/2022	John Carlone	None	None	Mahesh Dadoda
								12/15/2022

FROM 39.98400ml of W2606 + 0.01600ml of VP117471 = Final Quantity: 40.000 ml

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
620	50 PPB CCC, 8260-Water	VP117544	12/15/2022	12/16/2022	John Carlone	None	None	Mahesh Dadoda 12/15/2022
<u>FROM</u>	39.94450ml of W2606 + 0.00500ml of VP113990 + 0.00500ml of VP115433 + 0.00800ml of VP115432 + 0.01250ml of VP115359 + 0.01250ml of VP116911 + 0.01250ml of VP117244 = Final Quantity: 40.000 ml							

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
620	50 PPB CCC, 8260-Water	VP117545	12/15/2022	12/16/2022	John Carlone	None	None	Mahesh Dadoda 12/15/2022
<u>FROM</u>	39.94450ml of W2606 + 0.00500ml of VP113990 + 0.00500ml of VP115433 + 0.00800ml of VP115432 + 0.01250ml of VP115359 + 0.01250ml of VP116911 + 0.01250ml of VP117244 = Final Quantity: 40.000 ml							

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30067 / BFB tuneing solution	A0147670	12/12/2023	12/12/2022 / SAM	01/09/2020 / sam	V10601

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95318 / 2-Chloroethyl Vinyl Ether (Min = 5)	082620	03/14/2023	09/14/2022 / SAM	09/18/2020 / sam	V11274

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95318 / 2-Chloroethyl Vinyl Ether (Min = 5)	082620	03/14/2023	09/14/2022 / SAM	09/18/2020 / sam	V11275

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	555582 / Custom Mixture, 8260 A/B Surrogate Mix [CS 5179-2]	A0173020	03/16/2023	09/16/2022 / SAM	06/04/2021 / SAM	V12010

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	555581 / Custom Standard, 8260 Internal Std [CS 5179-1]	A0173600	01/15/2023	07/15/2022 / SAM	06/22/2021 / SAM	V12080

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30470 / VOA Stock Solution, tert-butanol std, 1mL, P&TM	A0168291	01/25/2023	07/25/2022 / SAM	10/15/2021 / SAM	V12224

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95319 / Revised Additions Mix (Min = 5)	031921	04/14/2023	10/14/2022 / SAM	11/30/2021 / SAM	V12411

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95319 / Revised Additions Mix (Min = 5)	031921	04/14/2023	10/14/2022 / SAM	11/30/2021 / SAM	V12412

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30042 / VOA Mix,500 series method 502.2 Calibration Std #1 gases, 2000uq/ml, PTM, 1ml	A0177872	04/14/2023	10/14/2022 / SAM	03/07/2022 / SAM	V12684

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30042 / VOA Mix,500 series method 502.2 Calibration Std #1 gases, 2000uq/ml, PTM, 1ml	A0177872	04/14/2023	10/14/2022 / SAM	03/07/2022 / SAM	V12685

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul	A0176219	01/28/2023	07/28/2022 / SAM	03/25/2022 / SAM	V12757

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul	A0176219	01/28/2023	07/28/2022 / SAM	03/25/2022 / SAM	V12766

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95318 / 2-Chloroethyl Vinyl Ether (Min = 5)	121321	03/14/2023	09/14/2022 / SAM	03/30/2022 / SAM	V12779

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95318 / 2-Chloroethyl Vinyl Ether (Min = 5)	121321	03/14/2023	09/14/2022 / SAM	03/30/2022 / SAM	V12780

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul	A0183824	01/28/2023	07/28/2022 / SAM	04/22/2022 / SAM	V12865

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul	A0183824	01/28/2023	07/28/2022 / SAM	04/22/2022 / SAM	V12866

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul	A0183824	01/28/2023	07/28/2022 / SAM	04/22/2022 / SAM	V12867

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95317 / Universal VOA Mega Mix (Min order = 5)	042921	04/14/2023	10/14/2022 / SAM	04/26/2022 / SAM	V12886

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95317 / Universal VOA Mega Mix (Min order = 5)	042921	04/14/2023	10/14/2022 / SAM	04/26/2022 / SAM	V12889

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA9077-02 / Methanol, Purge/Trap (cs=6x1L)	0000288323	01/28/2023	07/28/2022 / SAM	07/11/2022 / SAM	V13016

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30006 / VOA Mix, CLP method Calibration Std #1 ketones 5000uq/ml, PTM, 1ml	A0179406	04/14/2023	10/14/2022 / SAM	08/12/2022 / SAM	V13049

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30006 / VOA Mix, CLP method Calibration Std #1 ketones 5000uq/ml, PTM, 1ml	A0179406	04/14/2023	10/14/2022 / SAM	08/12/2022 / SAM	V13051

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30006 / VOA Mix, CLP method Calibration Std #1 ketones 5000uq/ml, PTM, 1ml	A0179406	04/14/2023	10/14/2022 / SAM	08/12/2022 / SAM	V13052

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	555408 / Custom Standard, Vinyl Acetate Standard w/ Grav [CS 5066-6] TWO SEPARATE	A0187424	04/14/2023	10/14/2022 / SAM	08/12/2022 / SAM	V13077

LOTS

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	555408 / Custom Standard, Vinyl Acetate Standard w/ Grav [CS 5066-6] TWO SEPARATE	A0187424	04/14/2023	10/14/2022 / SAM	08/12/2022 / SAM	V13078

LOTS

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30489 / VOA Mix, 8260B Acetates Mix, P&TM, 1mL	A0186868	04/14/2023	10/14/2022 / SAM	09/01/2022 / SAM	V13187

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30489 / VOA Mix, 8260B Acetates Mix, P&TM, 1mL	A0186868	04/14/2023	10/14/2022 / SAM	09/01/2022 / SAM	V13189

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA9077-02 / Methanol, Purge/Trap (cs=6x1L)	22C2362001	05/11/2023	11/11/2022 / pedro	09/13/2022 / SAM	V13213

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA9077-02 / Methanol, Purge/Trap (cs=6x1L)	22C2362001	06/12/2023	12/12/2022 / SAM	09/13/2022 / SAM	V13214

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA9077-02 / Methanol, Purge/Trap (cs=6x1L)	0000288323	03/14/2023	09/14/2022 / SAM	09/13/2022 / SAM	V13224

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA9077-02 / Methanol, Purge/Trap (cs=6x1L)	22C2862010	05/29/2023	11/29/2022 / SAM	11/28/2022 / SAM	V13363


Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	91980 / Acrolin Std (Min = 5)	112822	12/28/2022	11/29/2022 / SAM	11/29/2022 / SAM	V13371

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	91980 / Acrolin Std (Min = 5)	112822	12/28/2022	11/29/2022 / SAM	11/29/2022 / SAM	V13372

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	91980 / Acrolin Std (Min = 5)	112822	12/28/2022	11/29/2022 / SAM	11/29/2022 / SAM	V13373

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	91980 / Acrolin Std (Min = 5)	112822	12/28/2022	11/29/2022 / SAM	11/29/2022 / SAM	V13374

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	DIW / DI Water	Daily Lab-Certified	10/24/2024	10/24/2019 / apatel	10/24/2019 / apatel	W2606



Certified Reference Material CRM



CERTIFIED WEIGHT REPORT

Part Number:

95318

Lot Number:

082620

Description:

2-Chloroethyl vinyl ether

Solvent(s):

Methanol

Lot#

DX932-US

Expiration Date:

082623

Recommended Storage:

Refrigerate (4 °C)

Nominal Concentration (µg/mL):

10000

NIST Test ID#:

23060

Weight(s) shown below were combined and diluted to (mL):

30.0

5E-05 Balance Uncertainty


0.002 Flask Uncertainty

Formulated By:	Benson Chan	DATE	082620
Reviewed By:	Pedro L. Rentas	DATE	082620

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight (g)	Actual Weight (g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information	
										(Solvent Safety Info. On Attached pg.)	LD50
1. 2-Chloroethyl vinyl ether	74	MKCD0033	10000	99	0.2	0.30284	0.30289	10001.7	40.6	110-75-8	N/A

or-rat 250mg/kg

Method: GC6MSD-1.M. Detector: MSD. Column: (60m X 0.25mm X 1.5 µm). Oven Profile: Temp 1 = 35°C (Time 1=10min.), Temp 2 = 200°C (Time 2=8.75 min.), Rate = 4°C/min., Injector B Temp = 200°C, Detector B Temp. = 220°C. Analyst: Candice Warren.

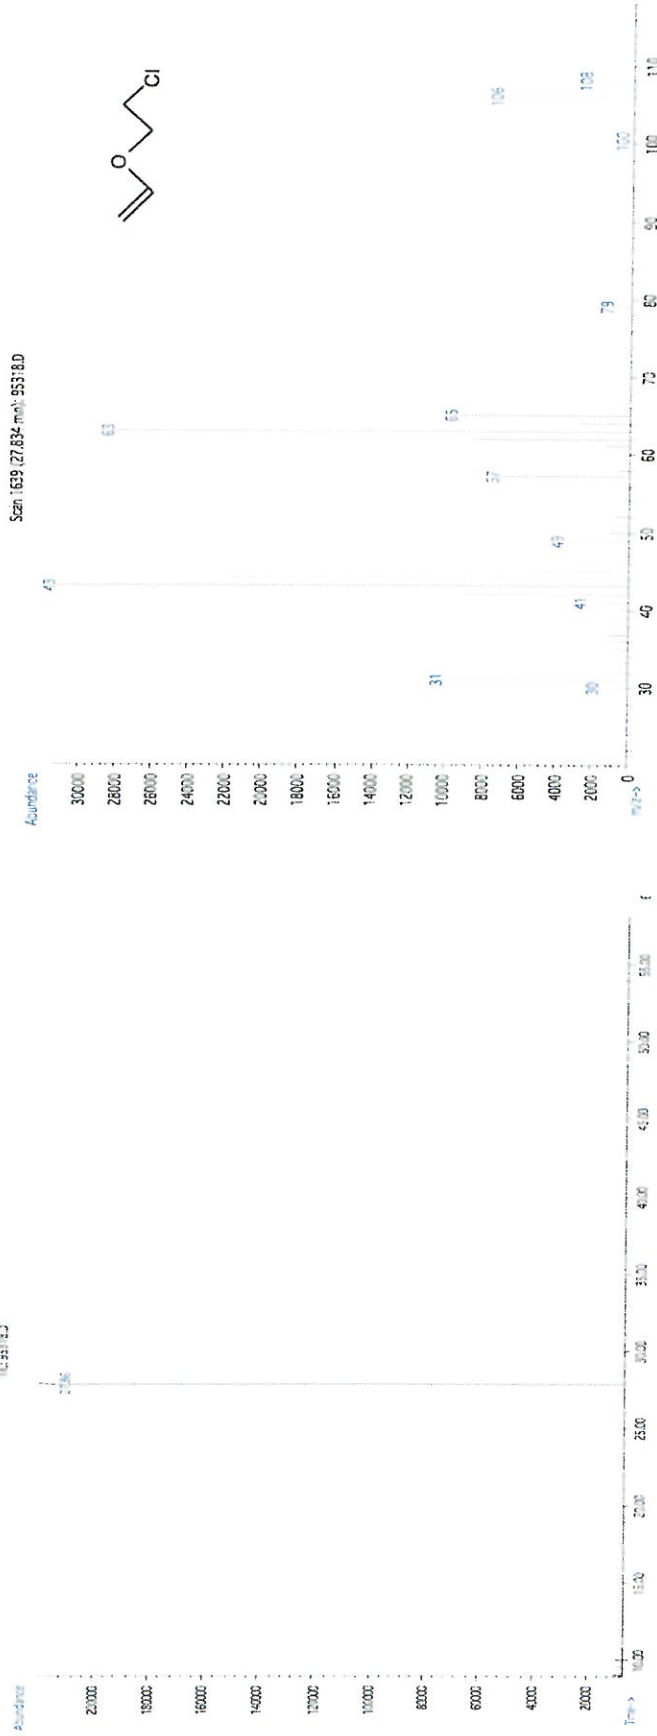

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N. and Kuyal, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

Safety Data Sheet (SDS)
GHS/OSHA Compliant

Section I Product and Company Identification




IDENTITY
ANALYTICAL STANDARD DISSOLVED IN METHANOL

Manufacturer's Name ABSOLUTE STANDARDS INC
Address 44 Rossetto Dr.
Hamden CT, 06514

Emergency Telephone USA & CANADA 1-800-535-5053
Emergency Telephone International 1-352-323-3500
Date Prepared/Revised May 1, 2015

Section II - Hazards Identification

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

H225 H370 P271 P302,332	Highly Flammable Liquid and Vapor Cause damage to organs Use in ventilated area If on skin, wash with soap and water	
H351 H370 P280 P305,351,338	Toxic if swallowed, skin contact, inhaled Suspected of causing cancer Use gloves, eye protection/face shield If in eyes, remove contacts, rinse with water	
		

Signal Word: DANGER

Section III - Composition

Components (Specific Chemical Identity; Common Name(s)) METHYL ALCOHOL
CAS#: 67-56-1
% (optional) > 97

See Certified Weight Report For Other Analytes Present At Trace Quantities.
INTENDED USE: REFERENCE MATERIAL

Section IV. FIRST AID MEASURES

General advice
If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.
If in case of skin contact, Wash with soap and water. Consult a physician.
If swallowed, Rinse mouth thoroughly with plenty of water for at least 15 minutes and consult a physician.
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

Section V. FIREFIGHTING MEASURES

Flammability
Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Wear self contained breathing apparatus for fire fighting if necessary.

Section VI. ACCIDENTAL RELEASE MEASURES

Personal precautions
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.
Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
Clean up
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

Section VII. HANDLING AND STORAGE

Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.
Storage Conditions
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

Methanol
67-56-1 TWA 200 ppm
Potential for skin absorption, ingestion and inhalation.
Personal protective equipment Respiratory protection
Handle with gloves. Gloves must be inspected prior to use. Eye protection.
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

Section IX - Physical/Chemical Characteristics

Boiling Point	65°C	Specific Gravity (H2O = 1)	0.79
Vapor Pressure (mm Hg)	96	Melting Point	-98°C
Vapor Density (AIR = 1)	1.11	Evaporation rate (Butyl Acetate = 1)	4.6
Solubility in Water	COMPLETE		
Appearance and Odor	CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR.		

Section X. STABILITY AND REACTIVITY

Chemical stability
Stable under recommended storage conditions.
Possibility of hazardous reactions
Vapours may form explosive mixture with air.
Heat, flames, sparks, extreme temperature and sunlight.
Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids
Hazardous decomposition products formed under fire conditions. - Carbon oxides

Section XI. TOXICOLOGICAL INFORMATION

LD50 Oral - rat - 5,628 mg/kg
LC50 Inhalation - rat - 4 h - 6400 ppm
LD50 Dermal - rabbit - 15,800 mg/kg
Toxic if absorbed through skin. Causes skin irritation.
Eye damage/eye irritation
Toxic if inhaled. Causes respiratory tract irritation.
Toxic if swallowed.

Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.

LC50 15,400 mg/l - 96 h
EC50 24,500.00 mg/l - 48 h
EC100 10,000.00 mg/l - 24 h

Section XIII. DISPOSAL CONSIDERATIONS

Dispose with normal Laboratory Solvent Waste.

Section XIV. TRANSPORT INFORMATION

DOT (US)
UN number: 1230 Class: 3 Packing group: II
Proper shipping name: Methanol
IATA
UN number: 1230 Class: 3 Packing group: II
Proper shipping name: Methanol

Section XV. REGULATORY INFORMATION

OSHA Hazards
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XVI. Misc. INFORMATION

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.



CERTIFIED WEIGHT REPORT

Part Number: 95318
Lot Number: 121321
Description: 2-Chloroethyl vinyl ether

Solvent(s): Methanol
Lot# EA899-US


Expiration Date: 121324
Recommended Storage: Refrigerate (4 °C)
Nominal Concentration (µg/mL): 10000
NIST Test ID#: 6UTB
Weight(s) shown below were combined and diluted to (mL): 30.0
5E-05 Balance Uncertainty
0.0003 Flask Uncertainty

Formulated By:	Benson Chan	121321
Reviewed By:	Pedro L. Rentes	121321
		DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight (g)	Actual Weight (g)	Actual Conc (µg/mL)	Expanded Uncertainty (µg/mL)	(Solvent Safety Info. On Attached pg.)	CAS#	OSHA PEL (TWA)	LD50
----------	-----	------------	----------------------	------------	--------------------	-------------------	-------------------	---------------------	------------------------------	--	------	----------------	------

1. 2-Chloroethyl vinyl ether	74	MKCD0033	10000	99	0.2	0.30320	0.30411	10030.2	40.7	110-75-8	N/A		or rat 250mg/kg
------------------------------	----	----------	-------	----	-----	---------	---------	---------	------	----------	-----	--	-----------------

Method: GC/MSD-1.M. **Detector:** MSD. **Column:** (60m X 0.25mm X 1.5 µm). **Oven Profile:** Temp 1 = 35°C (Time 1=10min.), Temp 2 = 200°C (Time 2=8.75 min.), Rate = 4°C/min.,
Injector B Temp= 200°C, Detector B Temp. = 220°C. Analyst: Candice Warren.

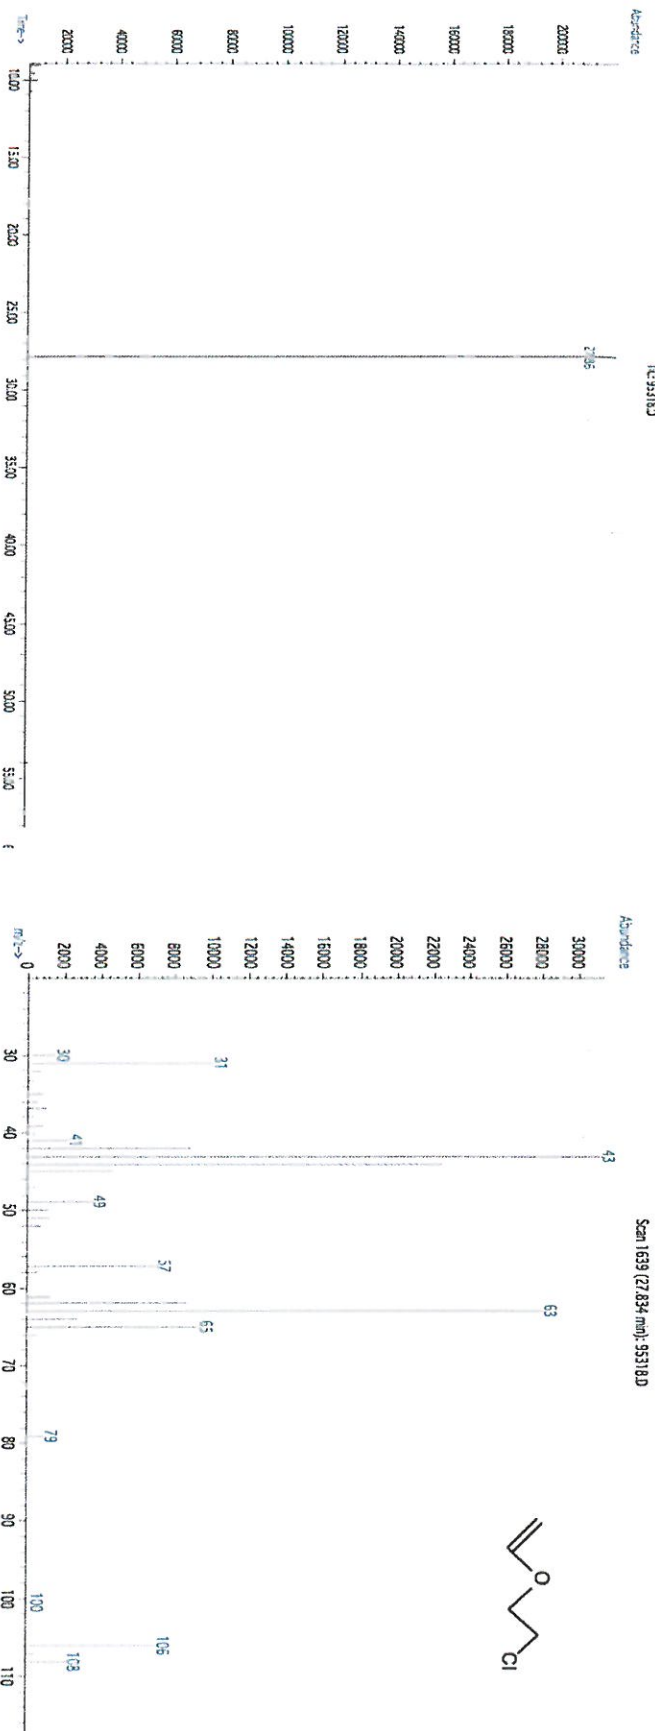

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Gravimetric Certificate



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 555582 Lot No.: A0173020

Description : Custom 8260A/B Surrogate Mix

Custom 8260A/B Surrogate Mix 25,000µg/mL, P&T Methanol, 1mL/ampul

Container Size : 2 mL Pkg Amt: > 1 mL


Expiration Date : June 30, 2024 Storage: 10°C or colder

Ship: Ambient

CERTIFIED VALUES

Component #	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)	
1	1,2-Dichloroethane-d4 CAS # 17060-07-0 (Lot PR-29377) Purity 99%	25,060.0 µg/mL	+/- 231.9100 µg/mL	Gravimetric
			+/- 1,416.6261 µg/mL	Unstressed
			+/- 1,449.2417 µg/mL	Stressed
2	1-Bromo-4-fluorobenzene (BFB) CAS # 460-00-4 (Lot 20401KO) Purity 99%	25,188.0 µg/mL	+/- 233.0945 µg/mL	Gravimetric
			+/- 1,423.8618 µg/mL	Unstressed
			+/- 1,456.6441 µg/mL	Stressed
3	Dibromofluoromethane CAS # 1868-53-7 (Lot 012021) Purity 99%	25,212.0 µg/mL	+/- 233.3166 µg/mL	Gravimetric
			+/- 1,425.2185 µg/mL	Unstressed
			+/- 1,458.0320 µg/mL	Stressed
4	Toluene-d8 CAS # 2037-26-5 (Lot PR-31750) Purity 99%	25,104.0 µg/mL	+/- 232.3171 µg/mL	Gravimetric
			+/- 1,419.1134 µg/mL	Unstressed
			+/- 1,451.7863 µg/mL	Stressed

Solvent: P&T Methanol
CAS # 67-56-1
Purity 99%


Lane Kibe - Mix Technician

Date Mixed: 03-Jun-2021

Balance: B251644995

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



Safety Data Sheet

Revision Date: 05/24/21

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name:	555582 / Custom 8260A/B Surrogate Mix
Company:	Restek Corporation
Address:	110 Benner Circle Bellefonte, Pa. 16823
Phone#:	814-353-1300
Fax#:	814-353-1309
Emergency#:	800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)
Email:	www.restek.com
Revision Number:	7
Intended use:	For Laboratory use only

2. HAZARD(S) IDENTIFICATION

Emergency Overview:

GHS Hazard
Symbols:



GHS Classification: Specific Target Organ Systemic Toxicity (STOT) - Single Exposure Category 1
Flammable Liquid Category 2
Acute Toxicity - Dermal Category 3
Acute Toxicity - Oral Category 3

GHS Signal Word: Danger

GHS Hazard: Highly flammable liquid and vapour.
Toxic if swallowed or in contact with skin.
Causes damage to organs.

GHS Precautions:

Safety Precautions: Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilation and lighting equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Do not breathe dust/fume/gas/mist/vapours/spray.
Wash hands and skin thoroughly after handling.
Do not eat, drink or smoke when using this product.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF SWALLOWED: Immediately call a POISON CENTER/doctor/....
IF ON SKIN: Wash with plenty of soap and water.
IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
IF exposed: Call a POISON CENTER or doctor/physician.
Call a POISON CENTER or doctor/physician if you feel unwell.
Specific treatment see section 4.
Rinse mouth.
Take off immediately all contaminated clothing and wash it before reuse.
In case of fire: Use extinguishing media in section 5 for extinction.

Storage: Keep container tightly closed.
Store in a well-ventilated place. Keep cool.
Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: Specific target organ toxicity - Single exposure - STOT SE 1: H370 Causes damage to organs. (C >= 10 %; No information to prove exclusion of certain routes of exposure); Specific target organ toxicity - Single exposure - STOT SE 2: H371 May cause damage to organs. (3 % <= C <10 %; Concentration limits for acute toxicity cannot be translated into GHS from the DSD especially when minimum classifications are given)

Repeated Exposure Target Organs: No data available

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS #	EINEC #	% Composition
P&T Methanol	67-56-1	200-659-6	90
1-Bromo-4-fluorobenzene (BFB)	460-00-4	207-300-2	2.5
1,2-dichloroethane-d4	17060-07-0		2.5
dibromofluoromethane	1868-53-7		2.5
toluene-d8	2037-26-5	218-009-5	2.5

4. FIRST-AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately

Eyes: Flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention.

Skin Contact: Wash with soap and water. Remove contaminated clothing and launder. Get medical attention if irritation develops or persists.

Ingestion: Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS.

5. FIRE- FIGHTING MEASURES

Extinguishing Media: Use alcohol resistant foam, carbon dioxide, or dry chemical extinguishing agents. Water may be ineffective but water spray can be used to extinguish a fire if swept across the base of the flames. Water can absorb heat and keep exposed material from being damaged by fire.

Fire and/or Explosion Hazards: Vapors may be ignited by heat, sparks, flames or other sources of ignition at or above the low flash point giving rise to a fire (Class B). Vapors are heavier than air and may travel to a source of ignition and flash back.

Fire Fighting Methods and Protection: Do not enter fire area without proper protection including self-contained breathing apparatus and full protective equipment. Fight fire from a safe distance and a protected location due to the potential of hazardous vapors and decomposition products. Flammable component(s) of this material may be lighter than water and burn while floating on the surface.

Hazardous Combustion Products: Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment: Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.

Methods for Clean-up: Prevent the spread of any spill to minimize harm to human health and the

environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions:	Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. Use spark-proof tools and explosion-proof equipment
Storage Technical Measures and Conditions:	Store in a cool dry ventilated location. Isolate from incompatible materials and conditions. Keep container(s) closed. Keep away from sources of ignition

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
P&T Methanol	67-56-1	6000 ppm IDLH	250 ppm STEL	200 ppm TWA	200 ppm TWA; 260 mg/m3 TWA
1-Bromo-4-fluorobenzene (BFB)	460-00-4	Not established	None Known	Not established	No data available
1,2-dichloroethane-d4	17060-07-0	Not established	None Known	Not established	No data available
dibromofluoromethane	1868-53-7	Not established	None Known	Not established	No data available
toluene-d8	2037-26-5	Not established	None Known	Not established	No data available

Personal Protection:

Engineering Measures:

Local exhaust ventilation is recommended when generating excessive levels of vapours from handling or thermal processing.

Respiratory Protection:

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms. If an exposure limit is exceeded or if an operator is experiencing symptoms of inhalation overexposure as explained in Section 3, provide respiratory protection.

Eye Protection:

Wear chemically resistant safety glasses with side shields when handling this product. Do not wear contact lenses.

Skin Protection:

Wear protective gloves. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:	No data available
Odor:	Mild
Physical State:	No data available
pH:	Not applicable
Vapor Pressure:	No data available
Vapor Density:	1.1 (air = 1)
Boiling Point (°C):	151.5 °C Boiling Point (at 1013.25 hPa) 64.7 °C at 760 mmHg (HSDB)
Melting Point (°C):	-98 °C
Flash Point (°F):	50
Flammability:	Highly Flammable
Upper Flammable/Explosive Limit, % in air:	36
Lower Flammable/Explosive Limit, % in air:	6
Autoignition Temperature (°C):	464 deg C
Decomposition Temperature (°C):	No data available
Specific Gravity:	0.791 - 0.792 g/cm3 at 20 °C
Evaporation Rate:	No data available
Odor Threshold:	No data available
Solubility:	Moderate; 50-99%

Partition Coefficient: n-octanol in water: No data available
VOC % by weight: 90
Molecular Weight: 32.04

10. STABILITY AND REACTIVITY

Stability: Stable under normal conditions.
Conditions to Avoid: None known.
Materials to Avoid / Chemical Incompatibility: Strong oxidizing agents
Hazardous Decomposition Products: Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry: Inhalation, Skin Contact, Eye Contact, Ingestion
Target Organs Potentially Affected By Exposure: Eyes, Central nervous system stimulation, Skin, GI Tract, Respiratory Tract
Chemical Interactions That Change Toxicity: None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.
Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs")Methanol can cause central nervous system depression and overexposure can cause damage to the optic nerve resulting in visual impairment or blindness.
Skin Contact: Can cause moderate skin irritation, defatting, and dermatitis. Not likely to cause permanent damage.
Eye Contact: Can cause moderate irritation, tearing and reddening, but not likely to permanently injure eye tissue.
Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.Highly toxic and may be fatal if swallowed.
Ingestion Toxicity: Toxic if swallowed. May cause target organ failure and/or death.May be fatal if swallowed.

Long-Term (Chronic) Health Effects:

Carcinogenicity: No data.
Reproductive and Developmental Toxicity: No data available to indicate product or any components present at greater than 0.1% may cause birth defects.
Inhalation: Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see "Target Organs")
Skin Contact: Upon prolonged or repeated contact, can cause moderate skin irritation, defatting, and dermatitis. Not likely to cause permanent damage.
Ingestion: Toxic if swallowed. May cause target organ failure and/or death.

Component Toxicological Data:

NIOSH:

Chemical Name	CAS No.	LD50/LC50
Benzene, 1-bromo-4-fluoro-	460-00-4	Inhalation LC50 Rat 18 g/m3 4 h; Oral LD50 Rat 2700 mg/kg
Methanol	67-56-1	Inhalation LC50 Rat 22500 ppm 8 h

Component Carcinogenic Data:

OSHA:

Chemical Name	CAS No.
No data available	

ACGIH:

Chemical Name	CAS No.
No data available	

NIOSH:

Chemical Name	CAS No.
No data available	

NTP:

Chemical Name
No data available

CAS No.

IARC:

Chemical Name

CAS No.

Group No.

12. ECOLOGICAL INFORMATION**Overview:**

Moderate ecological hazard. This product may be dangerous to plants and/or wildlife.

Mobility:

No data

Persistence:

No data

Bioaccumulation:

No data

Degradability:

Biodegrades slowly.

Ecological Toxicity Data:

No data available

13. DISPOSAL CONSIDERATIONS**Waste Description of Spent Product:**

Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

Disposal Methods:

Dispose of by incineration following Federal, State, Local, or Provincial regulations.

Waste Disposal of Packaging:

Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION**United States:****DOT Proper Shipping Name:**

Flammable liquids, n.o.s. (Methanol)

UN Number:

UN1993

Hazard Class:

3

Packing Group:

II

International:**IATA Proper Shipping Name:**

Flammable liquids, n.o.s. (Methanol)

UN Number:

UN1993

Hazard Class:

3

Packing Group:

II

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION**United States:**

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
P&T Methanol	67-56-1	X	X	-	X
1-Bromo-4-fluorobenzene (BFB)	460-00-4	-	-	-	X
1,2-dichloroethane-d4	17060-07-0	-	-	-	-
dibromofluoromethane	1868-53-7	-	-	-	-
toluene-d8	2037-26-5	-	-	-	-

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Methanol	67-56-1	Prop 65 Develop Tox

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
---------------	------	------------	---------------	--------------	------------

P&T Methanol	67-56-1	X	X	X	X
1-Bromo-4-fluorobenzene (BFB)	460-00-4	-	-	-	-
1,2-dichloroethane-d4	17060-07-0	-	-	-	-
dibromofluoromethane	1868-53-7	-	-	-	-
toluene-d8	2037-26-5	-	-	-	-

16. OTHER INFORMATION

Prior Version Date: 07/20/18

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

References: No data available

Disclaimer: Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Gravimetric Certificate



ISO 17034 Accredited
Reference Material Producer
Certificate #3222.01



ISO/IEC 17025 Accredited
Testing Laboratory
Certificate #3222.02

FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 555581 Lot No.: A0173600

Description : Custom 8260 Internal Standard Mix

Custom 8260 Internal Standard Mix 25,000µg/mL, P&T Methanol, 1mL/ampul

Container Size : 2 mL Pkg Amt: > 1 mL

Expiration Date : June 30, 2024 Storage: 10°C or colder

Ship: Ambient

CERTIFIED VALUES

Component #	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)			
1	1,4-Dichlorobenzene-d4 CAS # 3855-82-1 Purity 99% (Lot PR-30447)	25,040.0 µg/mL	+/-	231.7249	µg/mL	Gravimetric
			+/-	1,415.4955	µg/mL	Unstressed
			+/-	1,448.0851	µg/mL	Stressed
2	1,4-Difluorobenzene CAS # 540-36-3 Purity 99% (Lot MKBN8571 V)	25,216.0 µg/mL	+/-	233.3536	µg/mL	Gravimetric
			+/-	1,425.4447	µg/mL	Unstressed
			+/-	1,458.2633	µg/mL	Stressed
3	Chlorobenzene-d5 CAS # 3114-55-4 Purity 99% (Lot PR-29571)	25,120.0 µg/mL	+/-	232.4652	µg/mL	Gravimetric
			+/-	1,420.0178	µg/mL	Unstressed
			+/-	1,452.7116	µg/mL	Stressed
4	Pentafluorobenzene CAS # 363-72-4 Purity 99% (Lot MKCK2250)	25,092.0 µg/mL	+/-	232.2061	µg/mL	Gravimetric
			+/-	1,418.4350	µg/mL	Unstressed
			+/-	1,451.0923	µg/mL	Stressed

Solvent: P&T Methanol
CAS # 67-56-1
Purity 99%


Walker Workman - Operations Technician I

Date Mixed: 18-Jun-2021 Balance: 1128360905

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



Safety Data Sheet

Revision Date: 05/24/21

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name:	555581 / Custom 8260 Internal Standard Mix
Company:	Restek Corporation
Address:	110 Benner Circle Bellefonte, Pa. 16823
Phone#:	814-353-1300
Fax#:	814-353-1309
Emergency#:	800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)
Email:	www.restek.com
Revision Number:	8
Intended use:	For Laboratory use only

2. HAZARD(S) IDENTIFICATION

Emergency Overview:

GHS Hazard
Symbols:



GHS Classification: Specific Target Organ Systemic Toxicity (STOT) - Single Exposure Category 1
Flammable Liquid Category 2
Acute Toxicity - Dermal Category 3
Acute Toxicity - Oral Category 3

GHS Signal Word: Danger

GHS Hazard: Highly flammable liquid and vapour.
Toxic if swallowed or in contact with skin.
Causes damage to organs.

GHS Precautions:

Safety Precautions: Keep away from heat/sparks/open flames/hot surfaces. – No smoking.
Keep container tightly closed.
Ground/bond container and receiving equipment.
Use explosion-proof electrical/ventilation and lighting equipment.
Use only non-sparking tools.
Take precautionary measures against static discharge.
Do not breathe dust/fume/gas/mist/vapours/spray.
Wash hands and skin thoroughly after handling.
Do not eat, drink or smoke when using this product.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF SWALLOWED: Immediately call a POISON CENTER/doctor/....
IF ON SKIN: Wash with plenty of soap and water.
IF ON SKIN (or hair): Remove/Take off immediately all contaminated clothing. Rinse skin with water/shower.
IF exposed: Call a POISON CENTER or doctor/physician.
Call a POISON CENTER or doctor/physician if you feel unwell.
Specific treatment see section 4.
Rinse mouth.
Take off immediately all contaminated clothing and wash it before reuse.
In case of fire: Use extinguishing media in section 5 for extinction.

Storage: Keep container tightly closed.
Store in a well-ventilated place. Keep cool.
Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: Specific target organ toxicity - Single exposure - STOT SE 1: H370 Causes damage to organs. (C \geq 10 %; No information to prove exclusion of certain routes of exposure); Specific target organ toxicity - Single exposure - STOT SE 2: H371 May cause damage to organs. (3 % \leq C < 10 %; Concentration limits for acute toxicity cannot be translated into GHS from the DSD especially when minimum classifications are given)

Repeated Exposure Target Organs: No data available

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS #	EINEC #	% Composition
P&T Methanol	67-56-1	200-659-6	90
1,4-difluorobenzene	540-36-3	208-742-9	2.5
pentafluorobenzene	363-72-4	206-658-7	2.5
1,4-dichlorobenzene-d4	3855-82-1		2.5
chlorobenzene-d5	3114-55-4	221-482-0	2.5

4. FIRST-AID MEASURES

Inhalation: Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately

Eyes: Flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention.

Skin Contact: Wash with soap and water. Remove contaminated clothing and launder. Get medical attention if irritation develops or persists.

Ingestion: Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS.

5. FIRE- FIGHTING MEASURES

Extinguishing Media: Use alcohol resistant foam, carbon dioxide, or dry chemical extinguishing agents. Water may be ineffective but water spray can be used to extinguish a fire if swept across the base of the flames. Water can absorb heat and keep exposed material from being damaged by fire. Use alcohol resistant foam, carbon dioxide, dry chemical, or water spray when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the fire. Do not direct a water stream directly into the hot burning liquid.

Fire and/or Explosion Hazards: Vapors may be ignited by heat, sparks, flames or other sources of ignition at or above the low flash point giving rise to a fire (Class B). Vapors are heavier than air and may travel to a source of ignition and flash back.

Fire Fighting Methods and Protection: Do not enter fire area without proper protection including self-contained breathing apparatus and full protective equipment. Fight fire from a safe distance and a protected location due to the potential of hazardous vapors and decomposition products. Flammable component(s) of this material may be lighter than water and burn while floating on the surface.

Hazardous Combustion Products: Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

Personal Precautions and Equipment: Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the

Methods for Clean-up:

area responding to the spill. Never exceed any occupational exposure limits.

Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

Handling Technical Measures and Precautions:	Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. Use spark-proof tools and explosion-proof equipment
Storage Technical Measures and Conditions:	Store in a cool dry ventilated location. Isolate from incompatible materials and conditions. Keep container(s) closed. Keep away from sources of ignition

8. EXPOSURE CONTROLS / PERSONAL PROTECTION**United States:**

Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
P&T Methanol	67-56-1	6000 ppm IDLH	250 ppm STEL	200 ppm TWA	200 ppm TWA; 260 mg/m ³ TWA
1,4-difluorobenzene	540-36-3	Not established	None Known	Not established	No data available
pentafluorobenzene	363-72-4	Not established	None Known	Not established	No data available
1,4-dichlorobenzene-d4	3855-82-1	Not established	None Known	Not established	No data available
chlorobenzene-d5	3114-55-4	Not established	None Known	Not established	No data available

Personal Protection:**Engineering Measures:**

Local exhaust ventilation is recommended when generating excessive levels of vapours from handling or thermal processing.

Respiratory Protection:

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms. If an exposure limit is exceeded or if an operator is experiencing symptoms of inhalation overexposure as explained in Section 3, provide respiratory protection.

Eye Protection:

Wear chemically resistant safety glasses with side shields when handling this product. Do not wear contact lenses.

Skin Protection:

Wear protective gloves. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:	No data available
Odor:	Mild
Physical State:	No data available
pH:	Not applicable
Vapor Pressure:	No data available
Vapor Density:	1.1 (air = 1)
Boiling Point (°C):	64.7 °C at 760 mmHg (HSDB)
Melting Point (°C):	-98 °C
Flash Point (°F):	36
Flammability:	Highly Flammable
Upper Flammable/Explosive Limit, % in air:	36
Lower Flammable/Explosive Limit, % in air:	6
Autoignition Temperature (°C):	464 deg C
Decomposition Temperature (°C):	No data available
Specific Gravity:	0.791 - 0.792 g/cm ³ at 20 °C
Evaporation Rate:	No data available

Odor Threshold:	No data available
Solubility:	Moderate; 50-99%
Partition Coefficient: n-octanol in water:	No data available
VOC % by weight:	90
Molecular Weight:	32.04

10. STABILITY AND REACTIVITY

Stability:	Stable under normal conditions.
Conditions to Avoid:	None known.
Materials to Avoid / Chemical Incompatibility:	Strong oxidizing agents
Hazardous Decomposition Products:	Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:	Inhalation, Skin Contact, Eye Contact, Ingestion
Target Organs Potentially Affected By Exposure:	Eyes, Central nervous system stimulation, Skin, GI Tract, Respiratory Tract
Chemical Interactions That Change Toxicity:	None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation:	Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.
Inhalation Toxicity:	Harmful! Can cause systemic damage (see "Target Organs")Methanol can cause central nervous system depression and overexposure can cause damage to the optic nerve resulting in visual impairment or blindness.
Skin Contact:	Can cause moderate skin irritation, defatting, and dermatitis. Not likely to cause permanent damage.
Eye Contact:	Can cause moderate irritation, tearing and reddening, but not likely to permanently injure eye tissue.
Ingestion Irritation:	Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.Highly toxic and may be fatal if swallowed.
Ingestion Toxicity:	Toxic if swallowed. May cause target organ failure and/or death.May be fatal if swallowed.

Long-Term (Chronic) Health Effects:

Carcinogenicity:	No data.
Reproductive and Developmental Toxicity:	No data available to indicate product or any components present at greater than 0.1% may cause birth defects.
Inhalation:	Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see "Target Organs")
Skin Contact:	Upon prolonged or repeated contact, can cause moderate skin irritation, defatting, and dermatitis. Not likely to cause permanent damage.
Skin Absorption:	Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage
Ingestion:	Toxic if swallowed. May cause target organ failure and/or death.

Component Toxicological Data:

NIOSH:

Chemical Name	CAS No.	LD50/LC50
Benzene, 1,2,3,4,5-pentafluoro-	363-72-4	Oral LD50 Rat 2 g/kg
Methanol	67-56-1	Inhalation LC50 Rat 22500 ppm 8 h

Component Carcinogenic Data:

OSHA:

Chemical Name	CAS No.
No data available	

ACGIH:

Chemical Name	CAS No.
No data available	

NIOSH:

Chemical Name CAS No.
No data available

NTP:

Chemical Name CAS No.
No data available

IARC:

Chemical Name CAS No. Group No.

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous to plants and/or wildlife.
Mobility: No data
Persistence: No data
Bioaccumulation: No data
Degradability: Biodegrades slowly.
Ecological Toxicity Data: No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product: Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.
Disposal Methods: Dispose of by incineration following Federal, State, Local, or Provincial regulations.
Waste Disposal of Packaging: Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:
DOT Proper Shipping Name: Flammable liquids, n.o.s. (Methanol, Pentafluorobenzene)
UN Number: UN1993
Hazard Class: 3
Packing Group: II

International:
IATA Proper Shipping Name: Flammable liquids, n.o.s. (Methanol, Pentafluorobenzene)
UN Number: UN1993
Hazard Class: 3
Packing Group: II

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States:					
Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
P&T Methanol	67-56-1	X	X	-	X
1,4-difluorobenzene	540-36-3	-	-	-	-
pentafluorobenzene	363-72-4	-	-	-	X
1,4-dichlorobenzene-d4	3855-82-1	-	-	-	-
chlorobenzene-d5	3114-55-4	-	-	-	-

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Methanol	67-56-1	Prop 65 Develop Tox

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
P&T Methanol	67-56-1	X	X	X	X
1,4-difluorobenzene	540-36-3	-	-	-	-
pentafluorobenzene	363-72-4	-	-	-	-
1,4-dichlorobenzene-d4	3855-82-1	-	-	-	-
chlorobenzene-d5	3114-55-4	-	-	-	-

16. OTHER INFORMATION

Prior Version Date: 12/15/16

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

References: No data available

Disclaimer: Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30225 Lot No.: A0176219
Description : Bromochloromethane Standard
Bromochloromethane 2000µg/mL, P&T Methanol, 1mL/ampul
Container Size : 2 mL Pkg Amt: > 1 mL
Expiration Date : September 30, 2026 Storage: 0°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	Bromochloromethane CAS # 74-97-5 (Lot 00008541) Purity 99%	2,016.0 µg/mL	+/- 11.9744 µg/mL Gravimetric +/- 113.0617 µg/mL Unstressed +/- 115.7059 µg/mL Stressed

Solvent: P&T Methanol
CAS # 67-56-1
Purity 99%

Column:
105m x 0.53mm x 3.0µm
Rtx-502.2 (cat.#10910)


Carrier Gas:
hydrogen-constant pressure 11.0 psi.

Temp. Program:
40°C (hold 2 min.) to 240°C
@ 8°C/min. (hold 5 min.)

Inj. Temp:
200°C

Det. Temp:
250°C

Det. Type:
FID

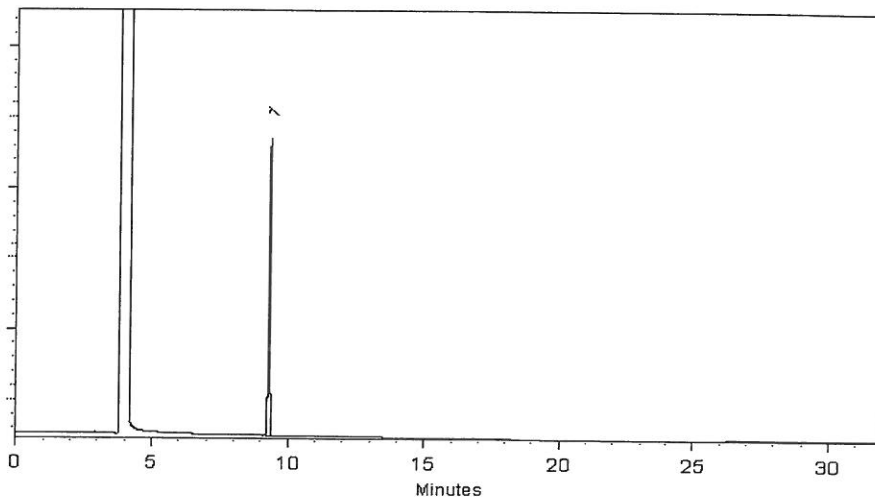

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dalton Stover
Dalton Stover - Operations Technician I

Date Mixed: 08-Sep-2021

Balance: 1128353505

Marlina Cowan
Marlina Cowan - Operations Tech I

Date Passed: 10-Sep-2021

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.

Certificate of Analysis

110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309
 www.restek.com



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.
 This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.


Catalog No.: 30042
Description: 502.2 Calibration Mix #1
 502.2 Calibration Mix #1 2,000µg/mL, P&T Methanol, 1mL/ampul
Container Size: 2 mL
Expiration Date: June 30, 2028
Storage: 0°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	Dichlorodifluoromethane (CFC-12) CAS # 75-71-8 Purity 99% (Lot 00012554)	2,000.9 µg/mL +/- 13.9607 +/- 112.4514 +/- 115.0704	Gravimetric Unstressed Stressed
2	Chloromethane (methyl chloride) CAS # 74-87-3 Purity 99% (Lot SHBK6571)	2,000.2 µg/mL +/- 13.2566 +/- 112.3274 +/- 114.9474	Gravimetric Unstressed Stressed
3	Vinyl chloride CAS # 75-01-4 Purity 99% (Lot 00015559)	2,001.1 µg/mL +/- 13.8225 +/- 112.4449 +/- 115.0645	Gravimetric Unstressed Stressed
4	Bromomethane (methyl bromide) CAS # 74-83-9 Purity 99% (Lot 101604)	2,000.2 µg/mL +/- 13.6930 +/- 112.3836 +/- 115.0025	Gravimetric Unstressed Stressed
5	Chloroethane (ethyl chloride) CAS # 75-00-3 Purity 99% (Lot 107-401039114-1)	2,000.5 µg/mL +/- 15.6153 +/- 112.6506 +/- 115.2642	Gravimetric Unstressed Stressed
6	Trichlorofluoromethane (CFC-11) CAS # 75-69-4 Purity 99% (Lot MKCL8411)	2,000.2 µg/mL +/- 15.8709 +/- 112.6692 +/- 115.2815	Gravimetric Unstressed Stressed

Solvent: R&T Methanol
CAS # 67-56-1
Purity 99%

Column: 60m x 0.25mm x 1.4µm
Rx-502.2 (cat.#10916)
Carrier Gas: helium-constant flow 2.0 mL/min.
Temp. Program: 40°C (hold 6 min.) to 100°C
@ 6°C/min.
Inj. Temp: 200°C
Det. Temp: 250°C
Det. Type: MSD

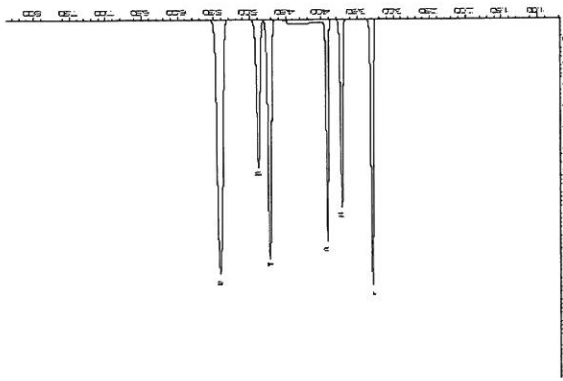

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Tom Suckal - Mix Technician
[Signature]

Date Mixed: 27-Oct-2021
Date Passed: 02-Nov-2021

Balance: B707717271

Marlina Cowan - Operations Tech I
[Signature]

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer)	< 25°C	≥ 25°C up to 7 days
-20°C or colder (Deep Freezer)		

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2 mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30006 **Lot No.:** A0179406

Description : VOA Calibration Mix #1

VOA Calibration Mix #1 5,000µg/mL, P&T Methanol/Water(90:10), 1mL/ampul

Container Size : 2 mL **Pkg Amt:** > 1 mL

Expiration Date : March 31, 2025 **Storage:** 0°C or colder

Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	Acetone CAS # 67-64-1 (Lot SHBN3661) Purity 99%	5,037.5 µg/mL	+/- 29.2885 µg/mL Gravimetric +/- 303.9347 µg/mL Unstressed +/- 304.6563 µg/mL Stressed
2	2-Butanone (MEK) CAS # 78-93-3 (Lot SHBL5543) Purity 99%	5,034.3 µg/mL	+/- 29.2700 µg/mL Gravimetric +/- 303.7436 µg/mL Unstressed +/- 304.4648 µg/mL Stressed
3	4-Methyl-2-pentanone (MIBK) CAS # 108-10-1 (Lot SHBM7956) Purity 99%	5,032.2 µg/mL	+/- 29.2575 µg/mL Gravimetric +/- 303.6129 µg/mL Unstressed +/- 304.3337 µg/mL Stressed
4	2-Hexanone CAS # 591-78-6 (Lot MKCL1599) Purity 99%	5,033.7 µg/mL	+/- 29.2662 µg/mL Gravimetric +/- 303.7034 µg/mL Unstressed +/- 304.4245 µg/mL Stressed

Solvent: P&T Methanol/Water (90:10)
CAS # 67-56-1/7732-18-5
Purity 99%

Column:

105m x 0.53mm x 3.0µm
Rtx-502.2 (cat.#10910)

Carrier Gas:

hydrogen-constant pressure 11.0 psi.

Temp. Program:

40°C (hold 2 min.) to 240°C
@ 8°C/min. (hold 5 min.)

Inj. Temp:


200°C

Det. Temp:

250°C

Det. Type:

FID

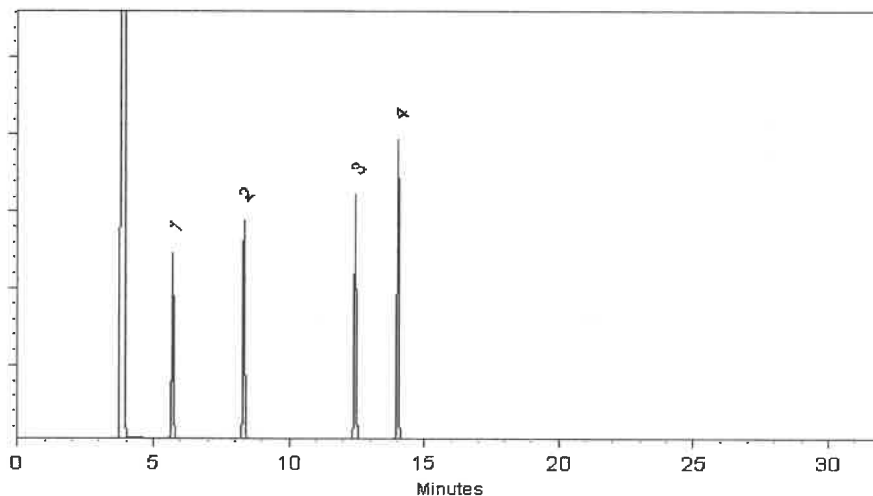

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Sam Moodler

Sam Moodler - Operations Tech I

Date Mixed: 09-Dec-2021

Balance: B707717271

Clara Windle

Clara Windle - Operations Technician I

Date Passed: 13-Dec-2021

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30225 Lot No.: A0183824
Description : Bromochloromethane Standard
Bromochloromethane 2000µg/mL, P&T Methanol, 1mL/ampul
Container Size : 2 mL Pkg Amt: > 1 mL
Expiration Date : April 30, 2027 Storage: 0°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	Bromochloromethane CAS # 74-97-5 Purity 99% (Lot 00008541)	2,000.0 µg/mL	+/- 11.8794 µg/mL Gravimetric +/- 112.1643 µg/mL Unstressed +/- 114.7876 µg/mL Stressed

Solvent: P&T Methanol
CAS # 67-56-1
Purity 99%

Column:

105m x 0.53mm x 3.0µm
Rtx-502.2 (cat.#10910)

Carrier Gas:

hydrogen-constant pressure 11.0 psi.

Temp. Program:

40°C (hold 2 min.) to 240°C
@ 8°C/min. (hold 5 min.)

Inj. Temp:


200°C

Det. Temp:

250°C

Det. Type:

FID

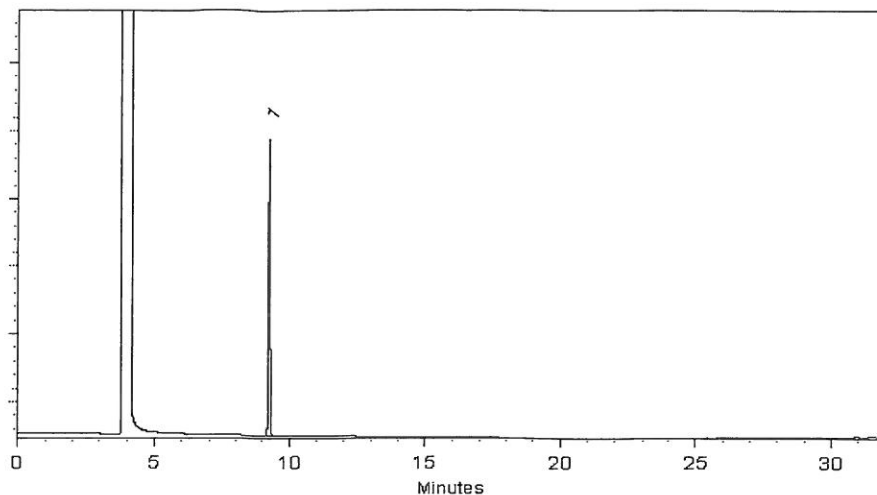


This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.


Jess Hoy - Operations Tech I

Date Mixed: 07-Apr-2022

Balance: 1127510105


Jennifer Pollino - Operations Tech-ARM QC

Date Passed: 11-Apr-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Composition



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 555408-SL **Lot No.:** A0187421
Description : Custom Vinyl Acetate Standard
Custom Vinyl Acetate Standard 8,000µg/mL, P&T Methanol, 1mL/ampul
Container Size : 2 mL **Pkg Amt:** > 1 mL
Expiration Date : January 31, 2024 **Storage:** -20°C or colder
Handling: This product is photosensitive. **Ship:** On Ice

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	Vinyl acetate CAS # 108-05-4 Purity 99% (Lot RD220630)	8,078.0 µg/mL	+/- 47.4062 µg/mL Gravimetric +/- 487.4241 µg/mL Unstressed +/- 488.5812 µg/mL Stressed

Solvent: P&T Methanol
CAS # 67-56-1
Purity 99%

Tech Tips:

Vinyl acetate is a volatile organic ester included in the target lists of several US EPA and other methods. Under acidic conditions, esters react with alcohols to form new esters (transesterification). Methanol-based mixes containing halogenated compounds are slightly acidic, so it is important to minimize exposure of vinyl acetate to mixes of halogenated compounds in methanol. For this reason, we offer vinyl acetate in individual solution, and suggest that it be introduced into the working level calibration solution immediately before use. This will minimize problems and ensure more consistent results.

Column:

105m x 0.53mm x 3.0µm
Rtx-502.2 (cat.#10910)

Carrier Gas:

hydrogen-constant pressure 11.0 psi.

Temp. Program:

40°C (hold 2 min.) to 240°C
@ 8°C/min. (hold 5 min.)

Inj. Temp:


200°C

Det. Temp:

250°C

Det. Type:

FID

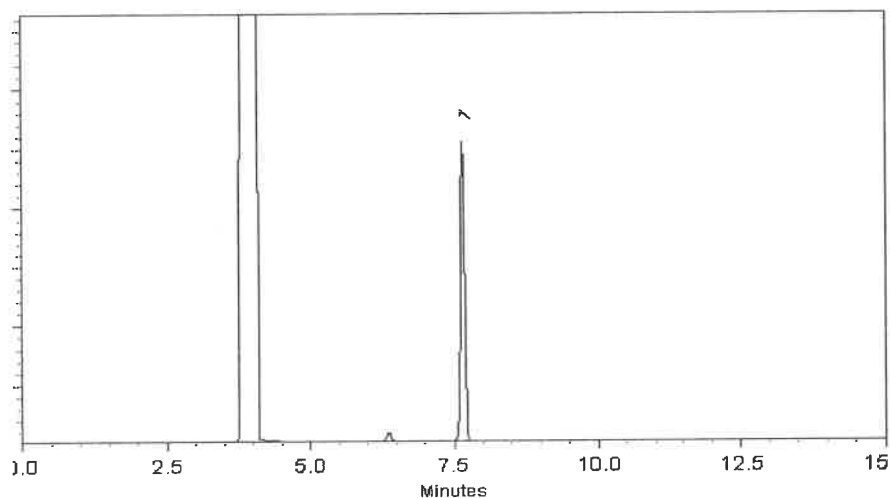

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.


Bethany Lowery - Operations Tech I

Date Mixed: 18-Jul-2022

Balance: B251644995


Fang-Yun Weaver - Operations Lead Tech - ARM QC

Date Passed: 26-Jul-2022



Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.

Methanol
ULTRA RESI-ANALYZED
For Purge and Trap Analysis



Material No.: 9077-02
Batch No.: 22C2362001
Manufactured Date: 2022-02-15
Expiration Date: 2025-02-14
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay (CH ₃ OH) (by GC, corrected for water)	≥ 99.9 %	100.0 %
Residue after Evaporation	≤ 1.0 ppm	< 0.1 ppm
Titration Acid (μeq/g)	≤ 0.3	0.3
Titration Base (μeq/g)	≤ 0.10	0.03
Water (by KF, coulometric)	≤ 0.08 %	< 0.01 %
Volatile Organic Trace Analysis – Below EPA 8260B CRQL	Conforms	Conforms

For Laboratory, Research, or Manufacturing Use
Performance Tested for Use in EPA Methods
500 Series for Drinking Water
600 Series for Wastewater
846 for Solid Waste

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC


Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC
100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700
Page 1 of 1

Methanol
ULTRA RESI-ANALYZED
For Purge and Trap Analysis




Material No.: 9077-02
Batch No.: 22C2862010
Manufactured Date: 2022-02-15
Expiration Date: 2025-02-14
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay (CH ₃ OH) (by GC, corrected for water)	≥ 99.9 %	100.0 %
Residue after Evaporation	≤ 1.0 ppm	0.2 ppm
Titration Acid (μeq/g)	≤ 0.3	0.3
Titration Base (μeq/g)	≤ 0.10	< 0.02
Water (by KF, coulometric)	≤ 0.08 %	< 0.01 %
Volatile Organic Trace Analysis – Below EPA 8260B CRQL	Conforms	Conforms

For Laboratory, Research, or Manufacturing Use
Performance Tested for Use in EPA Methods
500 Series for Drinking Water
600 Series for Wastewater
846 for Solid Waste

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC

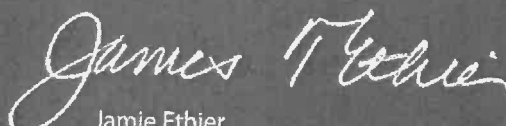
Jamie Ethier
Vice President Global Quality

Methanol
ULTRA RESI-ANALYZED
For Purge and Trap Analysis

 avantor™



Material No.: 9077-02

Batch No.: 0000288323

Manufactured Date: 2021-06-11


Expiration Date: 2024-06-10

Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay (CH ₃ OH) (by GC, corrected for water)	≥ 99.9 %	< 0.1 %
Residue after Evaporation	≤ 1.0 ppm	< 0.1 ppm
Titration Acid (μeq/g)	≤ 0.3	< 0.1
Titration Base (μeq/g)	≤ 0.10	< 0.01
Water (by KF, coulometric)	≤ 0.08 %	< 0.01 %
Volatile Organic Trace Analysis - Below EPA 8260B CRQL	Conforms	Falls

For Laboratory, Research, or Manufacturing Use
Performance Tested for Use in EPA Methods
500 Series for Drinking Water
600 Series for Wastewater
846 for Solid Waste
Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC

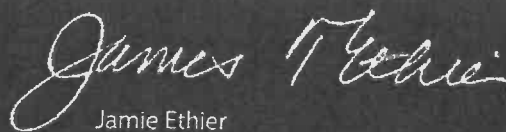
Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC
100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700



CERTIFIED WEIGHT REPORT

Part Number: **95317**
 Lot Number: **042921**
 Description: **Universal VOA Megamix**
 69 components

Solvent(s): **Lot#**
 Methanol **DY186-USQ8**

Expiration Date: **04/29/24**Recommended Storage: **Freezer (0 °C)**Nominal Concentration (µg/mL): **2000**NIST Test ID#: **6UTB**

5E-05 Balance Uncertainty

100.0 0.012 Flask Uncertainty

Weight(s) shown below were combined and diluted to (mL):

<i>Eli Aliaga</i>		042921
Formulated By:	Eli Aliaga	DATE
<i>Pedro L. Rantas</i>		042921
Reviewed By:	Pedro L. Rantas	DATE

Compound	(RM#)	Lot	Di.	Initial	Initial	Nominal	Purity	Purity	Uncertainty	Target	Actual	Expanded	SDS Information			
	Part Number	Number	Factor	Vol. (mL)	Conc.(ug/mL)	Conc (ug/mL)	(%)	Uncertainty	Pipette (mL)	Weight(g)	Weight(g)	Actual	Uncertainty	(Solvent Safety Info. On Attached pg.)		
												(ug/mL)	(+/-) (ug/mL)	CAS#	OSHA PEL (TWA)	LD50
Acetonitrile	(0324)	080812	NA	NA	NA	2000	99.9	0.2	NA	0.20021	0.20041	2002.0	8.1	75-05-8	40 ppm (70mg/m3/8H)	ori-rat 2460mg/kg
Allyl chloride (3-Chloropropene)	(0325)	102396	NA	NA	NA	2000	99	0.2	NA	0.20203	0.20233	2003.0	8.2	107-05-1	1 ppm (3mg/m3/8H)	ori-rat 700mg/kg
Carbon disulphide	(0600)	MKCD9804	NA	NA	NA	2000	100	0.2	NA	0.20001	0.20015	2001.4	8.1	75-15-0	4 ppm (12mg/m3) (skin)	ori-rat 1200mg/kg
cis-1,4-Dichloro-2-butene	(1196)	14718EF	NA	NA	NA	2000	95	0.2	NA	0.21054	0.21080	2000.6	8.5	1476-11-5	N/A	N/A
trans-1,4-Dichloro-2-butene	(0486)	MKBP6041V	NA	NA	NA	2000	96.5	0.2	NA	0.20726	0.20751	2002.4	8.4	110-57-6	N/A	N/A
Diethyl ether (Ethyl ether)	(0153)	SHBK1918	NA	NA	NA	2000	99.9	0.2	NA	0.20023	0.20046	2002.3	8.1	60-29-7	400ppm (1200mg/m3/8H)	ori-rat 1215mg/kg
Ethyl methacrylate	(0381)	06126PX	NA	NA	NA	2000	99	0.2	NA	0.20203	0.20230	2002.7	8.2	97-63-2	N/A	ori-rat 14800mg/kg
Iodomethane	(0489)	SHBF8718V	NA	NA	NA	2000	99.5	0.2	NA	0.20101	0.20130	2002.8	8.1	74-88-4	5 ppm(28mg/m3/8H)(skin)	ori-rat 70mg/kg
2-Methyl-1-propanol	(0445)	15241EB	NA	NA	NA	2000	99.5	0.2	NA	0.20101	0.20123	2002.1	8.1	78-83-1	50 ppm (150mg/m3/8H)	ori-rat 2460mg/kg
Methacrylonitrile	(0442)	00427ET	NA	NA	NA	2000	99	0.2	NA	0.20203	0.20220	2001.7	8.2	128-98-7	1 ppm (3mg/m3/8H)(skin)	ori-rat 120mg/kg
Methyl acrylate	(1075)	SHBK0679	NA	NA	NA	2000	99.9	0.2	NA	0.20021	0.20046	2002.5	8.1	96-33-3	10 ppm(35mg/m3/8H)(skin)	ori-rat 277mg/kg
Methyl methacrylate	(0404)	MKBW5137V	NA	NA	NA	2000	99.9	0.2	NA	0.20021	0.20048	2002.7	8.1	80-62-6	100 ppm (410mg/m3/8H)	ori-rat 7872mg/kg
Nitrobenzene	(0228)	01213TV	NA	NA	NA	2000	99	0.2	NA	0.20203	0.20218	2001.5	8.2	98-95-3	1 ppm (5mg/m3/8H)(skin)	ori-rat 780mg/kg
2-Nitropropane	(0461)	14002JX	NA	NA	NA	2000	97.3	0.2	NA	0.20556	0.20566	2001.0	8.3	79-46-9	10 ppm (35mg/m3/8H)	ori-rat 720mg/kg
Pentachloroethane	(0450)	HGA01	NA	NA	NA	2000	98	0.2	NA	0.20409	0.20418	2000.9	8.2	76-01-7	N/A	N/A
1,1,2-Trichlorotrifluoroethane	(0474)	18930	NA	NA	NA	2000	99	0.2	NA	0.20203	0.20221	2001.8	8.2	76-13-1	1000 ppm (7600mg/m3/8H)	ori-rat 439kg
Bromodichloromethane	35171	100220	0.05	5.00	40018.8	2000	NA	NA	0.017	NA	NA	2000.8	18.4	75-27-4	N/A	ori-rat 916mg/kg
Dibromochloromethane	35171	100220	0.05	5.00	40007.7	2000	NA	NA	0.017	NA	NA	2000.3	18.4	124-48-1	N/A	ori-rat 848mg/kg
cis-1,2-Dichloroethene	35171	100220	0.05	5.00	40012.4	2000	NA	NA	0.017	NA	NA	2000.5	18.4	156-59-2	N/A	N/A
trans-1,2-Dichloroethene	35171	100220	0.05	5.00	40005.6	2000	NA	NA	0.017	NA	NA	2000.2	18.4	156-60-5	N/A	ori-rat 1235mg/kg
Methylene chloride	35171	100220	0.05	5.00	40013.9	2000	NA	NA	0.017	NA	NA	2000.6	18.4	75-09-2	500 ppm	ori-rat 820mg/kg
1,1-Dichloroethene	32251	031821	0.10	10.00	20009.1	2000	NA	NA	0.042	NA	NA	2000.8	19.3	75-35-4	1 ppm (4mg/m3/8H)	ori-rat 200mg/kg
Bromoform	95321	010419	0.10	10.00	20001.7	2000	NA	NA	0.042	NA	NA	2000.1	19.3	75-25-2	0.5 ppm (5mg/m3) (skin)	ori-rat 933mg/kg
Carbon tetrachloride	95321	010419	0.10	10.00	20001.3	2000	NA	NA	0.042	NA	NA	2000.0	19.2	56-23-5	2 ppm (12.6mg/m3/8H)	ori-rat 2350mg/kg
Chloroform	95321	010419	0.10	10.00	20001.8	2000	NA	NA	0.042	NA	NA	2000.1	19.2	67-66-3	50 ppm (240mg/m3) (CL)	ori-rat 908mg/kg
Dibromomethane	95321	010419	0.10	10.00	20001.7	2000	NA	NA	0.042	NA	NA	2000.1	19.3	74-95-3	N/A	ori-rat 108mg/kg
1,1-Dichloroethane	95321	010419	0.10	10.00	20000.8	2000	NA	NA	0.042	NA	NA	2000.0	19.3	75-34-3	100 ppm	ori-rat 725mg/kg
2,2-Dichloropropane	95321	010419	0.10	10.00	20002.1	2000	NA	NA	0.042	NA	NA	2000.1	19.3	594-20-7	N/A	N/A
Tetrachloroethene	95321	010419	0.10	10.00	20002.2	2000	NA	NA	0.042	NA	NA	2000.1	19.3	127-18-4	25 ppm (170mg/m3/8H)(final)	ori-rat 2629mg/kg
1,1,1-Trichloroethane	95321	010419	0.10	10.00	20001.7	2000	NA	NA	0.042	NA	NA	2000.1	19.3	71-55-6	350 ppm (1900mg/m3/8H)	ori-rat 10300mg/kg
1,2-Dibromo-3-chloropropane	35161	011421	0.05	5.00	40001.2	2000	NA	NA	0.017	NA	NA	2000.0	18.4	96-12-8	0.001 ppm	ori-rat 170mg/kg
1,2-Dibromoethane	35161	011421	0.05	5.00	40003.9	2000	NA	NA	0.017	NA	NA	2000.1	18.4	106-93-4	20 ppm (8H)	ori-rat 108mg/kg
1,2-Dichloropropane	35161	011421	0.05	5.00	40002.2	2000	NA	NA	0.017	NA	NA	2000.0	18.4	107-06-2	50 ppm (8H)	ori-rat 670mg/kg
1,3-Dichloropropane	35161	011421	0.05	5.00	40013.9	2000	NA	NA	0.017	NA	NA	2000.6	18.4	142-28-9	75 ppm (350mg/m3/8H)	ori-rat 1947mg/kg
1,1-Dichloropropene	35161	011421	0.05	5.00	40015.0	2000	NA	NA	0.017	NA	NA	2000.7	26.1	563-58-6	N/A	uni-mus 3600mg/kg
cis-1,3-Dichloropropene	35161	011421	0.05	5.00	40004.4	2000	NA	NA	0.017	NA	NA	2000.1	18.4	10081-01-5	N/A	N/A
trans-1,3-Dichloropropene	35161	011421	0.05	5.00	40009.1	2000	NA	NA	0.017	NA	NA	2000.4	18.5	10061-02-6	N/A	N/A
Hexachloro-1,3-butadiene	35161	011421	0.05	5.00	40003.5	2000	NA	NA	0.017	NA	NA	2000.1	26.4	87-68-3	0.02 ppm (0.24mg/m3/8H)	ori-rat 82mg/kg
1,1,1,2-Tetrachloroethane	35161	011421	0.05	5.00	40011.9	2000	NA	NA	0.017	NA	NA	2000.5	18.4	830-20-6	N/A	ori-rat 670mg/kg
1,1,2,2-Tetrachloroethane	35161	011421	0.05	5.00	40011.0	2000	NA	NA	0.017	NA	NA	2000.5	18.4	79-34-5	5 ppm (35mg/m3/8H)(skin)	ori-rat 800mg/kg
1,1,2-Trichloroethane	35161	011421	0.05	5.00	40000.8	2000	NA	NA	0.017	NA	NA	1999.9	18.4	79-00-5	10 ppm (45mg/m3/8H)(skin)	ori-rat 838mg/kg
Trichloroethene	35161	011421	0.05	5.00	40003.2	2000	NA	NA	0.017	NA	NA	2000.1	18.4	79-01-6	50 ppm (270mg/m3/8H)	ori-mus 2402mg/kg
1,2,3-Trichloropropane	35161	011421	0.05	5.00	40015.2	2000	NA	NA	0.017	NA	NA	2000.7	18.4	96-18-4	10 ppm (60mg/m3/8H)	ori-rat 149.6mg/kg
Benzene	35162	020821	0.05	5.00	40008.9	2000	NA	NA	0.017	NA	NA	2000.3	18.4	71-43-2	1 ppm	ori-rat 4894mg/kg
Bromobenzene	35162	020821	0.05	5.00	40019.0	2000	NA	NA	0.017	NA	NA	2000.9	18.4	108-86-1	N/A	ori-rat 2899mg/kg
n-Butyl benzene	35162	020821	0.05	5.00	40019.8	2000	NA	NA	0.017	NA	NA	2000.9	18.4	104-51-8	N/A	N/A
Ethyl benzene	35162	020821	0.05	5.00	40009.9	2000	NA	NA	0.017	NA	NA	1999.9	18.4	100-41-4	100 ppm (435mg/m3/8H)	ori-rat >2000mg/kg
p-Isopropyl toluene	35162	020821	0.05	5.00	40056.4	2000	NA	NA	0.017	NA	NA	2002.7	18.4	99-87-6	N/A	ori-rat 4750mg/kg
Naphthalene	35162	020821	0.05	5.00	40005.1	2000	NA	NA	0.017	NA	NA	2000.2	18.3	91-20-3	10 ppm (50mg/m3/8H)	ori-rat 490mg/kg
Styrene	35162	020821	0.05	5.00	40022.8	2000	NA	NA	0.017	NA	NA	2001.0	18.4	100-42-5	100 ppm	ori-rat 5000mg/kg
Toluene	35162	020821	0.05	5.00	40008.9	2000	NA	NA	0.017	NA	NA	2000.3	18.4	108-88-3	200 ppm	ori-rat 5000mg/kg
1,2,3-Trichlorobenzene	35162	020821	0.05	5.00	40002.0	2000	NA	NA	0.017	NA	NA	2000.0	18.4	87-61-6	N/A	lpr-mus 1390mg/kg
1,2,4-Trichlorobenzene	35162	020821	0.05	5.00	40027.4	2000	NA	NA	0.017	NA	NA	2001.3	18.4	120-82-1	5 ppm (CL) (40mg/m3)	ori-rat 756mg/kg
1,2,4-Trimethylbenzene	35162	020821	0.05	5.00	40012.4	2000	NA	NA	0.017	NA	NA	2000.5	18.4	95-63-6	N/A	ori-rat 5g/kg
1,3,5-Trimethylbenzene	35162	020821	0.05	5.00	40011.5	2000	NA	NA	0.017	NA	NA	2000.5	18.5	108-67-8	N/A	ori-rat 5000mg/kg
m-Xylene	35162	020821	0.05	5.00	40021.8	2000	NA	NA	0.017	NA	NA	2001.0	18.4	108-38-3	100 ppm (435mg/m3/8H)	ori-rat 5g/kg
tert-Butyl benzene	35163	022521	0.05	5.00	40005.9	2000	NA	NA	0.017	NA	NA	2000.2	18.4	88-06-6	N/A	N/A
sec-Butyl benzene	35163	022521	0.05	5.00	40011.7	2000	NA	NA	0.017	NA	NA	2000.5	18.4	135-98-8	N/A	ori-rat 2240mg/kg
Chlorobenzene	35163	022521	0.05	5.00	40009.0	2000	NA	NA	0.017	NA	NA	2000.4	18.4	108-90-7	75 ppm (350mg/m3/8H)	ori-rat 2290mg/kg
2-Chlorotoluene	35163	022521	0.05	5.00	40002.0	2000	NA	NA	0.017	NA	NA	2000.0	18.4	95-49-8	50 ppm (250mg/m3/8H)	ori-rat 3900mg/kg
4-Chlorotoluene	35163	022521	0.05	5.00	40000.4	2000	NA	NA	0.017	NA	NA	1999.9	18.4	106-43-4	N/A	ori-rat 2100mg/kg
1,2-Dichlorobenzene	35163	022521	0.05	5.00	40004.0	2000	NA	NA	0.017	NA	NA	2000.1	18.4	95-50-1	50 ppm (300mg/m3) (CL)	ori-rat 500mg/kg
1,3-Dichlorobenzene	35163	022521	0.05	5.00	40003.6	2000	NA	NA	0.017	NA	NA	2000.1	18.4	541-73-1	N/A	lpr-mus 1062mg/kg
1,4-Dichlorobenzene	35163	022521	0.05	5.00	40005.0	2000	NA	NA	0.017	NA	NA	2000.2	18.4	106-46-7	75 ppm (450mg/m3/8H)	ori-rat 500mg/kg
Isopropylbenzene	35163	022521	0.05	5.00	40007.4	2000	NA	NA	0.017	NA	NA	2000.3	18.4	98-82-8	50 ppm (245mg/m3/8H)	ori-rat 1400mg/kg
Propylbenzene	35163	022521	0.05	5.00	40004.6	2000	NA	NA	0.017	NA	NA	2000.1	18.4	103-65-1</		




Run 22, "P95317 L042921 [2000µg/mL in MeOH]"

Run Length: 60.00 min, 35999 points at 10 points/second.
Created: Thu, Apr 29, 2021 at 3:49:30 PM.
Sampled: Sequence "042521-GC5M1", Method "GC5-M1".
Analyzed using Method "GC5-M1".

Comments

GC5-M1 Analysis by Candice Warren
Column ID SPB-Voccol 105 meter X 0.53mm X 3.0µm film thickness
Flow rates: Total flow=290mL/min., Helium (carrier)=10mL/min.,
Hydrogen(make-up)=40mL/min., Air(make-up)=230mL/min.
Oven Profile: Temp. 1=35°C (Time 1=10 min.), Temp 2=200°C (Time 2=8.75 min.),
Rate = 4°C/min., Total run time=60 min. Injector temp.=200°C, FID Temp.=200°C.
FID Signal = Edaq Channel 1
Standard injection = 0.5µL, Range=4

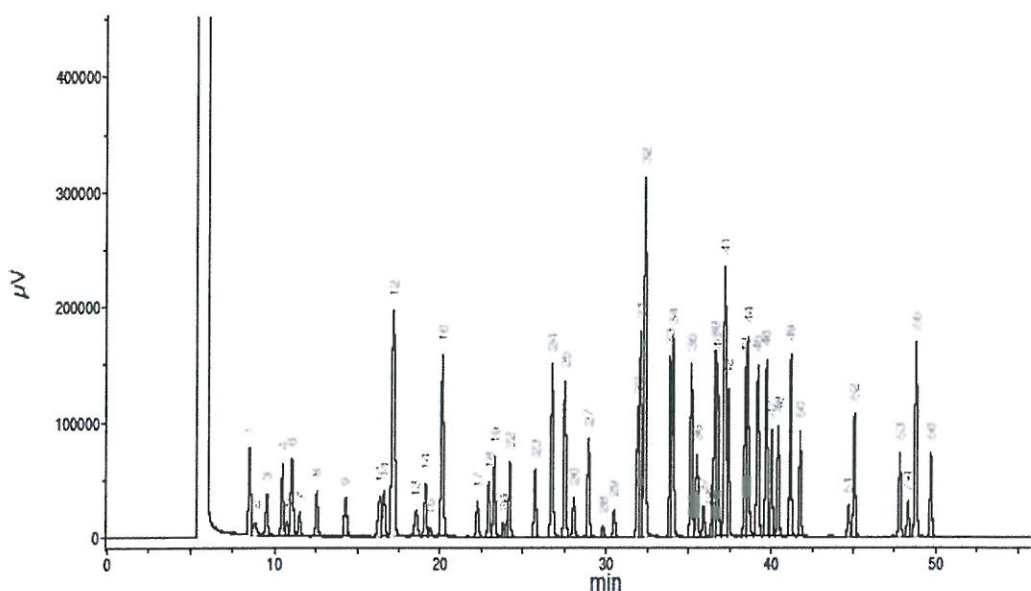

Peak #	Analyte	FID RT (min.)
1	Ether	8.48
2	1,1,2-Trichloro-1,2,2-trifluoroethane	8.80
3	1,1-Dichloroethane	9.51
4	Acetonitrile	10.44
5	Iodomethane	10.71
6	Aryl chloride	11.02
7	Carbon disulfide/Methylene chloride	11.51
8	trans-1,2-Dichloroethane	12.55
9	1,1-Dichloroethane	14.28
10	2,2-Dichloropropane	16.33
11	cis-1,2-Dichloroethane	16.59
12	Methacrylonitrile/Methyl acrylate/Chloroform	17.14
13	Isobutanol/1,1,1-Trichloroethane	18.52
14	1,1-Dichloropropane	19.08
15	Carbon tetrachloride	19.39
16	Benzene/1,2-Dichloroethane	20.10
17	Trichloroethane	22.23
18	1,2-Dichloropropane	22.92
19	Methyl methacrylate	23.26
20	Bromochloromethane	23.79
21	Dibromomethane	23.96
22	2-Nitropropane	24.18
23	cis-1,3-Dichloropropene	25.71
24	Thiurea	26.71
25	Ethyl methacrylate/trans-1,3-Dichloropropene	27.50
26	1,1,2-Trichloroethane	28.04
27	Tetrachloroethane/1,2-Dichloropropane	28.92
28	Dibromochloromethane	29.79
29	1,2-Dibromomethane	30.46
30	Chlorobenzene	31.89
31	Ethylbenzene/1,1,1,2-Tetrachloroethane	32.07
32	m-Xylene/p-Xylene	32.33
33	o-Xylene	33.87
34	Styrene	34.04
35	Isopropylbenzene/Bromofarm	35.14
36	cis-1,4-Dichloro-2-butene	35.49
37	1,1,2,2-Tetrachloroethane	35.90
38	1,2,3-Trichloropropane	36.34
39	n-Propylbenzene	36.50
40	trans-1,4-Dichloro-2-butene/Bromobenzene	36.73
41	1,2,5-Trimethylbenzene/2-Chlorotoluene	37.17
42	4-Chlorotoluene	37.38
43	tert-Butylbenzene	38.41
44	1,2,4-Trimethylbenzene/Pentachloroethane	38.55
45	sec-Butylbenzene	39.16
46	p-Isopropylbenzene	39.68
47	1,3-Dichlorobenzene	40.01
48	1,4-Dichlorobenzene	40.42
49	m-Butylbenzene	41.15
50	1,2-Dichlorobenzene	41.74
51	1,2-Dichloro-3-chloropropane	42.66
52	Nitrobenzene	43.04
53	1,2,4-Trichlorobenzene	47.80
54	Hexachlorocyclopentadiene	48.29
55	Asphaltene	48.76
56	1,2,3-Trichlorobenzene	49.66

Safety Data Sheet (SDS)

GHS/OSHA Compliant

Section I Product and Company Identification

IDENTITY ANALYTICAL STANDARD DISSOLVED IN METHANOL

Manufacturer's Name	ABSOLUTE STANDARDS INC	Emergency Telephone USA & CANADA	1-800-535-5053
Address	44 Rossotto Dr. Hamden CT, 06514	Emergency Telephone International	1-352-323-3500
		Date Prepared/Revised	May 1, 2019

Section II - Hazards Identification

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

H225	Highly Flammable Liquid and Vapor	H301, 311, 331	Toxic if swallowed, skin contact, inhaled
H370	Cause damage to organs	H351	Suspected of causing cancer
P271	Use in ventilated area	P280	Use gloves, eye protection/face shield
P302,332	If on skin, wash with soap and water	P305,351,338	If in eyes, remove contacts, rinse with water



Signal Word: DANGER

Section III - Composition

Components (Specific Chemical Identity; Common Name(s))		% (optional)
Methanol	METHYL ALCOHOL	> 97

CAS#: 67-56-1

See Certified Weight Report For Other Analytes Present At Trace Quantities.

INTENDED USE: REFERENCE MATERIAL

Section IV. FIRST AID MEASURES

General advice	Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.
If inhaled	If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.
In case of skin contact	Wash with soap and water. Consult a physician.
In case of eye contact	Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.
If swallowed	Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

Section V. FIREFIGHTING MEASURES

Flammability	Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.
Suitable extinguishing media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Protective equipment for fire	Wear self contained breathing apparatus for fire fighting if necessary.

Section VI. ACCIDENTAL RELEASE MEASURES

Personal precautions	Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.
Environmental precautions	Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
Clean up	Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

Section VII. HANDLING AND STORAGE

Precautions for safe handling	Avoid contact with skin and eyes. Avoid inhalation of vapour or mist. Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.
Storage Conditions	Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

Methanol	67-56-1 TWA 200 ppm
Skin notation	TWA 200 ppm
Potential for skin absorption, ingestion and inhalation.	
Personal protective equipment	Respiratory protection
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.	Handle with gloves. Gloves must be inspected prior to use. Eye protection.

Section IX - Physical/Chemical Characteristics

Boiling Point	65°C	Specific Gravity (H2O = 1)	0.79
Vapor Pressure (mm Hg)	96	Melting Point	-98°C
Vapor Density (AIR = 1)	1.11	Evaporation rate (Butyl Acetate = 1)	4.6
Solubility in Water	COMPLETE		
Appearance and Odor	CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR.		

Section X. STABILITY AND REACTIVITY

Chemical stability	Stable under recommended storage conditions.
Possibility of hazardous reactions	Vapours may form explosive mixture with air.
Conditions to avoid	Heat, flames, sparks, extreme temperature and sunlight.
Materials to avoid	Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids
Hazardous decomposition products formed under fire conditions.	- Carbon oxides

Section XI. TOXICOLOGICAL INFORMATION

LD50 Oral - rat - 5,628 mg/kg
LC50 Inhalation - rat - 4 h - 64000 ppm
LD50 Dermal - rabbit - 15,800 mg/kg
Toxic if absorbed through skin. Causes skin irritation.
Eye damage/eye irritation
Toxic if inhaled. Causes respiratory tract irritation.
Toxic if swallowed.

Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.

LC50 15,400 mg/l - 96 h
EC50 24,500.00 mg/l - 48 h
EC100 10,000.00 mg/l - 24 h

Section XIII. DISPOSAL CONSIDERATIONS

Dispose with normal Laboratory Solvent Waste.

Section XIV. TRANSPORT INFORMATION

DOT (US)	IATA
UN number: 1230 Class: 3 Packing group: II	UN number: 1230 Class: 3 Packing group: II
Proper shipping name: Methanol	Proper shipping name: Methanol

Section XV. REGULATORY INFORMATION

OSHA Hazards Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XVI. Misc. INFORMATION

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: (800)356-1688
Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30067 Lot No.: A0147670
Description : 4-Bromofluorobenzene Standard
4-Bromofluorobenzene Standard 2,500µg/mL, P&T Methanol,
1mL/ampul
Container Size : 2 mL Pkg Amt: > 1 mL
Expiration Date : April 30, 2024 Storage: 0°C or colder

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)			
1	1-Bromo-4-fluorobenzene (BFB)	2,511.0 µg/mL	+/-	14.7360	µg/mL	Gravimetric
	CAS # 460-00-4 (Lot 20401KO)		+/-	140.8035	µg/mL	Unstressed
	Purity 99%		+/-	144.0975	µg/mL	Stressed

Solvent: P&T Methanol
CAS # 67-56-1
Purity 99%

Column:

105m x 0.53mm x 3.0µm
Rtx-502.2 (cat.#10910)

Carrier Gas:

hydrogen-constant pressure 11.0 psi.

Temp. Program:

40°C (hold 2 min.) to 240°C
@ 8°C/min. (hold 5 min.)

Inj. Temp:


200°C

Det. Temp:

250°C

Det. Type:

FID

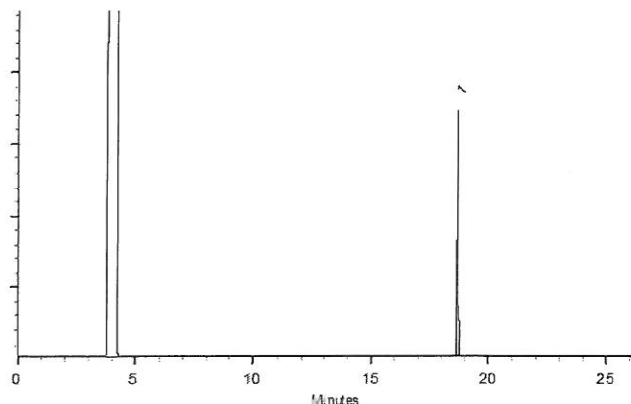

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dustin Lidgett - Mix Technician

Date Mixed: 01-Apr-2019

Balance: 1127510105

Justine Albertson - Operations Tech-ARM QC

Date Passed: 04-Apr-2019

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



Certified Reference Material CRM



ANAB ISO 17034 Accredited
AR-1539 Certificate Number
https://Absolutestandards.com

CERTIFIED WEIGHT REPORT

Part Number: **91980**
Lot Number: **112822**
Description: **Acrolein**

Solvent(s):
Water
Lot#
102422Q



Expiration Date: **122822**
Recommended Storage: **Refrigerate (4 °C)**
Nominal Concentration (µg/mL): **5000**
NIST Test ID#: **6UTB**

Weight(s) shown below were combined and diluted to (mL): **10.0**
5E-05 Balance Uncertainty
0.002 Flask Uncertainty

		112822
Formulated By:	Benson Chan	DATE
		112822
Reviewed By:	Pedro L. Rentas	DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)		
										CAS#	OSHA PEL (TWA)	LD50
1. Acrolein	5	103755R09M	5000	97.1	0.5	0.05180	0.05167	5008.3	52.5	107-02-8	0.1 ppm	ort-rat 46mg/kg

Method: GC6MSD-1. Detector: Mass Selective Detector (Scan mode). Column: Vocol (60m X 0.25mm ID X 1.5µm film thickness). Oven Profile: Temp. 1 = 35°C (Time 1 = 10min.), Temp. 2=200°C (Time 2 = 8.75 min.) Rate = 4°C/min., Injector Temp. = 200°C, Detector Temp. = 220°C. Analyst: Pedro Rentas. NOTE: Due to the instability of acrolein in solution, all solutions of acrolein, and any dilutions thereof, should be used immediately. Long term storage is not recommended. Please contact our technical department if further information is required.

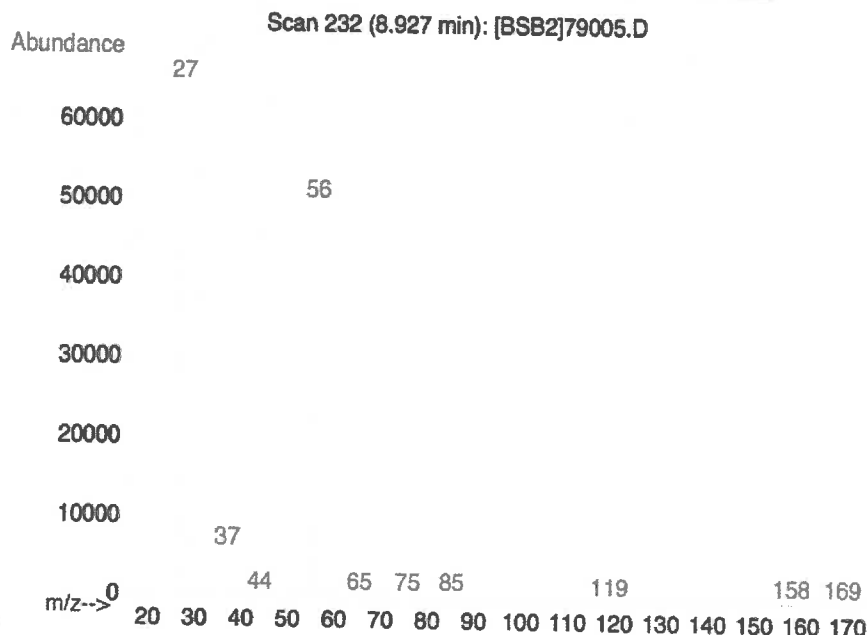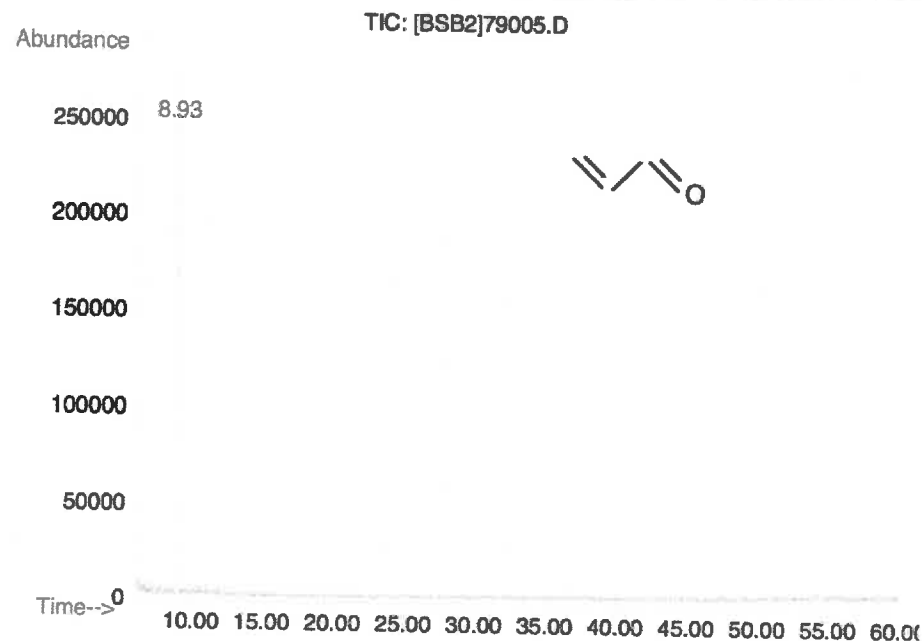

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

Safety Data Sheet (SDS) GHS/OSHA Compliant

Section I Product and Company Identification

IDENTITY	ANALYTICAL STANDARD DISSOLVED IN WATER
Manufacturer's Name	ABSOLUTE STANDARDS INC
Address	44 Rosotto Dr. Hamden CT, 06514
	Emergency Telephone USA & CANADA Emergency Telephone International Date Prepared/Revised
	1-800-535-5053 1-352-323-3500 May 1, 2022

Section II - Hazards Identification

P271 Use in ventilated area
P302,332 If on skin, wash with soap and water

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)
H315 Causes skin and eye irritation.
P280 Use gloves, eye protection/face shield
P305,351,338 If in eyes, remove contacts, rinse with water



Signal Word: DANGER

Section III - Composition

Components (Specific Chemical Identity; Common Name(s))
Water

CAS#: 7732-18-5

% (optional)
> 97

See Certified Weight Report For Other Analytes Present At Trace Quantities.

INTENDED USE: REFERENCE MATERIAL

Section IV. FIRST AID MEASURES

General advice	Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.
If inhaled	If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.
In case of skin contact	Wash with soap and water. Consult a physician.
In case of eye contact	Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.
If swallowed	Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

Section V. FIREFIGHTING MEASURES

Suitable extinguishing media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Protective equipment for fire	Wear self contained breathing apparatus for fire fighting if necessary.
Hazardous Decomposition products	Carbon oxides

Section VI. ACCIDENTAL RELEASE MEASURES

Personal precautions	Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.
Environmental precautions	Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
Clean up	Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

Section VII. HANDLING AND STORAGE

Precautions for safe handling	Avoid contact with skin and eyes. Avoid inhalation of vapour or mist. Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.
Storage Conditions	Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

Water	CAS#: 7732-18-5	TWA: 500 ppm
Personal protective equipment	Respiratory protection	Handle with gloves. Gloves must be inspected prior to use. Eye protection.
Avoid contact with skin, eyes and clothing.	Wash hands thoroughly after handling the product.	

Section IX - PHYSICAL/CHEMICAL CHARACTERISTICS

Boiling Point		Specific Gravity (H ₂ O = 1)	
Vapor Pressure (mm Hg)	100°C	Melting Point	1

Absolute Standards Inc.

PO Box 5585
Hamden, CT 06518-0585

Phone: 203-281-2917
FAX: 203-281-2922

Vapor Density (AIR = 1)	NA	Evaporation rate (Butyl Acetate = 1)	0°C
Solubility in Water	NA		NA

Completely miscible

Appearance and Odor CLEAR, COLORLESS LIQUID WITH SLIGHT CHEMICAL ODOR.

Section X. STABILITY AND REACTIVITY

Chemical stability Stable under recommended storage conditions.
Possibility of hazardous reactions NA
Conditions to avoid NA
Materials to avoid NA
Hazardous decomposition products - No data available

Section XI. TOXICOLOGICAL INFORMATION

LD50 Oral - Rat NA
LC50 Inhalation - Rat NA
LD50 Dermal - Guinea pig NA
Causes skin irritation.
Eye irritation

Section XII. ECOLOGICAL INFORMATION

LC50 NA
EC50 NA

Section XIII. DISPOSAL CONSIDERATIONS

Dispose with normal Laboratory Solvent Waste.

Section XIV. TRANSPORT INFORMATION

DOT (US)
Not dangerous goods
Proper shipping name: Water

IATA
Not dangerous goods
Proper shipping name: Water

Section XV. REGULATORY INFORMATION


SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XVI. Misc. INFORMATION

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.



Certified Reference Material CRM



CERTIFIED WEIGHT REPORT

Part Number: 95319
Lot Number: 031921
Description: Revised Additions Mix
11 components
031924
Refrigerate (4 °C)
Varied
6UTB
NIST Test ID#:
5E-05 Balance Uncertainty
0.012 Flask Uncertainty


Solvent(s): Methanol
Lot# DY186-US

Formulated By: Prashant Chauhan	031921
Reviewed By: Pedro L. Rentas	031921



Weight(s) shown below were combined and diluted to (mL): 100.0

Compound		RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)	OSHA PEL (TWA)	LD50
1.	Acrylonitrile	7	4718CK	10000	99	0.2	1.01015	1.01040	10002.5	40.5	107-13-1	N/A	ori-rat 78 mg/kg
2.	1-Chlorobutane	1072	MKCM5711	2000	99.99	0.2	0.20003	0.20033	2003.0	8.1	109-69-3	N/A	ori-rat 2670mg/kg
3.	Cyclohexane	1023	SHBD2795V	2000	99.5	0.2	0.20101	0.20130	2002.8	8.1	110-82-7	300 ppm (1050mg/m3/8H)	ori-rat 12705mg/kg
4.	Di-isopropyl ether (DIPE)	987	00412MX	2000	99	0.2	0.20203	0.20220	2001.7	8.2	108-20-3	500 ppm (2100mg/m3/8H)	ori-rat 8470mg/kg
5.	1,4-Dioxane	373	03853KE	4000	99	0.2	4.04060	4.04110	40005.0	161.9	123-91-1	25 ppm (90mg/m3/8H)(skin)	ori-mus 5700mg/kg
6.	Hexachloroethane	199	12604HBV	2000	99	0.2	0.20203	0.20230	2002.7	8.2	67-72-1	1 ppm (10mg/m3/8H)(skin)	ori-gpg 4970mg/kg
7.	Methylcyclohexane	1627	08046KN	2000	99	0.2	0.20203	0.20235	2003.2	8.2	108-87-2	N/A	N/A
8.	Methyl tert-butyl ether (MTBE)	209	02197JJ	2000	99.8	0.2	0.20041	0.20080	2003.9	8.1	1634-04-4	N/A	ori-rat 4g/kg
9.	Propionitrile	349	1395468	2000	99	0.2	2.02030	2.02080	20005.0	81.0	107-12-0	N/A	ori-rat 39mg/kg
10.	Tetrahydrofuran	380	113886	1000	99.9	0.2	1.00105	1.00140	10003.5	40.1	109-99-9	20 ppm (590mg/m3/8H)	ori-rat 2500mg/kg
11.	1,2,3,4-Tetramethylbenzene	491	AP01	2000	93	0.2	0.21506	0.21536	2002.8	8.7	488-23-3	N/A	ori-rat 6408mg/kg

TIC: 95319.D

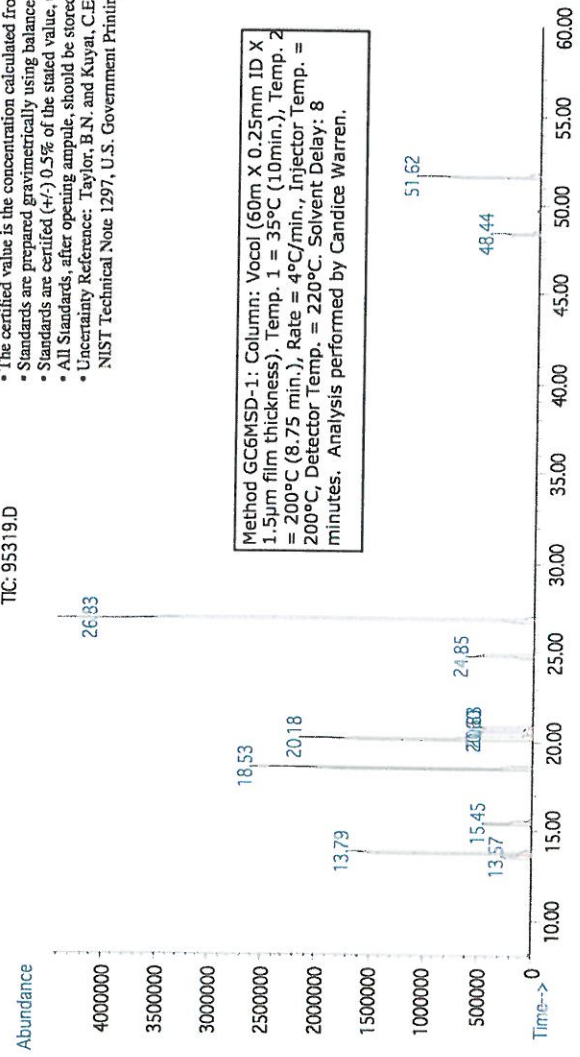

Name	MSD RT (min.)
Methyl tert-butyl ether (MTBE)	13.56
Acrylonitrile	13.79
Di-isopropyl ether	15.44
Propionitrile	18.53
Tetrahydrofuran	20.17
Cyclohexane	20.58
1-Chlorobutane	20.83
Methylcyclohexane	24.84
1,4-Dioxane	26.84
Hexachloroethane	48.44
1,2,3,4-Tetramethylbenzene	51.62



Run 44, "P95319 L031921 [Varied in MeOH]"

Run Length: 60.00 min, 36000 points at 10 points/second.

Created: Sun, Mar 28, 2021 at 4:18:23 PM.

Sampled: Sequence "032421-GC13M1", Method "GC13-M1".

Analyzed using Method "GC13-M1".

Comments

GC13-M1 Analysis by Candice Warren

Column ID SPB-Vocol 105 meter X 0.53mm X 3.0µm film thickness

Flow rates: Total flow=290mL/min., Helium (carrier)=10mL/min.,


Helium(make-up)=10mL/min., Hydrogen(make-up)=40mL/min., Air(make-up)=230mL/min.

Oven Profile: Temp. 1=35°C (Time 1=10 min.), Temp 2=200°C (Time 2=8.75 min.),

Rate = 4°C/min., Total run time=60 min. Injector temp.=200°C, FID Temp.=200°C.

FID Signal = Edaq Channel 1

Standard injection = 0.5µL, Range=6

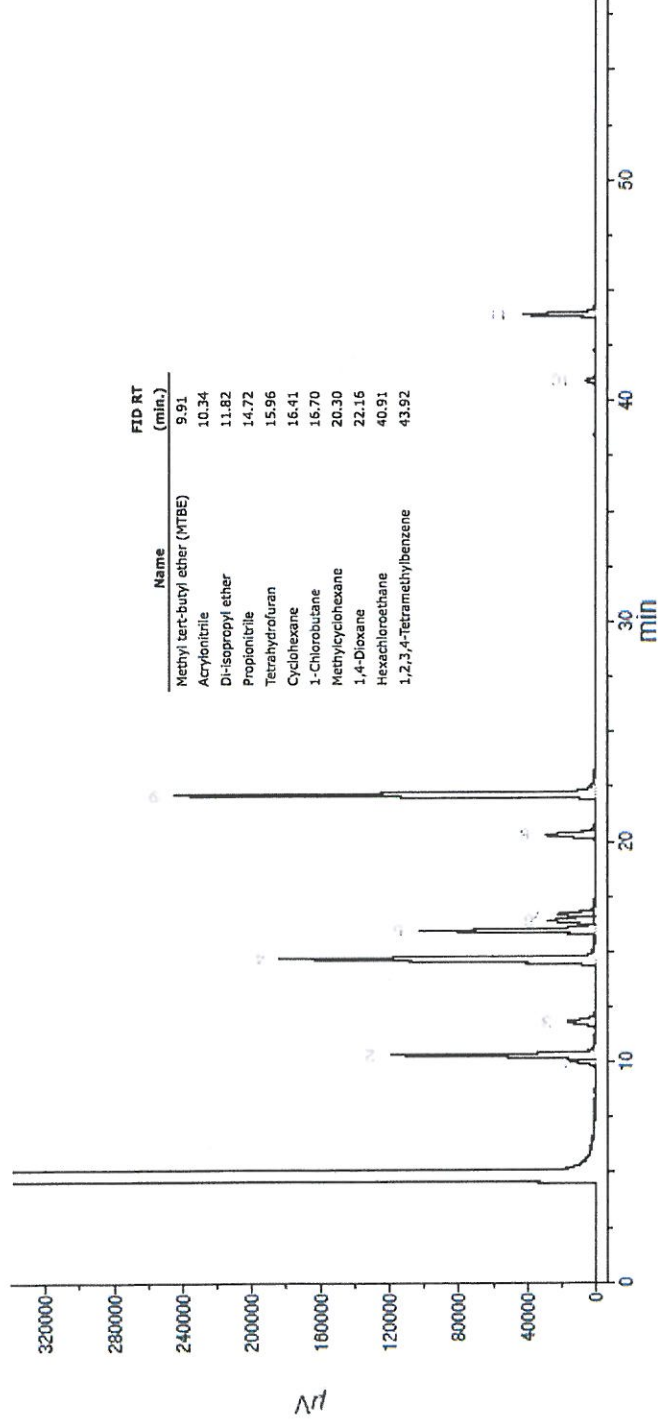

Safety Data Sheet (SDS)
GHS/OSHA Compliant

Section I Product and Company Identification

IDENTITY
ANALYTICAL STANDARD DISSOLVED IN METHANOL

Manufacturer's Name ABSOLUTE STANDARDS INC
Address 44 Rossetto Dr.
Hamden CT, 06514
Emergency Telephone USA & CANADA 1-800-535-5053
Emergency Telephone International 1-352-323-3500
Date Prepared/Revised May 1, 2019

Section II - Hazards Identification

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

H225 Highly Flammable Liquid and Vapor
H370 Cause damage to organs
P271 Use in ventilated area
P302,332 If on skin, wash with soap and water
H301, 311, 331 Toxic if swallowed, skin contact, inhaled
H351 Suspected of causing cancer
P280 Use gloves, eye protection/face shield
P305,351,338 If in eyes, remove contacts, rinse with water

Signal Word: DANGER



Section III - Composition

Components (Specific Chemical Identity; Common Name(s))
Methanol
METHYL ALCOHOL
CAS#: 67-56-1

% (optional)
> 97

See Certified Weight Report For Other Analytes Present At Trace Quantities.
INTENDED USE: REFERENCE MATERIAL

Section IV, FIRST AID MEASURES

General advice
If inhaled
Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.
If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.
If in case of skin contact
Wash with soap and water. Consult a physician.
If in case of eye contact
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.
If swallowed
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

Section V, FIREFIGHTING MEASURES

Flammability
Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.
Protective extinguishing media
Suitable extinguishing media
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Protective equipment for fire
Wear self contained breathing apparatus for fire fighting if necessary.

Section VI, ACCIDENTAL RELEASE MEASURES

Personal precautions
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.
Environmental precautions
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
Clean up
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

Section VII, HANDLING AND STORAGE

Precautions for safe handling
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Section VIII, EXPOSURE CONTROLS/PERSONAL PROTECTION

Methanol
67-56-1 TWA 200 ppm
Skin notation
TWA 200 ppm
Potential for skin absorption, ingestion and inhalation.
Personal protective equipment Respiratory protection. Handle with gloves. Gloves must be inspected prior to use. Eye protection.
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

Section IX - Physical/Chemical Characteristics

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.

Section XVI. Misc. INFORMATION

OSHA Hazards Flammable liquid, Target Organ Effect, Toxic by inhalation, Toxic by ingestion, Toxic by skin absorption, Irritant
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XV. REGULATORY INFORMATION

DOT (US) UN number: 1230 Class: 3 Packing group: II Methanol
Proper shipping name: Proper shipping name: UN number: 1230 Class: 3 Packing group: II Methanol
ATA

Section XIV. TRANSPORT INFORMATION

Dispose with normal Laboratory Solvent Waste.

Section XIII. DISPOSAL CONSIDERATIONS

LC50 15,400 mg/l - 96 h
EC50 24,500.00 mg/l - 48 h
EC100 10,000.00 mg/l - 24 h

Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.

LD50 Oral - rat - 5,628 mg/kg
LC50 Inhalation - rat - 4 h - 6400 ppm
LD50 Dermal - rabbit - 15,800 mg/kg
Toxic if absorbed through skin. Causes skin irritation.
Eye damage/eye irritation
Toxic if inhaled. Causes respiratory tract irritation.
Toxic if swallowed.

Section XI. TOXICOLOGICAL INFORMATION

Chemical stability Stable under recommended storage conditions.
Possibility of hazardous reactions Vapours may form explosive mixture with air.
Conditions to avoid Heat, flames, sparks, extreme temperature and sunlight.
Materials to avoid Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids
Hazardous decomposition products formed under fire conditions. - Carbon oxides

Section X. STABILITY AND REACTIVITY

Appearance and Odor CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR.

Solubility in Water			
COMPLETE			
Vapor Density (AIR = 1)	1.11	Evaporation rate (Butyl Acetate = 1)	4.6
Vapor Pressure (mm Hg)	96	Melting Point	-98°C
Boiling Point	65°C	Specific Gravity (H2O = 1)	0.79

Methanol
ULTRA RESI-ANALYZED
For Purge and Trap Analysis



Material No.: 9077-02
Batch No.: 0000288323
Manufactured Date: 2021-06-11
Expiration Date: 2024-06-10
Revision No.: 1

Certificate of Analysis

Test	Specification	Result
Assay (CH ₃ OH) (by GC, corrected for water)	≥ 99.9 %	100.0 %
Residue after Evaporation	≤ 1.0 ppm	0.5 ppm
Titration Acid (μeq/g)	≤ 0.3	0.2
Titration Base (μeq/g)	≤ 0.10	0.05
Water (by KF, coulometric)	≤ 0.08 %	0.01 %
Volatile Organic Trace Analysis - Below EPA 8260B CRQL	Conforms	Fails

For Laboratory, Research, or Manufacturing Use
Performance Tested for Use in EPA Methods
500 Series for Drinking Water
600 Series for Wastewater
846 for Solid Waste
Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC


Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700
Avantor Performance Materials, LLC
100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700