

Prep Standard - Chemical Standard Summary**Order ID :** O4699**Test :** EPH**Prepbatch ID :** PB156102,**Sequence ID/Qc Batch ID:** FC100523AL,**Standard ID :**

EP2385,EP2394,PP21954,PP21955,PP21956,PP21957,PP21958,PP21959,PP21960,PP22391,PP22542,PP22543,

Chemical ID :

E3412,E3480,E3495,E3566,E3567,E3572,E3576,M5653,P11134,P11263,P11735,P11829,P12171,P12377,P12378,P12379,P12380,P12480,P12524,P12579,P12580,P12581,P12582,P12675,P12676,P12677,P12678,W2606,

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

Extractions STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3319	6N HCL	EP2385	09/05/2023	02/17/2024	Rajesh Parikh	None	None	RUPESHKUMAR SHAH 09/05/2023

FROM 219.00000ml of M5653 + 781.00000ml of W2606 = Final Quantity: 1000.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3923	Baked Sodium Sulfate	EP2394	10/03/2023	10/23/2023	RUPESHKUMAR SHAH	Extraction_SC ALE_2 (EX-SC-2)	None	Rajesh Parikh 10/03/2023

FROM 1.00000gram of E3412 = Final Quantity: 4000.000 gram

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
781	100 PPM Aliphatic HC Working STD (Restek)	PP21954	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani

FROM 0.25000ml of P11735 + 0.25000ml of P12171 + 1.25000ml of P11829 + 23.25000ml of E3495 = Final Quantity: 25.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2900	100 PPM Aliphatic HC STD (Absolute)	PP21955	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani

FROM 0.25000ml of P11735 + 0.25000ml of P12171 + 2.50000ml of P11134 + 22.00000ml of E3495 = Final Quantity: 25.000 ml

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
783	50 PPM Aliphatic HC STD	PP21956	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani
04/24/2023								

FROM 0.50000ml of E3495 + 0.50000ml of PP21954 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
784	20 PPM Aliphatic HC STD	PP21957	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani
04/24/2023								

FROM 0.80000ml of E3495 + 0.20000ml of PP21954 = Final Quantity: 1.000 ml

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
785	10 PPM Aliphatic HC STD	PP21958	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani

04/24/2023

FROM 0.90000ml of E3495 + 0.10000ml of PP21954 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
786	5 PPM Aliphatic HC STD	PP21959	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani

04/24/2023

FROM 0.90000ml of E3495 + 0.10000ml of PP21956 = Final Quantity: 1.000 ml

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2901	20 PPM Aliphatic HC STD ICV (Absolute)	PP21960	04/20/2023	10/19/2023	Yogesh Patel	None	None	Ankita Jodhani

FROM 0.80000ml of E3495 + 0.20000ml of PP21955 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2589	20 PPM NJ EPH SPIKE for LOD-LOQ	PP22391	07/24/2023	01/24/2024	Yogesh Patel	None	None	Ankita Jodhani

FROM 1.00000ml of P12480 + 1.00000ml of P12524 + 8.00000ml of P11263 = Final Quantity: 10.000 ml

CHEMTECH

284, Sheffield Street, Mountainside NJ 07092 (908) 789 - 8900

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
1331	100 PPM NJEPH Fractionating Surrogate	PP22542	09/12/2023	03/09/2024	Yogesh Patel	None	None	Ankita Jodhani
								09/13/2023

FROM 1.25000ml of P12675 + 1.25000ml of P12676 + 1.25000ml of P12677 + 1.25000ml of P12678 + 195.00000ml of E3567 = Final Quantity: 200.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
1339	100 PPM NJEPH Surrogate Spike	PP22543	09/13/2023	03/12/2024	Yogesh Patel	None	None	Ankita Jodhani
								09/15/2023

FROM 1.25000ml of P12377 + 1.25000ml of P12378 + 1.25000ml of P12379 + 1.25000ml of P12380 + 1.25000ml of P12579 + 1.25000ml of P12580 + 1.25000ml of P12581 + 1.25000ml of P12582 + 490.00000ml of E3566 = Final Quantity: 500.000 ml

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	PC19631-100 / SODIUM SULFATE, ANHYDROUS, PEST GRADE, 1	139404	04/10/2024	10/18/2022 / Rajesh	10/13/2022 / Rajesh	E3412

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
phenomenex	SI500025-30 / Cleanert SPE Silica, 5000 mg/25 ml	YO119-QJ	12/10/2023	05/11/2023 / Rajesh	02/24/2023 / Rajesh	E3480

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9262-03 / Hexane, Ultra-Resi (cs/4x4L)	23A2662017	12/09/2023	04/19/2023 / rajesh	04/13/2023 / Rajesh	E3495

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9254-03 / Acetone, Ultra Resi (cs/4x4L)	22L2862006	03/12/2024	09/12/2023 / Rajesh	09/08/2023 / Rajesh	E3566

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9262-03 / Hexane, Ultra-Resi (cs/4x4L)	23C2462011	04/16/2024	09/09/2023 / Rajesh	09/08/2023 / Rajesh	E3567

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	23H2962015	03/25/2024	09/25/2023 / Rajesh	09/25/2023 / Rajesh	E3572

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9262-03 / Hexane, Ultra-Resi (cs/4x4L)	23G1262009	03/28/2024	09/28/2023 / Rajesh	09/28/2023 / Rajesh	E3576

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L)	22E1662006	02/17/2024	08/29/2023 / bin	04/11/2022 / Al-Terek	M5653

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95899 / NJ EPH Aliphatic n-Hydrocarbons-Revised, 1000 PPM	09282109	10/20/2023	04/20/2023 / yogesh	10/29/2021 / Abdul	P11134

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	HP782 / Pentane, 1L	21080835	11/13/2024	12/16/2021 / Ankita	12/16/2021 / Ankita	P11263

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0183688	10/20/2023	04/20/2023 / yogesh	05/27/2022 / Sohil	P11735

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30540 / Custom NJEPH Aliphatics Calibration Standard	A0184811	10/20/2023	04/20/2023 / yogesh	06/17/2022 / Ankita	P11829

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0183404	10/20/2023	04/20/2023 / yogesh	11/10/2022 / Yogesh	P12171

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0190428	03/13/2024	09/13/2023 / yogesh	03/16/2023 / Yogesh	P12377

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0190428	03/13/2024	09/13/2023 / yogesh	03/16/2023 / Yogesh	P12378

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0190428	03/13/2024	09/13/2023 / yogesh	03/16/2023 / Yogesh	P12379

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0190428	03/13/2024	09/13/2023 / yogesh	03/16/2023 / Yogesh	P12380

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0195645	01/24/2024	07/24/2023 / yogesh	05/23/2023 / Yogesh	P12480

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0195695	01/24/2024	07/24/2023 / yogesh	06/30/2023 / Yogesh	P12524

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0197729	03/13/2024	09/13/2023 / yogesh	06/30/2023 / Yogesh	P12579

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0197729	03/13/2024	09/13/2023 / yogesh	06/30/2023 / Yogesh	P12580

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0197729	03/13/2024	09/13/2023 / yogesh	06/30/2023 / Yogesh	P12581

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0197729	03/13/2024	09/13/2023 / yogesh	06/30/2023 / Yogesh	P12582

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0196246	03/12/2024	09/12/2023 / yogesh	07/19/2023 / yogesh	P12675

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0196246	03/12/2024	09/12/2023 / yogesh	07/19/2023 / yogesh	P12676

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0196246	03/12/2024	09/12/2023 / yogesh	07/19/2023 / yogesh	P12677

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0196246	03/12/2024	09/12/2023 / yogesh	07/19/2023 / yogesh	P12678

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	DIW / DI Water	Daily Lab-Certified	10/24/2024	10/24/2019 / apatel	10/24/2019 / apatel	W2606



**PRODUCTOS
QUÍMICOS
MONTERREY, S.A. DE C.V.**



MIRADOR 201, COL. MIRADOR
MONTERREY, N.L. MÉXICO
CP 64070
TEL +52 81 13 52 57 57
www.pqm.com.mx

CERTIFICATE OF ANALYSIS

PRODUCT :	SODIUM SULFATE CRYSTALS ANHYDROUS		
QUALITY :	ACS (CODE RMB3375)	FORMULA :	Na₂SO₄
SPECIFICATION NUMBER :	6399	RELEASE DATE:	OCT/28/2021
LOT NUMBER :	139404		

TEST	SPECIFICATIONS	LOT VALUES
Assay (Na ₂ SO ₄)	Min. 99.0%	99.8 %
pH of a 5% solution at 25°C	5.2 - 9.2	6.0
Insoluble matter	Max. 0.01%	0.005 %
Loss on ignition	Max. 0.5%	0.1 %
Chloride (Cl)	Max. 0.001%	<0.001 %
Nitrogen compounds (as N)	Max. 5 ppm	<5 ppm
Phosphate (PO ₄)	Max. 0.001%	<0.001 %
Heavy metals (as Pb)	Max. 5 ppm	<5 ppm
Iron (Fe)	Max. 0.001%	<0.001 %
Calcium (Ca)	Max. 0.01%	0.002 %
Magnesium (Mg)	Max. 0.005%	0.001 %
Potassium (K)	Max. 0.008%	0.002 %
Extraction-concentration suitability	Passes test	Passes test
Appearance	Passes test	Passes test
Identification	Passes test	Passes test
Solubility and foreign matter	Passes test	Passes test
Retained on US Standard No. 10 sieve	Max. 1%	0.2 %
Retained on US Standard No. 60 sieve	Min. 94%	97.6 %
Through US Standard No. 60 sieve	Max. 5%	2.1 %
Through US Standard No. 100 sieve	Max. 10%	0.2 %

COMMENTS

QC: PhC Irma Belmares

If you need further details, please call our factory or contact our local distributor.

E 3412

Recd. by RP on 10/13/22

Cleanert EPH

5g/25ml 15/pkg

固相萃取产品

LOT#:Y0119-QJ

MFG#:F00137

Made in China



CAT# SI500025-30

Agela Technologies

E 3480



Material No.: 9262-03
Batch No.: 23A2662017
Manufactured Date: 2023-01-10
Expiration Date: 2024-04-10
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	< 1
ECD-Sensitive Impurities (as Ethylene Dibromide) - Single Impurity Peak (ng/mL)	≤ 5	< 1
Assay (Total Saturated C ₆ Isomers) (by GC, corrected for water)	≥ 99.5 %	99.7 %
Assay (as n-Hexane) (by GC, corrected for water)	≥ 95 %	97 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Substances Darkened by H ₂ SO ₄	Passes Test	Passes Test
Water (by KF, coulometric)	≤ 0.05 %	< 0.01 %

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd. by RP on 4/13/23

E3495


Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700
Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700

Acetone
BAKER RESI-ANALYZED® Reagent
For Organic Residue Analysis



Material No.: 9254-03
Batch No.: 22L2862006
Manufactured Date: 2022-12-19
Expiration Date: 2025-12-18
Revision No.: 0

Certificate of Analysis


Test	Specification	Result
Assay ((CH ₃) ₂ CO) (by GC, corrected for water)	≥ 99.4 %	99.7 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.2 ppm
Substances Reducing Permanganate	Passes Test	Passes Test
Titration Acid (µeq/g)	≤ 0.3	0.1
Titration Base (µeq/g)	≤ 0.6	< 0.1
Water (H ₂ O)	≤ 0.5 %	0.3 %
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	4

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd by RP on 9/18/23

E 3566

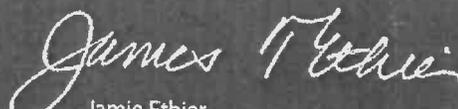
Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700

Hexanes (95% n-hexane)
BAKER RESI-ANALYZED® Reagent

avantor™



Material No.: 9262-03
Batch No.: 23C2462011
Manufactured Date: 2023-03-10
Expiration Date: 2024-06-08
Revision No.: 0

Certificate of Analysis


Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1
ECD-Sensitive Impurities (as Ethylene Dibromide) - Single Impurity Peak (ng/mL)	≤ 5	< 1
Assay (Total Saturated C ₆ Isomers) (by GC, corrected for water)	≥ 99.5 %	99.7 %
Assay (as n-Hexane) (by GC, corrected for water)	≥ 95 %	97 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.3 ppm
Substances Darkened by H ₂ SO ₄	Passes Test	Passes Test
Water (by KF, coulometric)	≤ 0.05 %	< 0.01 %

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd. by RP on 9/8/23

E 3567

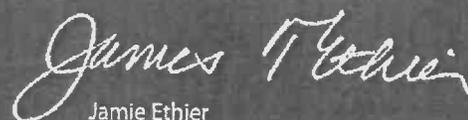
Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700

Page 1 of 1

Methylene Chloride
ULTRA RESI-ANALYZED
For Organic Residue Analysis
(dichloromethane)



Material No.: 9266-A4
Batch No.: 23H2962015
Manufactured Date: 2023-08-08
Expiration Date: 2024-11-06
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	3
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	7
Assay (CH ₂ Cl ₂) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Titration Acid (µeq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	≤ 0.02 %	< 0.01 %

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC
Manufacturer source batch: MG23H08469

E 3572

Ken Koehnlein
Sr. Manager, Quality Assurance

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700

Page 1 of 1

Material No.: 9262-03
Batch No.: 23G1262009
Manufactured Date: 2023-06-01
Expiration Date: 2024-08-30
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1
ECD-Sensitive Impurities (as Ethylene Dibromide) - Single Impurity Peak (ng/mL)	≤ 5	3
Assay (Total Saturated C ₆ Isomers) (by GC, corrected for water)	≥ 99.5 %	99.6 %
Assay (as n-Hexane) (by GC, corrected for water)	≥ 95 %	98 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.3 ppm
Substances Darkened by H ₂ SO ₄	Passes Test	Passes Test
Water (by KF, coulometric)	≤ 0.05 %	0.01 %

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd by RP on 9/28/23

E 3576



Ken Koehnlein
Sr. Manager, Quality Assurance

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700

Hydrochloric Acid, 36.5–38.0%
BAKER INSTRA-ANALYZED® Reagent
For Trace Metal Analysis



M5651 M5652 M5653
M5654 M5655 M5656

Material No.: 9530-33
Batch No.: 22E1662006
Manufactured Date: 2022-04-11
Retest Date: 2027-04-10
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
ACS – Assay (as HCl) (by acid–base titrn)	36.5 – 38.0 %	37.6 %
ACS – Color (APHA)	≤ 10	5
ACS – Residue after Ignition	≤ 3 ppm	< 1 ppm
ACS – Specific Gravity at 60°/60°F	1.185 – 1.192	1.190
ACS – Bromide (Br)	≤ 0.005 %	< 0.005 %
ACS – Extractable Organic Substances	≤ 5 ppm	< 1 ppm
ACS – Free Chlorine (as Cl ₂)	≤ 0.5 ppm	< 0.5 ppm
Phosphate (PO ₄)	≤ 0.05 ppm	< 0.03 ppm
Sulfate (SO ₄)	≤ 0.5 ppm	< 0.3 ppm
Sulfite (SO ₃)	≤ 0.8 ppm	0.3 ppm
Ammonium (NH ₄)	≤ 3 ppm	< 1 ppm
Trace Impurities – Arsenic (As)	≤ 0.010 ppm	< 0.003 ppm
Trace Impurities – Aluminum (Al)	≤ 10.0 ppb	< 0.2 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 3.0 ppb
Trace Impurities – Barium (Ba)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Beryllium (Be)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Bismuth (Bi)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Boron (B)	≤ 20.0 ppb	< 5.0 ppb
Trace Impurities – Cadmium (Cd)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities – Calcium (Ca)	≤ 50.0 ppb	37.0 ppb
Trace Impurities – Chromium (Cr)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities – Cobalt (Co)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities – Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities – Gallium (Ga)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Germanium (Ge)	≤ 3.0 ppb	< 2.0 ppb
Trace Impurities – Gold (Au)	≤ 4.0 ppb	0.2 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Trace Impurities – Iron (Fe)	≤ 15 ppb	1 ppb

>>> Continued on page 2 >>>

Test	Specification	Result
Trace Impurities – Lead (Pb)	≤ 1.0 ppb	< 0.5 ppb
Trace Impurities – Lithium (Li)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Magnesium (Mg)	≤ 10.0 ppb	1.0 ppb
Trace Impurities – Manganese (Mn)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities – Mercury (Hg)	≤ 0.5 ppb	0.1 ppb
Trace Impurities – Molybdenum (Mo)	≤ 10.0 ppb	< 3.0 ppb
Trace Impurities – Nickel (Ni)	≤ 4.0 ppb	< 0.3 ppb
Trace Impurities – Niobium (Nb)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Potassium (K)	≤ 9.0 ppb	< 2.0 ppb
Trace Impurities – Selenium (Se), For Information Only		1.0 ppb
Trace Impurities – Silicon (Si)	≤ 100.0 ppb	< 0.4 ppb
Trace Impurities – Silver (Ag)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities – Sodium (Na)	≤ 100.0 ppb	1.9 ppb
Trace Impurities – Strontium (Sr)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Tantalum (Ta)	≤ 1.0 ppb	< 0.9 ppb
Trace Impurities – Thallium (Tl)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Tin (Sn)	≤ 5.0 ppb	< 0.8 ppb
Trace Impurities – Titanium (Ti)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Vanadium (V)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Zinc (Zn)	≤ 5.0 ppb	< 0.3 ppb
Trace Impurities – Zirconium (Zr)	≤ 1.0 ppb	< 0.1 ppb

>>> Continued on page 3 >>>

Hydrochloric Acid, 36.5–38.0%
BAKER INSTRA–ANALYZED® Reagent
For Trace Metal Analysis



Material No.: 9530–33
Batch No.: 22E1662006

Test	Specification	Result
------	---------------	--------

For Laboratory, Research, or Manufacturing Use
Product Information (not specifications):
Appearance (clear, fuming liquid)
Meets ACS Specifications
Storage Condition: Store below 25 °C.

Country of Origin: USA
Packaging Site: Phillipsburg Mfg Ctr & DC


Jamie Ethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700
Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700



Certified Reference Material CRM



CERTIFIED WEIGHT REPORT

Part Number: 95899
Lot Number: 092821
Description: N1 EPH Aliphatic n-Hydrocarbons - Revised
20 components

Solvent(s): Cyclohexane
Lot# 28930

Formulated By: <i>[Signature]</i>	Benson Chan	092821
Reviewed By: <i>[Signature]</i>	Pedro L. Renterias	092821
		DATE

Expiration Date: 092831
Recommended Storage: Ambient (20 °C)
Nominal Concentration (µg/mL): 1000
NIST Test ID#: 8LJTB
SE-05 Balance Uncertainty
0.005 Flask Uncertainty

Expanded Uncertainty (Solvent Safety Info. On Attached pg.)

Compound	(RM#)	Lot Number	Dil. Factor	Initial Vol (mL)	Initial Conc (µg/mL)	Nominal Conc (µg/mL)	Purity (%)	Purity Uncertainty	Pipette Uncertainty	Target Weight (g)	Actual Weight (g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	CAS#	OSHA PEL (TWA)	LD50
----------	-------	------------	-------------	------------------	----------------------	----------------------	------------	--------------------	---------------------	-------------------	-------------------	---------------------	------------------------------------	------	----------------	------

1. 2-Methylnaphthalene	(0214)	MKBF3783V	NA	NA	NA	1000	97	0.2	NA	0.02577	0.02581	1001.6	5.7	91-57-6	N/A	or-tot 180mg/kg
2. Naphthalene	(0222)	MKBZ8680V	NA	NA	NA	1000	100	0.2	NA	0.02500	0.02506	1002.6	5.7	91-20-3	10 ppm (50mg/m3RH)	or-tot 490mg/kg
3. n-Nonane	95708	081621	1.00	25.00	1000.8	1000	NA	NA	0.013	NA	NA	1000.9	4.2	111-84-2	200 ppm (1050mg/m3RH)	or-tot 216mg/kg
4. n-Decane	95708	081621	1.00	25.00	1000.9	1000	NA	NA	0.013	NA	NA	1001.1	4.2	124-18-5	N/A	N/A
5. n-Dodecane	95708	081621	1.00	25.00	1001.2	1000	NA	NA	0.013	NA	NA	1001.3	4.2	112-40-3	N/A	or-tot 346mg/kg
6. n-Tetradecane	95708	081621	1.00	25.00	1002.0	1000	NA	NA	0.013	NA	NA	1002.2	4.2	629-59-4	N/A	N/A
7. n-Hexadecane	95708	081621	1.00	25.00	1001.9	1000	NA	NA	0.013	NA	NA	1002.0	4.2	544-78-3	N/A	N/A
8. n-Octadecane	95708	081621	1.00	25.00	1011.8	1000	NA	NA	0.013	NA	NA	1012.0	4.2	583-45-3	N/A	N/A
9. n-Eicosane	95708	081621	1.00	25.00	1000.5	1000	NA	NA	0.013	NA	NA	1001.4	4.2	112-95-8	N/A	N/A
10. n-Heneicosane	95708	081621	1.00	25.00	1001.2	1000	NA	NA	0.013	NA	NA	1001.7	4.2	629-94-7	N/A	N/A
11. n-Docosane	95708	081621	1.00	25.00	1001.6	1000	NA	NA	0.013	NA	NA	1001.4	4.2	646-31-1	N/A	N/A
12. n-Tetracosane	95708	081621	1.00	25.00	1001.3	1000	NA	NA	0.013	NA	NA	1001.7	4.2	630-02-4	N/A	N/A
13. n-Hexacosane	95708	081621	1.00	25.00	1000.4	1000	NA	NA	0.013	NA	NA	1001.4	4.2	630-01-3	N/A	N/A
14. n-Octacosane	95708	081621	1.00	25.00	1001.7	1000	NA	NA	0.013	NA	NA	1000.5	4.2	630-02-4	N/A	N/A
15. n-Triacontane	95708	081621	1.00	25.00	1001.0	1000	NA	NA	0.013	NA	NA	1001.2	4.2	638-68-6	N/A	N/A
16. n-Dotriacontane	95708	081621	1.00	25.00	1000.7	1000	NA	NA	0.013	NA	NA	1000.9	4.3	544-85-4	N/A	N/A
17. n-Tetracontane	95708	081621	1.00	25.00	1000.8	1000	NA	NA	0.013	NA	NA	1000.9	4.2	14167-59-0	N/A	or-tot 100mg/kg
18. n-Hexatriacontane	95708	081621	1.00	25.00	1000.9	1000	NA	NA	0.013	NA	NA	1001.1	4.2	630-06-8	N/A	N/A
19. n-Octatriacontane	95708	081621	1.00	25.00	1000.8	1000	NA	NA	0.013	NA	NA	1000.9	4.3	7194-95-6	N/A	N/A
20. n-Tetracontane	95708	081621	1.00	25.00	1000.5	1000	NA	NA	0.013	NA	NA	1000.6	4.3	4181-95-7	N/A	N/A


* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
 • Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 • Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
 • All Standards, after opening ampuls, should be stored with caps tight and under appropriate laboratory conditions.
 • Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

P 11132
P 11136
APR 11/20/21



Method GC8HOT.M: Column: SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 320°C (20 min.), Rate = 30°C/min., Injector B = 250°C, Detector B = 300°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by Melissa Stonier.

TIC: 95899.D

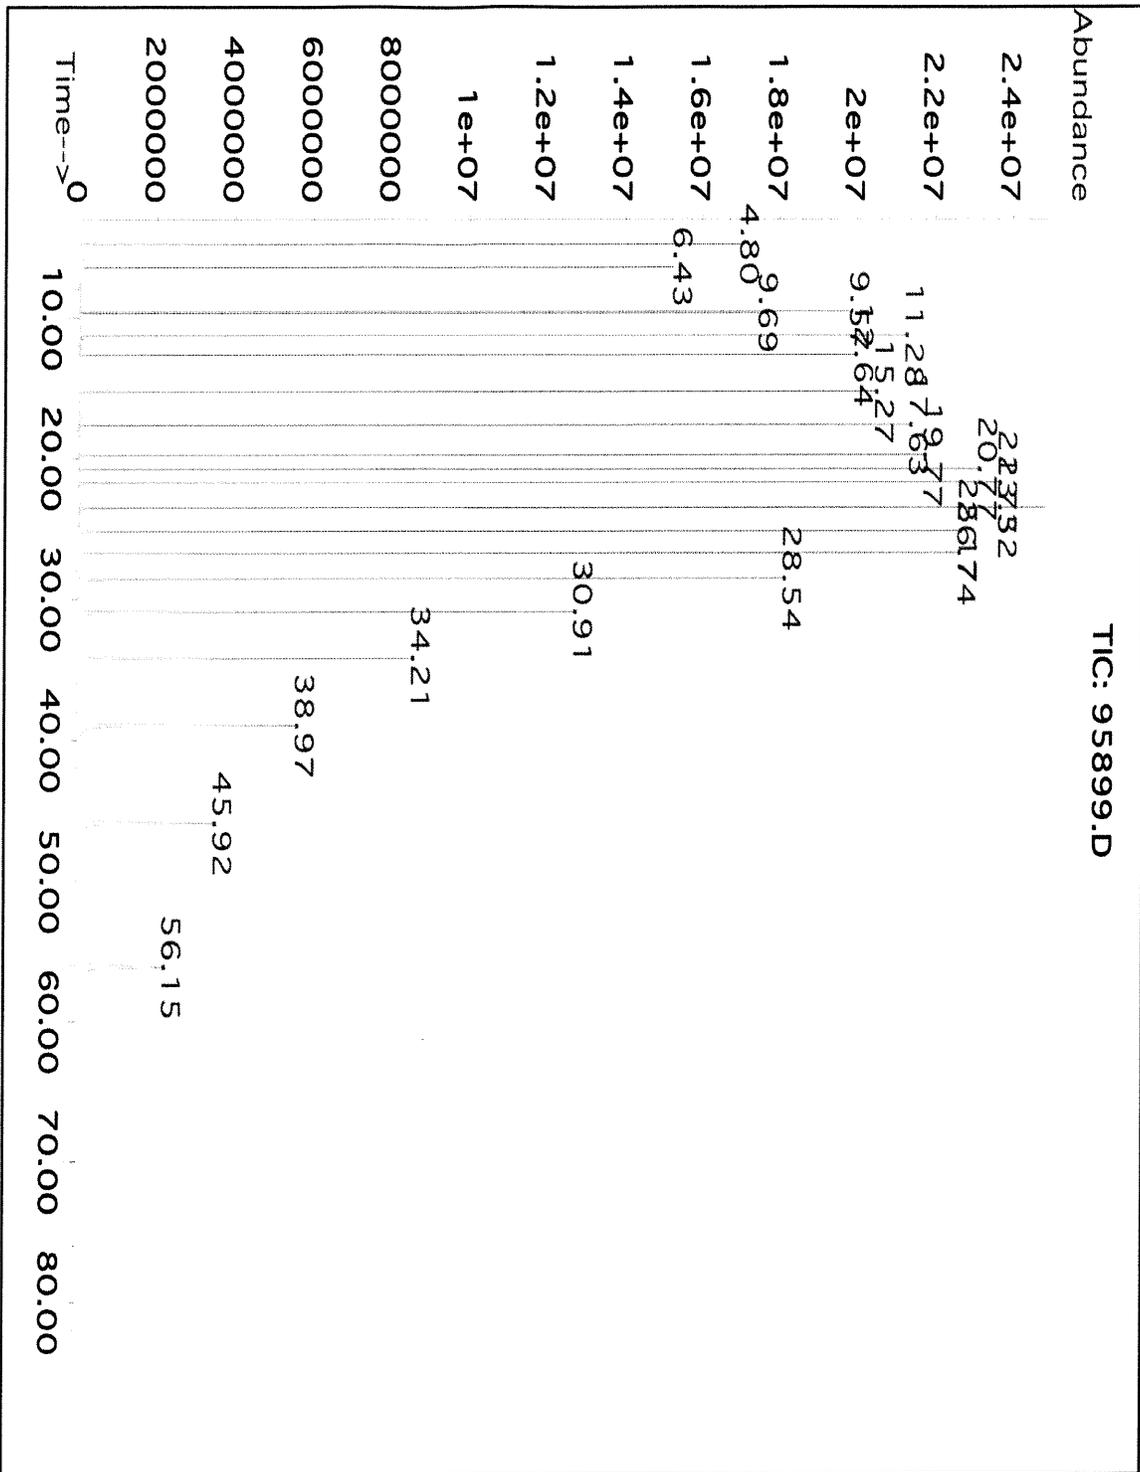

Peak No.	Name	MSD RT (min.)
1	n-Nonane	4.80
2	n-Decane	6.43
3	Naphthalene	9.57
4	n-Dodecane	9.69
5	2-Methylnaphthalene	11.28
6	n-Tetradecane	12.64
7	n-Hexadecane	15.27
8	n-Octadecane	17.93
9	n-Eicosane	19.77
10	n-Hentriacosane	20.77
11	n-Docosane	21.73
12	n-Tetracosane	23.52
13	n-Hexacosane	25.18
14	n-Octacosane	26.74
15	n-Triacontane	28.54
16	n-Dotriacontane	30.91
17	n-Tetraatriacontane	34.21
18	n-Hexatriacontane	38.97
19	n-Octatriacontane	45.92
20	n-Tetracontane	56.15



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309
 www.restek.com

Certificate of Analysis

P11719 to P11738

Received by SJ : 5/27/2022



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31097 **Lot No.:** A0183688
Description : o-Terphenyl Standard
o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul
Container Size : 2 mL **Pkg Amt:** > 1 mL
Expiration Date : November 30, 2025 **Storage:** 10°C or colder
Handling: Sonicate prior to use. **Ship:** Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)		
1	o-Terphenyl CAS # 84-15-1 Purity 99% (Lot MKCH4487)	10,006.9 µg/mL	+/-	58.1808 µg/mL	Gravimetric
			+/-	450.7156 µg/mL	Unstressed
			+/-	500.1247 µg/mL	Stressed

Solvent: Methylene chloride
 CAS # 75-09-2
 Purity 99%

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)


Carrier Gas:
hydrogen-constant pressure 10 psi.

Temp. Program:
75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:
250°C

Det. Temp:
330°C

Det. Type:
FID

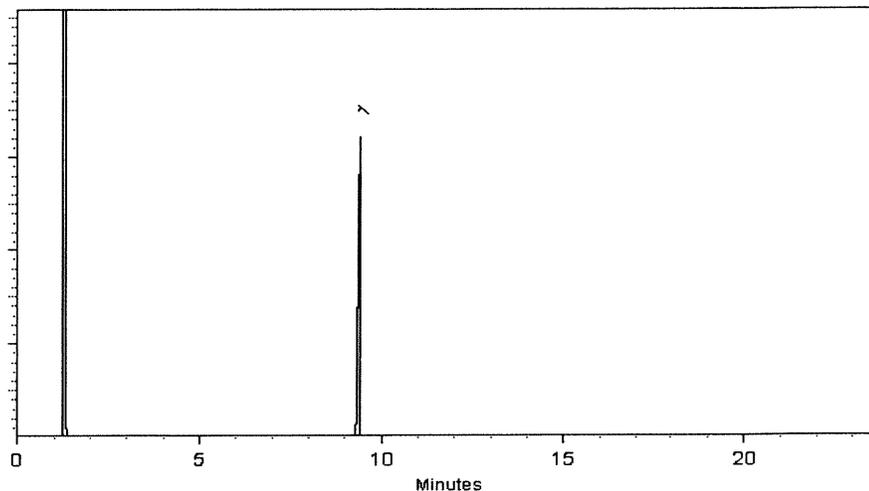

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Nick Yaw
Nick Yaw - Operations Tech I

Date Mixed: 05-Apr-2022 **Balance:** 1128360905

Clara Windle
Clara Windle - Operations Technician I

Date Passed: 07-Apr-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No.: 30540 **Lot No.:** A0184811
Description: NJEPH Aliphatics Calibration Standard
Aliphatics Calibration Standard 2000µg/mL, Hexane/Carbon Disulfide (80:20), 1mL/ampul
Container Size: 2 mL **Pkg Amt:** > 1 mL
Expiration Date: June 30, 2029 **Storage:** 25°C nominal
Handling: Sonicate prior to use. **Ship:** Ambient

p11827
AT
06/17/22
JK
p11831

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	n-Nonane (C9) CAS # 111-84-2 Purity 99%	2,015.3 µg/mL (Lot SHBN5361)	+/- 11.8271 µg/mL +/- 50.0358 µg/mL +/- 59.9888 µg/mL Gravimetric Unstressed Stressed
2	n-Decane (C10) CAS # 124-18-5 Purity 99%	2,010.7 µg/mL (Lot SHBN8619)	+/- 11.7997 µg/mL +/- 49.9200 µg/mL +/- 59.8498 µg/mL Gravimetric Unstressed Stressed
3	Naphthalene CAS # 91-20-3 Purity 99%	2,013.3 µg/mL (Lot MKCH0219)	+/- 11.8154 µg/mL +/- 49.9862 µg/mL +/- 59.9292 µg/mL Gravimetric Unstressed Stressed
4	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	2,007.3 µg/mL (Lot SHBK0925)	+/- 11.7802 µg/mL +/- 49.8372 µg/mL +/- 59.7506 µg/mL Gravimetric Unstressed Stressed
5	2-Methylnaphthalene CAS # 91-57-6 Purity 96%	2,010.2 µg/mL (Lot STBK0259)	+/- 11.7972 µg/mL +/- 49.9094 µg/mL +/- 59.8371 µg/mL Gravimetric Unstressed Stressed
6	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	2,010.0 µg/mL (Lot STBK2282)	+/- 11.7958 µg/mL +/- 49.9034 µg/mL +/- 59.8300 µg/mL Gravimetric Unstressed Stressed
7	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	2,012.9 µg/mL (Lot SHBM4146)	+/- 11.8129 µg/mL +/- 49.9759 µg/mL +/- 59.9169 µg/mL Gravimetric Unstressed Stressed

8	n-Octadecane (C18) CAS # 593-45-3 Purity 98%	(Lot UE5NG)	2,019.5 µg/mL	+/- 11.8513 +/- 50.1381 +/- 60.1114	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
9	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	(Lot MKCF7888)	2,008.7 µg/mL	+/- 11.7880 +/- 49.8703 +/- 59.7903	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
10	n-Heneicosane (C21) CAS # 629-94-7 Purity 99%	(Lot MKCL3226)	2,015.3 µg/mL	+/- 11.8271 +/- 50.0358 +/- 59.9888	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
11	n-Docosane (C22) CAS # 629-97-0 Purity 99%	(Lot MKCL8918)	2,012.7 µg/mL	+/- 11.8115 +/- 49.9696 +/- 59.9094	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
12	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	(Lot MKCN2863)	2,018.0 µg/mL	+/- 11.8428 +/- 50.1020 +/- 60.0681	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
13	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	(Lot MKCD4540)	2,009.3 µg/mL	+/- 11.7919 +/- 49.8869 +/- 59.8102	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
14	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	(Lot BCCG0084)	2,020.0 µg/mL	+/- 11.8545 +/- 50.1517 +/- 60.1277	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
15	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	(Lot MKCN9321)	2,018.7 µg/mL	+/- 11.8467 +/- 50.1186 +/- 60.0880	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
16	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	(Lot BCBW0661)	2,017.3 µg/mL	+/- 11.8388 +/- 50.0855 +/- 60.0483	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
17	n-Tetracontane (C34) CAS # 14167-59-0 Purity 99%	(Lot OML4N)	2,014.0 µg/mL	+/- 11.8193 +/- 50.0027 +/- 59.9491	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
18	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	(Lot U25B014)	2,019.3 µg/mL	+/- 11.8506 +/- 50.1351 +/- 60.1078	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
19	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	(Lot 0000127235)	2,017.0 µg/mL	+/- 11.8366 +/- 50.0761 +/- 60.0370	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
20	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	(Lot PADGI)	2,014.2 µg/mL	+/- 11.8206 +/- 50.0084 +/- 59.9558	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed

Solvent: Hexane/Carbon disulfide (80:20)

CAS # 110-54-3/75-15-0
Purity 99%

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

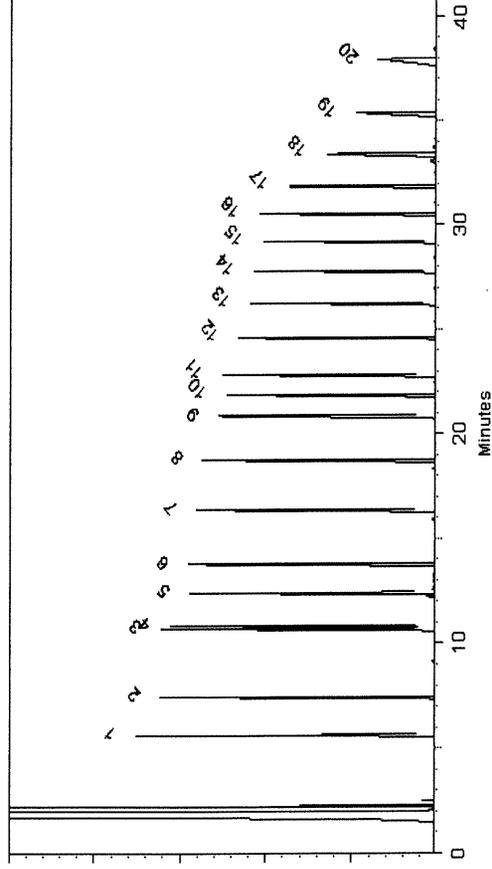

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Brittany Federinko - Operations Tech I

Date Mixed: 03-May-2022 **Balance:** 11.28360905

Christie Mills - Operations Technician II

Date Passed: 06-May-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampoules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampoules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

P 12371 } Y.P
 ↓ } 03/16/23
 P 12385 }

Catalog No.: 31098 **Lot No.:** A0190428
Description: 1-Chlorooctadecane Standard
1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride,
1mL/ampul
Container Size: 2 mL **Pkg Amt:** > 1 mL
Expiration Date: November 30, 2029 **Storage:** 10°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L., $k=2$)
1	1-Chlorooctadecane CAS # 3386-33-2 Purity 99% (Lot 13661500)	10,066.3 µg/mL +/-	58.5260 µg/mL +/-
			564.4046 µg/mL +/-
			577.6110 µg/mL +/-

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%

Gravimetric
 Unstressed
 Stressed

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

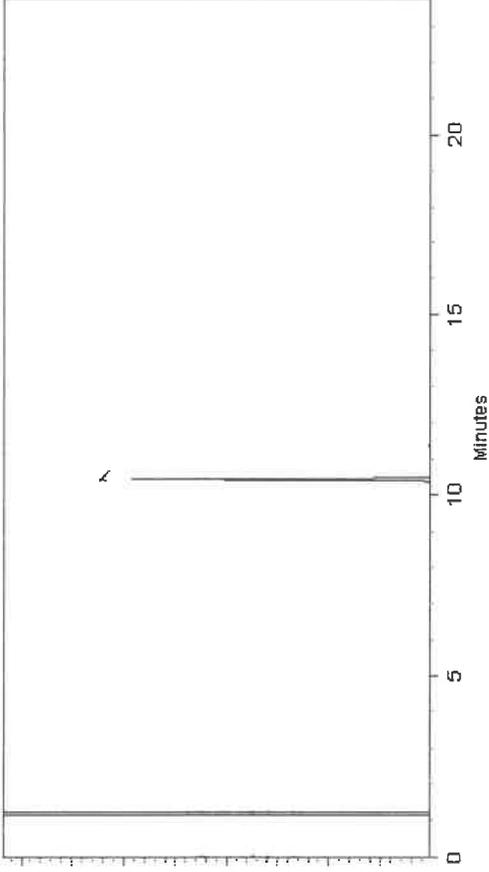

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Mallina Homan

Mallina Homan - Operations Technician I

Date Mixed: 10-Oct-2022 **Balance:** B442140311

Christie Mills

Christie Mills - Operations Tech II - ARM QC

Date Passed: 13-Oct-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

P 12371 } 7.0P
 ↓ } 03/16/23
 P 12385 }

Catalog No.: 31098 **Lot No.:** A0190428
Description: 1-Chlorooctadecane Standard
1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride,
1mL/ampul
Container Size: 2 mL **Pkg Amt:** > 1 mL
Expiration Date: November 30, 2029 **Storage:** 10°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L., $k=2$)
1	1-Chlorooctadecane CAS # 3386-33-2 Purity 99% (Lot 13661500)	10,066.3 µg/mL +/-	58.5260 µg/mL +/-
			564.4046 µg/mL +/-
			577.6110 µg/mL +/-

Solvent: Methylene chloride
 CAS # 75-09-2
 Purity 99%

Gravimetric
 Unstressed
 Stressed

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

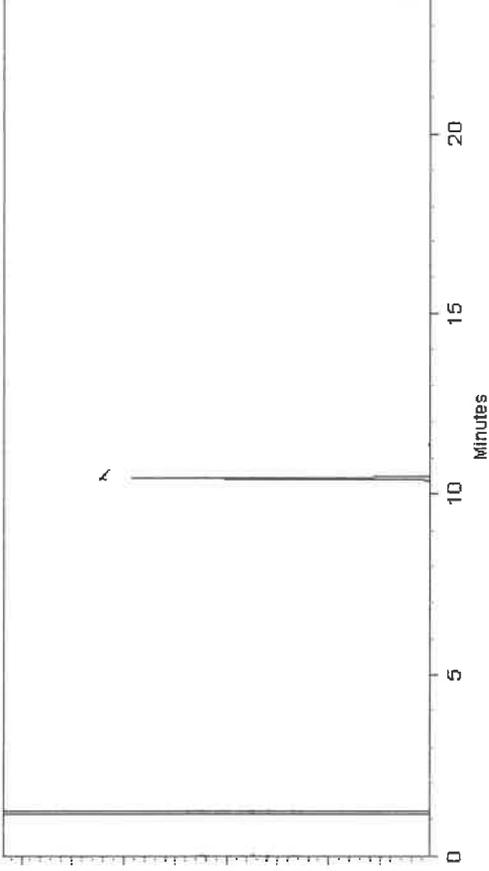

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Mallina Homan

Mallina Homan - Operations Technician I

Date Mixed: 10-Oct-2022 **Balance:** B442140311

Christie Mills

Christie Mills - Operations Tech II - ARM QC

Date Passed: 13-Oct-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

P 12371 } 7.0P
 ↓ } 03/16/23
 P 12385 }

Catalog No.: 31098 **Lot No.:** A0190428

Description: 1-Chlorooctadecane Standard
1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride,
1mL/ampul

Container Size: 2 mL **Pkg Amt:** > 1 mL

Expiration Date: November 30, 2029 **Storage:** 10°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L., $k=2$)
1	1-Chlorooctadecane CAS # 3386-33-2 Purity 99% (Lot 13661500)	10,066.3 µg/mL +/-	58.5260 µg/mL +/-
			564.4046 µg/mL +/-
			577.6110 µg/mL +/-

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%

Gravimetric
 Unstressed
 Stressed

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

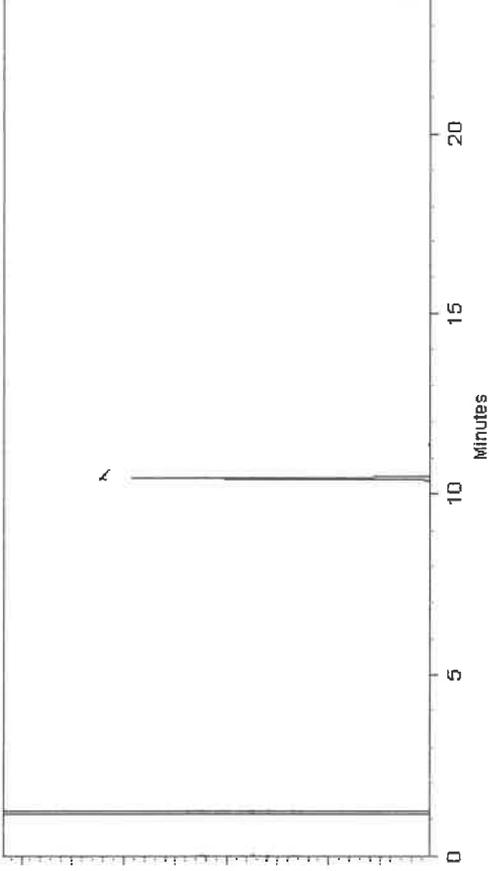

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Mallina Homan

Mallina Homan - Operations Technician I

Date Mixed: 10-Oct-2022 **Balance:** B442140311

Christie Mills

Christie Mills - Operations Tech II - ARM QC

Date Passed: 13-Oct-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: (800)356-1688
 Fax: (814)353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

P 12371 } Y.P
 ↓ } 03/16/23
 P 12385 }

Catalog No.: 31098 **Lot No.:** A0190428

Description: 1-Chlorooctadecane Standard
1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride,
1mL/ampul

Container Size: 2 mL **Pkg Amt:** > 1 mL

Expiration Date: November 30, 2029 **Storage:** 10°C or colder
Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L., $k=2$)
1	1-Chlorooctadecane CAS # 3386-33-2 Purity 99% (Lot 13661500)	10,066.3 µg/mL +/-	58.5260 µg/mL +/-
			564.4046 µg/mL +/-
			577.6110 µg/mL +/-

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%

Gravimetric
 Unstressed
 Stressed

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (Cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

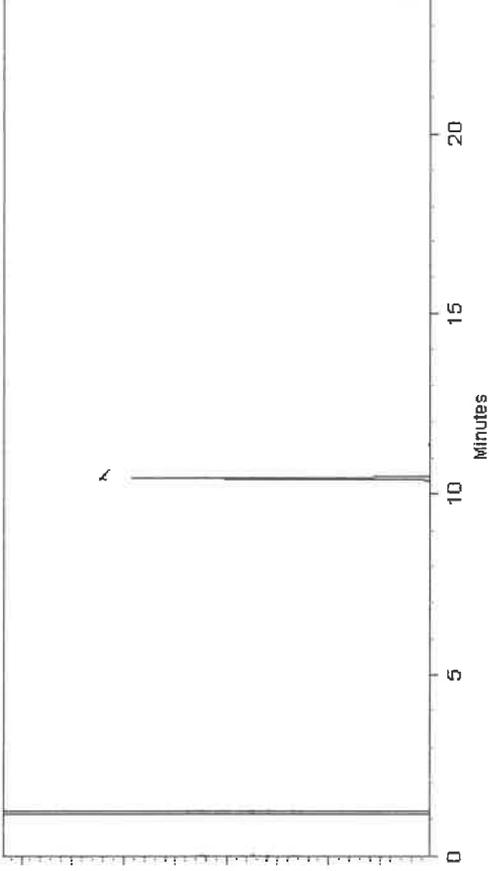

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Mallina Homan

Mallina Homan - Operations Technician I

Date Mixed: 10-Oct-2022 **Balance:** B442140311

Christie Mills

Christie Mills - Operations Tech II - ARM QC

Date Passed: 13-Oct-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



110 Benner Circle

Bellefonte, PA 16823-8812

Tel: 1-814-353-1300

Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30542

Lot No. : A0195645

Description : NIEPH Aliphatics Matrix Spike Mix

NIEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

Container Size : 5 mL

Pkg Amt: > 5 mL

Expiration Date : April 30, 2030

Storage: 10°C or colder

Handling: Sonicate prior to use.

Ship: Ambient

*PR24767 Y.S.
↓
P12485 05/23/23*

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBN5361	99%	202.0 µg/mL	+/- 5.2184
2	n-Decane (C10)	124-18-5	SHBN8619	99%	201.3 µg/mL	+/- 5.2012
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	202.0 µg/mL	+/- 5.2184
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	201.7 µg/mL	+/- 5.2098
5	n-Hexadecane (C16)	544-76-3	SHBQ0897	99%	201.3 µg/mL	+/- 5.2012
6	n-Octadecane (C18)	593-45-3	UESNG	98%	201.6 µg/mL	+/- 5.2068
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	200.8 µg/mL	+/- 5.1871
8	n-Heneicosane (C21)	629-94-7	MKCL3226	99%	201.0 µg/mL	+/- 5.1926
9	n-Docosane (C22)	629-97-0	MKCL8918	99%	200.7 µg/mL	+/- 5.1839
10	n-Tetracosane (C24)	646-31-1	MKCO8345	99%	201.3 µg/mL	+/- 5.2012
11	n-Hexacosane (C26)	630-01-3	MKCD4540	99%	201.0 µg/mL	+/- 5.1926
12	n-Octacosane (C28)	630-02-4	BCBS1577V	99%	201.7 µg/mL	+/- 5.2098
13	n-Triacontane (C30)	638-68-6	MKCO9436	97%	200.8 µg/mL	+/- 5.1871
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	200.3 µg/mL	+/- 5.1753
15	n-Tetracontane (C34)	14167-59-0	D3MZN	99%	200.3 µg/mL	+/- 5.1753
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.3 µg/mL	+/- 5.1753
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.6 µg/mL	+/- 5.2081



18 n-Tetracontane (C40)

4181-95-7

BSBME

99%


201.3 µg/mL

+/- 5.2012

* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: n-Pentane
CAS # 109-66-0
Purity 99%

Quality Confirmation Test

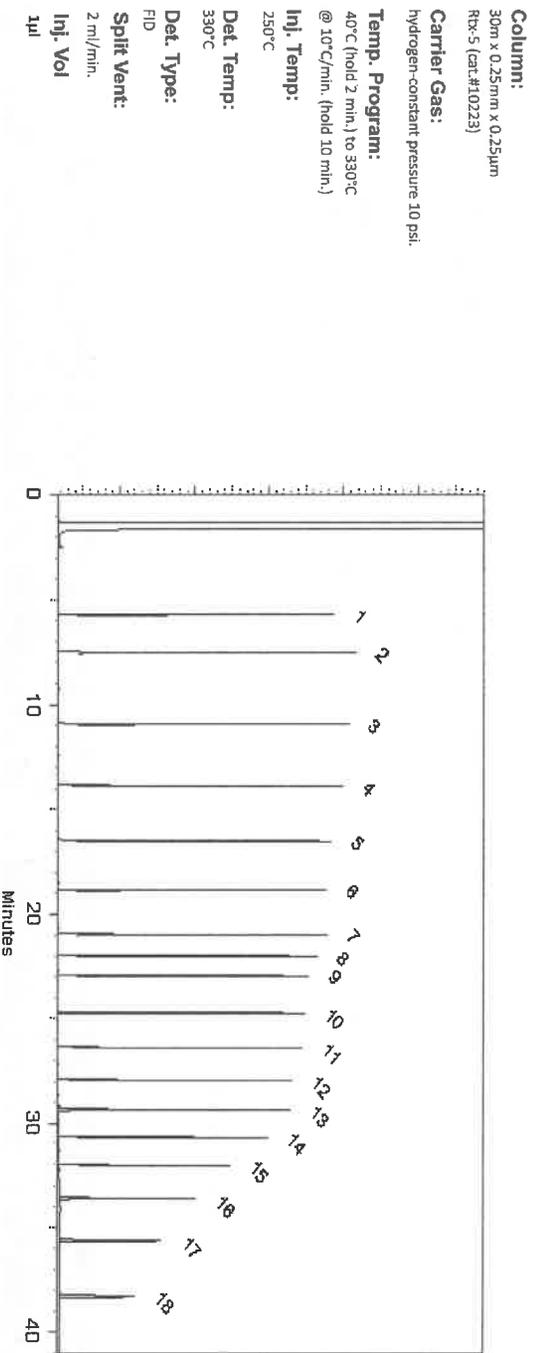

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Morgan
Morgan Crawford - Mtx Technician

Date Mixed: 08-Mar-2023

Balance Serial # B442140311

Fang
Fang Yun Wenner - Operations Lead Tech - ARN QC

Date Passed: 10-Mar-2023

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/IECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{U_{\text{gravimetric}}^2 + U_{\text{homogeneity}}^2 + U_{\text{storage stability}}^2 + U_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle
 Bellefonte, PA 16823-8812
 Tel: 1-814-353-1300
 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis
 chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30543

Lot No.: A0195695

Description : NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

Container Size : 5 ml

Pkg Amt: > 5 ml

Expiration Date : February 28, 2029

Storage: 10°C or colder

Handling: Sonication required. Mix is photosensitive.

Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-36	98%	200.7 µg/mL	+/- 9.0431
2	Naphthalene	91-20-3	MKCH0219	99%	200.8 µg/mL	+/- 9.0474
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.1 µg/mL	+/- 9.0143
4	Acenaphthylene	208-96-8	L10L	95%	199.9 µg/mL	+/- 9.0060
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10236068	99%	201.2 µg/mL	+/- 9.0655
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.4 µg/mL	+/- 9.0294
8	Anthracene	120-12-7	MKCP3968	99%	200.0 µg/mL	+/- 9.0114
9	Fluoranthene	206-44-0	MKCF7378	99%	200.0 µg/mL	+/- 9.0114
10	Pyrene	129-00-0	BCCG7845	99%	200.4 µg/mL	+/- 9.0294
11	Benz(a)anthracene	56-55-3	RP230103RSRA	97%	200.1 µg/mL	+/- 9.0173
12	Chrysene	218-01-9	468677R16R	99%	200.8 µg/mL	+/- 9.0474
13	Benzo(b)fluoranthene	205-99-2	012013B	99%	200.7 µg/mL	+/- 9.0420
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0474
15	Benzo(a)pyrene	50-32-8	J6LUE-00	99%	200.8 µg/mL	+/- 9.0474
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	99%	201.6 µg/mL	+/- 9.0835

P12516 } 7.8.
 P12535 } 06/30/23



17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	201.2	µg/mL	+/- 9.0655
18	Benzo(g,h,i)perylene	191-24-2	PMEVE	98%	200.1	µg/mL	+/- 9.0149

* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Acetone/Toluene (50:50)
CAS # 67-64-1/108-88-3
Purity 99%

Quality Confirmation Test

Column:
 30m x 0.25mm x 0.25µm
 RW-5 (cat.#10223)

Carrier Gas:
 hydrogen-constant pressure 10 psi.

Temp. Program:
 100°C (hold 1 min.) to 330°C
 @ 4°C/min. (hold 5 min.)


Inj. Temp:
 250°C

Det. Temp:
 330°C

Det. Type:
 FID

Split Vent:
 20 ml/min.

Inj. Vol
 1µl

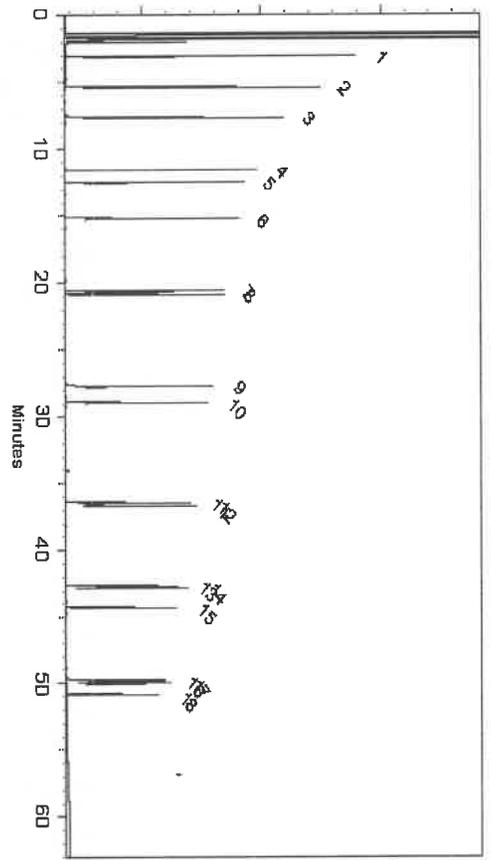

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Morgan Craighead
 Morgan Craighead - Mik Technician

Date Mixed: 09-Mar-2023 Balance Serial # 1128360905

Date Passed: 15-Mar-2023

Melina Cowan - Operations Tech II ARM GC

Manufactured under Restek's ISO 9001:2015
 Registered Quality System
 Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{u_{\text{gravimetric}}^2 + u_{\text{homogeneity}}^2 + u_{\text{storage stability}}^2 + u_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31097

Lot No.: A0197729

Description : o-Terphenyl Standard

Container Size : 2 mL

Expiration Date : December 31, 2026

Handling: Sonticate prior to use.

Pkg Amt: > 1 mL

Storage: 10°C or colder

Ship: Ambient

Handwritten notes: 11528, 2, 9.1P, 0.6130

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	MKCH4487	99%	10,007.5 µg/mL	+/- 450.7438

* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:
hydrogen-constant pressure 10 psi.

Temp. Program:
75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)


Inj. Temp:
250°C

Det. Temp:
330°C

Det. Type:
FID

Split Vent:
10 ml/min.

Inj. Vol
1µl

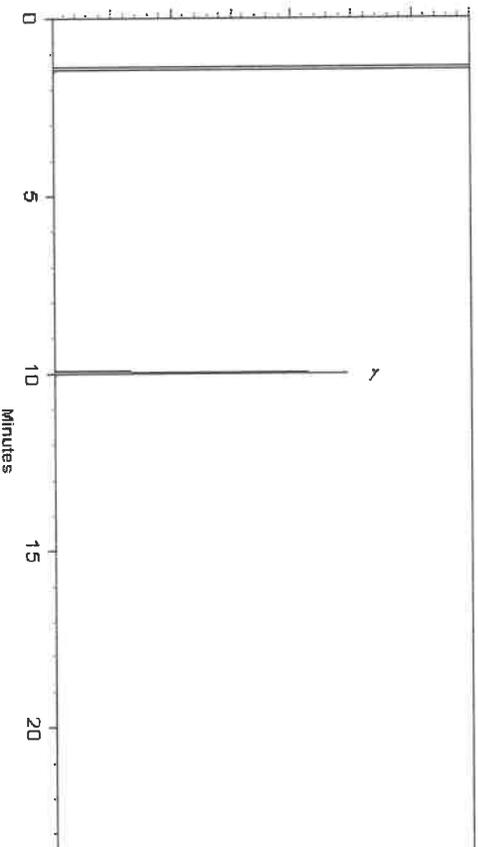

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Alicia Leathers
Alicia Leathers - Operation Technician I

Jennifer Pollino
Jennifer Pollino - Operations Tech III - ARM GC

Date Mixed: 03-May-2023

Balance Serial # 1128360905

Date Passed: 08-May-2023

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FIM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{U_{\text{gravimetric}}^2 + U_{\text{homogeneity}}^2 + U_{\text{storage stability}}^2 + U_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



Safety Data Sheet

Revision Date: 05/04/23

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31097 / o-Terphenyl Standard
Company: Restek Corporation
Address: 110 Benner Circle
Bellefonte, Pa. 16823
Phone#: 814-353-1300
Fax#: 814-353-1309
Emergency#: 800-424-9300 (CHEMTREC)
703-527-3887 (Outside the US)
Email: www.restek.com
Revision Number: 15
Intended use: For Laboratory use only. This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

2. HAZARD(S) IDENTIFICATION

Emergency Overview:

GHS Hazard Symbols:



GHS Classification: Carcinogenicity Category 2

GHS Signal Word: Warning

GHS Hazard: Suspected of causing cancer.

GHS Precautions:

Safety Precautions: Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF exposed or concerned: Get medical advice/attention.

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: No data available

Repeated Exposure Target Organs:

Repeated Exposure Target Organs: No data available

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS #	INEC #	% Composition
Methylene chloride (dichloromethane)	75-09-2	200-838-9	99
o-terphenyl	84-15-1	201-517-6	1

4. FIRST-AID MEASURES

- Inhalation:** Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.
- Eyes:** Immediately flush eyes with plenty of water for at least 20 minutes; retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical attention
- Skin Contact:** Wash with soap and water. Remove contaminated clothing, launder immediately, and discard contaminated leather goods. Get medical attention immediately.
- Ingestion:** Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth to an unconscious person

5. FIRE-FIGHTING MEASURES

- Extinguishing Media:** Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use methods suitable to fight surrounding fire.
- Fire and/or Explosion Hazards:** Material may be ignited only if preheated to temperatures above the high flash point, for example in a fire.
- Fire Fighting Methods and Protection:** Do not enter fire area without proper protection including self- contained breathing apparatus and full protective equipment.
- Hazardous Combustion Products:** Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

- Personal Precautions and Equipment:** Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including: the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.
- Methods for Clean-up:** Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

- Handling Technical Measures and Precautions:** Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be followed when handling this material.
- Storage Technical Measures and Conditions:** Store in a cool dry place. Isolate from incompatible materials. Keep container closed when not in use

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Methylene chloride (dichloromethane)	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)

o-terphenyl 84-15-1 500 mg/m³ None Known Not established No data available
IDLH

Personal Protection:

Local exhaust ventilation or other engineering controls are normally required when handling or using this product to avoid overexposure.

Engineering Measures:

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms.

Respiratory Protection:

Eye Protection:

Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash station available.

Skin Protection:

Avoid skin contact by wearing chemically resistant gloves, an apron and other protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work.

Medical Conditions Aggravated By Exposure:

Eye disease Skin disease including eczema and sensitization Respiratory disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:

Colorless

Odor:

Strong

Physical State:

No data available

pH:

Not applicable

Vapor Pressure:

No data available

Boiling Point (°C):

2.93 (air = 1)

Melting Point (°C):

40 °C at 1013 hPa (ECHA_API)

Flash Point (°F):

-96.7 °C.

Flammability:

230

Upper Flammable/Explosive Limit, % in air:

Combustible at elevated temperatures

Lower Flammable/Explosive Limit, % in air:

No data available

Autoignition Temperature (°C):

No data available

Decomposition Temperature (°C):

556 deg C

Specific Gravity:

No data available

Evaporation Rate:

1.3254 - 1.3258 g/cm³ at 20 °C

Odor Threshold:

No data available

Solubility:

ND

Partition Coefficient: n-octanol in water:

Moderate; 50-99%

VOC % by weight:

No data available

Molecular Weight:

99

Molecular Weight:

No data available

10. STABILITY AND REACTIVITY

Stability:

Stable under normal conditions.

Conditions to Avoid:

Temperatures above the high flash point of this combustible

material in combination with sparks, open flames, or other

sources of ignition. Contamination High temperatures

Materials to Avoid / Chemical Incompatibility:

Strong oxidizing agents Causics (bases)

Hazardous Decomposition Products:

Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:

Inhalation Absorption Ingestion Skin contact Eye contact

Target Organs Potentially Affected By Exposure:

Skin, Cardiovascular System, Eyes, Liver,

Respiratory Tract

Chemical Interactions That Change Toxicity:

None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.

Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs)\Inhalation may cause severe central nervous system depression (including unconsciousness).
Skin Contact: Contact causes severe skin irritation and possible burns.
Skin Absorption: Harmful if absorbed through the skin. May cause severe irritation and systemic damage.
Eye Contact: Contact with the eyes may cause moderate to severe eye injury. Eye contact may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.
Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.
Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity:
Reproductive and Developmental Toxicity:

Inhalation: Contains a probable or known human carcinogen. No data available to indicate product or any components present at greater than 0.1% may cause birth defects. Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache. Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (See "Target Organs")
Skin Absorption: Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage

Component Toxicological Data:

NIOSH:
Chemical Name **CAS No.** **LD50/LC50**
o-Terphenyl 84-15-1 Oral LD50 Rat 1900 mg/kg
Dichloromethane 75-09-2 Dermal LD50 Rat >2000 mg/kg; Inhalation LC50 Rat 53 mg/L 6 h; Oral LD50 Rat 1600 mg/kg

Component Carcinogenic Data:

OSHA:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
25 ppm TWA (8 hr.); 125 ppm STEL (15 min.);
12.5 ppm Action Level (see 29 CFR
1910.1051); effective date for respiratory
protection for certain employers to achieve the
8-hour TWA PEL is August 31, 1998; the start
up date to install engineering controls is
December 10, 1998.; {OSHA - 29 CFR 1910
Specifically Regulate

ACGIH:
Chemical Name **CAS No.**
Dichloromethane 75-09-2
A3 - Confirmed Animal Carcinogen with
Unknown Relevance to Humans

NIOSH:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
potential occupational carcinogen

NTP:
Chemical Name **CAS No.**
No data available

IARC:
Chemical Name **CAS No.** **Group No.**
Monograph 110 [2017]; 75-09-2 Group 2A
Monograph 71 [1999]

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous

Mobility: to plants and/or wildlife. Keep out of waterways.
Persistence: No data
Bioaccumulation: No data
Degradability: No data
Ecological Toxicity Data: No data
 No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product: Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

Disposal Methods: Incinerate spent or discarded material a permitted hazardous waste facility.

Waste Disposal of Packaging: Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name: Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number: UN2810

Hazard Class: 6.1

Packing Group: III

International:

IATA Proper Shipping Name: Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number: UN2810

Hazard Class: 6.1

Packing Group: III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States:

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Methylene chloride (dichloromethane)	75-09-2	X	X	-	X
o-terphenyl	84-15-1	-	-	-	X

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Methylene chloride (dichloromethane)	75-09-2	X	X	X	X
o-terphenyl	84-15-1	-	X	-	-

16. OTHER INFORMATION

Prior Version Date: 04/27/23

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

References:

No data available

Disclaimer:

Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812

Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31097

Lot No.: A0197729

Description : o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : December 31, 2026

Storage: 10°C or colder

Handling: Sonticate prior to use.

Ship: Ambient

Handwritten notes: 11528, 2, 9.1P, 06130

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	MKCH4487	99%	10,007.5 µg/mL	+/- 450.7438

* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%



Quality Confirmation Test

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:

250°C

Det. Temp:

330°C

Det. Type:


FID

Split Vent:

10 ml/min.

Inj. Vol

1µl

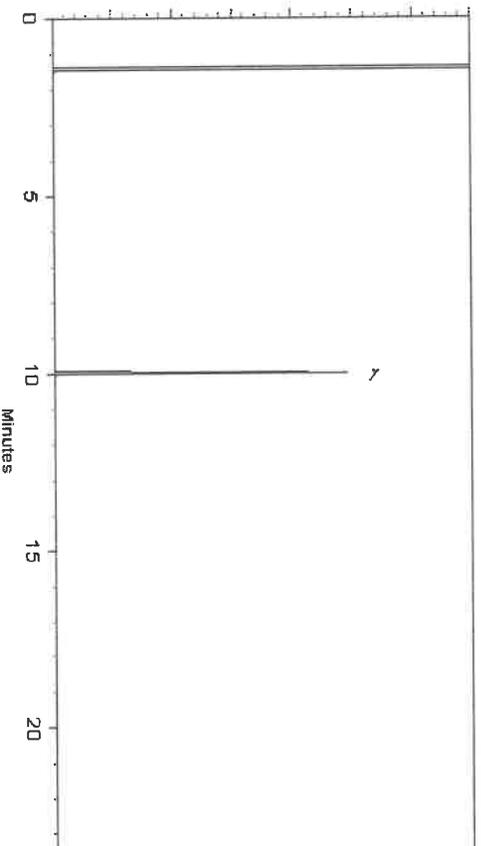

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Alicia Leathers
Alicia Leathers - Operation Technician I

Date Mixed: 03-May-2023

Balance Serial # 1128360905

Jennifer Pollino
Jennifer Pollino - Operations Tech III - ARM GC

Date Passed: 08-May-2023

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FIM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{U_{\text{gravimetric}}^2 + U_{\text{homogeneity}}^2 + U_{\text{storage stability}}^2 + U_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



Safety Data Sheet

Revision Date: 05/04/23

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31097 / o-Terphenyl Standard
Company: Restek Corporation
Address: 110 Benner Circle
Bellefonte, Pa. 16823
Phone#: 814-353-1300
Fax#: 814-353-1309
Emergency#: 800-424-9300 (CHEMTREC)
703-527-3887 (Outside the US)
Email: www.restek.com
Revision Number: 15
Intended use: For Laboratory use only. This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

2. HAZARD(S)IDENTIFICATION

Emergency Overview:

GHS Hazard Symbols:



GHS Classification: Carcinogenicity Category 2

GHS Signal Word: Warning

GHS Hazard: Suspected of causing cancer.

GHS Precautions:

Safety Precautions: Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF exposed or concerned: Get medical advice/attention.

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: No data available

Repeated Exposure Target Organs:

No data available

Repeated Exposure Target Organs:

3. COMPOSITION / INFORMATION ON INGREDIENT

Chemical Name	CAS #	INEC #	% Composition
Methylene chloride (dichloromethane)	75-09-2	200-838-9	99
o-terphenyl	84-15-1	201-517-6	1

4. FIRST-AID MEASURES

- Inhalation:** Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.
- Eyes:** Immediately flush eyes with plenty of water for at least 20 minutes; retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical attention
- Skin Contact:** Wash with soap and water. Remove contaminated clothing, launder immediately, and discard contaminated leather goods. Get medical attention immediately.
- Ingestion:** Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth to an unconscious person

5. FIRE-FIGHTING MEASURES

- Extinguishing Media:** Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use methods suitable to fight surrounding fire.
- Fire and/or Explosion Hazards:** Material may be ignited only if preheated to temperatures above the high flash point, for example in a fire.
- Fire Fighting Methods and Protection:** Do not enter fire area without proper protection including self- contained breathing apparatus and full protective equipment.
- Hazardous Combustion Products:** Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

- Personal Precautions and Equipment:** Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including: the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.
- Methods for Clean-up:** Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

- Handling Technical Measures and Precautions:** Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be followed when handling this material.
- Storage Technical Measures and Conditions:** Store in a cool dry place. Isolate from incompatible materials. Keep container closed when not in use

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Methylene chloride (dichloromethane)	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)

o-terphenyl 84-15-1 500 mg/m³ None Known Not established No data available
IDLH

Personal Protection:

Local exhaust ventilation or other engineering controls are normally required when handling or using this product to avoid overexposure.

Engineering Measures:

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms.

Respiratory Protection:

Eye Protection:

Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash station available.

Skin Protection:

Avoid skin contact by wearing chemically resistant gloves, an apron and other protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work.

Medical Conditions Aggravated By Exposure:

Eye disease Skin disease including eczema and sensitization Respiratory disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:

Colorless

Odor:

Strong

Physical State:

No data available

pH:

Not applicable

Vapor Pressure:

No data available

Boiling Point (°C):

2.93 (air = 1)

Melting Point (°C):

40 °C at 1013 hPa (ECHA_API)

Flash Point (°F):

-96.7 °C.

Flammability:

230

Upper Flammable/Explosive Limit, % in air:

Combustible at elevated temperatures

Lower Flammable/Explosive Limit, % in air:

No data available

Autoignition Temperature (°C):

No data available

Decomposition Temperature (°C):

556 deg C

Specific Gravity:

No data available

Evaporation Rate:

1.3254 - 1.3258 g/cm³ at 20 °C

Odor Threshold:

No data available

Solubility:

ND

Partition Coefficient: n-octanol in water:

Moderate; 50-99%

VOC % by weight:

No data available

Molecular Weight:

99

Molecular Weight:

No data available

10. STABILITY AND REACTIVITY

Stability:

Stable under normal conditions.

Conditions to Avoid:

Temperatures above the high flash point of this combustible

material in combination with sparks, open flames, or other

sources of ignition. Contamination High temperatures

Strong oxidizing agents Causitics (bases)

Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:

Inhalation Absorption Ingestion Skin contact Eye contact

Target Organs Potentially Affected By Exposure:

Skin, Cardiovascular System, Eyes, Liver,

Respiratory Tract

Chemical Interactions That Change Toxicity:

None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.

Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs)\Inhalation may cause severe central nervous system depression (including unconsciousness).
Skin Contact: Contact causes severe skin irritation and possible burns.
Skin Absorption: Harmful if absorbed through the skin. May cause severe irritation and systemic damage.
Eye Contact: Contact with the eyes may cause moderate to severe eye injury. Eye contact may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.
Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.
Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity:
Reproductive and Developmental Toxicity:

Inhalation: Contains a probable or known human carcinogen. No data available to indicate product or any components present at greater than 0.1% may cause birth defects. Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache. Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (See "Target Organs")
Skin Absorption: Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage

Component Toxicological Data:

NIOSH:
Chemical Name **CAS No.** **LD50/LC50**
o-Terphenyl 84-15-1 Oral LD50 Rat 1900 mg/kg
Dichloromethane 75-09-2 Dermal LD50 Rat >2000 mg/kg; Inhalation LC50 Rat 53 mg/L 6 h; Oral LD50 Rat 1600 mg/kg

Component Carcinogenic Data:

OSHA:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
25 ppm TWA (8 hr.); 125 ppm STEL (15 min.);
12.5 ppm Action Level (see 29 CFR
1910.1051); effective date for respiratory
protection for certain employers to achieve the
8-hour TWA PEL is August 31, 1998; the start
up date to install engineering controls is
December 10, 1998.; {OSHA - 29 CFR 1910
Specifically Regulate

ACGIH:
Chemical Name **CAS No.**
Dichloromethane 75-09-2
A3 - Confirmed Animal Carcinogen with
Unknown Relevance to Humans

NIOSH:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
potential occupational carcinogen

NTP:
Chemical Name **CAS No.**
No data available

IARC:
Chemical Name **CAS No.** **Group No.**
Monograph 110 [2017]; 75-09-2 Group 2A
Monograph 71 [1999]

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous

Mobility:
Persistence:
Bioaccumulation:
Degradability:
Ecological Toxicity Data:

to plants and/or wildlife. Keep out of waterways.

No data

No data

No data

No data

No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product:

Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

Disposal Methods:

Incinerate spent or discarded material a permitted hazardous waste facility.

Waste Disposal of Packaging:

Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name:

Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number:

UN2810

Hazard Class:

6.1

Packing Group:

III

International:

IATA Proper Shipping Name:

Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number:

UN2810

Hazard Class:

6.1

Packing Group:

III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States:

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Methylene chloride (dichloromethane)	75-09-2	X	X	-	X
o-terphenyl	84-15-1	-	-	-	X

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Methylene chloride (dichloromethane)	75-09-2	X	X	X	X
o-terphenyl	84-15-1	-	X	-	-

16. OTHER INFORMATION

Prior Version Date: 04/27/23

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

References:

No data available

Disclaimer:

Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812

Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31097

Lot No.: A0197729

Description : o-Terphenyl Standard

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : December 31, 2026

Storage: 10°C or colder

Handling: Sonicate prior to use.

Ship: Ambient

Handwritten notes: 11528, 2, 9.1P, 0.125g, 0.06130

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	MKCH4487	99%	10,007.5 µg/mL	+/- 450.7438

* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:
hydrogen-constant pressure 10 psi.

Temp. Program:
75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)


Inj. Temp:
250°C

Det. Temp:
330°C

Det. Type:
FID

Split Vent:
10 ml/min.

Inj. Vol
1µl

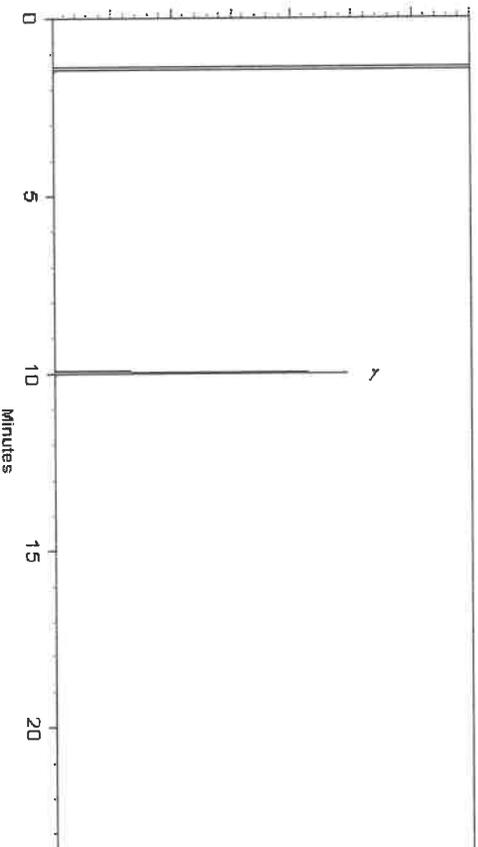

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Alicia Leathers
Alicia Leathers - Operation Technician I

Jennifer Pollino
Jennifer Pollino - Operations Tech III - ARM GC

Date Mixed: 03-May-2023

Balance Serial # 1128360905

Date Passed: 08-May-2023

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FIM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{U_{\text{gravimetric}}^2 + U_{\text{homogeneity}}^2 + U_{\text{storage stability}}^2 + U_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



Safety Data Sheet

Revision Date: 05/04/23

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31097 / o-Terphenyl Standard
Company: Restek Corporation
Address: 110 Benner Circle
Bellefonte, Pa. 16823
Phone#: 814-353-1300
Fax#: 814-353-1309
Emergency#: 800-424-9300 (CHEMTREC)
703-527-3887 (Outside the US)
Email: www.restek.com
Revision Number: 15
Intended use: For Laboratory use only. This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

2. HAZARD(S)IDENTIFICATION

Emergency Overview:

GHS Hazard Symbols:



GHS Classification: Carcinogenicity Category 2

GHS Signal Word: Warning

GHS Hazard: Suspected of causing cancer.

GHS Precautions:

Safety Precautions: Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF exposed or concerned: Get medical advice/attention.

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: No data available

Repeated Exposure Target Organs:

No data available

Repeated Exposure Target Organs:

3. COMPOSITION / INFORMATION ON INGREDIENT

31097 / o-Terphenyl Standard

Chemical Name	CAS #	INEC #	% Composition
Methylene chloride (dichloromethane)	75-09-2	200-838-9	99
o-terphenyl	84-15-1	201-517-6	1

4. FIRST-AID MEASURES

- Inhalation:** Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.
- Eyes:** Immediately flush eyes with plenty of water for at least 20 minutes; retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical attention.
- Skin Contact:** Wash with soap and water. Remove contaminated clothing, launder immediately, and discard contaminated leather goods. Get medical attention immediately.
- Ingestion:** Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth to an unconscious person.

5. FIRE-FIGHTING MEASURES

- Extinguishing Media:** Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use methods suitable to fight surrounding fire.
- Fire and/or Explosion Hazards:** Material may be ignited only if preheated to temperatures above the high flash point, for example in a fire.
- Fire Fighting Methods and Protection:** Do not enter fire area without proper protection including self- contained breathing apparatus and full protective equipment.
- Hazardous Combustion Products:** Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

- Personal Precautions and Equipment:** Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including: the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.
- Methods for Clean-up:** Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

- Handling Technical Measures and Precautions:** Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be followed when handling this material.
- Storage Technical Measures and Conditions:** Store in a cool dry place. Isolate from incompatible materials. Keep container closed when not in use

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Methylene chloride (dichloromethane)	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)

o-terphenyl 84-15-1 500 mg/m³ None Known Not established No data available
IDLH

Personal Protection:

Local exhaust ventilation or other engineering controls are normally required when handling or using this product to avoid overexposure.

Engineering Measures:

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms.

Respiratory Protection:

Eye Protection:

Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash station available.

Skin Protection:

Avoid skin contact by wearing chemically resistant gloves, an apron and other protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work.

Medical Conditions Aggravated By Exposure:

Eye disease Skin disease including eczema and sensitization Respiratory disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:

Colorless

Odor:

Strong

Physical State:

No data available

pH:

Not applicable

Vapor Pressure:

No data available

Boiling Point (°C):

2.93 (air = 1)

Melting Point (°C):

40 °C at 1013 hPa (ECHA_API)

Flash Point (°F):

-96.7 °C.

Flammability:

230

Upper Flammable/Explosive Limit, % in air:

Combustible at elevated temperatures

Lower Flammable/Explosive Limit, % in air:

No data available

Autoignition Temperature (°C):

No data available

Decomposition Temperature (°C):

556 deg C

Specific Gravity:

No data available

Evaporation Rate:

1.3254 - 1.3258 g/cm³ at 20 °C

Odor Threshold:

No data available

Solubility:

ND

Partition Coefficient: n-octanol in water:

Moderate; 50-99%

VOC % by weight:

No data available

Molecular Weight:

99

Molecular Weight:

No data available

10. STABILITY AND REACTIVITY

Stability:

Stable under normal conditions.

Conditions to Avoid:

Temperatures above the high flash point of this combustible

material in combination with sparks, open flames, or other

sources of ignition. Contamination High temperatures

Materials to Avoid / Chemical Incompatibility:

Strong oxidizing agents Causics (bases)

Hazardous Decomposition Products:

Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:

Inhalation Absorption Ingestion Skin contact Eye contact

Target Organs Potentially Affected By Exposure:

Skin, Cardiovascular System, Eyes, Liver,

Respiratory Tract

Chemical Interactions That Change Toxicity:

None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.

Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs)\Inhalation may cause severe central nervous system depression (including unconsciousness).
Skin Contact: Contact causes severe skin irritation and possible burns.
Skin Absorption: Harmful if absorbed through the skin. May cause severe irritation and systemic damage.
Eye Contact: Contact with the eyes may cause moderate to severe eye injury. Eye contact may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.
Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.
Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity:
Reproductive and Developmental Toxicity:

Inhalation: Contains a probable or known human carcinogen. No data available to indicate product or any components present at greater than 0.1% may cause birth defects. Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache. Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (See "Target Organs")
Skin Absorption: Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage

Component Toxicological Data:

NIOSH:
Chemical Name **CAS No.** **LD50/LC50**
o-Terphenyl 84-15-1 Oral LD50 Rat 1900 mg/kg
Dichloromethane 75-09-2 Dermal LD50 Rat >2000 mg/kg; Inhalation LC50 Rat 53 mg/L 6 h; Oral LD50 Rat 1600 mg/kg

Component Carcinogenic Data:

OSHA:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
25 ppm TWA (8 hr.); 125 ppm STEL (15 min.);
12.5 ppm Action Level (see 29 CFR
1910.1051); effective date for respiratory
protection for certain employers to achieve the
8-hour TWA PEL is August 31, 1998; the start
up date to install engineering controls is
December 10, 1998.; {OSHA - 29 CFR 1910
Specifically Regulate

ACGIH:
Chemical Name **CAS No.**
Dichloromethane 75-09-2
A3 - Confirmed Animal Carcinogen with
Unknown Relevance to Humans

NIOSH:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
potential occupational carcinogen

NTP:
Chemical Name **CAS No.**
No data available

IARC:
Chemical Name **CAS No.** **Group No.**
Monograph 110 [2017]; 75-09-2 Group 2A
Monograph 71 [1999]

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous

Mobility:
Persistence:
Bioaccumulation:
Degradability:
Ecological Toxicity Data:

to plants and/or wildlife. Keep out of waterways.

No data

No data

No data

No data

No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product:

Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

Disposal Methods:

Incinerate spent or discarded material a permitted hazardous waste facility.

Waste Disposal of Packaging:

Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name:

Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number:

UN2810

Hazard Class:

6.1

Packing Group:

III

International:

IATA Proper Shipping Name:

Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN2810

6.1

III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States:

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Methylene chloride (dichloromethane)	75-09-2	X	X	-	X
o-terphenyl	84-15-1	-	-	-	X

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Methylene chloride (dichloromethane)	75-09-2	X	X	X	X
o-terphenyl	84-15-1	-	X	-	-

16. OTHER INFORMATION

Prior Version Date: 04/27/23

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

References:

No data available

Disclaimer:

Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812

Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31097

Lot No.: A0197729

Description : o-Terphenyl Standard

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : December 31, 2026

Storage: 10°C or colder

Handling: Sonticate prior to use.

Ship: Ambient

Handwritten notes: 11528, 2, 9.1P, 0.12595, 0.06130

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	MKCH4487	99%	10,007.5 µg/mL	+/- 450.7438

* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:
hydrogen-constant pressure 10 psi.

Temp. Program:
75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)


Inj. Temp:
250°C

Det. Temp:
330°C

Det. Type:
FID

Split Vent:
10 ml/min.

Inj. Vol
1µl

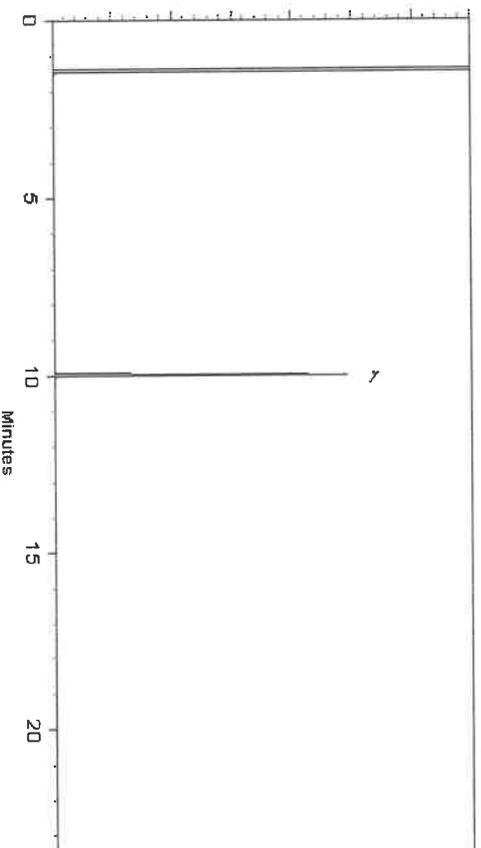

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Alicia Leathers
Alicia Leathers - Operation Technician I

Jennifer Pollino
Jennifer Pollino - Operations Tech III - ARM GC

Date Mixed: 03-May-2023

Balance Serial # 1128360905

Date Passed: 08-May-2023

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FIM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{U_{\text{gravimetric}}^2 + U_{\text{homogeneity}}^2 + U_{\text{storage stability}}^2 + U_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



Safety Data Sheet

Revision Date: 05/04/23

www.restek.com

2 Letter ISO country code/language code: US/EN

1. IDENTIFICATION

Catalog Number / Product Name: 31097 / o-Terphenyl Standard
Company: Restek Corporation
Address: 110 Benner Circle
Bellefonte, Pa. 16823
Phone#: 814-353-1300
Fax#: 814-353-1309
Emergency#: 800-424-9300 (CHEMTREC)
703-527-3887 (Outside the US)
Email: www.restek.com
Revision Number: 15
Intended use: For Laboratory use only. This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

2. HAZARD(S)IDENTIFICATION

Emergency Overview:

GHS Hazard Symbols:



GHS Classification: Carcinogenicity Category 2

GHS Signal Word: Warning

GHS Hazard: Suspected of causing cancer.

GHS Precautions:

Safety Precautions: Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid Measures: IF exposed or concerned: Get medical advice/attention.

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single Exposure Target Organs: No data available

Repeated Exposure Target Organs:

No data available

Repeated Exposure Target Organs:

3. COMPOSITION / INFORMATION ON INGREDIENT

31097 / o-Terphenyl Standard

Chemical Name	CAS #	INEC #	% Composition
Methylene chloride (dichloromethane)	75-09-2	200-838-9	99
o-terphenyl	84-15-1	201-517-6	1

4. FIRST-AID MEASURES

- Inhalation:** Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.
- Eyes:** Immediately flush eyes with plenty of water for at least 20 minutes; retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical attention.
- Skin Contact:** Wash with soap and water. Remove contaminated clothing, launder immediately, and discard contaminated leather goods. Get medical attention immediately.
- Ingestion:** Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth to an unconscious person.

5. FIRE-FIGHTING MEASURES

- Extinguishing Media:** Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use methods suitable to fight surrounding fire.
- Fire and/or Explosion Hazards:** Material may be ignited only if preheated to temperatures above the high flash point, for example in a fire.
- Fire Fighting Methods and Protection:** Do not enter fire area without proper protection including self- contained breathing apparatus and full protective equipment.
- Hazardous Combustion Products:** Carbon dioxide, Carbon monoxide

6. ACCIDENTAL RELEASE MEASURES

- Personal Precautions and Equipment:** Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including: the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.
- Methods for Clean-up:** Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

7. HANDLING AND STORAGE

- Handling Technical Measures and Precautions:** Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be followed when handling this material.
- Storage Technical Measures and Conditions:** Store in a cool dry place. Isolate from incompatible materials. Keep container closed when not in use

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

United States: Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Methylene chloride (dichloromethane)	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)

o-terphenyl 84-15-1 500 mg/m³ None Known Not established No data available
IDLH

Personal Protection:

Local exhaust ventilation or other engineering controls are normally required when handling or using this product to avoid overexposure.

Engineering Measures:

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms.

Respiratory Protection:

Eye Protection:

Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash station available.

Skin Protection:

Avoid skin contact by wearing chemically resistant gloves, an apron and other protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work.

Medical Conditions Aggravated By Exposure:

Eye disease Skin disease including eczema and sensitization Respiratory disease including asthma and bronchitis

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance, color:

Colorless

Odor:

Strong

Physical State:

No data available

pH:

Not applicable

Vapor Pressure:

No data available

Boiling Point (°C):

2.93 (air = 1)

Melting Point (°C):

40 °C at 1013 hPa (ECHA_API)

Flash Point (°F):

-96.7 °C.

Flammability:

230

Upper Flammable/Explosive Limit, % in air:

Combustible at elevated temperatures

Lower Flammable/Explosive Limit, % in air:

No data available

Autoignition Temperature (°C):

No data available

Decomposition Temperature (°C):

556 deg C

Specific Gravity:

No data available

Evaporation Rate:

1.3254 - 1.3258 g/cm³ at 20 °C

Odor Threshold:

No data available

Solubility:

ND

Partition Coefficient: n-octanol in water:

Moderate; 50-99%

VOC % by weight:

No data available

Molecular Weight:

99

Molecular Weight:

No data available

10. STABILITY AND REACTIVITY

Stability:

Stable under normal conditions.

Conditions to Avoid:

Temperatures above the high flash point of this combustible

material in combination with sparks, open flames, or other

sources of ignition. Contamination High temperatures

Strong oxidizing agents Causitics (bases)

Carbon dioxide Carbon monoxide

11. TOXICOLOGICAL INFORMATION

Routes of Entry:

Inhalation Absorption Ingestion Skin contact Eye contact

Target Organs Potentially Affected By Exposure:

Skin, Cardiovascular System, Eyes, Liver,

Respiratory Tract

Chemical Interactions That Change Toxicity:

None Known

Immediate (Acute) Health Effects by Route of Exposure:

Inhalation Irritation: Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.

Inhalation Toxicity: Harmful! Can cause systemic damage (see "Target Organs)\Inhalation may cause severe central nervous system depression (including unconsciousness).
Skin Contact: Contact causes severe skin irritation and possible burns.
Skin Absorption: Harmful if absorbed through the skin. May cause severe irritation and systemic damage.
Eye Contact: Contact with the eyes may cause moderate to severe eye injury. Eye contact may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.
Ingestion Irritation: Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.
Ingestion Toxicity: Harmful if swallowed. May cause systemic poisoning.

Long-Term (Chronic) Health Effects:

Carcinogenicity:
Reproductive and Developmental Toxicity:

Inhalation: Contains a probable or known human carcinogen. No data available to indicate product or any components present at greater than 0.1% may cause birth defects. Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache. Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (See "Target Organs")
Skin Absorption: Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage

Component Toxicological Data:

NIOSH:
Chemical Name **CAS No.** **LD50/LC50**
o-Terphenyl 84-15-1 Oral LD50 Rat 1900 mg/kg
Dichloromethane 75-09-2 Dermal LD50 Rat >2000 mg/kg; Inhalation LC50 Rat 53 mg/L 6 h; Oral LD50 Rat 1600 mg/kg

Component Carcinogenic Data:

OSHA:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
25 ppm TWA (8 hr.); 125 ppm STEL (15 min.);
12.5 ppm Action Level (see 29 CFR
1910.1051); effective date for respiratory
protection for certain employers to achieve the
8-hour TWA PEL is August 31, 1998; the start
up date to install engineering controls is
December 10, 1998.; {OSHA - 29 CFR 1910
Specifically Regulate

ACGIH:
Chemical Name **CAS No.**
Dichloromethane 75-09-2
A3 - Confirmed Animal Carcinogen with
Unknown Relevance to Humans

NIOSH:
Chemical Name **CAS No.**
Methylene chloride 75-09-2
potential occupational carcinogen

NTP:
Chemical Name **CAS No.**
No data available

IARC:
Chemical Name **CAS No.** **Group No.**
Monograph 110 [2017]; 75-09-2 Group 2A
Monograph 71 [1999]

12. ECOLOGICAL INFORMATION

Overview: Moderate ecological hazard. This product may be dangerous

Mobility:
Persistence:
Bioaccumulation:
Degradability:
Ecological Toxicity Data:

to plants and/or wildlife. Keep out of waterways.

No data

No data

No data

No data

No data available

13. DISPOSAL CONSIDERATIONS

Waste Description of Spent Product:

Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

Disposal Methods:

Incinerate spent or discarded material a permitted hazardous waste facility.

Waste Disposal of Packaging:

Comply with all Local, State, Federal, and Provincial Environmental Regulations.

14. TRANSPORTATION INFORMATION

United States:

DOT Proper Shipping Name:

Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number:

UN2810

Hazard Class:

6.1

Packing Group:

III

International:

IATA Proper Shipping Name:

Toxic, liquids, organic, n.o.s. (Dichloromethane, o-Terphenyl)

UN Number:

UN2810

Hazard Class:

6.1

Packing Group:

III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

15. REGULATORY INFORMATION

United States:

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Methylene chloride (dichloromethane)	75-09-2	X	X	-	X
o-terphenyl	84-15-1	-	-	-	X

The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Methylene chloride (dichloromethane)	75-09-2	X	X	X	X
o-terphenyl	84-15-1	-	X	-	-

16. OTHER INFORMATION

Prior Version Date: 04/27/23

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

References:

No data available

Disclaimer:

Restek Corporation provides the descriptions, data and information contained herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31480

Lot No.: A0196246

Description : MA Fractionation Surrogate Spike Mix

MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : February 28, 2029

Storage: 10°C or colder

Handling: Sonication required. Mix is photosensitive.

Ship: Ambient

P12665
P12684 }
Y.P.
07/19/23

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,025.1 µg/mL	+/- 181.3135
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,021.1 µg/mL	+/- 181.1342


* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Hexane
CAS # 110-54-3
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)
Carrier Gas:
hydrogen-constant pressure 10 psi.
Temp. Program:
40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)
Inj. Temp:
250°C
Det. Temp:
330°C
Det. Type:
FID
Split Vent:
2 ml/min.
Inj. Vol
1µl

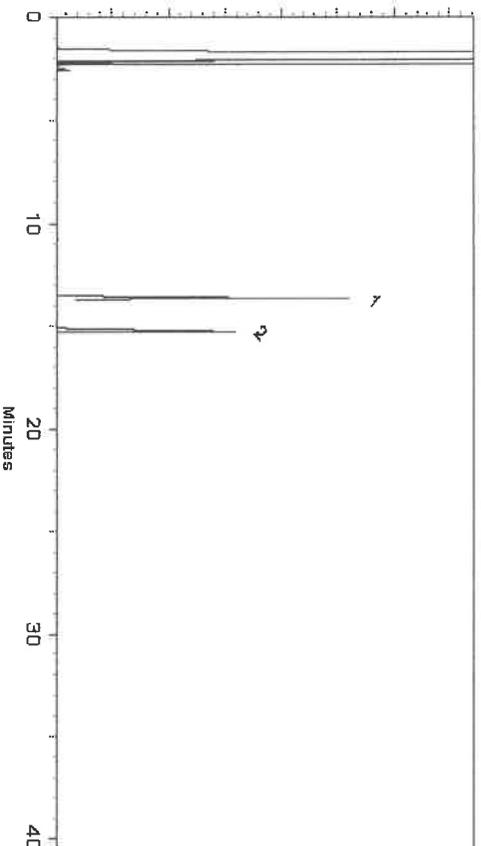

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Stacey Wanner
Stacey Wanner - Operations Technician I
Jennifer Polino - Operations Tech III - ARM QC

Date Mixed: 24-Mar-2023
Date Passed: 28-Mar-2023

Balance Serial # 1128360905

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{u_{\text{gravimetric}}^2 + u_{\text{homogeneity}}^2 + u_{\text{storage stability}}^2 + u_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31480

Lot No.: A0196246

Description : MA Fractionation Surrogate Spike Mix

MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : February 28, 2029

Storage: 10°C or colder

Handling: Sonication required. Mix is photosensitive.

Ship: Ambient

P12665
P12684 }
Y.P.
07/19/23

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,025.1 µg/mL	+/- 181.3135
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,021.1 µg/mL	+/- 181.1342


* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Hexane
CAS # 110-54-3
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)
Carrier Gas:
hydrogen-constant pressure 10 psi.
Temp. Program:
40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)
Inj. Temp:
250°C
Det. Temp:
330°C
Det. Type:
FID
Split Vent:
2 ml/min.
Inj. Vol
1µl

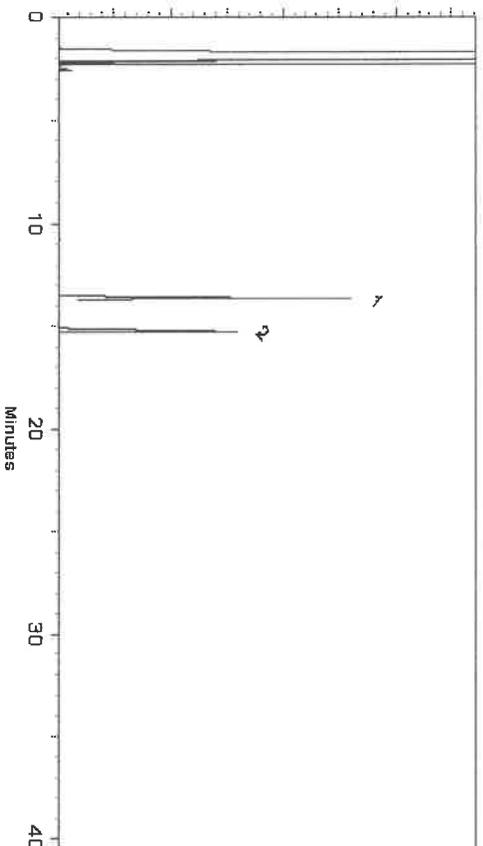

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Stacey Wanner
Stacey Wanner - Operations Technician I
Jennifer Polino - Operations Tech III - ARM QC

Date Mixed: 24-Mar-2023
Date Passed: 28-Mar-2023

Balance Serial # 1128360905

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{u_{\text{gravimetric}}^2 + u_{\text{homogeneity}}^2 + u_{\text{storage stability}}^2 + u_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31480

Lot No.: A0196246

Description : MA Fractionation Surrogate Spike Mix

MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : February 28, 2029

Storage: 10°C or colder

Handling: Sonication required. Mix is photosensitive.

Ship: Ambient

P12665
P12684 }
Y.P.
07/19/23

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,025.1 µg/mL	+/- 181.3135
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,021.1 µg/mL	+/- 181.1342


* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Hexane
CAS # 110-54-3
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)
Carrier Gas:
hydrogen-constant pressure 10 psi.
Temp. Program:
40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)
Inj. Temp:
250°C
Det. Temp:
330°C
Det. Type:
FID
Split Vent:
2 ml/min.
Inj. Vol
1µl

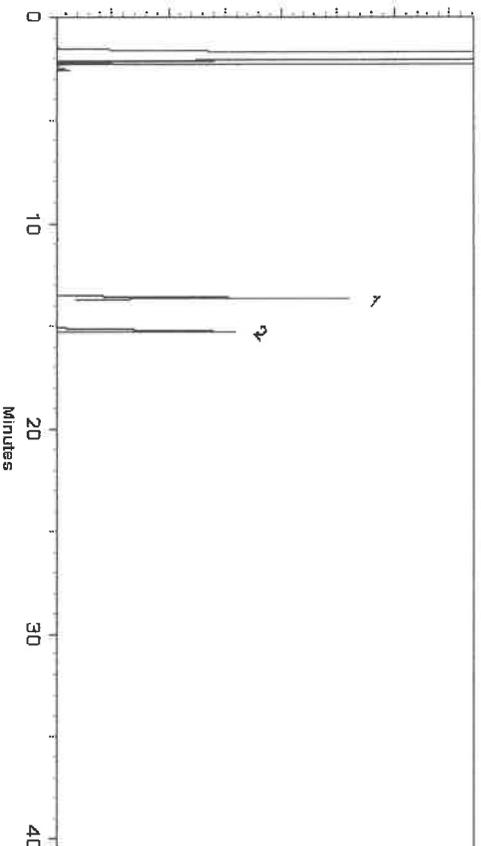

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Stacey Wanner
Stacey Wanner - Operations Technician I
Jennifer Polino - Operations Tech III - ARM QC

Date Mixed: 24-Mar-2023
Date Passed: 28-Mar-2023

Balance Serial # 1128360905

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{u_{\text{gravimetric}}^2 + u_{\text{homogeneity}}^2 + u_{\text{storage stability}}^2 + u_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

Certificate of Analysis
chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31480

Lot No.: A0196246

Description : MA Fractionation Surrogate Spike Mix

MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : February 28, 2029

Storage: 10°C or colder

Handling: Sonication required. Mix is photosensitive.

Ship: Ambient

P12665
P12684 }
Y.P.
07/19/23

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,025.1 µg/mL	+/- 181.3135
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,021.1 µg/mL	+/- 181.1342


* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Hexane
CAS # 110-54-3
Purity 99%



Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)
Carrier Gas:
hydrogen-constant pressure 10 psi.
Temp. Program:
40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)
Inj. Temp:
250°C
Det. Temp:
330°C
Det. Type:
FID
Split Vent:
2 ml/min.
Inj. Vol
1µl

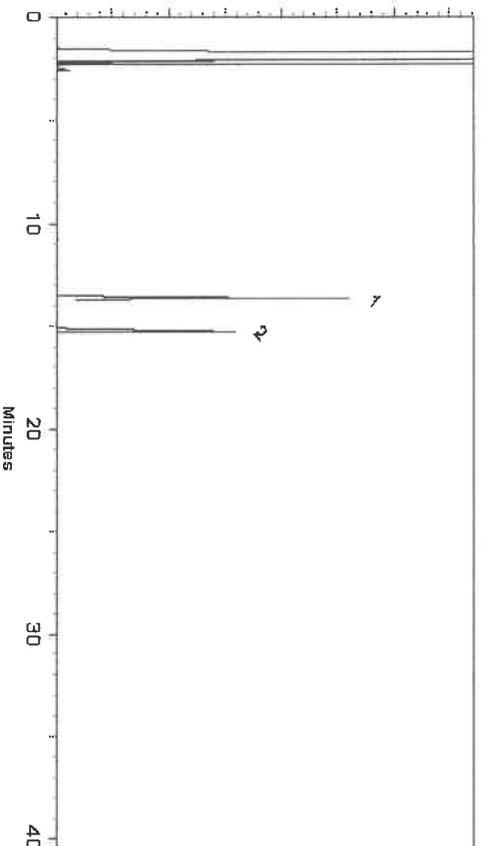

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Stacey Wanner
Stacey Wanner - Operations Technician I
Jennifer Polino - Operations Tech III - ARM QC

Date Mixed: 24-Mar-2023
Date Passed: 28-Mar-2023

Balance Serial # 1128360905

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{u_{\text{gravimetric}}^2 + u_{\text{homogeneity}}^2 + u_{\text{storage stability}}^2 + u_{\text{shipping stability}}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle

Bellefonte, PA 16823-8812

Tel: (800)356-1688

Fax: (814)353-1309

www.restek.com

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31098

Lot No.: A0183404

Description : 1-Chlorooctadecane Standard

1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : April 30, 2029

Storage: 10°C or colder

Ship: Ambient

*42166
Y.P.
P2166 11/12/12*

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)	µg/mL	Gravimetric
1	1-Chlorooctadecane CAS # 3386-33-2 Purity 99%	10,051.0 µg/mL (Lot 12882200)	+/- 58.4374 +/- 563.5496 +/- 576.7359	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed

Solvent: Methylene chloride
CAS # 75-09-2
Purity 99%

Column:

30m x 0.25mm x 0.25µm
RX-5 (cat.#10223)

Carrier Gas:

hydrogen-constant, pressure 10 psi.

Temp. Program:

75°C (hold 1 min.) to 330°C
@ 20°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

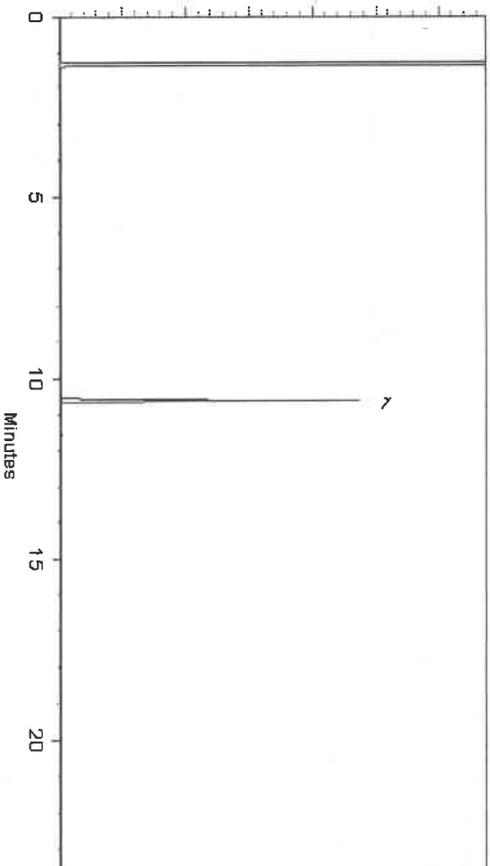

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Brittany Federinco - Operations Tech I

Date Mixed: 28-Mar-2022

Balance: 1128353505

Marilene Cowan - Operations Tech I

Date Passed: 31-Mar-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty) and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-Us.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.

