

## Prep Standard - Chemical Standard Summary

**Order ID :** P3390

**Test :** EPH

**Prepbatch ID :** PB162355,

**Sequence ID/Qc Batch ID:** FD073124AR,

**Standard ID :**

EP2511,EP2518,PP23429,PP23430,PP23471,PP23514,PP23519,PP23520,PP23521,PP23522,PP23523,PP23529,PP23539,

**Chemical ID :**

E2865,E3551,E3743,E3762,E3768,E3769,E3770,E3771,P10259,P11137,P11263,P12574,P12575,P12885,P12961,P12962,P13004,P13005,P13006,P13009,P13010,P13012,P13140,P13142,P13258,P13259,P13261,P13264,P13272,P13276,P13288,P13290,P13291,P13292,P13294,P13295,P13296,P13297,P13313,P13317,P13318,P13325,P13326,P13327,P13330,P13336,P13337,P13338,P13339,

## Extractions STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2017	1:1 ACETONE/METHYLENE CHLORIDE	<a href="#">EP2511</a>	07/12/2024	01/08/2025	Rajesh Parikh	None	None	RUPESHKUMAR SHAH 07/12/2024

**FROM** 8000.00000ml of E3768 + 8000.00000ml of E3769 = Final Quantity: 16000.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3923	Baked Sodium Sulfate	<a href="#">EP2518</a>	07/26/2024	01/03/2025	RUPESHKUMAR SHAH	Extraction_SCALE_2	None	Rajesh Parikh 07/26/2024

**FROM** 1.00000gram of E3551 = Final Quantity: 4000.000 gram

(EX-SC-2)

## Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
782	100 PPM Aromatic HC Working STD	<a href="#">PP23429</a>	05/21/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
05/24/2024								

**FROM** 0.25000ml of P13004 + 0.62500ml of P13259 + 1.25000ml of P10259 + 22.87500ml of E3743 = Final Quantity: 25.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2945	100 PPM Aromatic HC Working STD (Absolute)	<a href="#">PP23430</a>	05/21/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
05/24/2024								

**FROM** 0.25000ml of P13005 + 0.62500ml of P13258 + 1.25000ml of P11137 + 22.87500ml of E3743 = Final Quantity: 25.000 ml

[illegible]

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
1330	100 PPM NJEPH Spike Solution	<a href="#">PP23514</a>	07/09/2024	01/09/2025	Yogesh Patel	None	None	Ankita Jodhani 07/10/2024
<u>FROM</u>	5.00000ml of P13140 + 5.00000ml of P13288 + 5.00000ml of P13290 + 5.00000ml of P13291 + 5.00000ml of P13292 + 5.00000ml of P13294 + 5.00000ml of P13295 + 5.00000ml of P13296 + 5.00000ml of P13297 + 5.00000ml of P13313 + 5.00000ml of P13317 + 5.00000ml of P13318 + 5.00000ml of P13325 + 5.00000ml of P13326 + 5.00000ml of P13327 + 5.00000ml of P13330 + 5.00000ml of P13336 + 5.00000ml of P13337 + 5.00000ml of P13338 + 5.00000ml of P13339 = Final Quantity: 100.000 ml							

## Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
787	50 PPM Aromatic HC STD	<a href="#">PP23519</a>	07/15/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
07/16/2024								

**FROM** 0.50000ml of E3768 + 0.50000ml of PP23429 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
788	20 PPM Aromatic HC STD	<a href="#">PP23520</a>	07/15/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
07/16/2024								

**FROM** 0.80000ml of E3768 + 0.20000ml of PP23429 = Final Quantity: 1.000 ml

## Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
789	10 PPM Aromatic HC STD	<a href="#">PP23521</a>	07/15/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
07/16/2024								

**FROM** 0.90000ml of E3768 + 0.10000ml of PP23429 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
790	5 PPM Aromatic HC STD	<a href="#">PP23522</a>	07/15/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
07/16/2024								

**FROM** 0.90000ml of E3768 + 0.10000ml of PP23519 = Final Quantity: 1.000 ml

## Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2946	20 PPM Aromatic HC STD ICV (Absolute)	<a href="#">PP23523</a>	07/15/2024	11/16/2024	Yogesh Patel	None	None	Ankita Jodhani
								07/16/2024

**FROM** 0.80000ml of E3768 + 0.20000ml of PP23430 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
1339	100 PPM NJEPH Surrogate Spike	<a href="#">PP23529</a>	07/18/2024	01/12/2025	Abdul Mirza	None	None	Ankita Jodhani
								07/19/2024

**FROM** 1.25000ml of P12574 + 1.25000ml of P12575 + 1.25000ml of P12961 + 1.25000ml of P12962 + 1.25000ml of P13006 +  
1.25000ml of P13009 + 1.25000ml of P13010 + 1.25000ml of P13012 + 490.00000ml of E3769 = Final Quantity: 500.000 ml



<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2589	20 PPM NJ EPH SPIKE for LOD-LOQ	<a href="#">PP23539</a>	07/29/2024	11/13/2024	Yogesh Patel	None	None	Ankita Jodhani 07/30/2024
<u>FROM</u>	1.00000ml of P12885 + 1.00000ml of P13142 + 8.00000ml of P11263 = Final Quantity: 10.000 ml							



## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3382-05 / Sand, Purified (cs/4x2.5kg)	0000243821	12/31/2024	04/30/2020 / RAJESH	04/28/2020 / RAJESH	E2865

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	PC19631-100 / SODIUM SULFATE, ANHYDROUS, PEST GRADE, 1	313201	01/03/2025	01/03/2024 / Rajesh	07/20/2023 / Rajesh	E3551

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24C0162011	11/16/2024	05/16/2024 / Rajesh	04/26/2024 / Rajesh	E3743

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9262-03 / Hexane, Ultra-Resi (cs/4x4L)	24C1862008	12/18/2024	06/18/2024 / Rajesh	06/17/2024 / Rajesh	E3762

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24E2462004	01/08/2025	07/08/2024 / Rajesh	06/21/2024 / Rajesh	E3768

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9254-03 / Acetone, Ultra Resi (cs/4x4L)	23H1462005	01/12/2025	07/12/2024 /	07/02/2024 / Rajesh	E3769

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9262-03 / Hexane, Ultra-Resi (cs/4x4L)	24C1862008	01/12/2025	07/12/2024 / Rajesh	07/02/2024 / Rajesh	E3770

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24F1062004	01/19/2025	07/19/2024 / Rajesh	07/16/2024 / Rajesh	E3771

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30541 / Custom NJEPH Aromatics Calibration Standard	A0165529	11/21/2024	05/21/2024 / yogesh	01/26/2021 / dhaval	P10259

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	95709 / NJ EPH Aromatic Hydrocarbons, 2000 PPM	060420	07/08/2024	01/08/2024 / yogesh	10/29/2021 / Abdul	P11137

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	HP782 / Pentane, 1L	21080835	11/13/2024	12/16/2021 / Ankita	12/16/2021 / Ankita	P11263

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0196745	01/18/2025	07/18/2024 / Abdul	06/30/2023 / Yogesh	P12574

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0196745	01/18/2025	07/18/2024 / Abdul	06/30/2023 / Yogesh	P12575

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0200008	01/29/2025	07/29/2024 / yogesh	10/17/2023 / Yogesh	P12885

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0204989	01/18/2025	07/18/2024 / Abdul	12/20/2023 / Yogesh	P12961

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31098 / 1-Chlorooctadecane Standard	A0204989	01/18/2025	07/18/2024 / Abdul	12/20/2023 / Yogesh	P12962

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0204177	11/21/2024	05/21/2024 / yogesh	12/21/2023 / Yogesh	P13004

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0204177	11/21/2024	05/21/2024 / yogesh	12/21/2023 / Yogesh	P13005

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0204177	01/18/2025	07/18/2024 / Abdul	12/21/2023 / Yogesh	P13006

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0204177	01/18/2025	07/18/2024 / Abdul	12/21/2023 / Yogesh	P13009

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0204177	01/18/2025	07/18/2024 / Abdul	12/21/2023 / Yogesh	P13010

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31097 / o-Terphenyl Standard	A0204177	01/18/2025	07/18/2024 / Abdul	12/21/2023 / Yogesh	P13012

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0204020	01/09/2025	07/09/2024 / yogesh	01/12/2024 / Yogesh	P13140

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0204020	01/29/2025	07/29/2024 / yogesh	01/12/2024 / Yogesh	P13142

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0206496	11/21/2024	05/21/2024 / yogesh	02/20/2024 / yogesh	P13258

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0206496	11/21/2024	05/21/2024 / yogesh	02/20/2024 / yogesh	P13259

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0206496	12/20/2024	06/20/2024 / yogesh	02/20/2024 / yogesh	P13261

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0206496	12/20/2024	06/20/2024 / yogesh	02/20/2024 / yogesh	P13264

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0206496	12/20/2024	06/20/2024 / yogesh	02/20/2024 / yogesh	P13272

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31480 / MA Fractionation Surrogate Spike Mix	A0206496	12/20/2024	06/20/2024 / yogesh	02/20/2024 / yogesh	P13276

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13288

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13290

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13291

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13292

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13294

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13295

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13296

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13297

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13313

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30542 / Custom NJEPH Aliphatics Matrix Spike Mix	A0207239	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13317

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13318

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13325

## CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13326

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13327

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13330

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13336

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13337

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13338



**CHEMICAL RECEIPT LOG BOOK**

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	30543 / Custom NJEPH Aromatics Matrix Spike Mix	A0207019	01/09/2025	07/09/2024 / yogesh	04/23/2024 / yogesh	P13339



110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: (800)356-1688  
Fax: (814)353-1309

www.restek.com

# CERTIFIED REFERENCE MATERIAL

## Certificate of Analysis



**FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.**

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

DD  
06/17/2021

**Catalog No. :** 30541 **Lot No.:** A0172403

**Description :** NJEPH Aromatics Calibration Standard

NJEPH Aromatics Calibration Standard 2,000µg/mL, Methylene Chloride, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** April 30, 2027 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P10758  
TO  
P10762  
- (S)

### CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene CAS # 526-73-8 (Lot 8776.10-36) Purity 98%	2,010.0 µg/mL	+/- 11.7957 µg/mL Gravimetric +/- 90.5449 µg/mL Unstressed +/- 100.4678 µg/mL Stressed
2	Naphthalene CAS # 91-20-3 (Lot MKBZ8680V) Purity 99%	2,006.0 µg/mL	+/- 11.7723 µg/mL Gravimetric +/- 90.3656 µg/mL Unstressed +/- 100.2689 µg/mL Stressed
3	2-Methylnaphthalene CAS # 91-57-6 (Lot STBG8884) Purity 99%	2,008.0 µg/mL	+/- 11.7841 µg/mL Gravimetric +/- 90.4557 µg/mL Unstressed +/- 100.3688 µg/mL Stressed
4	Acenaphthylene CAS # 208-96-8 (Lot N19U) Purity 95%	2,002.6 µg/mL	+/- 11.7524 µg/mL Gravimetric +/- 90.2125 µg/mL Unstressed +/- 100.0989 µg/mL Stressed
5	Acenaphthene CAS # 83-32-9 (Lot MKCN0610) Purity 99%	2,000.0 µg/mL	+/- 11.7371 µg/mL Gravimetric +/- 90.0953 µg/mL Unstressed +/- 99.9689 µg/mL Stressed
6	Fluorene CAS # 86-73-7 (Lot 10217947) Purity 99%	2,016.0 µg/mL	+/- 11.8310 µg/mL Gravimetric +/- 90.8161 µg/mL Unstressed +/- 100.7687 µg/mL Stressed
7	Phenanthrene CAS # 85-01-8 (Lot MKCL7390) Purity 99%	2,012.0 µg/mL	+/- 11.8075 µg/mL Gravimetric +/- 90.6359 µg/mL Unstressed +/- 100.5688 µg/mL Stressed

8	Anthracene			2,002.0	µg/mL	+/-	11.7489	µg/mL	Gravimetric
	CAS #	120-12-7	(Lot MKCM0015)			+/-	90.1854	µg/mL	Unstressed
	Purity	99%				+/-	100.0689	µg/mL	Stressed
9	Fluoranthene			2,003.0	µg/mL	+/-	11.7547	µg/mL	Gravimetric
	CAS #	206-44-0	(Lot MKCF7378)			+/-	90.2305	µg/mL	Unstressed
	Purity	99%				+/-	100.1189	µg/mL	Stressed
10	Pyrene			2,011.0	µg/mL	+/-	11.8017	µg/mL	Gravimetric
	CAS #	129-00-0	(Lot BCCB9880)			+/-	90.5909	µg/mL	Unstressed
	Purity	99%				+/-	100.5188	µg/mL	Stressed
11	Benz(a)anthracene			2,011.0	µg/mL	+/-	11.8014	µg/mL	Gravimetric
	CAS #	56-55-3	(Lot P0022018-0505)			+/-	90.5890	µg/mL	Unstressed
	Purity	98%				+/-	100.5168	µg/mL	Stressed
12	Chrysene			2,000.0	µg/mL	+/-	11.7371	µg/mL	Gravimetric
	CAS #	218-01-9	(Lot STBJ8094)			+/-	90.0953	µg/mL	Unstressed
	Purity	99%				+/-	99.9689	µg/mL	Stressed
13	Benzo(b)fluoranthene			2,006.0	µg/mL	+/-	11.7721	µg/mL	Gravimetric
	CAS #	205-99-2	(Lot 012012B)			+/-	90.3638	µg/mL	Unstressed
	Purity	97%				+/-	100.2669	µg/mL	Stressed
14	Benzo(k)fluoranthene			2,010.0	µg/mL	+/-	11.7958	µg/mL	Gravimetric
	CAS #	207-08-9	(Lot 012019K)			+/-	90.5458	µg/mL	Unstressed
	Purity	99%				+/-	100.4688	µg/mL	Stressed
15	Benzo(a)pyrene			2,004.0	µg/mL	+/-	11.7606	µg/mL	Gravimetric
	CAS #	50-32-8	(Lot RP210113)			+/-	90.2755	µg/mL	Unstressed
	Purity	99%				+/-	100.1689	µg/mL	Stressed
16	Indeno(1,2,3-cd)pyrene			2,010.0	µg/mL	+/-	11.7958	µg/mL	Gravimetric
	CAS #	193-39-5	(Lot 1-RAK-33-4)			+/-	90.5458	µg/mL	Unstressed
	Purity	99%				+/-	100.4688	µg/mL	Stressed
17	Dibenz(a,h)anthracene			2,017.0	µg/mL	+/-	11.8369	µg/mL	Gravimetric
	CAS #	53-70-3	(Lot ER032211-01)			+/-	90.8611	µg/mL	Unstressed
	Purity	99%				+/-	100.8187	µg/mL	Stressed
18	Benzo(g,h,i)perylene			2,003.0	µg/mL	+/-	11.7547	µg/mL	Gravimetric
	CAS #	191-24-2	(Lot 8GFYJ)			+/-	90.2305	µg/mL	Unstressed
	Purity	99%				+/-	100.1189	µg/mL	Stressed
<hr/>									
<b>Solvent:</b>	Methylene chloride								
	CAS #	75-09-2							
	Purity	99%							

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)


**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

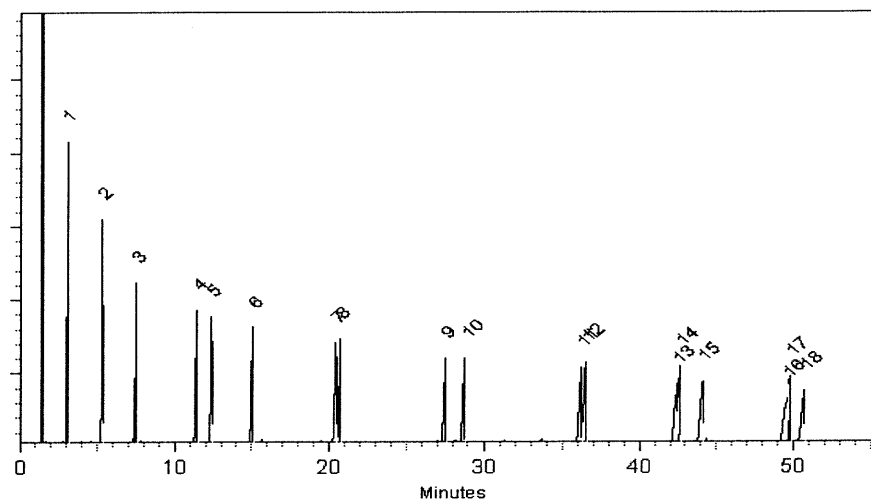

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Lane Kibe - Mix Technician

Date Mixed: 14-May-2021      Balance: B345965662

  
Alexis Shelow - Operations Tech I

Date Passed: 18-May-2021

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value ( includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at [www.restek.com/Contact-Us](http://www.restek.com/Contact-Us) for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at [www.restek.com/Contact-Us](http://www.restek.com/Contact-Us).
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.

Sand  
Purified  
Washed and Ignited



Material No.: 3382-05  
Batch No.: 0000243821  
Manufactured Date: 2018/04/09  
Retest Date: 2025/04/07  
Revision No: 1

## Certificate of Analysis

Test	Specification	Result
Substances Soluble in HCl	$\leq 0.16\%$	0.01

For Laboratory, Research or Manufacturing Use  
Meets Reagent Specifications for testing USP/NF monographs

Country of Origin: US  
Packaging Site: Paris Mfg Ctr & DC

E 2865

  
Jamie Ethier  
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC  
100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone: 610.386.1700



**PRODUCTOS  
QUÍMICOS  
MONTERREY, S.A. DE C.V.**

MIRADOR 201, COL. MIRADOR  
MONTERREY, N.L. MEXICO  
CP 64070  
TEL +52 81 13 52 57 57  
www.pqm.com.mx

## CERTIFICATE OF ANALYSIS

PRODUCT :	SODIUM SULFATE CRYSTALS ANHYDROUS		
QUALITY :	ACS (CODE RMB3375)	FORMULA :	Na <sub>2</sub> SO <sub>4</sub>
SPECIFICATION NUMBER :	6399	RELEASE DATE:	ABR/21/2023
LOT NUMBER :	313201		

TEST	SPECIFICATIONS	LOT VALUES
Assay (Na <sub>2</sub> SO <sub>4</sub> )	Min. 99.0%	99.7 %
pH of a 5% solution at 25°C	5.2 - 9.2	6.1
Insoluble matter	Max. 0.01%	0.005 %
Loss on ignition	Max. 0.5%	0.1 %
Chloride (Cl)	Max. 0.001%	<0.001 %
Nitrogen compounds (as N)	Max. 5 ppm	<5 ppm
Phosphate (PO <sub>4</sub> )	Max. 0.001%	<0.001 %
Heavy metals (as Pb)	Max. 5 ppm	<5 ppm
Iron (Fe)	Max. 0.001%	<0.001 %
Calcium (Ca)	Max. 0.01%	0.002 %
Magnesium (Mg)	Max. 0.005%	0.001 %
Potassium (K)	Max. 0.008%	0.003 %
Extraction-concentration suitability	Passes test	Passes test
Appearance	Passes test	Passes test
Identification	Passes test	Passes test
Solubility and foreign matter	Passes test	Passes test
Retained on US Standard No. 10 sieve	Max. 1%	0.1 %
Retained on US Standard No. 60 sieve	Min. 94%	97.3 %
Through US Standard No. 60 sieve	Max. 5%	2.5 %
Through US Standard No. 100 sieve	Max. 10%	0.1 %

### COMMENTS

QC: PhC Irma Belmares

If you need further details, please call our factory or contact our local distributor.

Recd. by R3 on 7/24/23 E 3551

RC-02-01, Ed. 3

Material No.: 92E  
Batch No.: 24C016  
Manufactured Date: 2024-C  
Expiration Date: 2025-C  
Revision I

## Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	$\leq 5$	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	$\leq 10$	2
Assay (CH <sub>2</sub> Cl <sub>2</sub> ) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8 \%$	100.0 %
Color (APHA)	$\leq 10$	10
Residue after Evaporation	$\leq 1.0$ ppm	0.2 ppm
Titration Acid ( $\mu$ eq/g)	$\leq 0.3$	< 0.1
Chloride (Cl)	$\leq 10$ ppm	< 5 ppm
Water (by KF, coulometric)	$\leq 0.02 \%$	< 0.01 %

For Laboratory, Research, or Manufacturing Use  
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC  
Manufacturer source batch: MG24A04224

E 3743

  
Ken Koehnlein  
Sr. Manager, Quality Assurance

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700  
Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087, U.S.A. Phone 610.386.1700



Hexanes (95% n-hexane)  
BAKER RESI-ANALYZED® Reagent  
For Organic Residue Analysis

Avantor™



Material No.: 9262-03  
Batch No.: 24C1862008  
Manufactured Date: 2024-01-30  
Expiration Date: 2025-04-30  
Revision No.: 0

## Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1
ECD-Sensitive Impurities (as Ethylene Dibromide) - Single Impurity Peak (ng/mL)	≤ 5	1
Assay (Total Saturated C <sub>6</sub> Isomers) (by GC, corrected for water)	≥ 99.5 %	99.7 %
Assay (as n-Hexane) (by GC, corrected for water)	≥ 95 %	98 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.4 ppm
Substances Darkened by H <sub>2</sub> SO <sub>4</sub>	Passes Test	Passes Test
Water (by KF, coulometric)	≤ 0.05 %	< 0.01 %

For Laboratory, Research, or Manufacturing Use  
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd. by RP on 6/11/24

E 3762

Jamie Croak  
Director Quality Operations, Bioscience Production

Methylene Chloride  
ULTRA RESI-ANALYZED  
For Organic Residue Analysis  
(dichloromethane)



Material No.: 9266-A4  
Batch No.: 24E2462004  
Manufactured Date: 2024-04-10  
Expiration Date: 2025-07-10  
Revision No.: 0

## Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	$\leq 5$	3
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	$\leq 10$	3
Assay ( $\text{CH}_2\text{Cl}_2$ ) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8 \%$	100.0 %
Color (APHA)	$\leq 10$	5
Residue after Evaporation	$\leq 1.0 \text{ ppm}$	0.1 ppm
Titration Acid ( $\mu\text{eq/g}$ )	$\leq 0.3$	< 0.1
Chloride (Cl)	$\leq 10 \text{ ppm}$	5 ppm
Water (by KF, coulometric)	$\leq 0.02 \%$	< 0.01 %

For Laboratory, Research, or Manufacturing Use  
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC  
Manufacturer source batch: MG24D10725

E 3768

Jamie Croak  
Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087, U.S.A. Phone 610.386.1700

Page 1 of 1

Acetone

BAKER RESI-ANALYZED® Reagent

For Organic Residue Analysis

avantor™



Material No.: 9254-03

Batch No.: 23H1462005

Manufactured Date: 2023-07-26

Expiration Date: 2026-07-25

Revision No.: 0

## Certificate of Analysis

Test	Specification	Result
Assay ((CH <sub>3</sub> ) <sub>2</sub> CO) (by GC, corrected for water)	≥ 99.4 %	99.7 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.3 ppm
Substances Reducing Permanganate	Passes Test	Passes Test
Titration Acid (μeq/g)	≤ 0.3	0.1
Titration Base (μeq/g)	≤ 0.6	< 0.1
Water (H <sub>2</sub> O)	≤ 0.5 %	0.3 %
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1

For Laboratory, Research, or Manufacturing Use  
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd. by RP on 7/21/24

E 3769

Ken Koehnlein  
Sr. Manager, Quality Assurance

Acetone

BAKER RESI-ANALYZED® Reagent

For Organic Residue Analysis

avantor™



Material No.: 9254-03

Batch No.: 23H1462005

Manufactured Date: 2023-07-26

Expiration Date: 2026-07-25

Revision No.: 0

## Certificate of Analysis

Test	Specification	Result
Assay ((CH <sub>3</sub> ) <sub>2</sub> CO) (by GC, corrected for water)	≥ 99.4 %	99.7 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.3 ppm
Substances Reducing Permanganate	Passes Test	Passes Test
Titration Acid (μeq/g)	≤ 0.3	0.1
Titration Base (μeq/g)	≤ 0.6	< 0.1
Water (H <sub>2</sub> O)	≤ 0.5 %	0.3 %
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1

For Laboratory, Research, or Manufacturing Use  
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Recd. by RP on 7/21/24

E 3769

Ken Koehnlein  
Sr. Manager, Quality Assurance

Methylene Chloride  
ULTRA RESI-ANALYZED  
For Organic Residue Analysis  
(dichloromethane)



Material No.: 9266-A4  
Batch No.: 24F1062004  
Manufactured Date: 2024-04-15  
Expiration Date: 2025-07-15  
Revision No.: 0

## Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	$\leq 5$	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	$\leq 10$	7
Assay (CH <sub>2</sub> Cl <sub>2</sub> ) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8 \%$	100.0 %
Color (APHA)	$\leq 10$	5
Residue after Evaporation	$\leq 1.0$ ppm	0.1 ppm
Titration Acid ( $\mu$ eq/g)	$\leq 0.3$	< 0.1
Chloride (Cl)	$\leq 10$ ppm	< 5 ppm
Water (by KF, coulometric)	$\leq 0.02 \%$	< 0.01 %

For Laboratory, Research, or Manufacturing Use  
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC  
Manufacturer source batch: MG24D15750

E 3771

Jamie Croak  
Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700



**CERTIFIED WEIGHT REPORT**

**Part Number:** 95709  
**Lot Number:** 060420  
**Description:** NJ EPH Aromatic Hydrocarbons  
18 components  
**Expiration Date:** 060425  
**Recommended Storage:** Refrigerate (4 °C)  
**Nominal Concentration (µg/mL):** 2000  
**NIST Test ID#:** 23060  
**Weight(s) shown below were combined and diluted to (mL):** 500.0  
**Balance Uncertainty:** 5E-05  
**Flask Uncertainty:** 0.058

**Solvent(s):** Methylene chloride  
**Lot#** 104923

Formulated By: Benson Chan		060420
Reviewed By: Pedro L. Renteria		DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (±) (µg/mL)	CAS#	SDS Information	
											(Solvent Safety Info. On Attached pg.)	LD50
1. Acenaphthene	1	MKB14871V	2000	99	0.2	1.01003	1.01010	2000.1	8.1	83-32-9	N/A	ip-rat 600mg/kg
2. Acenaphthylene	3	012014	2000	98	0.2	1.02033	1.02053	2000.4	8.2	208-96-6	N/A	N/A
3. Anthracene	13	A0210580	2000	99	0.2	1.01003	1.01009	2000.1	8.1	120-12-7	0.2mg/m3 (8h)	ip-rat 430mg/kg
4. Benz(a)anthracene	28	JY2TD-JT	2000	98	0.2	1.02033	1.02051	2000.3	8.2	56-55-3	N/A	N/A
5. Benz(a)pyrene	30	012012	2000	99.5	0.2	1.00495	1.00511	2000.3	8.1	50-32-8	0.2mg/m3 (8h)	scu-rat 50mg/kg
6. Benz(b)fluoranthene	31	012012b	2000	99	0.2	1.01003	1.01012	2000.2	8.1	205-99-2	N/A	N/A
7. Benz(k)fluoranthene	33	012012k	2000	99	0.2	1.01003	1.01018	2000.3	8.1	207-08-9	N/A	N/A
8. Benz(g,h,i)perylene	32	012018	2000	99	0.2	1.01003	1.01019	2000.3	8.1	191-24-2	N/A	N/A
9. Chrysene	91	012015	2000	98	0.2	1.02033	1.02040	2000.1	8.2	218-01-9	0.2mg/m3	N/A
10. Dibenzo(a,h)anthracene	112	012011	2000	98	0.2	1.02033	1.02050	2000.3	8.2	53-70-3	0.2mg/m3	N/A
11. Fluoranthene	183	04221PV	2000	98	0.2	1.02033	1.02050	2000.3	8.2	206-44-0	N/A	or-rat 2000mg/kg
12. Fluorene	184	07211MV	2000	98	0.2	1.02033	1.02047	2000.3	8.2	86-73-7	N/A	ip-rat 2 g/kg
13. Indeno(1,2,3-cd)pyrene	202	012014	2000	99.9	0.2	1.00093	1.00119	2000.5	8.0	193-39-5	N/A	N/A
14. 2-Methylnaphthalene	214	MKB13783V	2000	97	0.2	1.03085	1.03090	2000.1	8.3	91-57-6	N/A	or-rat 1630mg/kg
15. Naphthalene	222	MKB28690V	2000	100	0.2	0.99993	0.99999	2000.1	8.0	91-20-3	10 ppm (50mg/m3/8h)	or-rat 490mg/kg
16. Phenanthrene	248	03410PV	2000	99	0.2	1.01003	1.01030	2000.5	8.1	85-01-8	0.2mg/m3/8h	or-rat 700mg/kg
17. Pyrene	259	010197	2000	98	0.2	1.02033	1.02042	2000.2	8.2	129-00-0	0.2mg/m3/8h	or-rat 2700mg/kg
18. 1,2,3-Trimethylbenzene	944	031097	2000	99	0.2	1.01003	1.01025	2000.4	8.1	526-73-8	N/A	N/A

• The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.  
• Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).  
• Standards are certified (±) 0.5% of the stated value, unless otherwise stated.  
• All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.  
• Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).


P11137

P11141

PK 11/02/21



**Method GC8MSD-2.M:** Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (14min.), Rate = 10°C/min., Injector B= 250°C, Detector B = 275°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by: Melissa Stonier.

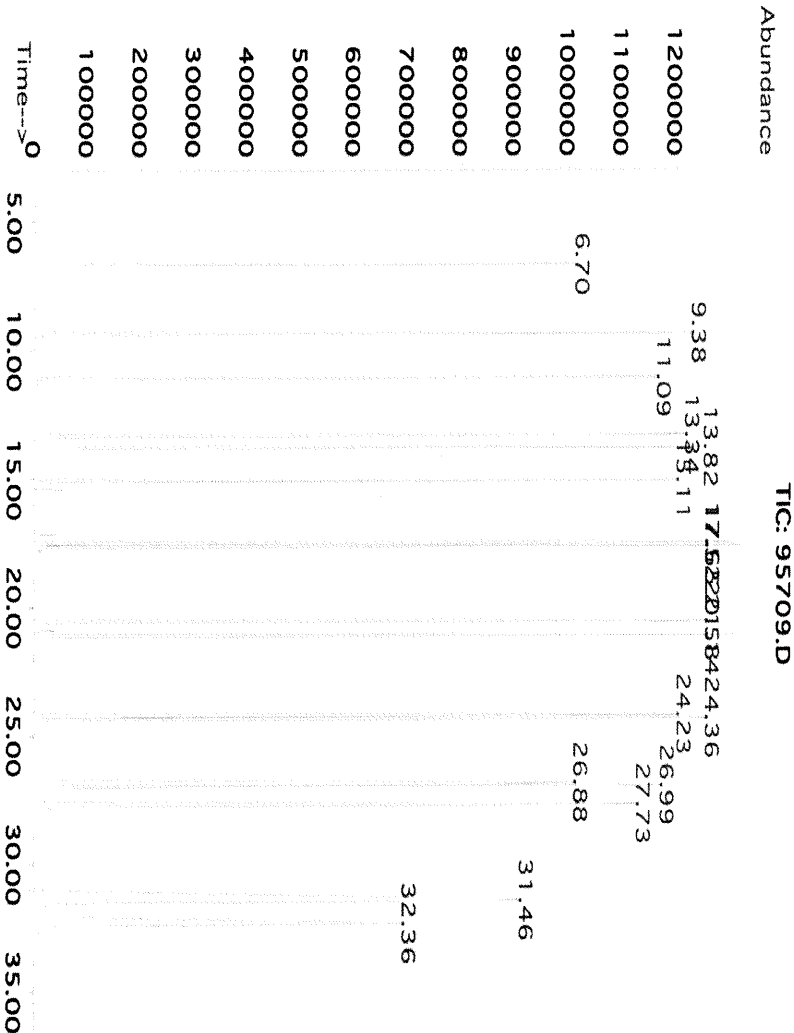

Peak No.	Name	MSD RT (min.)
1	1,2,3-Trimethylbenzene	6.70
2	Naphthalene	9.38
3	2-Methylnaphthalene	11.09
4	Acenaphthylene	13.34
5	Acenaphthene	13.82
6	Fluorene	15.11
7	Phenanthrene	17.52
8	Anthracene	17.65
9	Fluoranthene	20.58
10	Pyrene	21.14
11	Chrysene	24.23
12	Benzo(a)anthracene	24.36
13	Benzo(b)fluoranthene/Benzo(k)fluoranthene	26.98
14	Benzo(a)pyrene	27.73
15	Indeno(1,2,3-cd)pyrene/Dibenzo(a,h)anthracene	31.46
16	Benzo(g,h,i)perylene	32.36



## CERTIFIED REFERENCE MATERIAL



ISO 17034 Accredited  
Reference Material Producer  
Certificate #322201

110 Benner Circle

Bellefonte, PA 16823-8812

Tel: 1-814-353-1300

Fax: 1-814-353-1309

www.restek.com

# Certificate of Analysis

*chromatographic plus*



ISO/IEC 17025 Accredited  
Testing Laboratory  
Certificate #322202

### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No. : 31098

Lot No.: A0196745

Description : 1-Chlorooctadecane Standard

1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride,  
1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : May 31, 2030

Storage: 10°C or colder

Ship: Ambient

Pr2556  
↓  
Pr2575 } Y.P.  
06/30/23

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1-Chlorooctadecane	3386-33-2	13199700	99%	10,058.6 µg/mL	+/- 565.0485

\* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Methylene chloride

CAS # 75-09-2

Purity 99%



Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C



**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

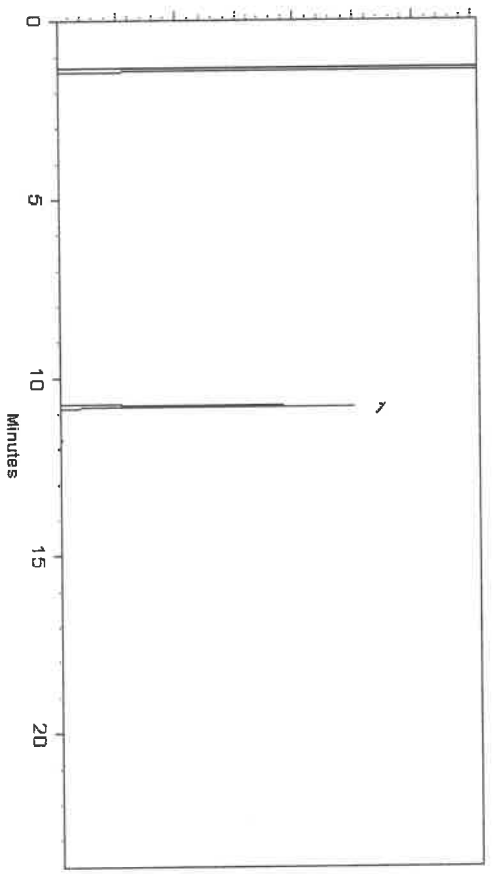**Inj. Vol**  
1µl



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

 <u>Jess Hoy - Operations Tech I</u>	<b>Date Mixed:</b> 06-Apr-2023	<b>Balance Serial #</b> 1128353505
 <u>Christine Mills - Operations Tech II - ARM QC</u>	<b>Date Passed:</b> 12-Apr-2023	

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FIM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





## Safety Data Sheet

Revision Date: 05/01/23

[www.restek.com](http://www.restek.com)

2 Letter ISO country code/language code: US/EN

### 1. IDENTIFICATION

Catalog Number / Product Name:	31098 / 1-Chlorooctadecane Standard
Company:	Restek Corporation
Address:	110 Banner Circle Bellefonte, Pa. 16823
Phone#:	814-353-1300
Fax#:	814-353-1309
Emergency#:	800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)
Email:	<a href="http://www.restek.com">www.restek.com</a>
Revision Number:	15
Intended use:	For Laboratory use only. This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

### 2. HAZARD(S) IDENTIFICATION

#### Emergency Overview:

GHS Hazard  
Symbols:



GHS Classification: Carcinogenicity Category 2

GHS Signal  
Word: Warning

GHS Hazard:  
GHS Suspected of causing cancer.

Precautions:

**Safety**  
**Precautions:** Obtain special instructions before use.  
Do not handle until all safety precautions have been read and understood.  
Wear protective gloves/protective clothing/eye protection/face protection.

**First Aid**  
**Measures:** IF exposed or concerned: Get medical advice/attention.

**Storage:** Store locked up.

**Disposal:** Dispose of contents/container according to section 13 of the SDS.

**Single**  
**Exposure**  
**Target Organs:** No data available

**Repeated**  
**Exposure**  
**Target Organs:** No data available

### 3. COMPOSITION / INFORMATION ON INGREDIENT

31098 / 1-Chlorooctadecane Standard

Chemical Name	CAS #	EINEC #	% Composition
Methylene chloride (dichloromethane)	75-09-2	200-838-9	99
1-chlorooctadecane	3386-33-2	222-207-7	1

#### 4. FIRST-AID MEASURES

##### Inhalation:

Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.

##### Eyes:

Immediately flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical attention

##### Skin Contact:

Wash with soap and water. Remove contaminated clothing, launder immediately, and discard contaminated leather goods. Get medical attention immediately.

##### Ingestion:

Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth to an unconscious person

#### 5. FIRE-FIGHTING MEASURES

##### Extinguishing Media:

Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use methods suitable to fight surrounding fire.

##### Fire and/or Explosion Hazards:

Material may be ignited only if preheated to temperatures above the high flash point, for example in a fire.

##### Fire Fighting Methods and Protection:

Do not enter fire area without proper protection including self-contained breathing apparatus and full protective equipment.

##### Hazardous Combustion Products:

Carbon dioxide, Carbon monoxide

#### 6. ACCIDENTAL RELEASE MEASURES

##### Personal Precautions and Equipment:

Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.

##### Methods for Clean-up:

Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

#### 7. HANDLING AND STORAGE

##### Handling Technical Measures and Precautions:

Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be followed when handling this material.

##### Storage Technical Measures and Conditions:

Store in a cool dry place. Isolate from incompatible materials. Keep container closed when not in use

#### 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

##### United States:

Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Methylene chloride (dichloromethane)	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)

1-chlorooctadecane	3386-33-2	Not established	None Known	Not established	No data available
--------------------	-----------	-----------------	------------	-----------------	-------------------

**Personal Protection:**

Local exhaust ventilation or other engineering controls are normally required when handling or using this product to avoid overexposure.

**Engineering Measures:**

**Respiratory Protection:**

Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection. Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms.

**Eye Protection:**

Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash station available.

**Skin Protection:**

Avoid skin contact by wearing chemically resistant gloves, an apron and other protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work.

**Medical Conditions Aggravated By Exposure:**

Eye disease Skin disease including eczema and sensitization Respiratory disease including asthma and bronchitis

**9. PHYSICAL AND CHEMICAL PROPERTIES**

<b>Appearance, color:</b>	Colorless
<b>Odor:</b>	Strong
<b>Physical State:</b>	No data available
<b>pH:</b>	Not applicable
<b>Vapor Pressure:</b>	No data available
<b>Vapor Density:</b>	2.93 (air = 1)
<b>Boiling Point (°C):</b>	40 °C at 1013 hPa (ECHA_API)
<b>Melting Point (°C):</b>	-96.7 °C
<b>Flash Point (°F):</b>	228
<b>Flammability:</b>	Combustible at elevated temperatures
<b>Upper Flammable/Explosive Limit, % in air:</b>	No data available
<b>Lower Flammable/Explosive Limit, % in air:</b>	No data available
<b>Autoignition Temperature (°C):</b>	556 deg C
<b>Decomposition Temperature (°C):</b>	No data available
<b>Specific Gravity:</b>	1.3254 - 1.3258 g/cm3 at 20 °C
<b>Evaporation Rate:</b>	No data available
<b>Odor Threshold:</b>	ND
<b>Solubility:</b>	Moderate; 50-99%
<b>Partition Coefficient: n-octanol in water:</b>	No data available
<b>VOC % by weight:</b>	99
<b>Molecular Weight:</b>	No data available

**10. STABILITY AND REACTIVITY**

<b>Stability:</b>	Stable under normal conditions.
<b>Conditions to Avoid:</b>	None known Contamination High temperatures
<b>Materials to Avoid / Chemical Incompatibility:</b>	Strong oxidizing agents Caustics (bases)
<b>Hazardous Decomposition Products:</b>	Carbon dioxide Carbon monoxide

**11. TOXICOLOGICAL INFORMATION**

<b>Routes of Entry:</b>	Inhalation Absorption Ingestion Skin contact Eye contact
<b>Target Organs Potentially Affected By Exposure:</b>	Skin, Cardiovascular System, Eyes, Liver
<b>Chemical Interactions That Change Toxicity:</b>	None Known

**Immediate (Acute) Health Effects by Route of Exposure:**

**Inhalation Irritation:** Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.

**Inhalation Toxicity:**

Harmful! Can cause systemic damage (see "Target Organs)Inhalation may cause severe central nervous system depression (including unconsciousness).

**Skin Contact:**

Contact causes severe skin irritation and possible burns.

**Skin Absorption:** Harmful if absorbed through the skin. May cause severe irritation and systemic damage.

**Eye Contact:** Contact with the eyes may cause moderate to severe eye injury. Eye contact may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.

**Ingestion Irritation:** Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.

**Ingestion Toxicity:** Harmful if swallowed. May cause systemic poisoning.

**Long-Term (Chronic) Health Effects:**

**Carcinogenicity: Reproductive and Developmental Toxicity:**

Contains a probable or known human carcinogen.  
 No data available to indicate product or any components present at greater than 0.1% may cause birth defects.  
 Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache. Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see "Target Organs")  
 Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage

**Skin Absorption:**

**Component Toxicological Data:**

<b>NIOSH:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
Dichloromethane	75-09-2
	<b>LD50/LC50</b>
	Dermal LD50 Rat >2000 mg/kg; Inhalation LC50 Rat 53 mg/L 6 h; Oral LD50 Rat 1600 mg/kg

**Component Carcinogenic Data:**

<b>OSHA:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
Methylene chloride	75-09-2
	25 ppm TWA (8 hr.); 125 ppm STEL (15 min.); 12.5 ppm Action Level (see 29 CFR 1910.1051); effective date for respiratory protection for certain employers to achieve the 8-hour TWA PEL is August 31, 1998; the start up date to install engineering controls is December 10, 1998.; {OSHA - 29 CFR 1910 Specifically Regulate

<b>ACGIH:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
Dichloromethane	75-09-2
	A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans

<b>NIOSH:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
Methylene chloride	75-09-2
	potential occupational carcinogen

<b>NTP:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
No data available	

<b>IARC:</b>	<b>CAS No.</b>	<b>Group No.</b>
<b>Chemical Name</b>		
Monograph 110 [2017]; Monograph 71 [1999]	75-09-2	Group 2A

**12. ECOLOGICAL INFORMATION**

**Overview:** Moderate ecological hazard. This product may be dangerous to plants and/or wildlife. Keep out of waterways.

**Mobility:** No data

**Persistence:** No data

**Bioaccumulation:** No data

Degradability:  
Ecological Toxicity Data:

No data  
No data available

### 13. DISPOSAL CONSIDERATIONS

#### Waste Description of Spent Product:

Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

#### Disposal Methods:

Incinerate spent or discarded material a permitted hazardous waste facility.

#### Waste Disposal of Packaging:

Comply with all Local, State, Federal, and Provincial Environmental Regulations.

### 14. TRANSPORTATION INFORMATION

#### United States:

DOT Proper Shipping Name:

Dichloromethane

UN Number:

UN1593

Hazard Class:

6.1

Packing Group:

III

#### International:

IATA Proper Shipping Name:

Dichloromethane

UN Number:

UN1593

Hazard Class:

6.1

Packing Group:

III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

### 15. REGULATORY INFORMATION

#### United States:

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Methylene chloride (dichloromethane)	75-09-2	X	X	-	X
1-chlorooctadecane	3386-33-2	-	-	-	X

#### The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

#### State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Methylene chloride (dichloromethane)	75-09-2	X	X	X	X
1-chlorooctadecane	3386-33-2	-	-	-	-

### 16. OTHER INFORMATION

Prior Version Date: 04/27/23

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

#### References:

No data available

#### Disclaimer:

Restek Corporation provides the descriptions, data and information contained



herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



## CERTIFIED REFERENCE MATERIAL



ISO 17034 Accredited  
Reference Material Producer  
Certificate #322201

110 Benner Circle

Bellefonte, PA 16823-8812

Tel: 1-814-353-1300

Fax: 1-814-353-1309

www.restek.com

# Certificate of Analysis

*chromatographic plus*



ISO/IEC 17025 Accredited  
Testing Laboratory  
Certificate #322202

### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No. : 31098

Lot No.: A0196745

Description : 1-Chlorooctadecane Standard

1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride,  
1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : May 31, 2030

Storage: 10°C or colder

Ship: Ambient

PR2556  
↓  
PR2575 } 7.8.  
06/30/23

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity *	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1-Chlorooctadecane	3386-33-2	13199700	99%	10,058.6 µg/mL	+/- 565.0485

\* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: Methylene chloride

CAS # 75-09-2

Purity 99%

Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C



**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

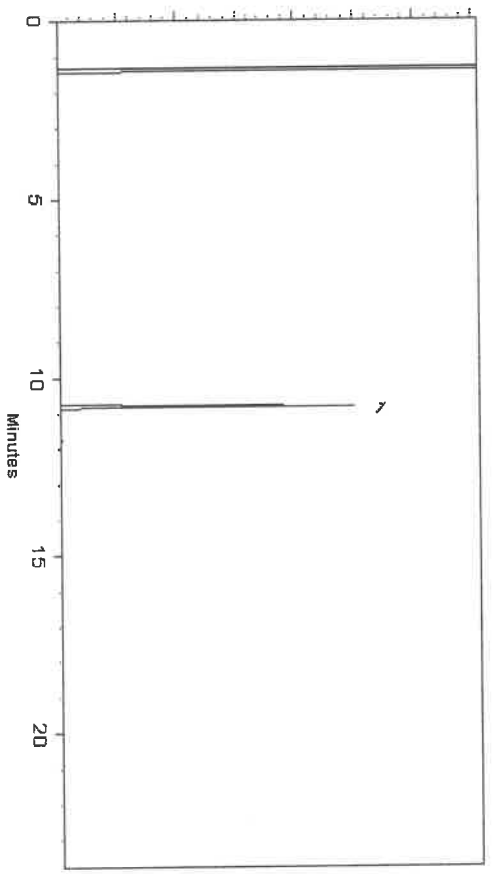**Inj. Vol**  
1µl



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

 <u>Jess Hoy - Operations Tech I</u>	<b>Date Mixed:</b> 06-Apr-2023	<b>Balance Serial #</b> 1128353505
 <u>Christine Mills - Operations Tech II - ARM QC</u>	<b>Date Passed:</b> 12-Apr-2023	

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FIM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





## Safety Data Sheet

Revision Date: 05/01/23

[www.restek.com](http://www.restek.com)

2 Letter ISO country code/language code: US/EN

### 1. IDENTIFICATION

Catalog Number / Product Name:	31098 / 1-Chlorooctadecane Standard
Company:	Restek Corporation
Address:	110 Banner Circle Bellefonte, Pa. 16823
Phone#:	814-353-1300
Fax#:	814-353-1309
Emergency#:	800-424-9300 (CHEMTREC) 703-527-3887 (Outside the US)
Email:	<a href="http://www.restek.com">www.restek.com</a>
Revision Number:	15
Intended use:	For Laboratory use only. This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

### 2. HAZARD(S) IDENTIFICATION

#### Emergency Overview:

GHS Hazard  
Symbols:



GHS Classification: Carcinogenicity Category 2

GHS Signal  
Word: Warning

GHS Hazard:  
GHS Suspected of causing cancer.

Precautions:

Safety  
Precautions: Obtain special instructions before use.  
Do not handle until all safety precautions have been read and understood.  
Wear protective gloves/protective clothing/eye protection/face protection.

First Aid  
Measures: IF exposed or concerned: Get medical advice/attention.

Storage: Store locked up.

Disposal: Dispose of contents/container according to section 13 of the SDS.

Single  
Exposure  
Target Organs: No data available

Repeated  
Exposure  
Target Organs: No data available

### 3. COMPOSITION / INFORMATION ON INGREDIENT

31098 / 1-Chlorooctadecane Standard

Chemical Name	CAS #	EINEC #	% Composition
Methylene chloride (dichloromethane)	75-09-2	200-838-9	99
1-chlorooctadecane	3386-33-2	222-207-7	1

#### 4. FIRST-AID MEASURES

##### Inhalation:

Remove to fresh air. If breathing is difficult, have a trained individual administer oxygen. If not breathing, give artificial respiration and have a trained individual administer oxygen. Get medical attention immediately.

##### Eyes:

Immediately flush eyes with plenty of water for at least 20 minutes retracting eyelids often. Tilt the head to prevent chemical from transferring to the uncontaminated eye. Get immediate medical attention and monitor the eye daily as advised by your physician. Serious harm (damage) may result if treatment is delayed. Continue to flush eyes while awaiting medical attention

##### Skin Contact:

Wash with soap and water. Remove contaminated clothing, launder immediately, and discard contaminated leather goods. Get medical attention immediately.

##### Ingestion:

Do not induce vomiting and seek medical attention immediately. Drink two glasses of water or milk to dilute. Provide medical care provider with this SDS. Never give anything by mouth to an unconscious person

#### 5. FIRE-FIGHTING MEASURES

##### Extinguishing Media:

Use alcohol resistant foam, carbon dioxide, or dry chemical when fighting fires. Water or foam may cause frothing if liquid is burning but it still may be a useful extinguishing agent if carefully applied to the surface of the fire. Do Not direct a stream of water into the hot burning liquid. Use methods suitable to fight surrounding fire.

##### Fire and/or Explosion Hazards:

Material may be ignited only if preheated to temperatures above the high flash point, for example in a fire.

##### Fire Fighting Methods and Protection:

Do not enter fire area without proper protection including self-contained breathing apparatus and full protective equipment.

##### Hazardous Combustion Products:

Carbon dioxide, Carbon monoxide

#### 6. ACCIDENTAL RELEASE MEASURES

##### Personal Precautions and Equipment:

Exposure to the spilled material may be severely irritating or toxic. Follow personal protective equipment recommendations found in Section 8 of this SDS. Personal protective equipment needs must be evaluated based on information provided on this sheet and the special circumstances created by the spill including; the material spilled, the quantity of the spill, the area in which the spill occurred, and the expertise of employees in the area responding to the spill. Never exceed any occupational exposure limits.

##### Methods for Clean-up:

Prevent the spread of any spill to minimize harm to human health and the environment if safe to do so. Wear complete and proper personal protective equipment following the recommendation of Section 8 at a minimum. Dike with suitable absorbent material like granulated clay. Gather and store in a sealed container pending a waste disposal evaluation.

#### 7. HANDLING AND STORAGE

##### Handling Technical Measures and Precautions:

Toxic or severely irritating material. Avoid contacting and avoid breathing the material. Use only in a well ventilated area. As with all chemicals, good industrial hygiene practices should be followed when handling this material.

##### Storage Technical Measures and Conditions:

Store in a cool dry place. Isolate from incompatible materials. Keep container closed when not in use

#### 8. EXPOSURE CONTROLS / PERSONAL PROTECTION

##### United States:

Chemical Name	CAS No.	IDLH	ACGIH STEL	ACGIH TLV-TWA	OSHA Exposure Limit
Methylene chloride (dichloromethane)	75-09-2	2300 ppm IDLH	None Known	50 ppm TWA	25 ppm TWA; 125 ppm STEL (15 min. TWA)

1-chlorooctadecane	3386-33-2	Not established	None Known	Not established	No data available
--------------------	-----------	-----------------	------------	-----------------	-------------------

**Personal Protection:**

Local exhaust ventilation or other engineering controls are normally required when handling or using this product to avoid overexposure.

**Engineering Measures:** Respiratory protection may be required to avoid overexposure when handling this product. General or local exhaust ventilation is the preferred means of protection.

**Respiratory Protection:**

Use a respirator if general room ventilation is not available or sufficient to eliminate symptoms.

**Eye Protection:** Wear chemically resistant safety glasses with side shields when handling this product. Wear additional eye protection such as chemical splash goggles and/or face shield when the possibility exists for eye contact with splashing or spraying liquid, or airborne material. Do not wear contact lenses. Have an eye wash station available.

**Skin Protection:** Avoid skin contact by wearing chemically resistant gloves, an apron and other protective equipment depending upon conditions of use. Inspect gloves for chemical break-through and replace at regular intervals. Clean protective equipment regularly. Wash hands and other exposed areas with mild soap and water before eating, drinking, and when leaving work.

**Medical Conditions Aggravated By Exposure:** Eye disease Skin disease including eczema and sensitization Respiratory disease including asthma and bronchitis

**9. PHYSICAL AND CHEMICAL PROPERTIES**

<b>Appearance, color:</b>	Colorless
<b>Odor:</b>	Strong
<b>Physical State:</b>	No data available
<b>pH:</b>	Not applicable
<b>Vapor Pressure:</b>	No data available
<b>Vapor Density:</b>	2.93 (air = 1)
<b>Boiling Point (°C):</b>	40 °C at 1013 hPa (ECHA_API)
<b>Melting Point (°C):</b>	-96.7 °C
<b>Flash Point (°F):</b>	228
<b>Flammability:</b>	Combustible at elevated temperatures
<b>Upper Flammable/Explosive Limit, % in air:</b>	No data available
<b>Lower Flammable/Explosive Limit, % in air:</b>	No data available
<b>Autoignition Temperature (°C):</b>	556 deg C
<b>Decomposition Temperature (°C):</b>	No data available
<b>Specific Gravity:</b>	1.3254 - 1.3258 g/cm3 at 20 °C
<b>Evaporation Rate:</b>	No data available
<b>Odor Threshold:</b>	ND
<b>Solubility:</b>	Moderate; 50-99%
<b>Partition Coefficient: n-octanol in water:</b>	No data available
<b>VOC % by weight:</b>	99
<b>Molecular Weight:</b>	No data available

**10. STABILITY AND REACTIVITY**

<b>Stability:</b>	Stable under normal conditions.
<b>Conditions to Avoid:</b>	None known Contamination High temperatures
<b>Materials to Avoid / Chemical Incompatibility:</b>	Strong oxidizing agents Caustics (bases)
<b>Hazardous Decomposition Products:</b>	Carbon dioxide Carbon monoxide

**11. TOXICOLOGICAL INFORMATION**

<b>Routes of Entry:</b>	Inhalation Absorption Ingestion Skin contact Eye contact
<b>Target Organs Potentially Affected By Exposure:</b>	Skin, Cardiovascular System, Eyes, Liver
<b>Chemical Interactions That Change Toxicity:</b>	None Known

**Immediate (Acute) Health Effects by Route of Exposure:**

**Inhalation Irritation:** Can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache.

**Inhalation Toxicity:** Harmful! Can cause systemic damage (see "Target Organs)Inhalation may cause severe central nervous system depression (including unconsciousness).

**Skin Contact:** Contact causes severe skin irritation and possible burns.



**Skin Absorption:** Harmful if absorbed through the skin. May cause severe irritation and systemic damage.

**Eye Contact:** Contact with the eyes may cause moderate to severe eye injury. Eye contact may result in tearing and reddening, but not likely to permanently injure eye tissue. Temporary vision impairment (cloudy or blurred vision) is possible.

**Ingestion Irritation:** Irritating to mouth, throat, and stomach. Can cause abdominal discomfort, nausea, vomiting and diarrhea.

**Ingestion Toxicity:** Harmful if swallowed. May cause systemic poisoning.

**Long-Term (Chronic) Health Effects:**

**Carcinogenicity:  
Reproductive and Developmental Toxicity:**

**Inhalation:** Contains a probable or known human carcinogen. No data available to indicate product or any components present at greater than 0.1% may cause birth defects. Upon prolonged and/or repeated exposure, can cause moderate respiratory irritation, dizziness, weakness, fatigue, nausea and headache. Harmful! Can cause systemic damage upon prolonged and/or repeated exposure (see "Target Organs")

**Skin Absorption:** Upon prolonged or repeated exposure, harmful if absorbed through the skin. May cause severe irritation and systemic damage

**Component Toxicological Data:**

<b>NIOSH:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
Dichloromethane	75-09-2
	<b>LD50/LC50</b>
	Dermal LD50 Rat >2000 mg/kg; Inhalation LC50 Rat 53 mg/L 6 h; Oral LD50 Rat 1600 mg/kg

**Component Carcinogenic Data:**

<b>OSHA:</b>	<b>CAS No.</b>
<b>Chemical Name</b>	
Methylene chloride	75-09-2
	25 ppm TWA (8 hr.); 125 ppm STEL (15 min.); 12.5 ppm Action Level (see 29 CFR 1910.1051); effective date for respiratory protection for certain employers to achieve the 8-hour TWA PEL is August 31, 1998; the start up date to install engineering controls is December 10, 1998.; {OSHA - 29 CFR 1910 Specifically Regulate

**ACGIH:**

<b>Chemical Name</b>	<b>CAS No.</b>
Dichloromethane	75-09-2
	A3 - Confirmed Animal Carcinogen with Unknown Relevance to Humans

**NIOSH:**

<b>Chemical Name</b>	<b>CAS No.</b>
Methylene chloride	75-09-2
	potential occupational carcinogen

**NTP:**

<b>Chemical Name</b>	<b>CAS No.</b>
No data available	

**IARC:**

<b>Chemical Name</b>	<b>CAS No.</b>	<b>Group No.</b>
Monograph 110 [2017]; Monograph 71 [1999]	75-09-2	Group 2A

**12. ECOLOGICAL INFORMATION**

**Overview:** Moderate ecological hazard. This product may be dangerous to plants and/or wildlife. Keep out of waterways.

**Mobility:** No data

**Persistence:** No data

**Bioaccumulation:** No data

Degradability:  
Ecological Toxicity Data:

No data  
No data available

### 13. DISPOSAL CONSIDERATIONS

#### Waste Description of Spent Product:

Spent or discarded material is a hazardous waste. Mixing spent or discarded material with other materials may render the mixture hazardous. Perform a hazardous waste determination on mixtures.

#### Disposal Methods:

Incinerate spent or discarded material a permitted hazardous waste facility.

#### Waste Disposal of Packaging:

Comply with all Local, State, Federal, and Provincial Environmental Regulations.

### 14. TRANSPORTATION INFORMATION

#### United States:

DOT Proper Shipping Name:

Dichloromethane

UN Number:

UN1593

Hazard Class:

6.1

Packing Group:

III

#### International:

IATA Proper Shipping Name:

Dichloromethane

UN Number:

UN1593

Hazard Class:

6.1

Packing Group:

III

Marine Pollutant: No

Chemical Name	CAS#	Marine Pollutant	Severe Marine Pollutant
No data available			

### 15. REGULATORY INFORMATION

#### United States:

This chemical/product is not and cannot be distributed in commerce (as defined in TSCA section 3(5)) or processed (as defined in TSCA section 3(13)) for consumer paint or coating removal.

Chemical Name	CAS#	CERCLA	SARA 313	SARA EHS 313	TSCA
Methylene chloride (dichloromethane)	75-09-2	X	X	-	X
1-chlorooctadecane	3386-33-2	-	-	-	X

#### The following chemicals are listed on CA Prop 65:

Chemical Name	CAS #	Regulation
Dichloromethane	75-09-2	Prop 65 Cancer
Dichloromethane (Methylene chloride)		

#### State Right To Know Listing:

Chemical Name	CAS#	New Jersey	Massachusetts	Pennsylvania	California
Methylene chloride (dichloromethane)	75-09-2	X	X	X	X
1-chlorooctadecane	3386-33-2	-	-	-	-

### 16. OTHER INFORMATION

Prior Version Date: 04/27/23

Other Information: Any changes to the SDS compared to previous versions are marked by a vertical line in front of the concerned paragraph.

#### References:

No data available

#### Disclaimer:

Restek Corporation provides the descriptions, data and information contained

herein in good faith but makes no representation as to its comprehensiveness or accuracy. It is provided for your guidance only. Because many factors may affect processing or application/use, Restek Corporation recommends you perform an assessment to determine the suitability of a product for your particular purpose prior to use. No warranties of any kind, either expressed or implied, including fitness for a particular purpose, are made regarding products described, data or information set forth. In no case shall the descriptions, information, or data provided be considered a part of our terms and conditions of sale. Further, the descriptions, data and information furnished hereunder are given gratis. No obligation or liability for the description, data and information given are assumed. All such being given and accepted at your risk.



110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 30542 Lot No.: A0200008  
Description : NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul  
Container Size : 5 mL Pkg Amt: > 5 mL  
Expiration Date : August 31, 2030 Storage: 10°C or colder  
Handling: Sonicate prior to use. Ship: Ambient

P12856  
↓  
P12855 } Y.P.  
10/17/23

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.7 µg/mL	+/- 5.2098
2	n-Decane (C10)	124-18-5	SHBP4427	99%	201.3 µg/mL	+/- 5.2012
3	n-Dodecane (C12)	112-40-3	SHBN7174	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	201.0 µg/mL	+/- 5.1926
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	201.7 µg/mL	+/- 5.2098
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	201.2 µg/mL	+/- 5.1984
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	201.4 µg/mL	+/- 5.2038
8	n-Heneicosane (C21)	629-94-7	MKCL3226	99%	201.3 µg/mL	+/- 5.2012
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	201.3 µg/mL	+/- 5.2012
10	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	201.3 µg/mL	+/- 5.2012
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	201.7 µg/mL	+/- 5.2098
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	201.0 µg/mL	+/- 5.1926
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	200.5 µg/mL	+/- 5.1788
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.3 µg/mL	+/- 5.2012
15	n-Tetratriacontane (C34)	14167-59-0	D3MZN	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	201.0 µg/mL	+/- 5.1926
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.3 µg/mL	+/- 5.1998

18 n-Tetracontane (C40) 4181-95-7 4LJYN 98% 200.6 µg/mL +/- 5.1815

\* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: n-Pentane  
CAS # 109-66-0  
Purity 99%

## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**


2 ml/min.

**Inj. Vol**

1µl

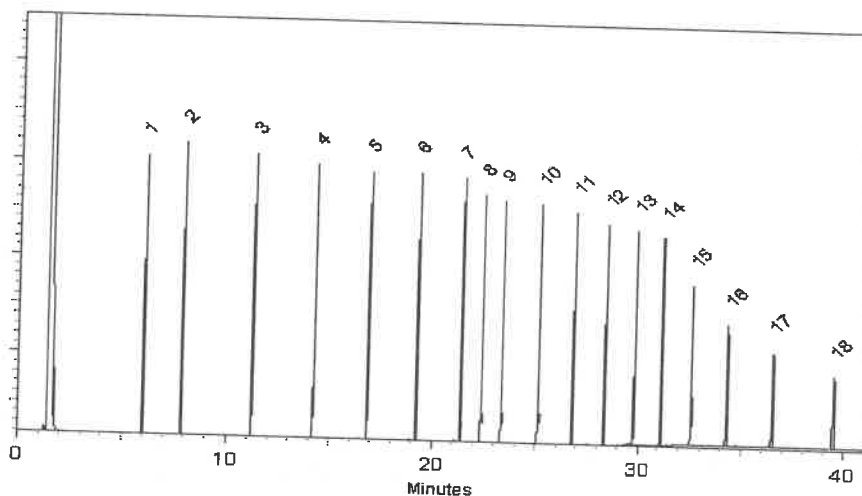

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
John Friedline - Operations Technician I

Date Mixed: 18-Jul-2023

Balance Serial # 1127510105

  
Jennifer Pollino - Operations Tech III - ARM QC

Date Passed: 21-Jul-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No.:** 31098 **Lot No.:** A0204989

**Description:** 1-Chlorooctadecane Standard

1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride, 1mL/ampul

**Container Size:** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date:** January 31, 2031 **Storage:** 10°C or colder

**Ship:** Ambient

P12960  
↓  
P12991 } Y.P.  
12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1-Chlorooctadecane	3386-33-2	14738400	99%	10,097.3 µg/mL	+/- 567.2675

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Methylene chloride  
**CAS #** 75-09-2  
**Purity** 99%



## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

10 ml/min.

**Inj. Vol**

1µl

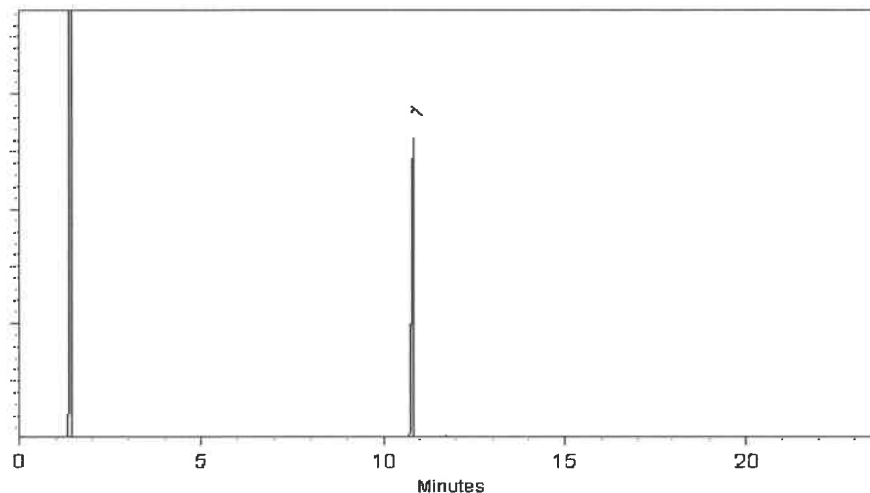

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Peter Robbins - Operations Technician I

Date Mixed: 02-Dec-2023

Balance Serial # B345965662

Christie Mills - Operations Lead Tech - ARM QC

Date Passed: 08-Dec-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No.:** 31098 **Lot No.:** A0204989

**Description:** 1-Chlorooctadecane Standard

1-Chlorooctadecane Standard 10,000µg/mL, Methylene Chloride, 1mL/ampul

**Container Size:** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date:** January 31, 2031 **Storage:** 10°C or colder

**Ship:** Ambient

P12960  
↓  
P12991 } Y.P.  
12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1-Chlorooctadecane	3386-33-2	14738400	99%	10,097.3 µg/mL	+/- 567.2675

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Methylene chloride  
**CAS #** 75-09-2  
**Purity** 99%

## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

10 ml/min.

**Inj. Vol**

1µl

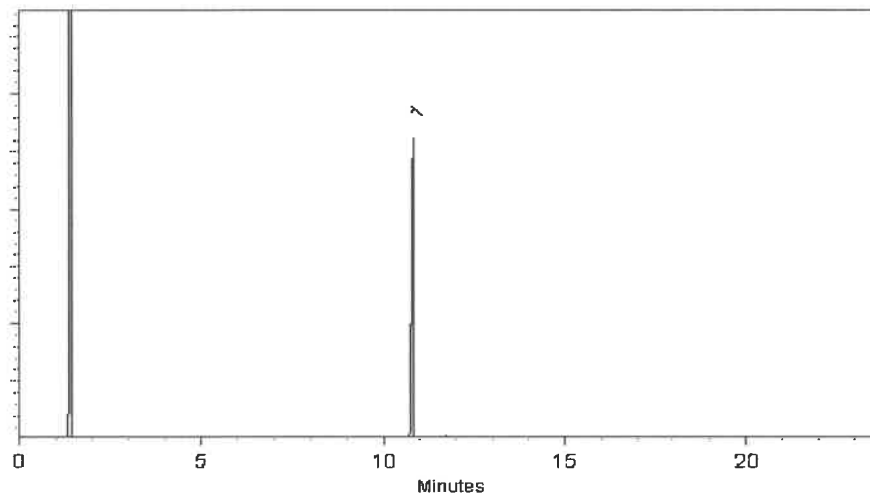

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Peter Robbins - Operations Technician I

Date Mixed: 02-Dec-2023

Balance Serial # B345965662

Christie Mills - Operations Lead Tech - ARM QC

Date Passed: 08-Dec-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.






110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

[www.restek.com](http://www.restek.com)

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No.:** 31097 **Lot No.:** A0204177

**Description:** o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

**Container Size:** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date:** June 30, 2027 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P12992 } Y.P.  
↓  
P13031 } 12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	GKSSA	99%	10,000.5 µg/mL	+/- 450.4278

**Solvent:** Methylene chloride  
**CAS #** 75-09-2  
**Purity** 99%

\* Expanded Uncertainty displayed in same units as Grav. Conc.



## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

**Inj. Vol**  
1µl

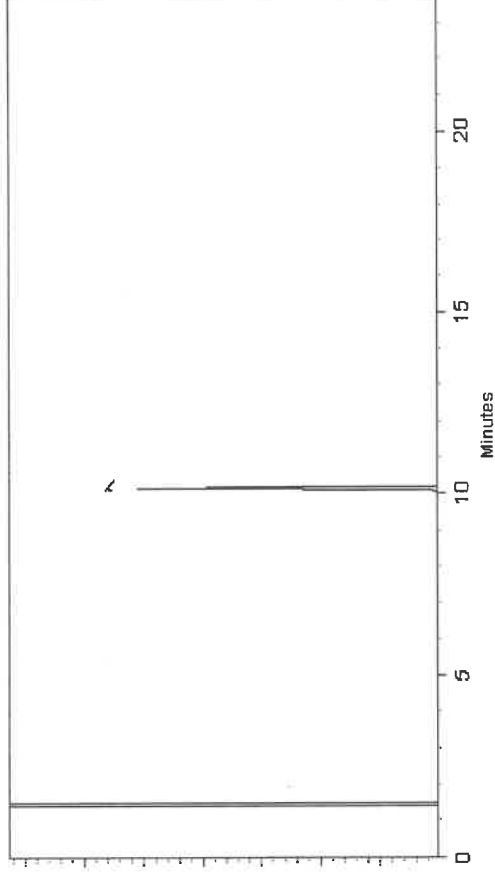

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.



Laith Clemente - Operations Technician I

**Date Mixed:** 07-Nov-2023      **Balance Serial #** 1128360905



Dillian Murphy - Operations Technician I

**Date Passed:** 09-Nov-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

[www.restek.com](http://www.restek.com)

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No.:** 31097 **Lot No.:** A0204177

**Description:** o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

**Container Size:** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date:** June 30, 2027 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P12992 } Y.P.  
↓  
P13031 } 12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	GKSSA	99%	10,000.5 µg/mL	+/- 450.4278

**Solvent:** Methylene chloride  
**CAS #** 75-09-2  
**Purity** 99%

\* Expanded Uncertainty displayed in same units as Grav. Conc.

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

**Inj. Vol**  
1µl

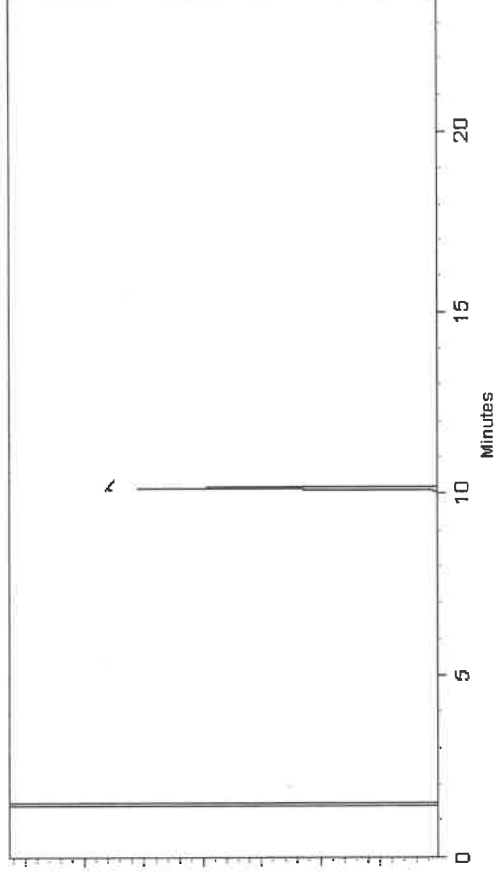

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 07-Nov-2023      **Balance Serial #** 1128360905

  
Dillian Murphy - Operations Technician I

**Date Passed:** 09-Nov-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.






110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

[www.restek.com](http://www.restek.com)

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No.: 31097 Lot No.: A0204177

Description: o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

Container Size: 2 mL Pkg Amt: > 1 mL

Expiration Date: June 30, 2027 Storage: 10°C or colder

Handling: Sonicate prior to use. Ship: Ambient

P12992 } Y.P.  
↓  
P13031 } 12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	GKSSA	99%	10,000.5 µg/mL	+/- 450.4278

Solvent: Methylene chloride  
CAS # 75-09-2  
Purity 99%

\* Expanded Uncertainty displayed in same units as Grav. Conc.



## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

**Inj. Vol**  
1µl

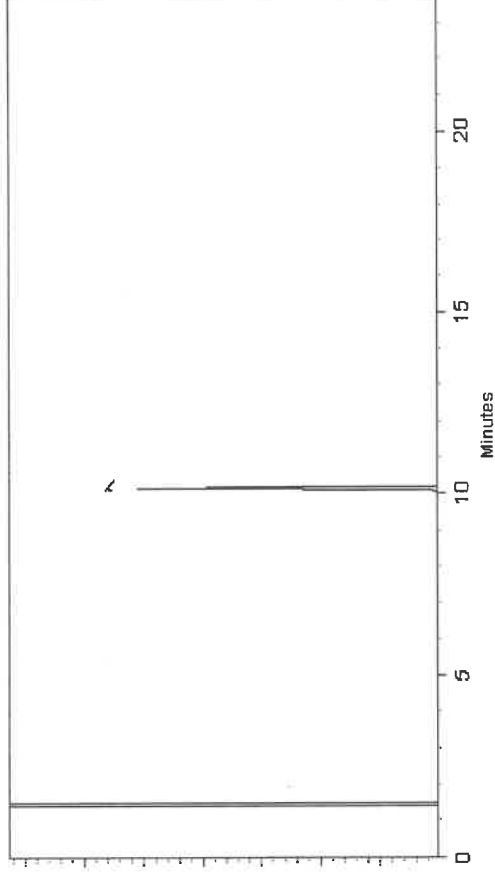

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.



Laith Clemente - Operations Technician I

**Date Mixed:** 07-Nov-2023      **Balance Serial #** 1128360905



Dillian Murphy - Operations Technician I

**Date Passed:** 09-Nov-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.






110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

[www.restek.com](http://www.restek.com)

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No.: 31097 Lot No.: A0204177

Description: o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

Container Size: 2 mL Pkg Amt: > 1 mL

Expiration Date: June 30, 2027 Storage: 10°C or colder

Handling: Sonicate prior to use. Ship: Ambient

P12992 } Y.P.  
↓  
P13031 } 12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	GKSSA	99%	10,000.5 µg/mL	+/- 450.4278

Solvent: Methylene chloride  
CAS # 75-09-2  
Purity 99%

\* Expanded Uncertainty displayed in same units as Grav. Conc.

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

**Inj. Vol**  
1µl

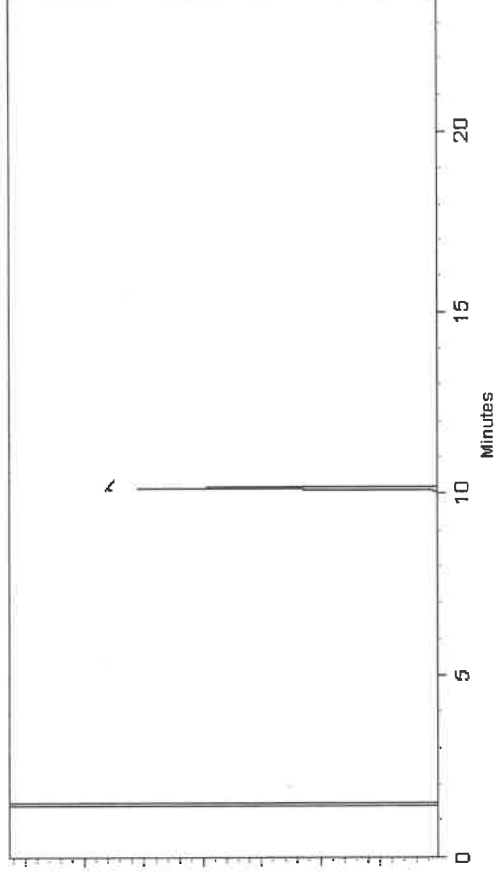

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 07-Nov-2023      **Balance Serial #** 1128360905

  
Dillian Murphy - Operations Technician I

**Date Passed:** 09-Nov-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.






110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

[www.restek.com](http://www.restek.com)

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No.:** 31097 **Lot No.:** A0204177

**Description:** o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

**Container Size:** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date:** June 30, 2027 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P12992 } Y.P.  
↓  
P13031 } 12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	GKSSA	99%	10,000.5 µg/mL	+/- 450.4278

**Solvent:** Methylene chloride  
**CAS #** 75-09-2  
**Purity** 99%

\* Expanded Uncertainty displayed in same units as Grav. Conc.



## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

**Inj. Vol**  
1µl

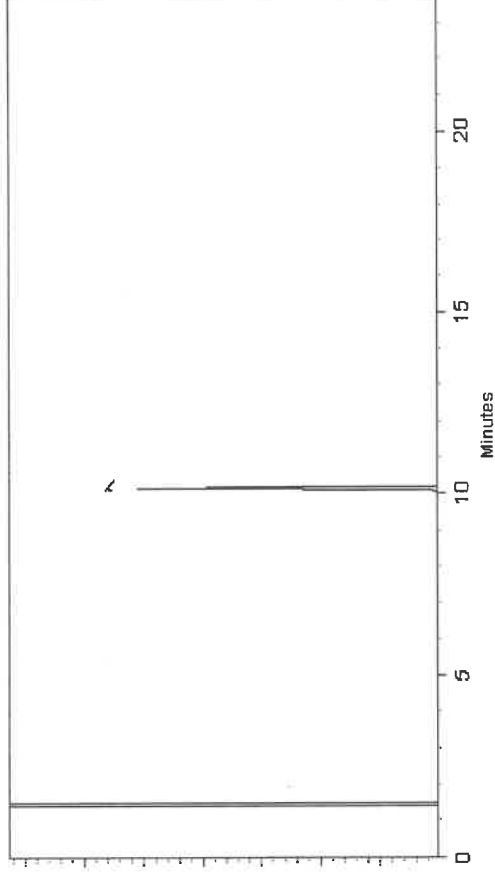

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.



Laith Clemente - Operations Technician I

**Date Mixed:** 07-Nov-2023      **Balance Serial #** 1128360905



Dillian Murphy - Operations Technician I

**Date Passed:** 09-Nov-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ $\mu$ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{\text{combined uncertainty}} = k \sqrt{u_{\text{gravimetric}}^2 + u_{\text{homogeneity}}^2 + u_{\text{storage stability}}^2 + u_{\text{shipping stability}}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

[www.restek.com](http://www.restek.com)

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No.: 31097 Lot No.: A0204177

Description: o-Terphenyl Standard

o-Terphenyl Standard 10,000 µg/mL, Methylene Chloride, 1mL/ampul

Container Size: 2 mL Pkg Amt: > 1 mL

Expiration Date: June 30, 2027 Storage: 10°C or colder

Handling: Sonicate prior to use. Ship: Ambient

P12992 } Y.P.  
↓  
P13031 } 12/21/2023

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	o-Terphenyl	84-15-1	GKSSA	99%	10,000.5 µg/mL	+/- 450.4278

Solvent: Methylene chloride  
CAS # 75-09-2  
Purity 99%

\* Expanded Uncertainty displayed in same units as Grav. Conc.

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
75°C (hold 1 min.) to 330°C  
@ 20°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
10 ml/min.

**Inj. Vol**  
1µl

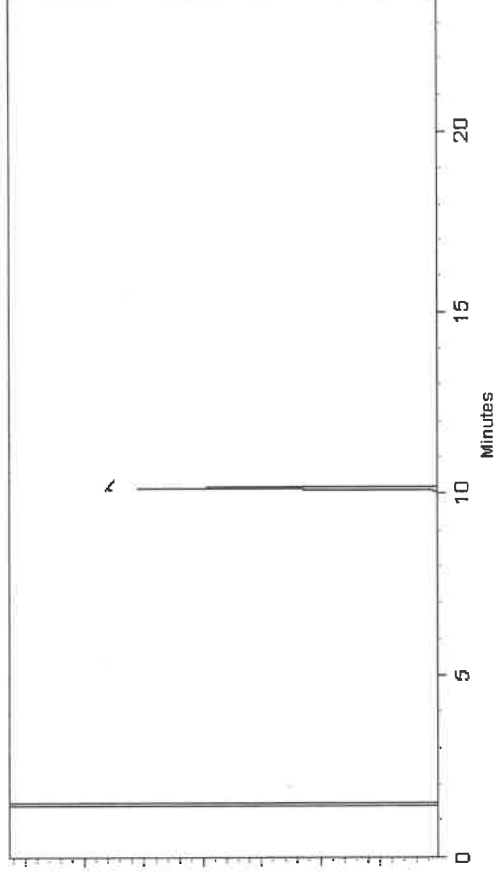

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.



Laith Clemente - Operations Technician I

**Date Mixed:** 07-Nov-2023      **Balance Serial #** 1128360905



Dillian Murphy - Operations Technician I

**Date Passed:** 09-Nov-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0200091

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** June 30, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13113 } Y.P.  
↓  
P13121 } 01/12/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-36	98%	200.7 µg/mL	+/- 9.0431
2	Naphthalene	91-20-3	MKCH0219	99%	200.8 µg/mL	+/- 9.0474
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.8 µg/mL	+/- 9.0489
4	Acenaphthylene	208-96-8	L10L	95%	201.0 µg/mL	+/- 9.0574
5	Acenaphthene	83-32-9	MKCR7169	99%	201.0 µg/mL	+/- 9.0565
6	Fluorene	86-73-7	10236068	99%	201.0 µg/mL	+/- 9.0547
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.8 µg/mL	+/- 9.0492
8	Anthracene	120-12-7	MKCR0570	99%	201.1 µg/mL	+/- 9.0601
9	Fluoranthene	206-44-0	MKCF7378	99%	201.0 µg/mL	+/- 9.0583
10	Pyrene	129-00-0	BCCG8479	98%	201.0 µg/mL	+/- 9.0572
11	Benz(a)anthracene	56-55-3	0012022BAA	99%	201.0 µg/mL	+/- 9.0583
12	Chrysene	218-01-9	RP230512B	99%	200.8 µg/mL	+/- 9.0474
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.8 µg/mL	+/- 9.0492
14	Benzo(k)fluoranthene	207-08-9	022022K	99%	200.9 µg/mL	+/- 9.0510
15	Benzo(a)pyrene	50-32-8	RP230525	99%	200.8 µg/mL	+/- 9.0474
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.9 µg/mL	+/- 9.0522




17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.8 µg/mL	+/- 9.0474
18	Benzo(g,h,i)perylene	191-24-2	RP230511B	98%	200.9 µg/mL	+/- 9.0519

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)  
**Carrier Gas:**  
hydrogen-constant pressure 10 psi.  
**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)  
**Inj. Temp:**  
250°C  
**Det. Temp:**  
330°C  
**Det. Type:**  
FID  
**Split Vent:**  
20 ml/min.  
**Inj. Vol**  
1µl

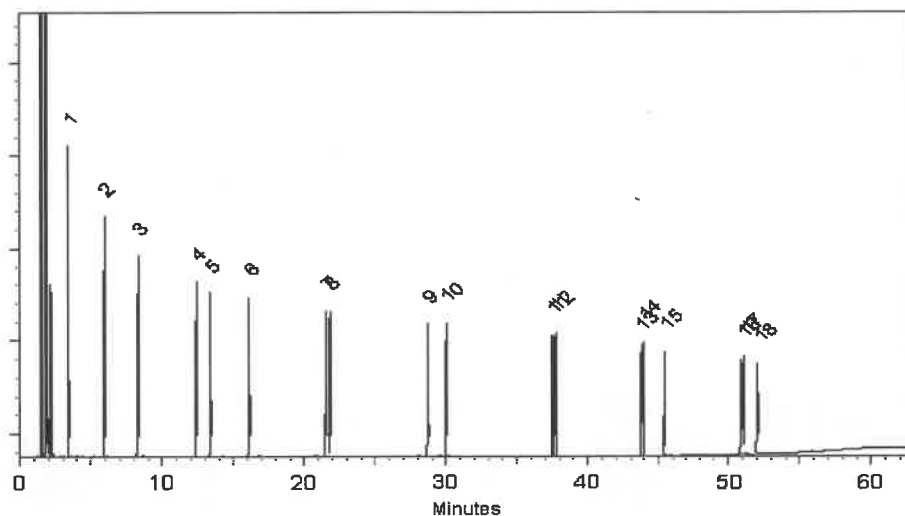

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Nick Yaw*  
Nick Yaw - Operations Tech I

**Date Mixed:** 19-Jul-2023 **Balance Serial #** 1128353505

*Christie Mills*  
Christie Mills - Operations Lead Tech - ARM QC

**Date Passed:** 25-Jul-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0200091

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** June 30, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13113 } Y.P.  
↓  
P13121 } 01/12/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-36	98%	200.7 µg/mL	+/- 9.0431
2	Naphthalene	91-20-3	MKCH0219	99%	200.8 µg/mL	+/- 9.0474
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.8 µg/mL	+/- 9.0489
4	Acenaphthylene	208-96-8	L10L	95%	201.0 µg/mL	+/- 9.0574
5	Acenaphthene	83-32-9	MKCR7169	99%	201.0 µg/mL	+/- 9.0565
6	Fluorene	86-73-7	10236068	99%	201.0 µg/mL	+/- 9.0547
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.8 µg/mL	+/- 9.0492
8	Anthracene	120-12-7	MKCR0570	99%	201.1 µg/mL	+/- 9.0601
9	Fluoranthene	206-44-0	MKCF7378	99%	201.0 µg/mL	+/- 9.0583
10	Pyrene	129-00-0	BCCG8479	98%	201.0 µg/mL	+/- 9.0572
11	Benz(a)anthracene	56-55-3	0012022BAA	99%	201.0 µg/mL	+/- 9.0583
12	Chrysene	218-01-9	RP230512B	99%	200.8 µg/mL	+/- 9.0474
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.8 µg/mL	+/- 9.0492
14	Benzo(k)fluoranthene	207-08-9	022022K	99%	200.9 µg/mL	+/- 9.0510
15	Benzo(a)pyrene	50-32-8	RP230525	99%	200.8 µg/mL	+/- 9.0474
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.9 µg/mL	+/- 9.0522


17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.8 µg/mL	+/- 9.0474
18	Benzo(g,h,i)perylene	191-24-2	RP230511B	98%	200.9 µg/mL	+/- 9.0519

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)  
**Carrier Gas:**  
hydrogen-constant pressure 10 psi.  
**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)  
**Inj. Temp:**  
250°C  
**Det. Temp:**  
330°C  
**Det. Type:**  
FID  
**Split Vent:**  
20 ml/min.  
**Inj. Vol**  
1µl

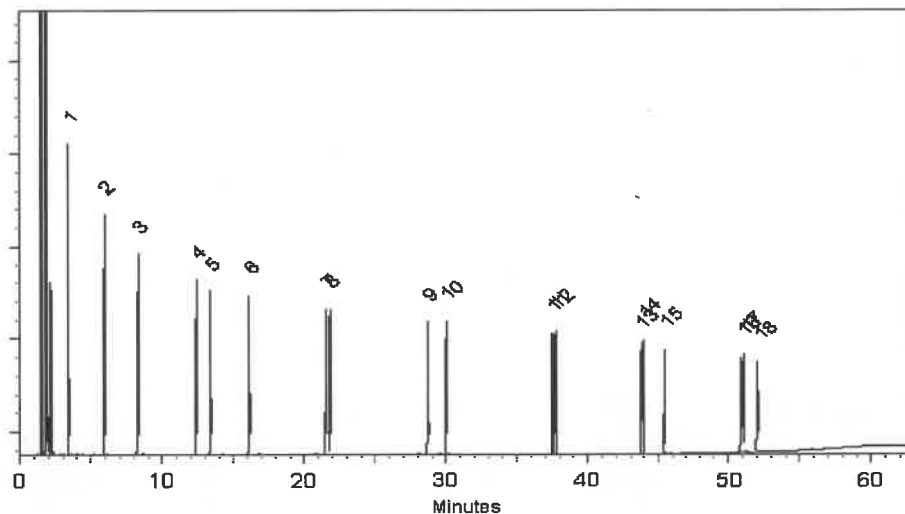

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Nick Yaw*  
Nick Yaw - Operations Tech I

**Date Mixed:** 19-Jul-2023 **Balance Serial #** 1128353505

*Christie Mills*  
Christie Mills - Operations Lead Tech - ARM QC

**Date Passed:** 25-Jul-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 31480 **Lot No.:** A0206496

**Description :** MA Fractionation Surrogate Spike Mix  
MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2029 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P13258 } 7-P.  
↓  
P13277 } 02/20/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,008.5 µg/mL	+/- 180.5736
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,001.5 µg/mL	+/- 180.2582

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Hexane  
**CAS #** 110-54-3  
**Purity** 99%



## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

2 ml/min.

**Inj. Vol**

1µl

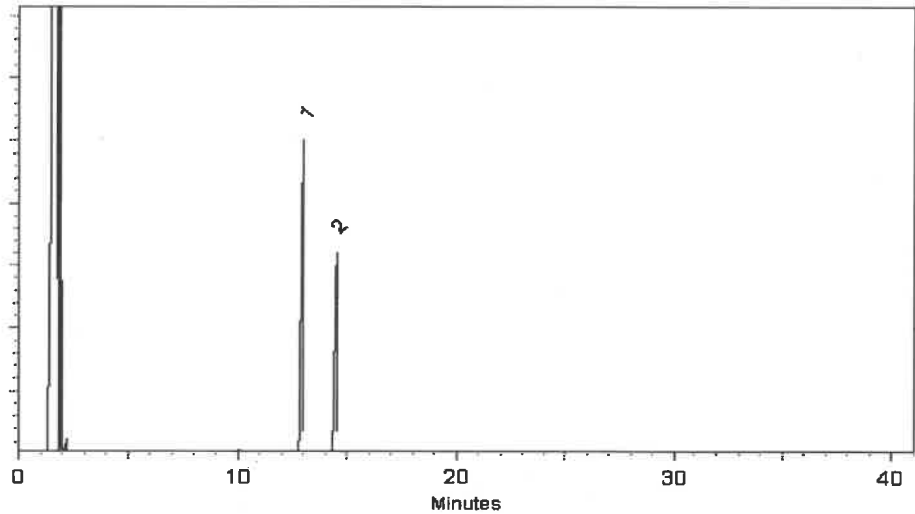

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Rebecca Gingerich*

Rebecca Gingerich - Operations Tech II

Date Mixed: 11-Jan-2024

Balance Serial # B345965662

*Dylan Murphy*

Dylan Murphy - Operations Technician I

Date Passed: 15-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 31480 **Lot No.:** A0206496

**Description :** MA Fractionation Surrogate Spike Mix  
MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2029 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P13258 } 7-P.  
↓  
P13277 } 02/20/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,008.5 µg/mL	+/- 180.5736
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,001.5 µg/mL	+/- 180.2582

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Hexane  
**CAS #** 110-54-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

2 ml/min.

**Inj. Vol**

1µl

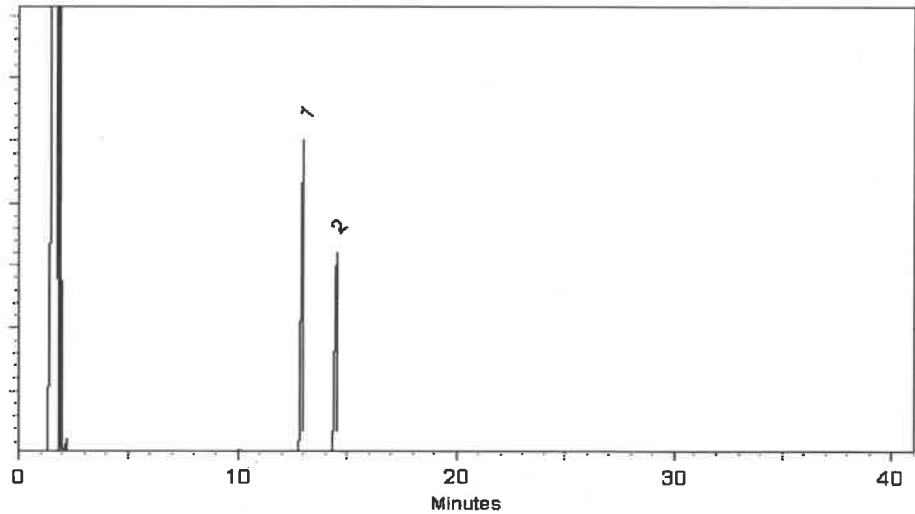

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Rebecca Gingerich*

Rebecca Gingerich - Operations Tech II

Date Mixed: 11-Jan-2024

Balance Serial # B345965662

*Dylan Murphy*

Dylan Murphy - Operations Technician I

Date Passed: 15-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 31480 **Lot No.:** A0206496

**Description :** MA Fractionation Surrogate Spike Mix  
MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2029 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P13258 } 7-P.  
↓  
P13277 } 02/20/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,008.5 µg/mL	+/- 180.5736
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,001.5 µg/mL	+/- 180.2582

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Hexane  
**CAS #** 110-54-3  
**Purity** 99%



## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

2 ml/min.

**Inj. Vol**

1µl

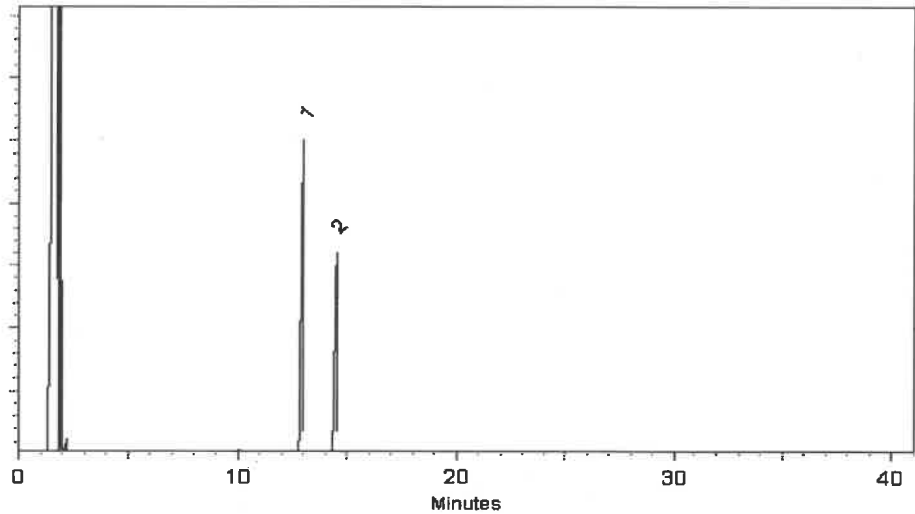

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Rebecca Gingerich*

Rebecca Gingerich - Operations Tech II

Date Mixed: 11-Jan-2024

Balance Serial # B345965662

*Dylan Murphy*

Dylan Murphy - Operations Technician I

Date Passed: 15-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 31480 **Lot No.:** A0206496

**Description :** MA Fractionation Surrogate Spike Mix  
MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2029 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P13258 } 7-P.  
↓  
P13277 } 02/20/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,008.5 µg/mL	+/- 180.5736
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,001.5 µg/mL	+/- 180.2582

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Hexane  
**CAS #** 110-54-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

2 ml/min.

**Inj. Vol**

1µl

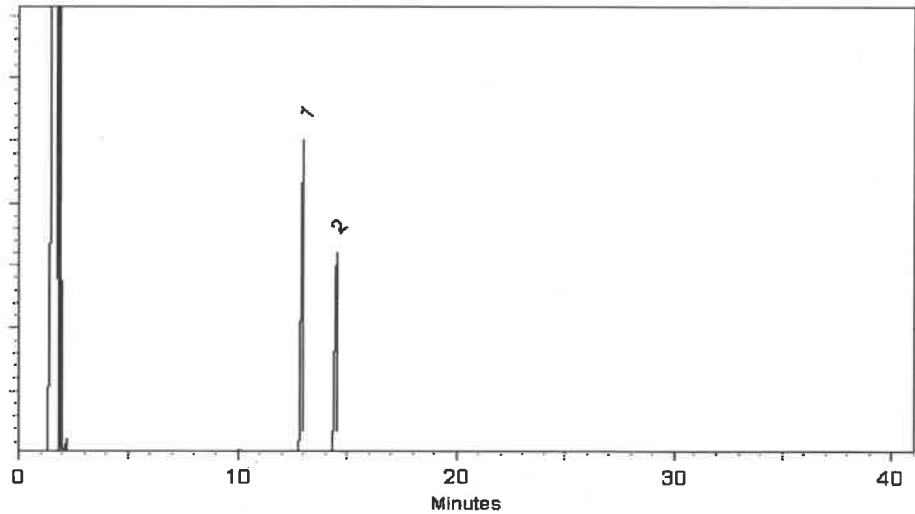

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Rebecca Gingerich*

Rebecca Gingerich - Operations Tech II

Date Mixed: 11-Jan-2024

Balance Serial # B345965662

*Dylan Murphy*

Dylan Murphy - Operations Technician I

Date Passed: 15-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 31480 **Lot No.:** A0206496

**Description :** MA Fractionation Surrogate Spike Mix  
MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2029 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P13258 } 7-P.  
↓  
P13277 } 02/20/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,008.5 µg/mL	+/- 180.5736
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,001.5 µg/mL	+/- 180.2582

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Hexane  
**CAS #** 110-54-3  
**Purity** 99%



## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

2 ml/min.

**Inj. Vol**

1µl

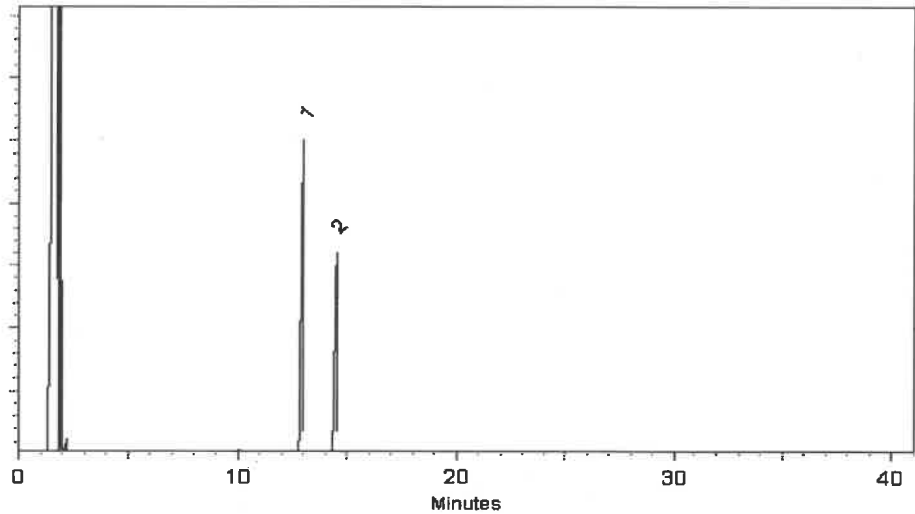

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Rebecca Gingerich*

Rebecca Gingerich - Operations Tech II

Date Mixed: 11-Jan-2024

Balance Serial # B345965662

*Dylan Murphy*

Dylan Murphy - Operations Technician I

Date Passed: 15-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 31480 **Lot No.:** A0206496

**Description :** MA Fractionation Surrogate Spike Mix  
MA Fractionation Surrogate Spike Mix 4000µg/mL, Hexane, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2029 **Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive. **Ship:** Ambient

P13258 } 7-P.  
↓  
P13277 } 02/20/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	2-Fluorobiphenyl	321-60-8	00021384	99%	4,008.5 µg/mL	+/- 180.5736
2	2-Bromonaphthalene	580-13-2	STBC5362V	99%	4,001.5 µg/mL	+/- 180.2582

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Hexane  
**CAS #** 110-54-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**

30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**

hydrogen-constant pressure 10 psi.

**Temp. Program:**

40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)

**Inj. Temp:**

250°C

**Det. Temp:**

330°C

**Det. Type:**


FID

**Split Vent:**

2 ml/min.

**Inj. Vol**

1µl

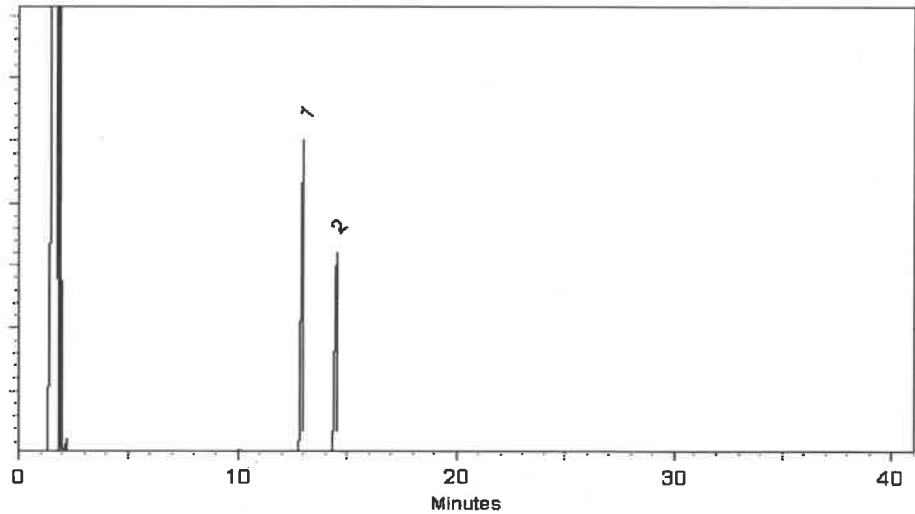

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Rebecca Gingerich*

Rebecca Gingerich - Operations Tech II

Date Mixed: 11-Jan-2024

Balance Serial # B345965662

*Dillon Murphy*

Dillon Murphy - Operations Technician I

Date Passed: 15-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915



\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

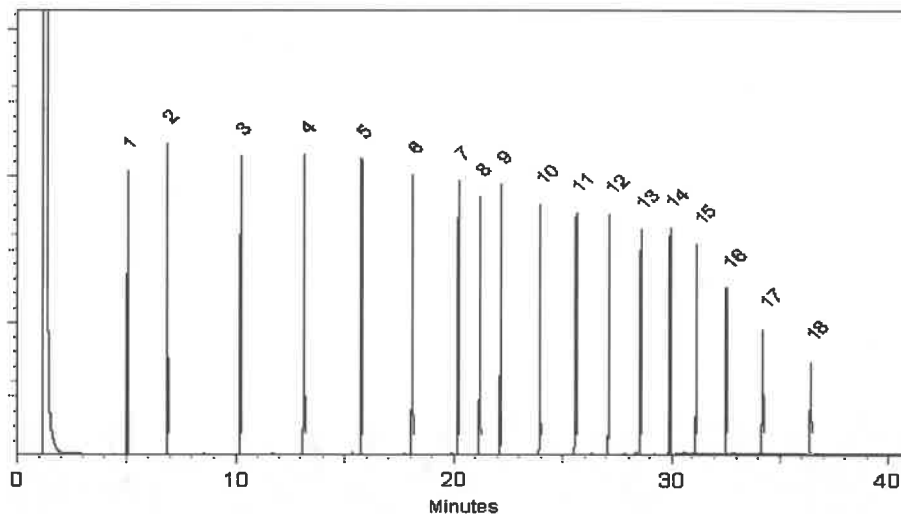

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

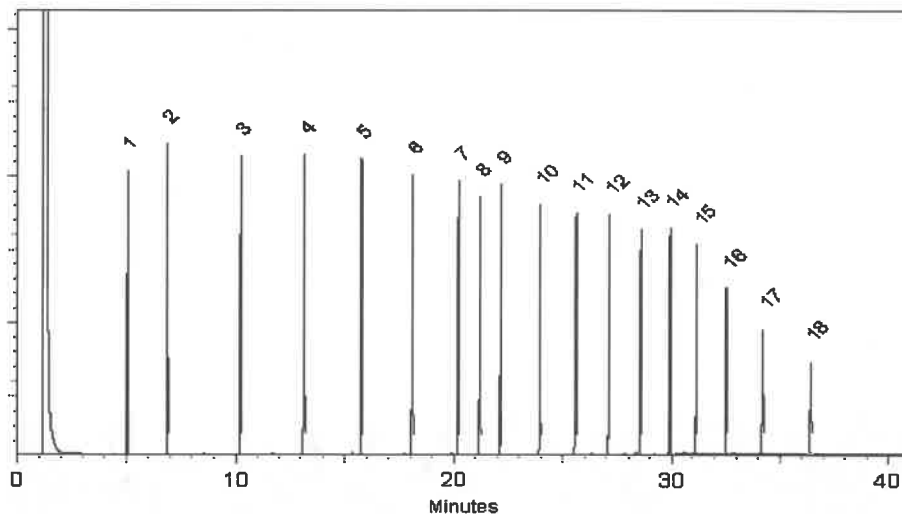

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915



\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

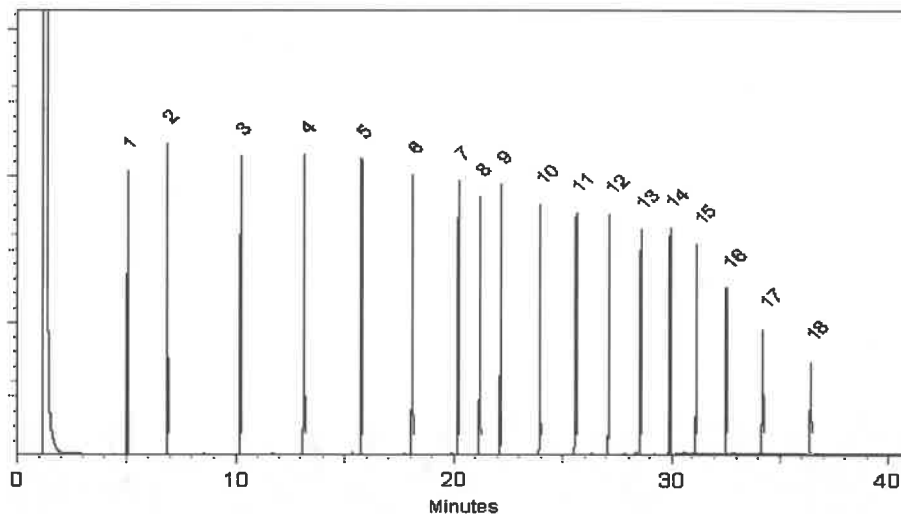

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)  
**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

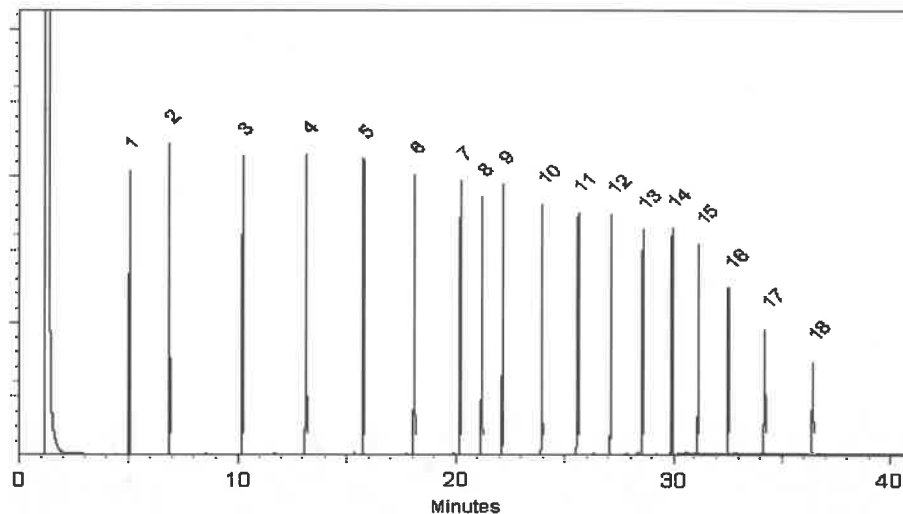

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915



\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

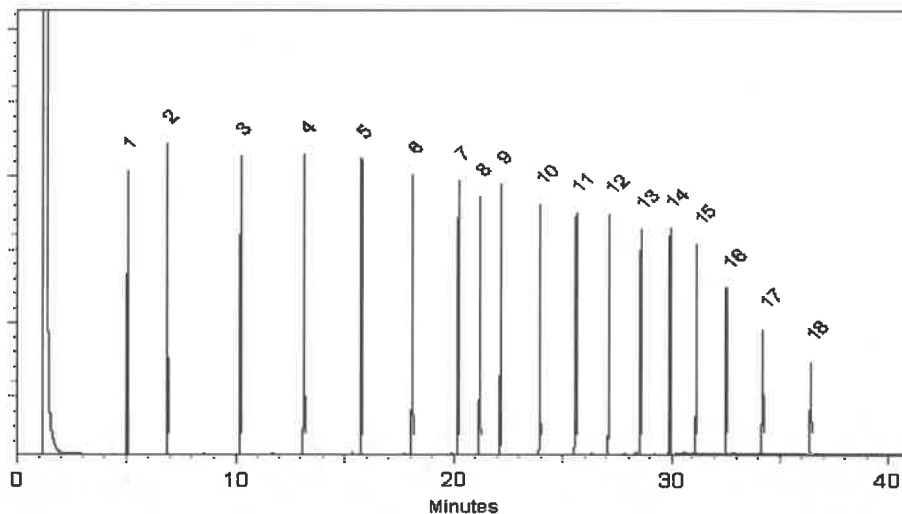

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

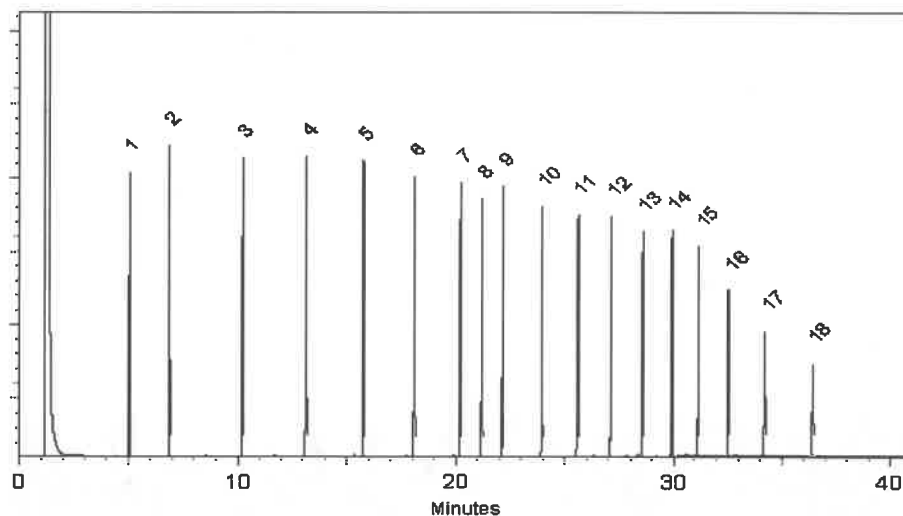

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915



\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)  
**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

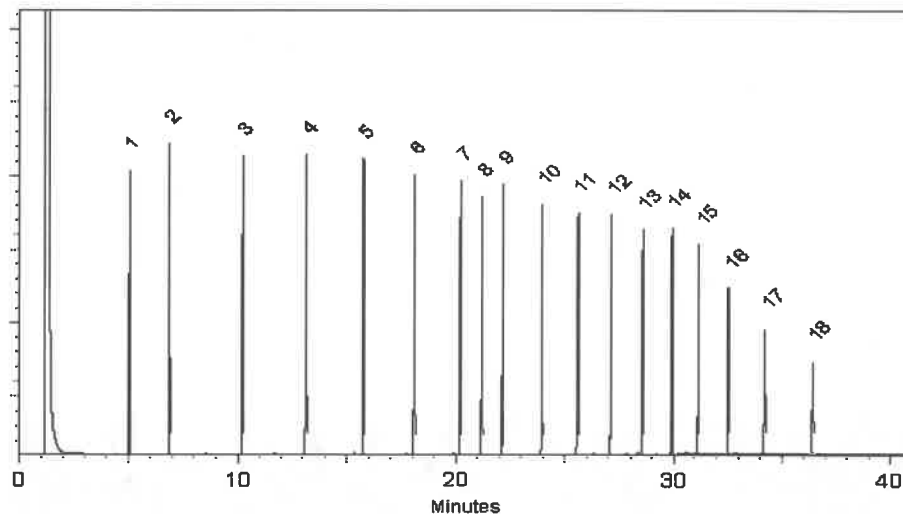

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

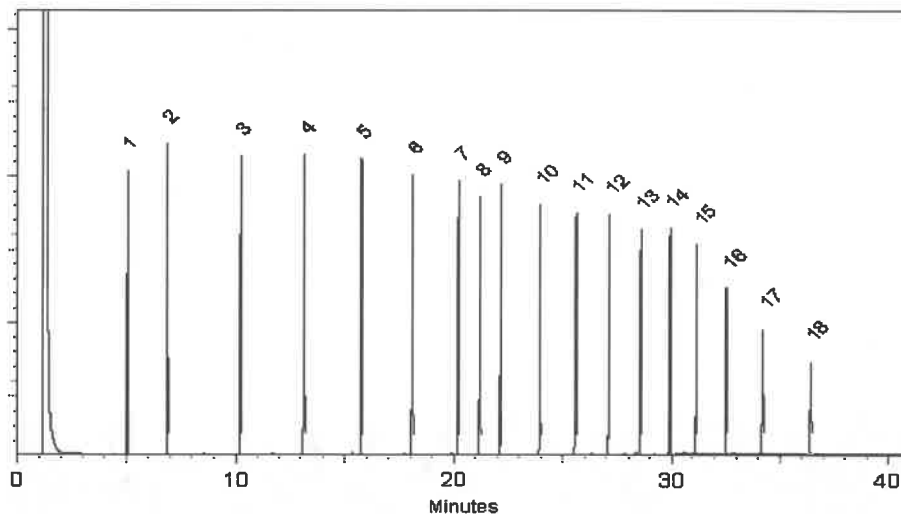

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915



\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

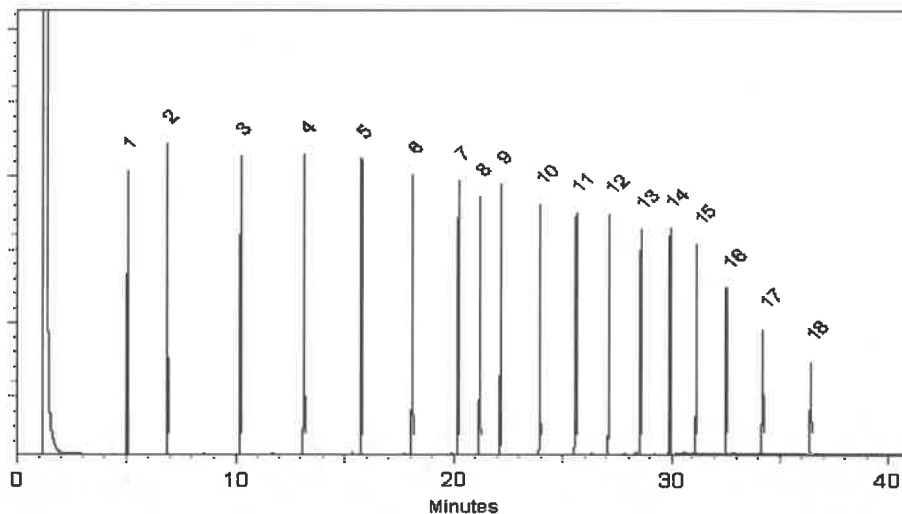

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30542 **Lot No.:** A0207239

**Description :** NJEPH Aliphatics Matrix Spike Mix  
NJEPH Aliphatics Matrix Spike Mix 200 µg/mL, n-Pentane, 5mL/ampul

**Container Size :** 5 mL **Pkg Amt:** > 5 mL

**Expiration Date :** February 28, 2031 **Storage:** 10°C or colder

**Handling:** Sonicate prior to use. **Ship:** Ambient

P13288 } Y.P.  
↓  
P13317 } 06/28/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Nonane (C9)	111-84-2	SHBP9752	99%	201.0 µg/mL	+/- 5.1926
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	200.7 µg/mL	+/- 5.1839
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	200.7 µg/mL	+/- 5.1839
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	200.7 µg/mL	+/- 5.1839
5	n-Hexadecane (C16)	544-76-3	SHBM4146	98%	200.6 µg/mL	+/- 5.1815
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	199.9 µg/mL	+/- 5.1647
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	199.8 µg/mL	+/- 5.1621
8	n-Heneicosane (C21)	629-94-7	MKCL8682	99%	200.7 µg/mL	+/- 5.1839
9	n-Docosane (C22)	629-97-0	MKCQ3882	99%	200.0 µg/mL	+/- 5.1667
10	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	200.7 µg/mL	+/- 5.1839
11	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	200.3 µg/mL	+/- 5.1753
12	n-Octacosane (C28)	630-02-4	BCCG0084	99%	200.3 µg/mL	+/- 5.1753
13	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	199.8 µg/mL	+/- 5.1621
14	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	201.0 µg/mL	+/- 5.1926
15	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	200.7 µg/mL	+/- 5.1839
16	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	200.0 µg/mL	+/- 5.1667
17	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	201.0 µg/mL	+/- 5.1915

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** n-Pentane  
**CAS #** 109-66-0  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
40°C (hold 2 min.) to 330°C  
@ 10°C/min. (hold 10 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
2 ml/min.

**Inj. Vol**  
1µl

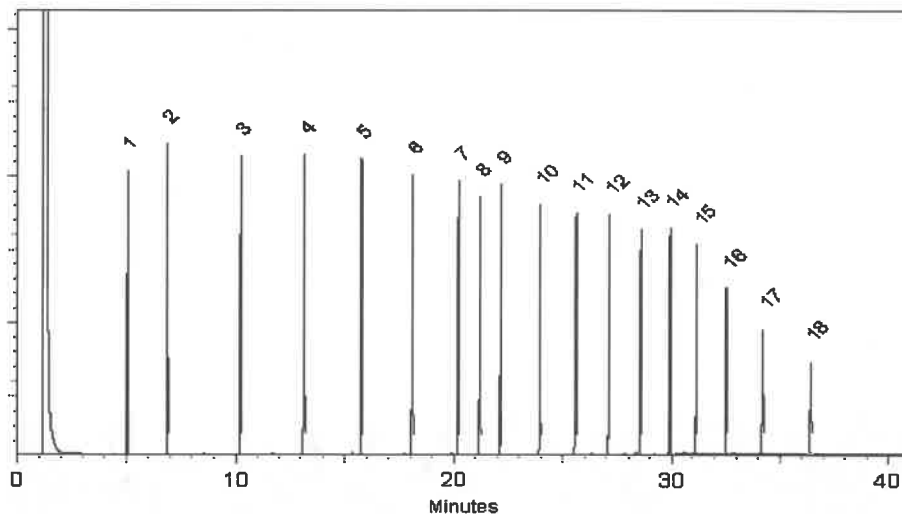

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
**Matt Fragassi - Mix Technician**

**Date Mixed:** 31-Jan-2024 **Balance Serial #** 1128353505

  
**Dillan Murphy - Operations Technician I**

**Date Passed:** 02-Feb-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400



17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

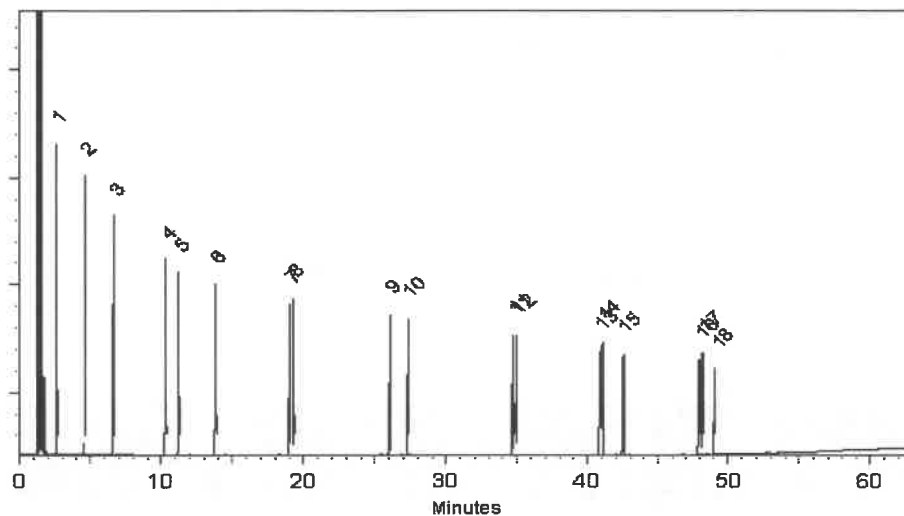

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

### chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400

17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

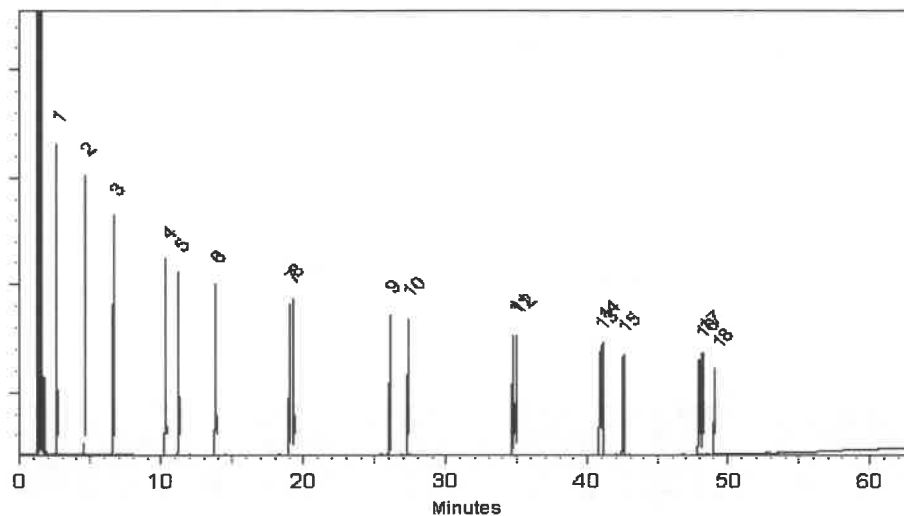

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

Date Mixed: 25-Jan-2024

Balance Serial # 1128360905

  
Dillan Murphy - Operations Technician I

Date Passed: 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400



17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

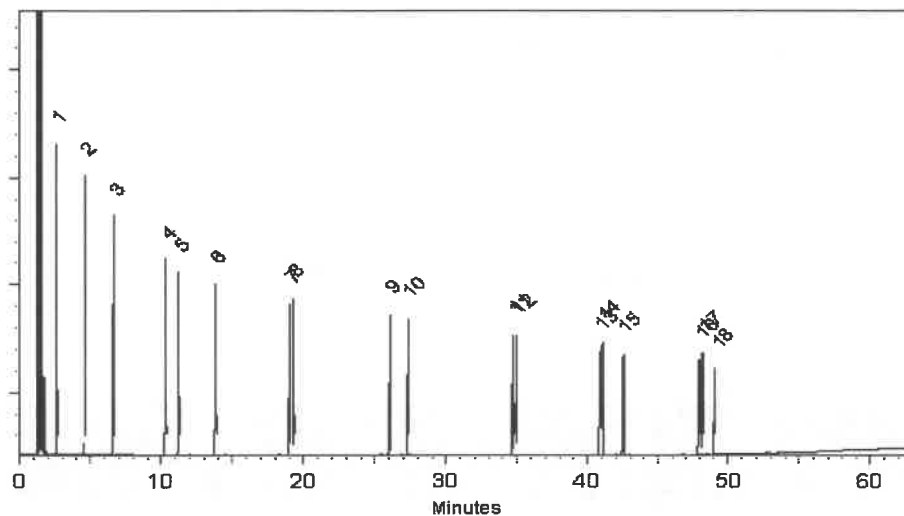

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

### chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400

17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

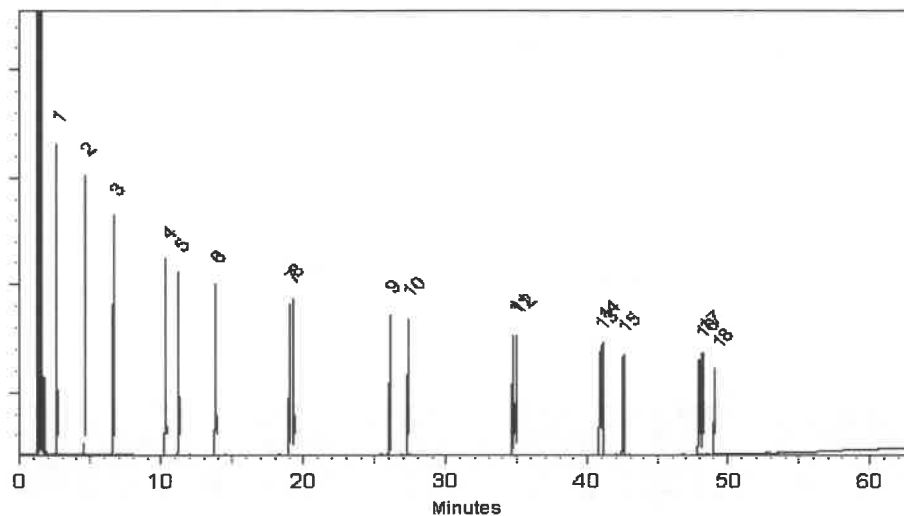

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400



17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

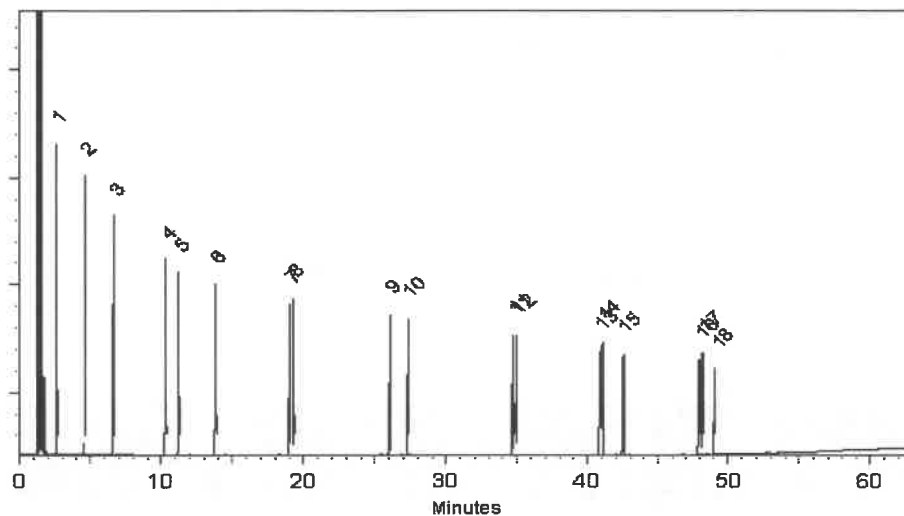

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

*Laith Clemente*  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

*Dylan Murphy*  
Dylan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400

17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

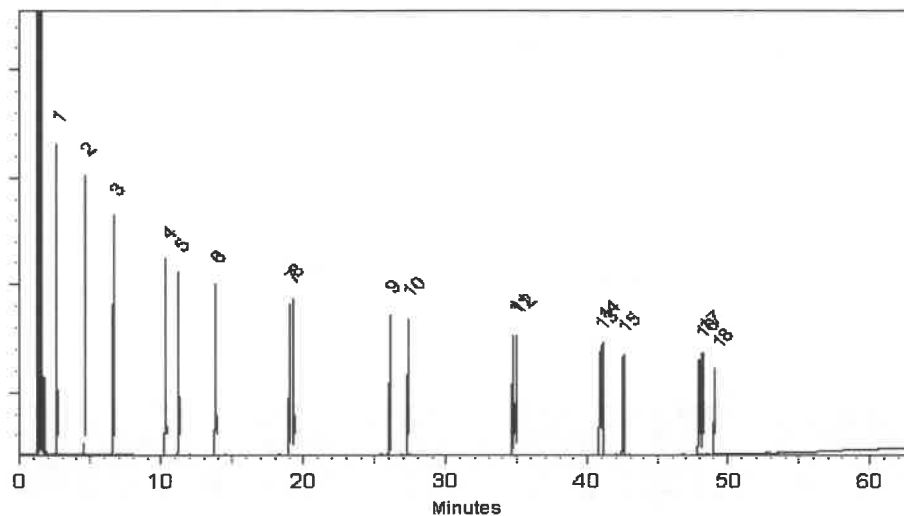

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400



17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

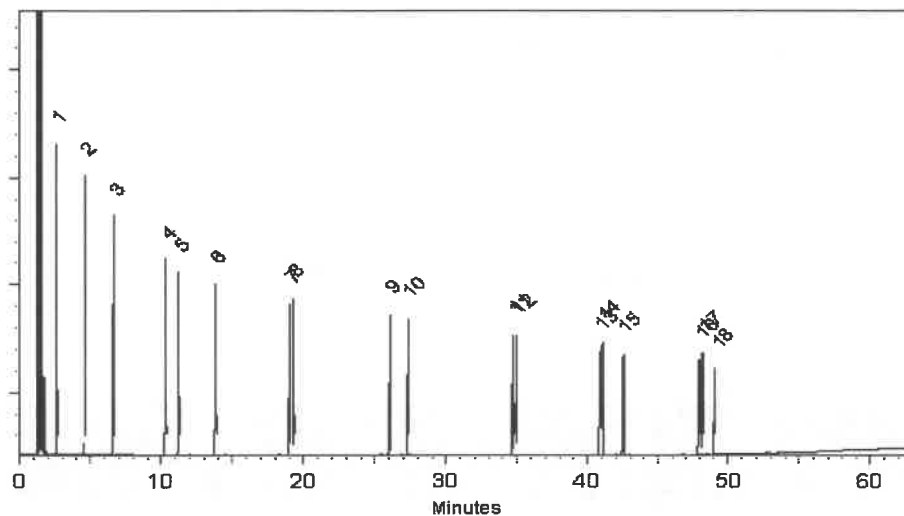

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400

17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)

**Carrier Gas:**  
hydrogen-constant pressure 10 psi.

**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)


**Inj. Temp:**  
250°C

**Det. Temp:**  
330°C

**Det. Type:**  
FID

**Split Vent:**  
20 ml/min.

**Inj. Vol**  
1µl

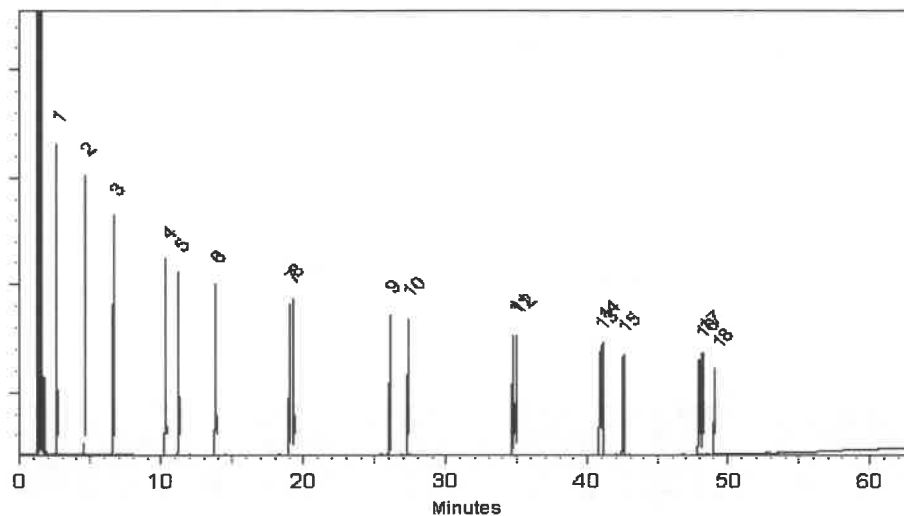

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30543

**Lot No.:** A0207019

**Description :** NJEPH Aromatics Matrix Spike Mix

NJEPH Aromatics Matrix Spike Mix 200µg/mL, Acetone/Toluene (50:50), 5mL/ampul

**Container Size :** 5 mL

**Pkg Amt:** > 5 mL

**Expiration Date :** December 31, 2029

**Storage:** 10°C or colder

**Handling:** Sonication required. Mix is photosensitive.

**Ship:** Ambient

P13318 } Y.P.  
↓  
P13347 } 04/23/24

### CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty* (95% C.L.; K=2)
1	1,2,3-Trimethylbenzene	526-73-8	8776.10-38	99%	200.6 µg/mL	+/- 9.0384
2	Naphthalene	91-20-3	STBL1057	99%	200.6 µg/mL	+/- 9.0384
3	2-Methylnaphthalene	91-57-6	STBK0259	96%	200.4 µg/mL	+/- 9.0299
4	Acenaphthylene	208-96-8	L10L	95%	200.7 µg/mL	+/- 9.0437
5	Acenaphthene	83-32-9	MKCR7169	99%	200.0 µg/mL	+/- 9.0114
6	Fluorene	86-73-7	10241100	99%	200.4 µg/mL	+/- 9.0294
7	Phenanthrene	85-01-8	MKCQ2033	99%	200.5 µg/mL	+/- 9.0330
8	Anthracene	120-12-7	MKCR0570	99%	200.7 µg/mL	+/- 9.0438
9	Fluoranthene	206-44-0	MKCQ4728	99%	200.6 µg/mL	+/- 9.0366
10	Pyrene	129-00-0	BCCG8479	98%	200.7 µg/mL	+/- 9.0449
11	Benz(a)anthracene	56-55-3	I20012022BAA	99%	200.8 µg/mL	+/- 9.0474
12	Chrysene	218-01-9	RP230601	99%	200.5 µg/mL	+/- 9.0330
13	Benzo(b)fluoranthene	205-99-2	022013B	99%	200.6 µg/mL	+/- 9.0384
14	Benzo(k)fluoranthene	207-08-9	012022K	99%	200.8 µg/mL	+/- 9.0456
15	Benzo(a)pyrene	50-32-8	O45GL	98%	200.6 µg/mL	+/- 9.0378
16	Indeno(1,2,3-cd)pyrene	193-39-5	12-JKL-118-9	97%	200.6 µg/mL	+/- 9.0400




17	Dibenz(a,h)anthracene	53-70-3	ER032211-01	99%	200.4 µg/mL	+/- 9.0276
18	Benzo(g,h,i)perylene	191-24-2	RP231003RSR	99%	200.5 µg/mL	+/- 9.0330

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** Acetone/Toluene (50:50)  
**CAS #** 67-64-1/108-88-3  
**Purity** 99%

## Quality Confirmation Test

**Column:**  
30m x 0.25mm x 0.25µm  
Rtx-5 (cat.#10223)  
**Carrier Gas:**  
hydrogen-constant pressure 10 psi.  
**Temp. Program:**  
100°C (hold 1 min.) to 330°C  
@ 4°C/min. (hold 5 min.)  
**Inj. Temp:**  
250°C  
**Det. Temp:**  
330°C  
**Det. Type:**  
FID  
**Split Vent:**  
20 ml/min.  
**Inj. Vol**  
1µl

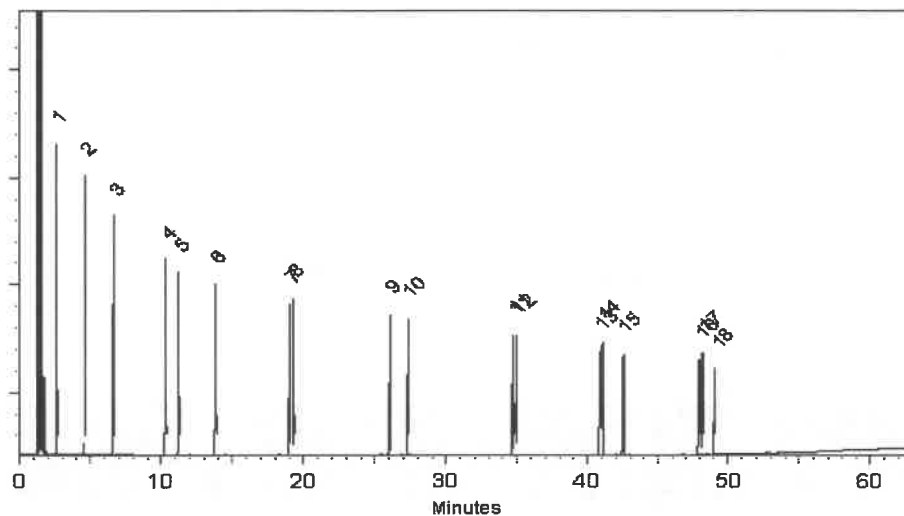

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

**Date Mixed:** 25-Jan-2024

**Balance Serial #** 1128360905

  
Dillan Murphy - Operations Technician I

**Date Passed:** 29-Jan-2024

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.

