

Prep Standard - Chemical Standard Summary

Order ID : P3390

Test : TPH GC

Prepbatch ID : PB162367,

Sequence ID/Qc Batch ID: FG073124,

Standard ID :

EP2511,EP2518,PP23111,PP23155,PP23156,PP23204,PP23205,PP23206,PP23207,PP23208,PP23518,

Chemical ID :

E3551,E3706,E3707,E3725,E3768,E3769,E3771,P11949,P12308,P12309,P13105,P13112,P13206,P13207,P13208,P1320 9,P13215,P13216,



Extractions STANDARD PREPARATION LOG

<u>Recipe</u> <u>ID</u> 2017	NAME 1:1 ACETONE/METHYLENE CHLORIDE	<u>NO.</u> EP2511	Prep Date 07/12/2024		<u>Prepared</u> <u>By</u> Rajesh Parikh	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By RUPESHKUMAR SHAH 07/12/2024
FROM	8000.00000ml of E3768 + 8000.0000	0ml of E376	69 = Final Qu	antity: 16000.0	100 ml			

<u>Recipe</u> <u>ID</u>	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u> Rajesh Parikh
3923	Baked Sodium Sulfate	<u>EP2518</u>	07/26/2024	01/03/2025	RUPESHKUMA		None	
					R SHAH	ALE_2		07/26/2024
FROM	1.00000gram of E3551 = Final Quar	ntity: 4000.0	00 gram			(EX-SC-2)		



Recipe ID 3609	NAME 20 PPM DRO SPIKE SOLUTION (RESTEK)	<u>NO.</u> PP23111	Prep Date 02/21/2024	<u>Expiration</u> <u>Date</u> 08/19/2024	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 02/21/2024
FROM	1.00000ml of P13105 + 1.00000ml of	FP13112 + 4	18.00000ml of	E3706 = Fina	I Quantity: 50.00	00 ml		

<u>Recipe</u> <u>ID</u> 433	<u>NAME</u> 100/100 PPM DRO (Restek)	<u>NO.</u> PP23155	Prep Date 03/15/2024	Expiration Date 08/21/2024	Prepared By Yogesh Patel	<u>ScaleID</u> None	PipetteID None	Supervised By Ankita Jodhani 03/18/2024
FROM	1.00000ml of P11949 + 1.00000ml of	P12308 + 1	1.00000ml of I	P13112 + 7.000	000ml of E3707	= Final Quantit	y: 10.000 ml	



Recipe ID 3796	<u>NAME</u> 100/100 PPM DRO STD (CPI)	<u>NO.</u> PP23156	Prep Date 03/15/2024	<u>Expiration</u> <u>Date</u> 08/28/2024	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 03/18/2024
FROM	1.00000ml of P12309 + 1.00000ml of	P13215 +	1.00000ml of	P13216 + 7.000	000ml of E3707	= Final Quanti	ty: 10.000 ml	

<u>Recipe</u> <u>ID</u> 435	NAME 50 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23204	<u>Prep Date</u> 04/11/2024	Expiration Date 08/21/2024	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 04/17/2024
FROM	0.50000ml of E3725 + 0.50000ml of I	PP23155 =	Final Quantity	y: 1.000 ml	<u> </u>			5



Recipe ID 437	NAME 20 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23205	Prep Date 04/11/2024	Expiration Date 08/21/2024	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 04/17/2024
FROM	0.80000ml of E3725 + 0.20000ml of	PP23155 =	Final Quantit	y: 1.000 ml				

<u>Recipe</u> <u>ID</u> 438	NAME 10 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23206	<u>Prep Date</u> 04/11/2024	Expiration Date 08/21/2024	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	<u>Supervised By</u> Ankita Jodhani 04/17/2024
<u>FROM</u>	0.90000ml of E3725 + 0.10000ml of l	PP23155 =	Final Quantity	y: 1.000 ml				



Recipe ID 439	NAME 5 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23207	Prep Date 04/11/2024	Expiration Date 08/21/2024	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 04/17/2024
FROM	0.90000ml of E3725 + 0.10000ml of I	PP23204 =	Final Quantity	y: 1.000 ml				

<u>Recipe</u> <u>ID</u> 3797	NAME 50 PPM DRO ICV STD (CPI)	<u>NO.</u> PP23208	Prep Date 04/11/2024	Expiration Date 08/28/2024	Prepared By Yogesh Patel	<u>ScaleID</u> None	PipetteID None	Supervised By Ankita Jodhani 04/17/2024
FROM	0.50000ml of E3725 + 0.50000ml of	PP23156 =	Final Quantity	y: 1.000 ml	<u> </u>			



Recipe ID 147	NAME 20 PPM DRO Surrogate Spike Solution	<u>NO.</u> PP23518	Prep Date 07/15/2024	Expiration Date 01/08/2025	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 07/16/2024
FROM	1.00000ml of P13206 + 1.00000ml o Final Quantity: 200.000 ml	f P13207 +	1.00000ml of	P13208 + 1.00(000ml of P1320	9 + 196.00000n	nl of E3768 =	



CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	PC19631-100 / SODIUM SULFATE, ANHYDROUS, PEST GRADE, 1	313201	01/03/2025	01/03/2024 / Rajesh	07/20/2023 / Rajesh	E3551
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24A1562007	08/19/2024	02/19/2024 / RUPESH	01/31/2024 / RUPESH	E3706
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24A1562007	08/28/2024	02/28/2024 / Rajesh	02/19/2024 / Rajesh	E3707
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24A1962016	10/04/2024	04/04/2024 / Rajesh	03/20/2024 / Rajesh	E3725
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24E2462004	01/08/2025	07/08/2024 / Rajesh	06/21/2024 / Rajesh	E3768
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9254-03 / Acetone, Ultra Resi (cs/4x4L)	23H1462005	01/12/2025	07/12/2024 /	07/02/2024 / Rajesh	E3769



CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24F1062004	01/19/2025	07/19/2024 / Rajesh	07/16/2024 / Rajesh	E3771
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	09/15/2024	03/15/2024 / yogesh	07/11/2022 / Yogesh	P11949
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	09/15/2024	03/15/2024 / yogesh	02/22/2023 / Yogesh	P12308
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	09/15/2024	03/15/2024 / yogesh	02/22/2023 / Yogesh	P12309
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0204859	08/21/2024	02/21/2024 / yogesh	01/12/2024 / Yogesh	P13105
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0204859	08/21/2024	02/21/2024 / yogesh	01/12/2024 / Yogesh	P13112



CHEMICAL RECEIPT LOG BOOK

ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13206
ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13207
ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13208
ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13209
ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml	514983	09/15/2024	03/15/2024 / yogesh	01/31/2024 / Ankita	P13215
ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Z-110400-05-01 / TRPH Standard (C8-C40), 500	514983	09/15/2024	03/15/2024 / yogesh	01/31/2024 / Ankita	P13216
	72072 / n-Tetracosane-d50, 1000 ug/ml ItemCode / ItemName ItemCode / ItemName Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml ItemCode / ItemName Z-110400-05-01 / TRPH	72072 / n-Tetracosane-d50, 101122 ItemCode / ItemName Lot # 72072 / n-Tetracosane-d50, 101122 1000 ug/ml 101122 ItemCode / ItemName Lot # 72072 / n-Tetracosane-d50, 101122 1000 ug/ml 101122 ItemCode / ItemName Lot # 72072 / n-Tetracosane-d50, 101122 1000 ug/ml 101122 ItemCode / ItemName Lot # 72072 / n-Tetracosane-d50, 101122 101122 ItemCode / ItemName Lot # 72072 / n-Tetracosane-d50, 101122 101122 ItemCode / ItemName Lot # Z-110400-05-01 / TRPH 514983 ItemCode / ItemName Lot # Z-110400-05-01 / TRPH 514983	ItemCode / ItemName Lot # Date 72072 / n-Tetracosane-d50, 1000 ug/ml 101122 01/15/2025 ItemCode / ItemName Lot # Expiration Date 72072 / n-Tetracosane-d50, 1000 ug/ml 101122 01/15/2025 ItemCode / ItemName Lot # Expiration Date 72072 / n-Tetracosane-d50, 1000 ug/ml 101122 01/15/2025 ItemCode / ItemName Lot # Expiration Date 72072 / n-Tetracosane-d50, 1000 ug/ml 101122 01/15/2025 ItemCode / ItemName Lot # Expiration Date 72072 / n-Tetracosane-d50, 1000 ug/ml 101122 01/15/2025 ItemCode / ItemName Lot # Expiration Date 72072 / n-Tetracosane-d50, 1000 ug/ml 01/15/2025 01/15/2024 ItemCode / ItemName Lot # Expiration Date Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml 514983 09/15/2024 ItemCode / ItemName Lot # Expiration Date Z-110400-05-01 / TRPH 514983 09/15/2024	ItemCode / ItemNameLot #DateOpened By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogeshItemCode / ItemNameLot #Expiration DateDate Opened / Opened By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogeshItemCode / ItemNameLot #Expiration DateDate Opened / Opened By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogeshItemCode / ItemNameLot #Expiration DateDate Opened / Opened By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogeshItemCode / ItemNameLot #Expiration DateDate Opened / Opened By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogeshItemCode / ItemNameLot #Expiration DateDate Opened / Opened By72072 / n-Tetracosane-d50, 1000 ug/ml01/15/202507/15/2024 / yogesh03/15/2024 / yogeshItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByZ-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 mlLot #Expiration DateDate Opened / Opened ByZ-110400-05-01 / TRPH51498309/15/202403/15/2024 / Ogened By03/15/2024 / Ogened ByZ-110400-05-01 / TRPH51498309/15/202403/15/2024 / Ogened By	ItemCode / ItemNameLot #DateOpened ByReceived By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogesh01/17/2024 / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogesh01/17/2024 / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogesh01/17/2024 / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received By72072 / n-Tetracosane-d50, 1000 ug/ml10112201/15/202507/15/2024 / yogesh01/17/2024 / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received Date / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received Date / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received Date / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received Date / AnkitaItemCode / ItemNameLot #Expiration DateDate Opened / Opened ByReceived Date / Received By



PRODUCTOS QUIMICOS MONTERREY, S.A. DE CY. MIRADOR 201, COL. MIRADOR MONTERREY, N.L. MEXICO CP 64070 TEL +52 81 13 52 57 57 WWW.pqm.com.mx

CERTIFICATE OF ANALYSIS

	DIUM SULFATE CRYS CS (CODE RMB3375)			NA.CO
SPECIFICATION NUMBER :	-		E DATE:	Na ₂ SO ₄ ABR/21/2023
	3201	Naila la Mo	E 1./A I E.	ADR/2 1/2023
TEST	SPECI	FICATIONS	LOT V	ALUES
Assay (Na ₂ SO ₄)	Min. 99	1.0%	99.7 %	
pH of a 5% solution at 25°C	5.2 - 9.	2	6.1	
Insoluble matter	Max. 0.	01%	0.005	1
Loss on ignition	Max. 0.	5%	0.1 %	16
Chloride (Cl)	Max. 0.	001%	<0.001	0/
Nitrogen compounds (as N)	Max. 5	ppm	<0.001 <5 ppn	
Phosphate (PO ₄)	Max. 0.		<0.001	
Heavy metals (as Pb)	Max. S			
Iron (Fe)	Max, 0,	9 R ·	<5 ppn <0.001	
Calcium (Ca)	Max. 0.	01%	0.002 %	
Magnesium (Mg)	Max. 0.	005%	0.002 9	
Potassium (K)	Max. 0.		0.003 %	
Extraction-concentration suit	ability Passes	test	Passes	*
Appearance	Passes		Passes	
Identification	Passes	test	Passes	test
Solubility and foreing matter		test	Passes	: test
Retained on US Standard No.		h	0.1 %	
Retained on US Standard No.	60 sieve Min. 94	a/ ₀	97.3 %	
Through US Standard No. 60	sieve Max. 5%	46	2.5 %	
Through US Standard No. 100) sieve Max. 10	1%	0.1 %	
an second a second s	CON	MENTS	ಕ್ಷಿತ್ರಾಲೆಗೂ ಕಾರ್ಯಕ್ರಿ ಪ್ರದೇಶಕರ್ಷ ಪ್ರದೇಶಕ	
91 <i>0</i> 91			n+	15 HANDOWNI
			- he "	
			1	
		QC: Ph	C Irma Belma	res

If you need further details, please call our factory or contact our local distributor.

Read. by R: 017/293 E3551

RE-02-01, Ed. 1

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)



Material No.: 9266-A4 Batch No.: 24A1562007 Manufactured Date: 2023-12-14 Expiration Date: 2025-03-14 Revision No.: 0

Certificate of Analysis

Test	Specification	Result	
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1	
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	< 1	
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %	
Color (APHA)	≤ 10	5	
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm	
Titrable Acid (µeq/g)	≤ 0.3	< 0.1	
Chloride (Cl)	≤ 10 ppm	< 5 ppm	
Water (by KF, coulometric)	≤ 0.02 %	< 0.01 %	

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG23L14152

E 3706

Rec. No:/2/19/24

Kennet lel

Ken Koehnlein Sr. Manager, Quality Assurance Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)

(Vavantor



Material No.: 9266-A4 Batch No.: 24A1562007 Manufactured Date: 2023-12-14 Expiration Date: 2025-03-14 Revision No.: 0

Certificate of Analysis

Specification	Result	
≤ 5	< 1	
≤ 10	< 1	
≥ 99.8 %	100.0 %	
≤ 10	5	
≤ 1.0 ppm	0.1 ppm	
≤ 0.3	< 0.1	
≤ 10 ppm	< 5 ppm	
≤ 0.02 %	< 10.0 %	
	 ≤ 5 ≤ 10 ≥ 99.8 % ≤ 10 ≤ 1.0 ppm ≤ 0.3 ≤ 10 ppm 	 ≤ 5 < 1 ≤ 10 < 1 ≥ 99.8% 100.0% ≤ 10 ≤ 1.0 ppm 0.1 ppm ≤ 0.3 < 0.1 ≤ 10 ppm < 5 ppm

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG23L14152

E 3707

Kemetrkel.

Ken Koehnlein Sr. Manager, Quality Assurance Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)

(Vavantor^{**}



Material No.: 9266-A4 Batch No.: 24A1962016 Manufactured Date: 2023-12-14 Expiration Date: 2025-03-14 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	2
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.5 ppm
Titrable Acid (µeq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	≤ 0.02 %	< 0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG23L14151

femelakel

Sr. Manager, Quality Assurance

PO: PO1-8886 PRODUCT CODE: SHIP DATE: 6/21/2024

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)






Material No.: 9266-A4 Batch No.: 24E2462004 Manufactured Date: 2024-04-10 Expiration Date: 2025-07-10 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	3
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	3
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Titrable Acid (µeq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	5 ppm
Water (by KF, coulometric)	≤ 0 . 02 %	< 0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG24D10725



floak
Janue Croak Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700 Page 1 of 1 Acetone BAKER RESI-ANALYZED® Reagent For Organic Residue Analysis

(Vavantor)



Material No.: 9254-03 Batch No.: 23H1462005 Manufactured Date: 2023-07-26 Expiration Date: 2026-07-25 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay ((CH3)2CO) (by GC, corrected for water)	≥ 99.4 %	99.7 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.3 ppm
Substances Reducing Permanganate	Passes Test	Passes Test
Titrable Acid (µeq/g)	≤ 0.3	0.1
Titrable Base (µeq/g)	≤ 0.6	< 0.1
Water (H2O)	≤ 0.5 %	0.3 %
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor EpoxIde) Single Peak (pg/mL)	≤ 10	1

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC

Recd. by RP on 7/2124 E 3769



PO: PO1-9448 PRODUCT CODE: SHIP DATE: 7/16/2024

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)





Material No.: 9266-A4 Batch No.: 24F1062004 Manufactured Date: 2024-04-15 Expiration Date: 2025-07-15 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	7
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Titrable Acid (µeq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	≤ 0.02 %	< 0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG24D15750

Jamie Croak **Director Quality Operations, Bioscience Production**

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700 Page 1 of 1

110 Benner Circle Bellefonte, PA 16823-8812 Tel: (800)356-1688 Fax: (814)353-1309	er Circle \ 16823-8812 356-1688 353-1309	Certific	Certificate of Analysis	nalysi			
www.restek.com	tek.com						ACCREDITED ISO/IEC 17025 Accredited Testing Laboratory Certificate #3222.02
		FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE. This Reference Material is intended for Laboratory Use Only as a standard the qualitative and/or quantitative determination of the analyte(s) listed	USE ONLY-RE, is intended for Labo	AD SDS PRIO	E.		
Catalog No. :	31266		Lot No.: A0186840	840		- - - -	
) . (I	t	_
Description :	Florida TRPH Standard	ndard				210	140/ 2
	Florida TRPH Sta	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul	, 1mL/ampul			r II C	162 /
Container Size :	2 mL		Pkg Amt: > 1 mL				
Expiration Date :	July 31, 2029		Storage: 25°C r	25°C nominal	i		
Handling:	Sonicate prior to use.	<u>se.</u>	Ship: Ambient	nt			
				CERTI	IFIE D	VALUE	ш С
Elution Order	Co	Compound	Grav. Conc. (weight/volume)	Conc. volume)	Expanded Uncertainty (95% C.L.; K=2)	Incertainty (=2)	
1 n-Octa CAS # Purity	n-Octane (C8) CAS # 111-65-9 Purity 99%	(Lot SHBN3807)	505.0	μg/mL +/- +/- +/-	2.9995 12.5465 15.0390	baller 1. Tw/Bή 1. Tw/Bή	Gravimetric Unstressed Stressed
2 n-Decs CAS # Purity	n-Decane (C10) CAS # 124-18-5 Purity 99%	(Lot SHBN8619)	503.0	μg/mL +/- +/- +/-	- 2.9877 - 12.4968 - 14.9795	μg/mL (μg/mL 1	Gravimetric Unstressed Stressed
3 n-Dode CAS # Purity	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	(Lot SHBN7174)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	μg/mL 1 μg/mL 1	Gravimetric Unstressed Stressed
4 n-Tetra CAS # Purity	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	(Lot STBK2282)	505.0	μg/mL +/- +/- +/-	- 2.9995 - 12.5465 - 15.0390	hg/mL 1 hg/mL 1	Gravimetric Unstressed Stressed
5 n-Hexa CAS # Purity	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	(Lot SHBM4146)	504.7	µg/mL +/- +/- +/-	- 2.9978 - 12.5390 - 15.0301	րց/mL կեշր կեշր	Gravimetric Unstressed Stressed
6 n-Octa CAS # Purity	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	(Lot VZKOJ)	504.4	μg/mL +/- +/- +/-	- 2.9960 - 12.5316 - 15.0212	hg/mL hg/mL	Gravimetric Unstressed Stressed
7 n-Eico: CAS # Purity	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	(Lot MKCF7888)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	µg/mL µg/mL	Gravimetric Unstressed Stressed

RES

CERTIFIED REFERENCE MATERIAL

ACCREDITED ISO 17034 Accredited Veference Material Producer Certificate #3222.01

110 Benner Circle Bellefonte, PA 16823-8812

01-Aug-2020 rev.

Solvent:	17	16	15	14	13	12	11	10	و	∞
lt: Hexane CAS # Purity	n-Tetrac CAS # Purity	n-Octati CAS # Purity	n-Hexat CAS # Purity	n-Tetrat CAS # Purity	n-Dotria CAS # Purity	n-Triacc CAS # Purity	n-Octac CAS # Purity	n-Hexac CAS # Purity	n-Tetrac CAS # Purity	n-Docos CAS # Purity
110-54-3 99%	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	n-Docosane (C22) CAS # 629-97-0 Purity 99%
	(Lot PADGI)	(Lot 0000127235)	(Lot U25B014)	(Lot OML4N)	(Lot BCBW0661)	(Lot MKCN9321)	(Lot BCCG0084)	(Lot MKCD4540)	(Lot MKCN2863)	(Lot MKCL8918)
	504.7	504.4	504.0	504.5	505.0	505.0	504.5	504.0	503.5	504.5
	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL
	+ + +	+/- +/-	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +
	2.9978 12.5390 15.0301	2.9960 12.5316 15.0212	2.9936 12.5216 15.0093	2.9966 12.5340 15.0241	2.9995 12.5465 15.0390	2.9995 12.5465 15.0390	2.9966 12.5340 15.0241	2.9936 12.5216 15.0093	2.9906 12.5092 14.9944	2.9966 12.5340 15.0241
	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	ից/mL կց/mL կց/mL	µg/mL µg/mL	µg/mL µg/mL
	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed

01-Aug-2020 rev.

01-Aug-2020	
) rev.	


Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223)

Carrier Gas: hydrogen-constant pressure 10 psi.

Temp. Program: 40°C (hold 2 min.) to 330°C @ 10°C/min. (hold 10 min.) Inj. Temp:

250°C **Det. Temp:** 330°C

Det. Type:

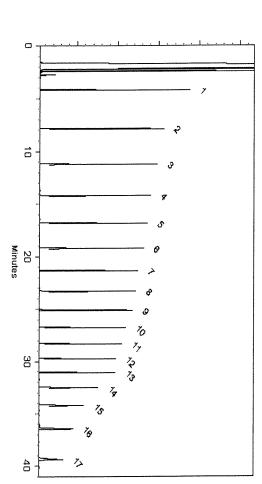

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Attraction Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022 Balance: 1128360905

িক গঠ Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015 Registered Quality System Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- GC/MS, LC/MS, RI, and/or melting point. Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD
- correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. parent compound in solution. ≻
- Purity of isomeric compounds is reported as the sum of the isomers

Purity values are rounded to the nearest whole number. Certified Uncertainty Value Notes:

٠ uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula: The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- standard temperature conditions. www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at nonstored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time
- . Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions as specified below. conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days


- are available by contacting Restek Technical Service at www.restek.com/Contact-Us. separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed,
- . that the minimum packaged amount can be sufficiently transferred The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure

Manufacturing Notes:

٠ using NIST traceable weights, and/or dilutions with Class A glassware. Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily

Handling Notes:

most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with information, with the knowledge/understanding that open product stability is subject to the specific handling and which includes complete instructions. the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through

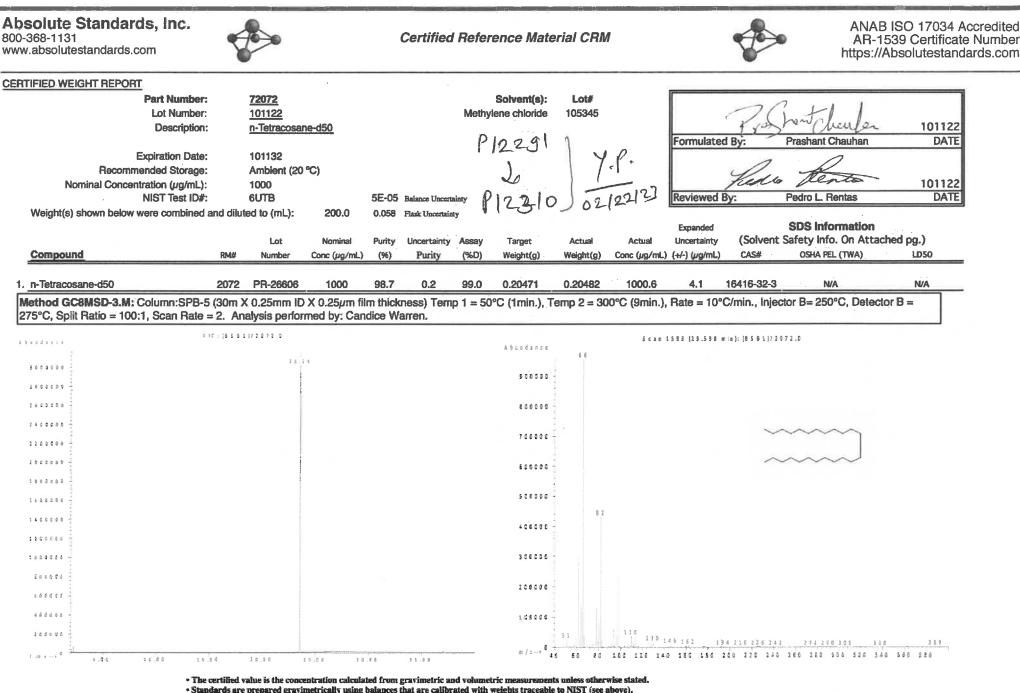

• Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

• All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.

. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result."

NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

ICAL STANDARD DISSOLVED IN ME ABSOLUTE STANDARDS INC 44 Rossotto Dr. Hamden CT, 06514 htmden CT, 0654 htmden CT, 0656 htmden CT, 0756 htmden CT, 0756	FHYLENE CHLORIDE Emergency Telephone USA & CANADA Emergency Telephone International Date Prepared/Revised	
In wash if swal entities and of contracting the second of contracting the second of contracting to the second of contracting to the second of the second sec		1-800-535-5053 1-362-323-3500 January 1, 2022
Harmful if swal Suspected of c Use in ventilate If on skin, wash on III - Composition on III - Composition Certified Weight Repo of skin contact of skin contact of skin contact of skin contact ignition ignition on VI. FIREFIGHTING MEA on V. FIREFIGHTING MEA of skin contact ignition of skin absorption, ingestion al protective equipment for skin absorption, ingestion al for skin absorption, ingestion al for skin, eves and chini on IX - PHYSICAL/CHEMIA	FR 1910 (OSHA HCS)	
In Difference of the second of	Causes skin and eye irritation. May cause respiratory irritation. Use gloves, eye protection/face sheild If in eyes, remove contacts, rinse with water	n. e sheild ise with water
In Lange Contraction of the Lange Contraction		
It Reponsibility It Responsibility It Reponsibility It Reponsibility <td></td> <td></td>		
The set of	OSHA PEL (TWA) LD50 orl-rat	% (optional)
t Report Ransser Construction Control Contro	50 ppm > 2,000 mg/kg	. > 97
Contractic	Quantities.	
IG MEA	in attendance.Move to safe area. ificial respiration. Consult a physician. ind consult a physician.	
AND ST Rest of the second seco		
L RELE I RELE Provey Contry Provey AND S: AND S: CONT CONT A 50 pp ngestion and clothi	carbon dioxide. If necessary.	
Wean Prevv Cont AND S MA 50 pp ngestion and clothin CHEMI		
Previous Contraction of Contraction Contra	as. Ensure adequate ventilation. Remove	all sources of
AND S CONT MA 50 pp ngestion of the Resp and clothin	s, product enter drains. sposal according to local regulations (see	estion 13).
r safe handling tions EXPOSURE CONT oride 75-09-2 TWA 50 pp in absorption, ingestion ctive equipment Resp with skin, eyes and dothi PHYSICAL/CHEMI		
. EXPOSURE CONTROLS/PERSON ride 75-09-2 TVM 50 ppm in absorption, ingestion and inhalation. ctive equipment Respiratory protection with skin, eyes and clothing. Wash hands th with skin, eyes and clothing. Wash hands th	our or mist. smoking. Prevent the build up of electrosts place. Containers which are opened must	atic charge. t be carefully resealed
ride 75-09-2 TWA 50 ppm in absorption, ingestion and inhalation. ctive equipment Respiratory protection with skin, eyes and clothing. Wash hands th PHYSICAL/CHEMICAL CHARACT		
PHYSICAL/CHEMICAL CHARACTERISTICS	nspected prior to use. Eye protection.	
	r (H2O = 1)	- Maria
40°C		1.325

Phone: 203-281-2917 FAX: 203-281-2922


PO Box 5585 Hamden, CT 06518-0585


Absolute Standards Inc.

Absolute Standards Inc.	PO Box 5585 Hamden, CT 06518-0585	Phone: 203-281-2917 FAX: 203-281-2922
Vapor Pressure (mm Hg)	Melting Point	-97°C
Vapor Density (AIR = 1)		0.71
Solubility in Water Slightly soluble		-
Appearance and Odor CLEAR, COLORLESS	CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR.	
Section X. STABILITY AND REACTIVITY		
Chemical stability Stable under recommunity of hazardous reactions No data available Conditions to avoid Heat, flames, sparks, Materials to avoid Alkali metals, Aluminu Hazardous decomposition products - No data available	Stable under recommended storage conditions. No data available Heat, flames, sparks, extreme temperature and sunlight. Alkali metals, Aluminum, Oxidizing agents, Bases, Amines, Magnesium, Acids, Vinyl compounds to data available	
Section XI. TOXICOLOGICAL INFORMATION		
LD50 Oral - Rat - > 2,000 mg/kg LC50 Inhalation - Rat - 52,000 mg/m3 LD50 Demmal - Rat - > 2,000 mg/kg Toxic if absorbed through skin. Causes skin irritation. Teye damage/eye irritation Toxic if inhaled. Causes respiratory tract irritation. Toxic if swallowed.		
Section XII. ECOLOGICAL INFORMATION FOR F	INFORMATION FOR REPORTABLE QUANTITY OF 1000 lbs.	
LC50 193.00 mg/l - 96 h EC50 1,682.00 mg/l - 48 h		
Section XIII. DISPOSAL CONSIDERATIONS		
Dispose with normal Laboratory Solvent Waste.		
Section XIV. TRANSPORT INFORMATION		
DOT (US) IA UN number: 1593 Class: 6.1 Packing group: III UI Proper shipping name: Dichloromethane Reportable Quantity (RQ): 1000 lbs	IATA UN number: 1593 Class: 6.1 Packing group: III Proper shipping name: Dichloromethane	
Section XV. REGULATORY INFORMATION		
OSHA Hazards Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302	Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant nicals in this material are subject to the reporting requirements of SARA Title III, Section 302.	
Section XVI. Misc. INFORMATION		
The information in this Material Safety Data Sheet meets the requirements of the United States Occupationa 1910.1200 et. seq.) and Giobal Harmonized System (GHS). This document is intended only as a guide to th supervised by a person trained in chemical handling. The user is responsible for determining the precaution usage, protective clothing including eya and face guards and respirators must be used to avoid contact with usage, protective clothing including eya and face guards and respirators must be used to avoid contact with usage, protective clothing including eya and face guards and respirators must be used to avoid contact with serious adverse health effects. This chemical may interact with other substances. Since the potential uses at dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC ANTAN STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REN MARKHANTABILITY OR ITS FITNESS FOR A PAXTICULAR APPLICATION. The user should recognated for the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please cust.	The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usago a protective with material or breathing chemical application. Depending on usago a protective application is the precautions and tangers of this chemical modeling error of the precautions and tangers of the chemical manufing of the material or breathing chemical application. Depending whate services adverse health effects. This chemical material with other chemical and intersection with other chemical may interact with material or ontact with material or substate. This chemical may interact with the protectial uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemical sor substances. AIBSOLUTE STANDARDS INC, matma that the healt appectitation set forth on the label. ABSOLUTE STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS POR A PARLICATION. The use should recognize that this product can cause severe injury or dath, especially if improperly handled or the known dangers of use or to headed. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for asistance.	er (29 CFR I personnel, or ion. Depending on ion. Depending on all the potential el. ABSOLUTE el. AbsOLUTE lable, Absolute

.

ABSOLUTE STANDARDS, INC.
ISO - 17034 Certificate of Analysis
Certified Reference Material (CRM)
Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.
Health & Safety: See the attached SDS & Certified Weight Report before use. Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the es- tablishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.
Characterization Values : In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.
Homogeneity: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report. Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless snecifically stated on the Certified Wt. Power
Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in ac- cordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.
Uncertainty : UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).
Purity & Identity : Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, HD, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitonnetry.
Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.
Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.
Minimum Sample Size: 0.5 uL for analytical applications.
Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.
Certifying Officer: Stephen J. Arpie, M.S., Director General
Page 1 of 2
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019

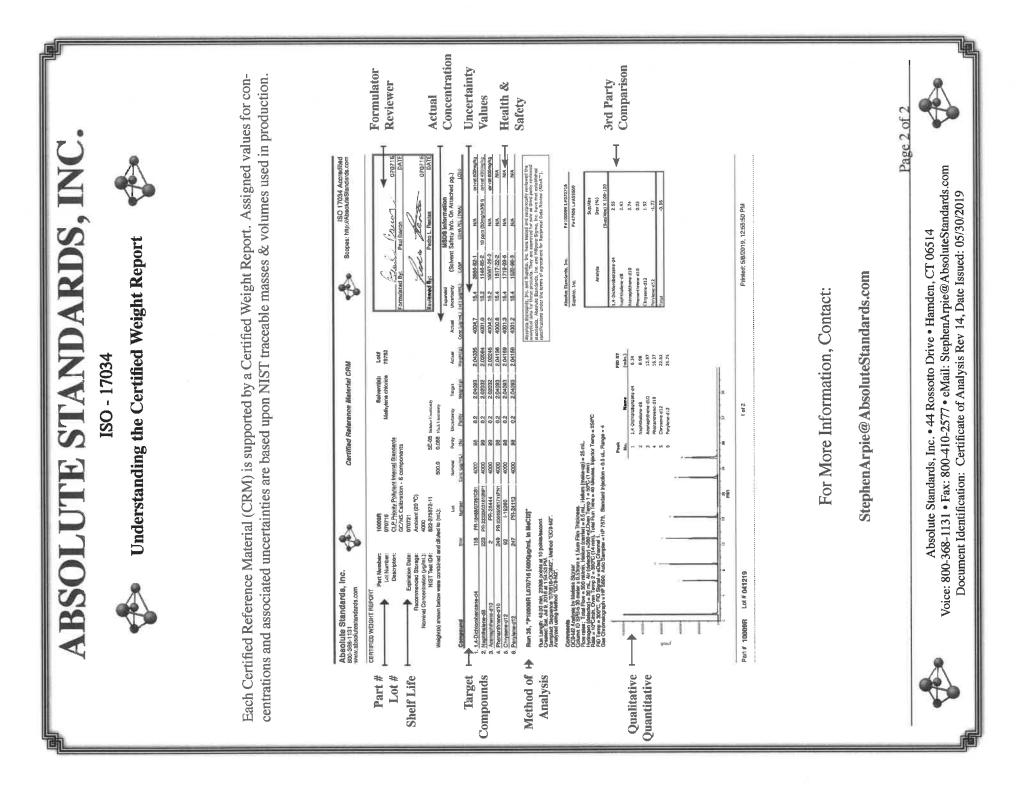

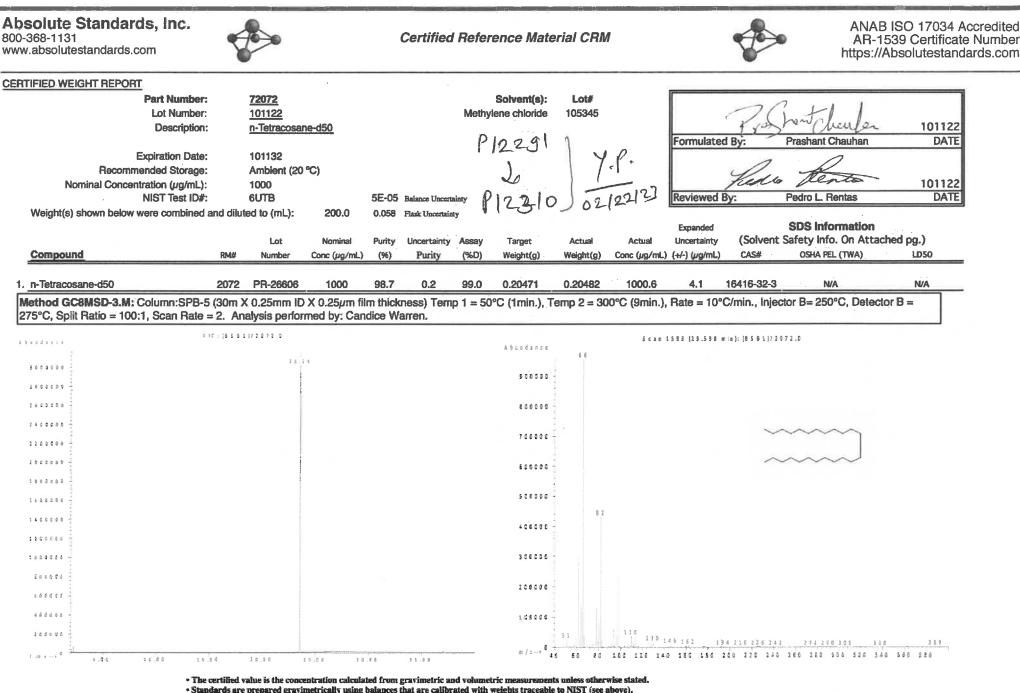

• Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

• All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.

. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result."

NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

ICAL STANDARD DISSOLVED IN ME ABSOLUTE STANDARDS INC 44 Rossotto Dr. Hamden CT, 06514 htmden CT, 0654 htmden CT, 0656 htmden CT, 0756 htmden CT, 0756	FHYLENE CHLORIDE Emergency Telephone USA & CANADA Emergency Telephone International Date Prepared/Revised	
In wash if swal entities and of contracting the second of contracting the second of contracting to the second of contracting to the second of the second sec		1-800-535-5053 1-362-323-3500 January 1, 2022
Harmful if swal Suspected of c Use in ventilate If on skin, wash on III - Composition on III - Composition Certified Weight Repo of skin contact of skin contact of skin contact of skin contact ignition ignition on VI. FIREFIGHTING MEA on V. FIREFIGHTING MEA of skin contact ignition of skin absorption, ingestion al protective equipment for skin absorption, ingestion al for skin absorption, ingestion al for skin, eves and chini on IX - PHYSICAL/CHEMIA	FR 1910 (OSHA HCS)	
In Difference of the second of	Causes skin and eye irritation. May cause respiratory irritation. Use gloves, eye protection/face sheild If in eyes, remove contacts, rinse with water	n. e sheild ise with water
In Lange Contraction of the Lange Contraction		
It Reponsibility It Responsibility It Reponsibility It Reponsibility <td></td> <td></td>		
The set of	OSHA PEL (TWA) LD50 orl-rat	% (optional)
t Report Ransser Construction Control Contro	50 ppm > 2,000 mg/kg	. > 97
Contractic	Quantities.	
IG MEA	in attendance.Move to safe area. ificial respiration. Consult a physician. ind consult a physician.	
AND ST Rest of the second seco		
L RELE I RELE Provey Contry Provey AND S: AND S: CONT CONT A 50 pp ngestion and clothi	carbon dioxide. If necessary.	
Wean Prevv Cont AND S MA 50 pp ngestion and clothin CHEMI		
Previous Contraction of Contraction Contra	as. Ensure adequate ventilation. Remove	all sources of
AND S CONT MA 50 pp ngestion of the Resp and clothin	s, product enter drains. sposal according to local regulations (see	estion 13).
r safe handling tions EXPOSURE CONT oride 75-09-2 TWA 50 pp in absorption, ingestion ctive equipment Resp with skin, eyes and dothi PHYSICAL/CHEMI		
. EXPOSURE CONTROLS/PERSON ride 75-09-2 TVM 50 ppm in absorption, ingestion and inhalation. ctive equipment Respiratory protection with skin, eyes and clothing. Wash hands th with skin, eyes and clothing. Wash hands th	our or mist. smoking. Prevent the build up of electrosts place. Containers which are opened must	atic charge. t be carefully resealed
ride 75-09-2 TWA 50 ppm in absorption, ingestion and inhalation. ctive equipment Respiratory protection with skin, eyes and clothing. Wash hands th PHYSICAL/CHEMICAL CHARACT		
PHYSICAL/CHEMICAL CHARACTERISTICS	nspected prior to use. Eye protection.	
	r (H2O = 1)	- Maria
40°C		1.325

Phone: 203-281-2917 FAX: 203-281-2922


PO Box 5585 Hamden, CT 06518-0585

Absolute Standards Inc.

Absolute Standards Inc.	PO Box 5585 Hamden, CT 06518-0585	Phone: 203-281-2917 FAX: 203-281-2922
Vapor Pressure (mm Hg)	Melting Point	-97°C
Vapor Density (AIR = 1)		0.71
Solubility in Water Slightly soluble		-
Appearance and Odor CLEAR, COLORLESS	CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR.	
Section X. STABILITY AND REACTIVITY		
Chemical stability Stable under recommunity of hazardous reactions No data available Conditions to avoid Heat, flames, sparks, Materials to avoid Alkali metals, Aluminu Hazardous decomposition products - No data available	Stable under recommended storage conditions. No data available Heat, flames, sparks, extreme temperature and sunlight. Alkali metals, Aluminum, Oxidizing agents, Bases, Amines, Magnesium, Acids, Vinyl compounds to data available	
Section XI. TOXICOLOGICAL INFORMATION		
LD50 Oral - Rat - > 2,000 mg/kg LC50 Inhalation - Rat - 52,000 mg/m3 LD50 Demmal - Rat - > 2,000 mg/kg Toxic if absorbed through skin. Causes skin irritation. Teye damage/eye irritation Toxic if inhaled. Causes respiratory tract irritation. Toxic if swallowed.		
Section XII. ECOLOGICAL INFORMATION FOR F	INFORMATION FOR REPORTABLE QUANTITY OF 1000 lbs.	
LC50 193.00 mg/l - 96 h EC50 1,682.00 mg/l - 48 h		
Section XIII. DISPOSAL CONSIDERATIONS		
Dispose with normal Laboratory Solvent Waste.		
Section XIV. TRANSPORT INFORMATION		
DOT (US) IA UN number: 1593 Class: 6.1 Packing group: III UI Proper shipping name: Dichloromethane Reportable Quantity (RQ): 1000 lbs	IATA UN number: 1593 Class: 6.1 Packing group: III Proper shipping name: Dichloromethane	
Section XV. REGULATORY INFORMATION		
OSHA Hazards Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302	Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant nicals in this material are subject to the reporting requirements of SARA Title III, Section 302.	
Section XVI. Misc. INFORMATION		
The information in this Material Safety Data Sheet meets the requirements of the United States Occupationa 1910.1200 et. seq.) and Giobal Harmonized System (GHS). This document is intended only as a guide to th supervised by a person trained in chemical handling. The user is responsible for determining the precaution usage, protective clothing including eya and face guards and respirators must be used to avoid contact with usage, protective clothing including eya and face guards and respirators must be used to avoid contact with usage, protective clothing including eya and face guards and respirators must be used to avoid contact with serious adverse health effects. This chemical may interact with other substances. Since the potential uses at dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC ANTAN STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REN MARKHANTABILITY OR ITS FITNESS FOR A PAXTICULAR APPLICATION. The user should recognated for the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please cust.	The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usago a protective with material or breathing chemical application. Depending on usago a protective application is the precautions and tangers of this chemical modeling error of the precautions and tangers of the chemical manufing of the material or breathing chemical application. Depending whate services adverse health effects. This chemical material with other chemical and intersection with other chemical may interact with material or ontact with material or substate. This chemical may interact with the protectial uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemical sor substances. AIBSOLUTE STANDARDS INC, matma that the healt appectitation set forth on the label. ABSOLUTE STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS POR A PARLICATION. The use should recognize that this product can cause severe injury or dath, especially if improperly handled or the known dangers of use or to headed. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for asistance.	er (29 CFR I personnel, or ion. Depending on ion. Depending on all the potential el. ABSOLUTE el. AbsOLUTE lable, Absolute

.

ABSOLUTE STANDARDS, INC.
ISO - 17034 Certificate of Analysis
Certified Reference Material (CRM)
Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.
Health & Safety: See the attached SDS & Certified Weight Report before use. Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the es- tablishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.
Characterization Values : In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.
Homogeneity: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report. Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless snecifically stated on the Certified Wt. Power
Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in ac- cordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.
Uncertainty : UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).
Purity & Identity : Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, HD, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitonnetry.
Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.
Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.
Minimum Sample Size: 0.5 uL for analytical applications.
Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.
Certifying Officer: Stephen J. Arpie, M.S., Director General
Page 1 of 2
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019

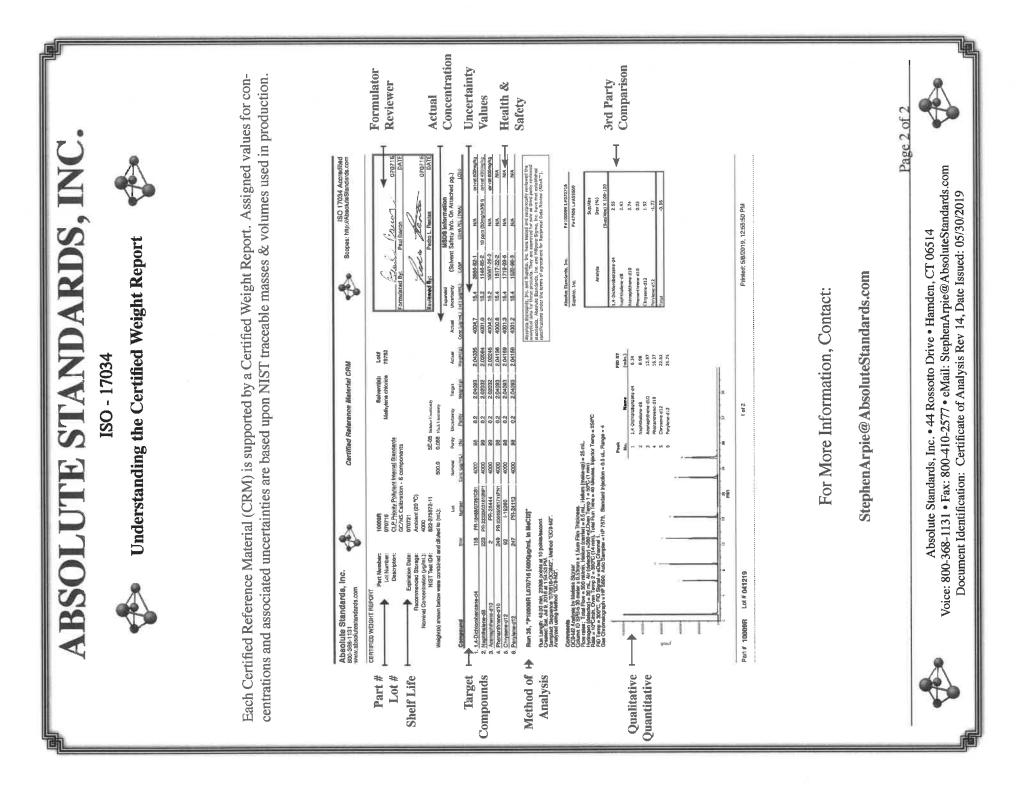



110 Benner Circle Bellefonte, PA 16823-8812 Tel: 1-814-353-1300 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus





FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.


This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. :	31266	Lot No.:	A0204859	- P13103 7 Yp
Description :	Florida TRPH Standard			
	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul		P13112 JO1/12/2024	
Container Size :	2 mL	Pkg Amt:	> 1 mL	P1312 J01/12/2024
Expiration Date :	December 31, 2030	Storage:	25°C nominal	
Handling:	Sonicate prior to use.	Ship:	Ambient	

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc <i>.</i> (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBP9758	99%	504.4 μg/mL	+/- 13.0305
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	503.6 μg/mL	+/- 13.0098
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	503.6 μg/mL	+/- 13.0098
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	504.0 μg/mL	+/- 13.0201
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	504.0 μg/mL	+/- 13.0201
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	504.1 μg/mL	+/- 13.0230
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	504.0 μg/mL	+/- 13.0204
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	503.6 μg/mL	+/- 13.0098
9	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	504.0 μg/mL	+/- 13.0201
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	504.0 μg/mL	+/- 13.0201
11	n-Octacosane (C28)	630-02-4	BCCG0084	99%	504.0 μg/mL	+/- 13.0201
12	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	504.0 μg/mL	+/- 13.0204
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	504.0 μg/mL	+/- 13.0201
14	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	504.4 μg/mL	+/- 13.0305
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	504.0 μg/mL	+/- 13.0201
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	503.8 μg/mL	+/- 13.0152
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.6 μg/mL	+/- 13.0098

Solvent: Hexane CAS# 110-54-3 Purity 99%

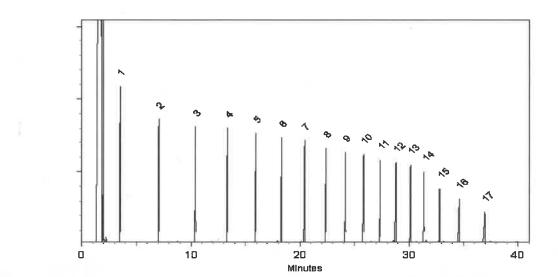

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dakota Parson - Operations Technician I

Date Mixed:

B442140311

Manufactured under Restek's ISO 9001:2015 **Registered Quality System** Certificate #FM 80397

Gunghe & Billord Jennifer Pollino - Operations Tech III - ARM QC

Date Passed:

01-Dec-2023

hydrogen-constant pressure 10 psi. Temp. Program: 40°C (hold 2 min.) to 330°C

@ 10°C/min. (hold 10 min.) Inj. Temp:

250°C

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223) **Carrier Gas:**

Det. Temp: 330°C

Det. Type: FID

Split Vent: 2 ml/min.

Inj. Vol 1µl

29-Nov-2023

Balance Serial #



General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A
 correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the
 parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

 The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

• The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

• Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle Bellefonte, PA 16823-8812 Tel: 1-814-353-1300 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus





FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. :	31266	Lot No.:	A0204859	- P13103 7 Yp
Description :	Florida TRPH Standard			
	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul		P13112 JO1/12/2024	
Container Size :	2 mL	Pkg Amt:	> 1 mL	P1312 J01/12/2024
Expiration Date :	December 31, 2030	Storage:	25°C nominal	
Handling:	Sonicate prior to use.	Ship:	Ambient	

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc <i>.</i> (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBP9758	99%	504.4 µg/mL	+/- 13.0305
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	503.6 μg/mL	+/- 13.0098
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	503.6 μg/mL	+/- 13.0098
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	504.0 μg/mL	+/- 13.0201
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	504.0 μg/mL	+/- 13.0201
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	504.1 μg/mL	+/- 13.0230
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	504.0 μg/mL	+/- 13.0204
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	503.6 μg/mL	+/- 13.0098
9	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	504.0 μg/mL	+/- 13.0201
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	504.0 μg/mL	+/- 13.0201
11	n-Octacosane (C28)	630-02-4	BCCG0084	99%	504.0 μg/mL	+/- 13.0201
12	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	504.0 μg/mL	+/- 13.0204
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	504.0 μg/mL	+/- 13.0201
14	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	504.4 μg/mL	+/- 13.0305
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	504.0 μg/mL	+/- 13.0201
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	503.8 μg/mL	+/- 13.0152
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.6 μg/mL	+/- 13.0098

Solvent: Hexane CAS# 110-54-3 Purity 99%

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223) **Carrier Gas:**

hydrogen-constant pressure 10 psi.


Temp. Program: 40°C (hold 2 min.) to 330°C @ 10°C/min. (hold 10 min.)

Inj. Temp: 250°C

Det. Temp: 330°C Det. Type: FID

Split Vent: 2 ml/min. Inj. Vol

1µl

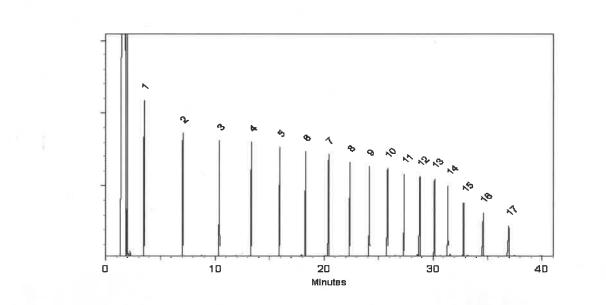

Quality Confirmation Test

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dakota Parson - Operations Technician I

B442140311

Manufactured under Restek's ISO 9001:2015 **Registered Quality System** Certificate #FM 80397

Gunghe & Billord Jennifer Pollino - Operations Tech III - ARM QC

01-Dec-2023

Date Passed:

29-Nov-2023 **Balance Serial #**

Date Mixed:

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A
 correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the
 parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

 The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage stability}^2 + u_{shipping stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

• The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

• Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	i Refere	nce Mate	Certified Reference Material CRM				ANAB I AR-15: https://At	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol	rent Cheulen	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	Stopiration Date: Bnded Storage: Iration (µg/mL): NIST Test ID#: vere combined and c	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	latinty rty				Formulated By Reviewed By:	and and a	Prashant Chauhan	DATE 101122 DATE	
Compound		S.	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent S cAS#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LD50	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 I:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Injecto	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	N/A	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		9 - F	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				a 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		5 5 5 5 5	5 8 3 {2 3 .5 3 8 m	5 c v n 1589 {23.538 m 143:1958 1172072.0	2 2 . D		
ы та со со со со со со со со со со со со со			m (*)	97 147 147 147				900300	0					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60								000008						~ ~ ~ ~ ~)
м м м м м м м м м м м м м м м м м м м								78889				5			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								0 0 0 0 0 0 0 0				ζ		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500000	• 4					AJ	1
				1944 - 100 g mba) - 100 a 200 g				4 2 0 2 3 0	₩					421211	421
n n n n n n n n n n n n n n n n n n n n								30000						110	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								4 4 4 9 9							
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	44 44		2.3.0 5.4.6 3.6.2 	184 278 255 243		4 9 8	
T ## e # D	19,81 08,5	15. 8.8	19 N. 19	5 5 5 5 7 7		na ar s e	the desired or quadratic	a / 2 - 2 3	8.8 8.8 8.8 8.8 8.8 8.8	202 224 245	14				
		 The certi Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under s	ric measuremen veights traceabl appropriate lab	ats unless other te to NIST (see a oratory condition	vise stated. (bove). ons.		3			
		NIST Te	- curculamy veterence: 1 ayer, p.v. and Auya, C.L., 'outgenes or Evanang and Expressing the Uncertamy of NIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuation, DC, (1)	g and Express 1994).	og the Uncertan	ny of NIST Mea	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	i Refere	nce Mate	Certified Reference Material CRM				ANAB I AR-15: https://At	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol	rent Cheulen	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	Stopiration Date: Bnded Storage: Iration (µg/mL): NIST Test ID#: vere combined and c	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	latinty rty				Formulated By Reviewed By:	and and a	Prashant Chauhan	DATE 101122 DATE	
Compound		S.	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent S cAS#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LD50	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 I:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Injecto	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	N/A	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		e i e	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				a 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		5 2 2 3 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	5 8 3 {2 3 ·5 3 8 m	5 c v n 1589 {23.538 m 143:1958 1172072.0	2 2 . D		
ы та со со со со со со со со со со со со со			m (*)	97 107 101				900300	0					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60								000008						~ ~ ~ ~ ~)
м м м м м м м м м м м м м м м м м м м								78889				5			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								0 0 0 0 0 0 0 0				ζ		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500000	• 4					AJ	1
				1944 - 100 g mba) - 100 a 200 g				4 2 0 2 3 0	₩					421211	421
n n n n n n n n n n n n n n n n n n n n								30000						110	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								4 4 4 9 9							
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	94 94		2.3.0 5.4.6 3.6.2 	184 278 255 243		4 9 8	
T ## e # D	19,81 08,5	15. 8.8	19 N. 19	5 5 5 5 7 7		na ar s e	the desired or quadratic	a / 2 - 2 3	8.8 8.8 8.8 8.8 8.8 8.8	202 224 245	14				
		 The certi Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated.	ric measuremen veights traceabl appropriate lab	uts unless other te to NIST (see a oratory condition	vise stated. (bove). ons.		3			
		NIST Te	- curculamy veterence: 1 ayer, p.v. and Auya, C.L., 'outgenes or Evanang and Expressing the Uncertamy of NIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuation, DC, (1)	g and Express 1994).	og the Uncertan	ny of NIST Mea	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	i Refere	nce Mate	Certified Reference Material CRM				ANAB I AR-15: https://At	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol	rent Cheulen	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	Stopiration Date: Bnded Storage: Iration (µg/mL): NIST Test ID#: vere combined and c	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	latinty rty				Formulated By Reviewed By:	and and a	Prashant Chauhan	DATE 101122 DATE	
Compound		S.	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent S cAS#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LD50	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 I:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Injecto	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	N/A	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		9 - F	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				a 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		5 5 5 5 5	5 8 3 {2 3 .5 3 8 m	5 c v n 1589 {23.538 m 143:1958 1172072.0	2 2 . D		
ы на со со со со со со со со со со со со со			m (*)	97 107 101				900300	0					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60 6								000008						~ ~ ~ ~ ~)
м м м м м м м м м м м м м м м м м м м								78889				5			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								0 0 0 0 0 0 0 0				ζ		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500000	• 4					AJ	1
				1944 - 100 g mbu) - 100 u - 100 g				4 2 0 2 3 0	₩					421211	421
n n n n n n n n n n n n n n n n n n n n								30000						110	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								4 4 4 9 9							
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	94 94		2.3.0 5.4.6 3.6.2 	184 278 255 243		4 9 8	
T ## e # D	19,81 08,5	15. 8.8	19 N. 19	5 5 5 5 7 7		na ar s e	the desired or quadratic	a (2 9	8.8 8.8 8.8 8.8 8.8 8.8	202 224 245	14				
		 The certi Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Shandards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Shandards, after operating are provide should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under s	ric measuremen veights traceabl appropriate lab	ats unless other te to NIST (see a oratory condition	vise stated. (bove). ons.		3			
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auya, C.L., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuation, DC, (1)	g and Express 1994).	og the Uncertan	ny of NIST Mea	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	i Refere	nce Mate	Certified Reference Material CRM				ANAB I AR-15: https://At	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol	rent Cheulen	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	Stopiration Date: Bnded Storage: Iration (µg/mL): NIST Test ID#: vere combined and c	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	latinty rty				Formulated By Reviewed By:	and and a	Prashant Chauhan	DATE 101122 DATE	
Compound		S.	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent S cAS#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LD50	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 I:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Injecto	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	N/A	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		e i e	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				a 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		2 2 2 3 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	5 8 3 {2 3 .5 3 8 m	5 c v n 1589 {23.538 m 143:1958 1172072.0	2 2 . D		
ы на со со со со со со со со со со со со со			m (*)	97 147 147 147				900300	0					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60 6								000008						~ ~ ~ ~ ~)
м м м м м м м м м м м м м м м м м м м								78889				5			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								0 0 0 0 0 0 0 0				ζ		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500000	• 4					AJ	1
				1944 - 100 g mbu) - 100 u - 100 g				4 2 0 2 3 0	₩					421211	421
n n n n n n n n n n n n n n n n n n n n								30000						110	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								4 4 4 9 9							
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	44 44		2.3.0 5.4.6 3.6.2 	184 278 255 243		4 9 8	
T ## e # D	19,81 08,5	15. 8.8	19 N. 19	5 5 5 5 7 7		na ar s e	the desired or quadratic	a (2 9	8.8 8.8 8.8 8.8 8.8 8.8	202 224 245	14				
		 The certi Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under s	ric measuremen veights traceabl appropriate lab	ats unless other te to NIST (see a oratory condition	vise stated. (bove). ons.		3			
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auyar, C.E., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuation, DC, (1)	g and Express 1994).	og the Uncertan	ny of NIST Mea	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

	Santa	5580 Skylane Blvd Santa Rosa, CA 95403	Manuf	Manufacturer's Quality System Andited & Registered
	L)	(707)525-5788		by TUV USA to ISO 9001:2015
INTERNATIONAL	(800) (707)	(800)878-7654 Toll Free (707)545-7901 Fax	e Date Received:	ved:
	Certific	Certificate of Analysis	VSiS Rev 0	Page 1 of 1
Catalog No.: Lot No.: Storage: 7-110400-05 514983 < -10 Degrees C	Solvent: Hevane	Exp. Date: 11/20/2028 TRPH 5	Exp. Date: Description: Description: 11/20/2028 TRPH Standard (C8-C40), 500 mg/L, 1 ml	ption: g/L, 1 ml
Compound	CAS No.		Compound Lot No.	Concentration, mod.
and a second second				
decane (C10)	124-18-5	7.66	415.7.2P	498.5 ± 6.92
docosane (C22)	629-97-0	98.8	420.9.1P	499.4 ± 6.93
dodecane (C12)	112-40-3	7.99	416.9.3P	502 ± 6.97
dotriacontane (C32)	544-85-4	57	425.9.2.2P	499.6 ± 8.53
eicosane (C20)	112-95-8	99.8	419.7.1P	501 ± 6.95
hexacosane (C26)	630-01-3	99.3	422.7.2.1P	501 ± 6.95
hexatriacontane (C36)	630-06-8	86	427.29.1.1P	499.3 ± 8.53
n-hexadecane (C16)	544-76-3	99.45	368.271.1P	498.7 ± 6.91
octacosane (C28)	630-02-4	1.99.1	423.24.1P	500.5 ± 6.95
n-octadecane (C18)	593-45-3	99.5	418.29.1P	499.5 ± 6.92
octane (C8)	111-65-9	99.4	385.7.2.1P	498.5 ± 6.92
octatriacontane (C38)	7194-85-6	95	428.1.2P	500.2 ± 6.94
tetracontane (C40)	4181-95-7	67	429.7.2P	499.6 ±6.93
n-tetracosane (C24)	646-31-1	99.5	421.7.IP	499.5 ± 6.93
n-tetradecane (C14)	629-59-4	99.3	417.9.IP	500 ± 6.94
tetratriacontane (C34)	14167-59-0	96.1	426.7.2.2P	499.7 ± 8.53
triacontane (C30)	638-68-6	99.5	424.7.1.1P	500 ± 6.94
		Q	212610	ET I'
Let the standard warm to room temperature and sonicate before opening.	50	CL-	p 13224	01 1 3 1 1 - 9 *Not a certified value
Oundrea & Main UC	M	All weights are tra Concentration (co	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence)	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) values
Certified By:		listed are determir	listed are determined gravimetriclly.	

5580 Skylane Blvd

Andrea Schaible Chemist

Certified By:

	Santa	5580 Skylane Blvd Santa Rosa, CA 95403	Manuf	Manufacturer's Quality System Andited & Registered
	L)	(707)525-5788		by TUV USA to ISO 9001:2015
INTERNATIONAL	(800) (707)	(800)878-7654 Toll Free (707)545-7901 Fax	e Date Received:	ved:
	Certific	Certificate of Analysis	VSiS Rev 0	Page 1 of 1
Catalog No.: Lot No.: Storage: 7-110400-05 514983 < -10 Degrees C	Solvent: Hevane	Exp. Date: 11/20/2028 TRPH 5	Exp. Date: Description: Description: 11/20/2028 TRPH Standard (C8-C40), 500 mg/L, 1 ml	ption: g/L, 1 ml
Compound	CAS No.		Compound Lot No.	Concentration, mod.
and a second second				
decane (C10)	124-18-5	7.66	415.7.2P	498.5 ± 6.92
docosane (C22)	629-97-0	98.8	420.9.1P	499.4 ± 6.93
dodecane (C12)	112-40-3	7.99	416.9.3P	502 ± 6.97
dotriacontane (C32)	544-85-4	57	425.9.2.2P	499.6 ± 8.53
eicosane (C20)	112-95-8	99.8	419.7.1P	501 ± 6.95
hexacosane (C26)	630-01-3	99.3	422.7.2.1P	501 ± 6.95
hexatriacontane (C36)	630-06-8	86	427.29.1.1P	499.3 ± 8.53
n-hexadecane (C16)	544-76-3	99.45	368.271.1P	498.7 ± 6.91
octacosane (C28)	630-02-4	1.99.1	423.24.1P	500.5 ± 6.95
n-octadecane (C18)	593-45-3	99.5	418.29.1P	499.5 ± 6.92
octane (C8)	111-65-9	99.4	385.7.2.1P	498.5 ± 6.92
octatriacontane (C38)	7194-85-6	95	428.1.2P	500.2 ± 6.94
tetracontane (C40)	4181-95-7	67	429.7.2P	499.6 ±6.93
n-tetracosane (C24)	646-31-1	99.5	421.7.1P	499.5 ± 6.93
n-tetradecane (C14)	629-59-4	99.3	417.9.IP	500 ± 6.94
tetratriacontane (C34)	14167-59-0	96.1	426.7.2.2P	499.7 ± 8.53
triacontane (C30)	638-68-6	99.5	424.7.1.1P	500 ± 6.94
		Q	212610	ET I'
Let the standard warm to room temperature and sonicate before opening.	50	CL-	p 13224	01 1 3 1 1 - 9 *Not a certified value
Oundrea & Main UC	M	All weights are tra Concentration (co	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence)	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) values
Certified By:		listed are determir	listed are determined gravimetriclly.	

5580 Skylane Blvd

Andrea Schaible Chemist

Certified By: