

284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

### **Prep Standard - Chemical Standard Summary**

Order ID: P3451

Test: Mercury, Metals Group4

**Prepbatch ID:** PB162680,PB162950,

Sequence ID/Qc Batch ID: LB131960,LB132155,

### Standard ID:

MP81779,MP81780,MP81781,MP81782,MP81783,MP81784,MP81785,MP81786,MP81787,MP81788,MP81789,MP81790, MP81791,MP81795,MP81796,MP81797,MP81798,MP81799,MP81800,MP81801,MP81802,MP81803,MP81804,MP81805, MP81806,MP81807,MP81808,MP81809,MP81813,MP81814,MP81816,MP81818,MP81819,MP81820,MP81821,MP81889, MP81890,MP81891,MP81892,MP81946,MPMP81803,

### Chemical ID:

M4251, M4399, M4465, M4916, M5062, M5192, M5227, M5231, M5288, M5295, M5304, M5390, M5473, M5498, M5513, M5515, M5519, M5613, M5658, M5697, M5698, M5739, M5769, M5776, M5798, M5799, M5800, M5801, M5802, M5806, M5815, M5817, M5818, M5819, M5873, M5874, M5951, M5953, M5961, M5962, M5963, M5965, M5976, M5978, M5981, M5982, M5983, M6023, M6025, M6028, M6030, M6033, M6036, M79051, W3112, M54818, M





### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
871	MERCURY INTERMEDIATE B 250PPB WORKING STD.	MP81779	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	NO.	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1340	Hg 0.00 PPB STD	MP81780	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE	
							TTE_5 (HG A)	08/13/2024

**FROM** 2.50000ml of M5965 + 247.50000ml of W3112 = Final Quantity: 250.000 ml





### **Metals STANDARD PREPARATION LOG**

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1341	Hg 0.2 PPB STD	MP81781	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

<u>FROM</u>	2.50000ml of M5965 + 247.30000ml of W3112 + 0.20000ml of MP81779 = Final Quantity: 250.000 ml
-------------	---

Recipe				<b>Expiration</b>	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	NO.	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1342	Hg 2.5 PPB STD	MP81782	08/12/2024	08/13/2024	Mohan Bera	None	METALS_PIPE	<u> </u>
							TTE_5 (HG A)	08/13/2024

FROM 2.50000ml of M5965 + 245.00000ml of W3112 + 2.50000ml of MP81779 = Final Quantity: 250.000 ml



Aliance TECHNICAL GROUP

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	<u>NAME</u>	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1343	Hg 5.0 PPB STD	MP81783	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

FROM	2.50000ml of M5965 + 242.50000ml of W3112 + 5.00000ml of MP81779 = Final Quantity: 250.000 ml
------	---

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	NO.	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1344	Hg 7.5 PPB STD	MP81784	08/12/2024	08/13/2024	Mohan Bera	None	METALS_PIPE	
							TTE_5 (HG A)	08/13/2024

FROM 2.50000ml of M5965 + 240.00000ml of W3112 + 7.50000ml of MP81779 = Final Quantity: 250.000 ml



Aliance

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

ID NA	NAME.	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1345 Hg	lg 10.0 PPB STD	MP81785	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

<u>FROM</u>	2.50000ml of M5965 + 237.50000ml of W3112 +	F 10.00000ml of MP81779	= Final Quantity: 250.000 ml
-------------	---	-------------------------	------------------------------

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1346	Hg ICV SOLUTION	MP81786	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

**FROM** 2.50000ml of M5953 + 2.50000ml of M5965 + 245.00000ml of W3112 = Final Quantity: 250.000 ml





### **Metals STANDARD PREPARATION LOG**

1351 ICB (Hg 0.00 PPB SOLUTION) MP81787 08/12/2024 08/13/2024 Mohan Bera None METALS_PIPE	Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
	1351	ICB (Hg 0.00 PPB SOLUTION)	MP81787	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

**FROM** 2.50000ml of M5965 + 247.50000ml of W3112 = Final Quantity: 250.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1358	CCV (Hg 5.0 PPB SOLUTION)	MP81788	08/12/2024	08/13/2024	Mohan Bera	None	METALS_PIPE	·
							TTE_5 (HG A)	08/13/2024

FROM 485.00000ml of W3112 + 5.00000ml of M5965 + 10.00000ml of MP81779 = Final Quantity: 500.000 ml





### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1352	CCB (Hg 0.00 PPB SOLUTION)		08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE 5 (HG A)	
	<u>I</u>	<u> </u>	<u> </u>				\ 1	

FROM	495.00000ml of W3112 + 5.00000ml of M5965 = Final Quantity: 500.000 ml
------	--

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1349	CRA/CRI (Hg 0.2 PPB SOLUTION)	MP81790	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	08/13/2024

FROM 2.50000ml of M5965 + 247.30000ml of W3112 + 0.20000ml of MP81779 = Final Quantity: 250.000 ml





**Metals STANDARD PREPARATION LOG** 

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1350	CHK STD (Hg 7.0 PPB SOLUTION)	MP81791	08/12/2024	08/13/2024	Mohan Bera		METALS_PIPE TTE_5 (HG A)	

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By  Mohan Bera
1122	ICPMS CALIB BLANK(S0/ICB/CCB)	MP81795	08/07/2024	08/31/2024	Sarabjit Jaswal	None	None	08/13/2024

FROM 25.00000ml of M5951 + 4925.00000ml of W3112 + 50.00000ml of M5963 = Final Quantity: 5000.000 ml



284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By  Mohan Bera
2902	S8 ICPMS	MP81796	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE TTE_3 (A)	08/13/2024

FROM

1.00000ml of M6033 + 2.50000ml of M5288 + 2.50000ml of M5515 + 5.00000ml of M5498 + 5.00000ml of M5806 + 79.00000ml of MP81795 = Final Quantity: 100.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3947	S7(SFAM,6020,200.8)	MP81797	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	<u> </u>
							TTE_3 (A)	08/13/2024

**FROM** 

 $0.40000 ml \ of \ M5513 + 1.00000 ml \ of \ M5799 + 1.00000 ml \ of \ M5818 + 1.00000 ml \ of \ M5981 + 1.00000 ml \ of \ M5983 + 1.00000 ml \ of \ M5981 + 1.000000 ml \ of \ M5981 + 1.00000 ml \ of \ M5981 + 1.000000 ml \ of \ M5981 + 1.00000 ml \ of \ M5981 + 1.000000 ml \ of \ M5981 + 1.0000000 ml \ of \ M5981 + 1.0000000 ml \ of \ M5981 + 1.$ 

1.90000ml of M6033 + 10.00000ml of M5963 + 10.00000ml of M5976 + 10.00000ml of M5978 + 2.00000ml of M5815 +

2.00000ml of M5817 + 2.50000ml of M5473 + 4.00000ml of M5390 + 4.90000ml of M5515 + 4.90000ml of M5519 +

5.00000ml of M5951 + 50.00000ml of M5304 + 831.70000ml of W3112 + 9.00000ml of M5697 + 9.00000ml of M5698 +

9.00000ml of M5819 + 9.90000ml of M5498 + 9.90000ml of M5769 + 9.90000ml of M5806 = Final Quantity: 1000.000 ml





### **Metals STANDARD PREPARATION LOG**

3948 S6(SFAM,6020,200.8) MP81798 08/07/2024 08/31/2024 Sarabjit Jaswal None METALS_PIPE TTE 3 (A) 08/13/2024	I	Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	<u>PipetteID</u>	Supervised By  Mohan Bera
			S6(SFAM,6020,200.8)	MP81798	08/07/2024		Sarabjit Jaswal		_	

FROM	0.50000ml of M5951 +	1.00000ml of M5963	+ 48.50000ml of W3112	2 + 50.00000ml of MP81797	= Final Quantity: 100.000 ml
------	----------------------	--------------------	-----------------------	---------------------------	------------------------------

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3949	S5(SFAM,6020,200.8)	MP81799	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	=
							TTE_3 (A)	08/13/2024

FROM 0.50000ml of M5951 + 1.00000ml of M5963 + 73.50000ml of W3112 + 25.00000ml of MP81797 = Final Quantity: 100.000 ml





**Metals STANDARD PREPARATION LOG** 

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By  Mohan Bera
3954	S4(SFAM,6020,200.8)	MP81800	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE TTE_3 (A)	08/13/2024

FROM 0.50000ml of M5951 + 1.00000ml of M5963 + 86.00000ml of W3112 + 12.50000ml of MP81797 = Final Quantity: 100.000 ml

Recipe				<u>Expiration</u>	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	NO.	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3951	S3(SFAM, 6020,200.8)	MP81801	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	ļ
							TTE_3 (A)	08/13/2024

FROM 0.50000ml of M5951 + 1.00000ml of M5963 + 88.50000ml of W3112 + 10.00000ml of MP81798 = Final Quantity: 100.000 ml



284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3955	S2CONC(SFAM,6020,200.8)	MP81802	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	<u> </u>
							TTE_3 (A)	08/13/2024

**FROM** 

0.05000ml of M5961 + 0.05000ml of M5981 + 0.05000ml of M5983 + 0.05000ml of M6023 + 0.05000ml of M6025 +

0.05000ml of M6028 + 0.05000ml of M6030 + 0.10000ml of M5658 + 0.10000ml of M5697 + 0.10000ml of M5802 +

0.10000ml of M6033 + 0.25000ml of M5227 + 0.25000ml of M5515 + 0.25000ml of M5799 + 0.25000ml of M5819 +

0.25000ml of M5962 + 0.25000ml of M5976 + 0.25000ml of M5978 + 0.50000ml of M5390 + 0.50000ml of M5818 +

1.25000ml of M5815 + 1.25000ml of M5817 + 2.5000ml of M5498 + 2.50000ml of M5519 + 2.50000ml of M5806 + 2.50000ml of M5951 + 226.25000ml of W3112 + 5.00000ml of M5963 = Final Quantity: 250.000 ml

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME.	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3956	S2(SFAM,6020,200.8)	MP81803	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	<u> </u>
							TTE_3 (A)	08/13/2024

FROM 0.50000ml of M5951 + 1.00000ml of M5963 + 98.00000ml of W3112 + 0.50000ml of MP81802 = Final Quantity: 100.000 ml





### **Metals STANDARD PREPARATION LOG**

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
68	STANNOUS CHLORIDE SOLUTION	MP81804	08/13/2024	08/14/2024		METALS_SCA LE_3 (M SC-3)		08/13/2024

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3957	S1(SFAM,6020,200.8)	MP81805	08/07/2024	08/31/2024	Sarabjit Jaswal	None	None	
								08/13/2024

FROM 0.50000ml of M5951 + 1.00000ml of M5963 + 88.50000ml of W3112 + 10.00000ml of MP81803 = Final Quantity: 100.000 ml





**Metals STANDARD PREPARATION LOG** 

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By  Mohan Bera
3958	ICV(SFAM)	MP81806	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE TTE_3 (A)	08/13/2024

FROM 2.00000ml of M5295 + 98.00000ml of MP81795 = Final Quantity: 100.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	ScaleID	<u>PipetteID</u>	Supervised By  Mohan Bera
3961	ccv	MP81807	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	
							TTE_3 (A)	08/13/2024

**FROM** 





### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	PipetteID	Supervised By
1142			08/07/2024		=- Sarabjit Jaswal		METALS_PIPE	Mohan Bera
							TTE_3 (A)	08/13/2024

<u>FROM</u>	10.00000ml of M58/3 + $90.00000$ ml of MP81/95 = Final Quantity: $100.000$ ml
-------------	---

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
1143	ICSAB ICPMS	MP81809	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	
							TTE_3 (A)	08/13/2024

FROM 10.00000ml of M5873 + 10.00000ml of M5874 + 80.00000ml of MP81795 = Final Quantity: 100.000 ml





Metals STANDARD PREPARATION LOG

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	By	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3962	MG 10PPM FOR TUNE	MP81813	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	<u> </u>
							TTE_3 (A)	08/13/2024

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3903	ISS 3PPM	MP81814	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	<u> </u>
							TTE_3 (A)	08/13/2024

FROM 5.00000ml of M5963 + 75.00000ml of M5739 + 170.00000ml of MP81795 = Final Quantity: 250.000 ml



Aliance

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	<u>NAME</u>	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	ScaleID	<u>PipetteID</u>	Supervised By  Mohan Bera
3894	TUNE 200PPB	MP81816	08/07/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE TTE_3 (A)	

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
3965	2:1 H2SO4 : HNO3	MP81818	08/13/2024	01/04/2025	Mohan Bera	None	None	08/13/2024

FROM 1600.00000ml of M5613 + 800.00000ml of M5963 = Final Quantity: 3200.000 ml



Aliance

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
65	POTASSIUM PERMANGANATE SOLUTION 5 %	MP81819	08/13/2024	02/13/2025		METALS_SCA LE_3 (M SC-3)		08/13/2024

<b>FROM</b>	100.00000gram of M4916 + 2000.00000ml of W3112 = Final Quantity: 2000.000 ml
-------------	--

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
66	POTASSIUM PERSULFATE SOLUTION 5 %	MP81820	08/13/2024	02/13/2025		METALS_SCA LE_3 (M SC-3)		08/13/2024

FROM 100.00000ml of M4465 + 2000.00000ml of W3112 = Final Quantity: 2000.000 ml





### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
67	000.0 02022	MP81821	08/13/2024	02/14/2025		METALS_SCA		00/40/0004
	HYDROXYL- CHLORIDE					LE_3 (M SC-3)		08/13/2024

FROM

2000.00000ml of W3112 + 240.00000gram of M4251 + 240.00000gram of M4399 = Final Quantity: 2000.000 ml

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date		<u>By</u>	<u>ScaleID</u>	PipettelD	Mohan Bera
3880	M&B SPIKE-1	<u>MP81889</u>	08/16/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE TTE_3 (A)	08/16/2024

**FROM** 

5.00000ml of M5961 + 5.00000ml of M5962 + 5.00000ml of M5981 + 5.00000ml of M5982 + 5.00000ml of M5983 +

5.00000ml of M6023 + 5.00000ml of M6028 + 5.00000ml of M6030 + 35.00000ml of MP81795 = Final Quantity: 100.000 ml





### **Metals STANDARD PREPARATION LOG**

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3881	M&B SPIKE-2	MP81890	08/16/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	
							TTE_3 (A)	08/16/2024
								<u> </u>

FROM 10.00000ml of M5976 + 12.50000ml of M5390 + 12.50000ml of M5515 + 12.50000ml of M5519 + 2.50000ml of M5818 + 5.0000ml of M6033 + 30.00000ml of MP81795 = Final Quantity: 100.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	NO.	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
3882	M&B SPIKE-3	MP81891	08/16/2024	08/31/2024	Sarabjit Jaswal	None	None	
								08/16/2024

FROM 0.62500ml of M5513 + 12.50000ml of M5697 + 12.50000ml of M5698 + 12.50000ml of M5819 + 11.87500ml of MP81795 = Final Quantity: 50.000 ml





### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By  Mohan Bera
3900	M&B SPIKE-4	MP81892	08/16/2024	08/31/2024	Sarabjit Jaswal	None	None	
								08/16/2024

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Mohan Bera
4025	M&B SPIKE-5	MP81946	08/19/2024	08/31/2024	Sarabjit Jaswal	None	METALS_PIPE	<u> </u>
							TTE_3 (A)	08/19/2024

FROM 15.00000ml of M5192 + 15.00000ml of M5978 + 20.00000ml of MP81795 = Final Quantity: 50.000 ml



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-2196-01 / Hydroxylamine Hydrochloride, Crystal (cs/4x500g)	0000215387	06/25/2025	12/19/2018 / mohan	12/05/2018 / mohan	M4251
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3624-05 / Sodium Chloride, Crystal (cs/4x2.5kg)	0000187425	08/16/2024	08/16/2019 / RICHARD	07/08/2019 / RICHARD	M4399
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3238-05 / Potassium Persulfate (2.5kg)	0000234156	08/06/2025	07/23/2019 / jaswal	07/25/2019 / manojkumar	M4465
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3227-05 / Potassium Permanganate (2.5kg)	210800	03/31/2026	11/30/2022 / mohan	07/28/2021 / mohan	M4916
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Inorganic Ventures	MSHG-10PPM / MERCURY HCI 125mL 10ug/mL	S2-HG709270	09/22/2026	05/28/2022 / mohan	01/27/2022 / mohan	M5062
						_
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57023 / V, 1000 PPM, 125 ml	100121	10/01/2024	07/01/2022 / bin	10/18/2021 / bin	M5227
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	IV-STOCK-12 / TUNE-A,	R2-MEB695520	08/31/2024	11/27/2022 / jaswal	07/06/2022 / jaswal	M5231
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58119 / K, 10000 PPM, 500 ml	071122	07/11/2025	09/01/2022 / jaswal	07/21/2022 / jaswal	M5288
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-1 / ICV (ICP/ICPMS) STOCK SOLN	ICV-1014	02/05/2025	08/07/2024 / jaswal	02/20/2020 / bin	M5295
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Inorganic Ventures	6020CAL-1 / Calibration Standard Method 6020	S2-MEB711244	10/20/2026	08/07/2024 / jaswal	04/01/2022 / jaswal	M5304
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57056 / Ba, 1000 PPM, 125 ml	072122	07/21/2025	08/07/2024 / jaswal	09/18/2022 / bin	M5390



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57138 / Sr, 10000 PPM, 125 ml	082922	08/29/2025	03/16/2023 / jaswal	03/16/2023 / jaswal	M5473
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58120 / Ca, 10000 PPM, 500 ml	031523	03/15/2026	08/15/2023 / jaswal	03/17/2023 / bin	M5498
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57182 / Pb, 10000 PPM, 125 ml	061522	06/15/2025	03/19/2023 / bin	03/17/2023 / bin	M5513
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58126 / Fe, 10000 PPM, 500 ml	092122	09/21/2025	08/01/2024 / Jaswal	03/17/2023 / bin	M5515
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57119 / Potassium (K) 10,000PPM	120822	12/08/2025	01/08/2024 / bin	03/17/2023 / bin	M5519
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9673-33 / Sulfuric Acid, Instra-Analyzed (cs/6c2.5L)	0000265056	11/05/2025	07/13/2023 / mohan	07/07/2023 / mohan	M5613



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58024 / Chromium, Cr, 500 ml, 1000 PPM	060523	06/05/2026	08/28/2023 / jaswal	08/25/2023 / jaswal	M5658
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58029 / Cu, 1000 PPM, 500 ml	102523	10/25/2026	04/03/2024 / jaswal	10/27/2023 / jaswal	M5697
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58025 / Mn, 1000 PPM, 500 ml	102623	10/26/2026	04/18/2024 / jaswal	10/27/2023 / jaswal	M5698
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Inorganic Ventures	6020ISS / 6020ISS, 10 ug/ml, Bi, Ho, In, 6Li, Rh, Sc, TB, Y	T2-MEB709511	09/03/2026	08/07/2024 / jaswal	04/11/2022 / jaswal	M5739
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58112 / Mg, 10000 PPM, 500 ml	091823	09/18/2026	05/24/2024 / Jaswal	01/03/2024 / bin	M5769
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3980-01 / Stannous Chloride (cs/4x500g)	0000281938	07/06/2026	06/26/2023 / mohan	07/18/2023 / mohan	M5776



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57004 / Be, 1000 PPM, 125 ml	102523	10/25/2026	02/09/2024 / bin	02/09/2024 / bin	M5798
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57050 / Sn, 1000 PPM, 125 ml	071123	07/11/2026	02/09/2024 / bin	02/09/2024 / bin	M5799
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57027 / CO, 1000 PPM, 125 ml	091923	09/19/2026	05/31/2024 / bin	02/09/2024 / bin	M5800
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57033 / As, 1000 PPM, 125 ml	111323	11/13/2026	02/09/2024 / bin	02/09/2024 / bin	M5801
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57051 / Sb, 1000 PPM, 125 ml	120523	12/05/2026	08/07/2024 / jaswal	01/03/2024 / jaswal	M5802
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58111 / Na, 10000 PPM, 500 ml	122223	12/22/2026	08/01/2024 / Jaswal	01/03/2024 / jaswal	M5806



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57115 / P, 10000 PPM, 125 ml	041723	04/17/2026	05/21/2024 / Jaswal	02/09/2024 / jaswal	M5815
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57116 / S, 10000 PPM, 125 ml	071123	07/11/2026	03/01/2024 / jaswal	02/09/2024 / jaswal	M5817
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57014 / Si, 1000 PPM, 125 ml	122023	12/20/2026	03/06/2024 / jaswal	02/09/2024 / jaswal	M5818
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58030 / Zinc, Zn, 500 ml, 1000 PPM	111623	11/16/2026	03/20/2024 / jaswal	02/09/2024 / jaswal	M5819
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
EPA	PART A / ICSA (ICPMS ) STOCK SOLN	CP-MS ICSA-0803	04/30/2025	04/17/2024 / jaswal	07/14/2022 / jaswal	M5873
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
EPA	PART B / ICSB (ICPMS) STOCK SOLUTION	CP-MS ICSB-0803		04/17/2024 / jaswal	07/14/2022 / jaswal	M5874



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L)	22G2862015	12/27/2024	07/04/2024 / Jaswal	06/23/2024 / Al-Terek	M5951
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-5 / ICV (HG)STOCK SOLN	ICV5-0415	01/01/2025	07/01/2024 / mohan	03/30/2023 / mohan	M5953
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57028 / Ni, 1000 PPM, 125 ml	041124	04/11/2027	07/02/2024 / Jaswal	06/11/2024 / Jaswal	M5961
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57034 / Se, 1000 PPM, 125 ml	060624	06/06/2027	07/02/2024 / Jaswal	06/14/2024 / Jaswal	M5962
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date /	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	24B1362001	01/04/2025	07/09/2024 / Al-Terek	07/03/2024 / Al-Terek	M5963
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	24B1362001	01/04/2025	07/05/2024 / Jaswal	07/03/2024 / Al-Terek	M5965



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGMO1-1 / MOLYBDENUM 125mL 1000ug/mL	T2-MO720876	07/17/2027	08/07/2024 / jaswal	02/22/2024 / Jaswal	M5976
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGTI1-1 / TITANIUM 125mL 1000ug/mL	T2-TI719972	06/17/2027	08/07/2024 / jaswal	02/22/2024 / Jaswal	M5978
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57092 / U, 1000 PPM, 125 ml	060724	06/07/2027	07/29/2024 / Jaswal	06/11/2024 / Jaswal	M5981
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57038 / Sr, 1000 PPM, 125 ml	031524	03/15/2027	07/01/2024 / Jaswal	06/11/2024 / Jaswal	M5982
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57040 / Zr, 1000 PPM, 125 ml	071423	07/14/2026	07/29/2024 / Jaswal	06/11/2024 / Jaswal	M5983
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57081 / TI, 1000 PPM, 125 ml	0624724	06/27/2027	08/05/2024 / kareem	08/05/2024 / Jaswal	M6023



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57082 / Pb, 1000 PPM, 125 ml	061224	06/12/2027	08/05/2024 / Jaswal	08/05/2024 / Jaswal	M6025
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57048 / Cd, 1000 PPM, 125 ml	070124	07/01/2027	08/05/2024 / kareem	01/25/2019 / Jaswal	M6028
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57047 / Ag, 1000 PPM, 125 ml	122823	12/28/2026	08/05/2024 / kareem	08/05/2024 / Jaswal	M6030
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58113 / Al, 10000 PPM, 500 ml	011623	01/16/2026	08/07/2024 / Jaswal	01/03/2024 / Jaswal	M6033
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date /	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	24D1062002	03/25/2029	08/10/2024 / Janvi	08/01/2024 / Janvi	M6036
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date / Received By	Chemtech Lot #
Seidler Chemical	DIW / DI Water	Daily Lab-Certified	07/03/2029	07/03/2024 / Iwona	07/03/2024 / Iwona	W3112

Sulfuric Acid
BAKER INSTRA-ANALYZED® Reagent

For Trace Metal Analysis Low Selenium





M 56 3

Material No.: 9673-33 Batch No.: 0000265056 Manufactured Date: 2020/05/12 Retest Date: 2025/05/11

Revision No: 1

### Certificate of Analysis

Test	Specification	Result
ACS - Assay (H <sub>2</sub> SO <sub>4</sub> )	95.0 - 98.0 %	96.5
Appearance	Passes Test	PT
ACS - Color (APHA)	<= 10	5
ACS - Residue after Ignition	<= 3 ppm	< 1
ACS - Substances Reducing Permanganate (as SO2)	<= 2 ppm	< 2
Ammonium (NH <sub>4</sub> )	<= 1 ppm	< 1
Chloride (CI)	<= 0.1 ppm	< 0.1
Nitrate (NO3)	<= 0.2 ppm	< 0.1
Phosphate (PO4)	<= 0.5 ppm	< 0.1
Trace Impurities – Aluminum (AI)	<= 30.0 ppb	< 0.2
Arsenic and Antimony (as As)	<= 4 ppb	< 2
Trace Impurities – Barium (Ba)	<= 10.0 ppb	< 1.0
Trace Impurities – Beryllium (Be)	<= 10.0 ppb	< 1.0
Frace Impurities - Bismuth (Bi)	<= 10.0 ppb	< 1.0
Frace Impurities – Boron (B)	<= 10.0 ppb	< 5.0
Trace Impurities - Cadmium (Cd)	<= 2.0 ppb	< 0.3
Frace Impurities – Calcium (Ca)	<= 50.0 ppb	< 1.0
Frace Impurities – Chromium (Cr)	<= 6.0 ppb	< 0.4
Frace Impurities - Cobalt (Co)	<= 0.5 ppb	< 0.3
race Impurities - Copper (Cu)	<= 1.0 ppb	< 0.1
race Impurities – Gallium (Ga)	<= 10.0 ppb	< 1.0
race Impurities – Germanium (Ge)	<= 10.0 ppb	< 10.0
race Impurities – Gold (Au)	<= 10.0 ppb	< 0.2
Heavy Metals (as Pb)	<= 500 ppb	< 100

Material No.: 9673-33 Batch No.: 0000265056

Test	Specification	Result
Trace Impurities - Iron (Fe)	<= 50.0 ppb	3.3
Trace Impurities - Lead (Pb)	<= 0.5 ppb	< 0.5
Trace Impurities - Lithium (Li)	<= 10.0 ppb	< 1.0
Trace Impurities - Magnesium (Mg)	<= 7.0 ppb	< 0.2
Trace Impurities – Manganese (Mn)	<= 1.0 ppb	< 0.4
Trace Impurities – Mercury (Hg)	<= 0.5 ppb	< 0.1
Trace Impurities – Molybdenum (Mo)	<= 10.0 ppb	< 5.0
Trace Impurities - Nickel (Ni)	<= 2.0 ppb	< 0.3
Trace Impurities - Niobium (Nb)	<= 10.0 ppb	< 1.0
Trace Impurities – Potassium (K)	<= 500.0 ppb	< 2.0
Trace Impurities – Selenium (Se)	<= 50.0 ppb	17.8
Trace Impurities – Silicon (Si)	<= 100.0 ppb	< 10.0
Trace Impurities – Silver (Ag)	<= 1.0 ppb	< 0.3
Trace Impurities – Sodium (Na)	<= 500.0 ppb	1.5
Trace Impurities – Strontium (Sr)	<= 5.0 ppb	< 0.2
Trace Impurities – Tantalum (Ta)	<= 10.0 ppb	< 5.0
Trace Impurities – Thallium (TI)	<= 20.0 ppb	< 5.0
Trace Impurities – Tin (Sn)	<= 5.0 ppb	< 0.8
Frace Impurities – Titanium (Ti)	<= 10.0 ppb	< 1.0
Frace Impurities – Vanadium (V)	<= 10.0 ppb	< 1.0
race Impurities – Zinc (Zn)	<= 5.0 ppb	0.4
Frace Impurities – Zirconium (Zr)	<= 10.0 ppb	< 1.0

For Laboratory, Research or Manufacturing Use

Country of Origin:

US

Packaging Site:

Phillipsburg Mfg Ctr & DC



Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

R 815/24

Solvent:

24002546

Nitric Acid

Lot #

M6028

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number:

57048 070124

Lot Number: Description:

Cadmium (Cd)

Nominal Concentration (µg/mL):

NIST Test Number:

6UTB

1000

Recommended Storage:

**Expiration Date:** 

070127 Ambient (20 °C)

Weight shown below was dliuted to (mL):

2000.07

0.100 Flask Uncertainty 5E-05 Balance Uncertainty

2%

40.0 (mL) Nitric Acid

Formulated By:

Alban PROBAN

Aleah O'Brady

070124

Reviewed By:

Pedro L. Rentas

070124

Expanded

Weight (g) Conc. (µg/mL) Uncertainty

Cadmium nitrate tetrahydrate (Cd)

IN024 CDM092021A1

1000

99.999

0.10

36.5

5.4797

5.4804

1000.1

2.0

10022-68-1

0.01 mg/m3

orl-rat 60.2mg/kg

3108

RM#

Number Lot

Conc. (µg/mL)

8

8

Weight (g)

Target

Actual

Actual

Nominal

Purity

Uncertainty Assay Purity (%)

+/- (µg/mL)

CAS#

**SDS Information** 

(Solvent Safety Info. On Attached pg.)
# OSHA PEL (TWA) LD50

**NIST** SRM

m/z-> -z/m m/z-> 1.0E7 2.0E7 5.OE4 1.0E5 2.5E4 5.0M4 [1] Spectrum No.1 010 110 0 220 120 20 [ 12.514 sec]:58148.D# [Count] [Linear] 230 130 30 240 140 40 N00 150 50 2000 160 60 170 70 180 80 061 Ö 200 100

1 of 2

www.absolutestandards.com

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

		₩ !	묤	Ве	ן ל	炗	As	. 0	ç	2		I		
	10.04	200	A (2)	10.02	0.02	3	4	20.02	3	<b>♦</b> 0.02				
	2	2 8	3	Ţ.	) {	,	င္ပ	2	?	2				
	70.02	2 6	3	<0.02	20.02	3	<u>6</u> .02	8	5	Н				
	J.	}	3	G	2	2	달	Ę	, t	Ų				
	20:02	6 6	3	40.02	20.02	3	88	40.02		0.02	TO SECURITION OF THE PARTY OF T			
	70	2 5	<del>,</del>	4	ing.	4	5	HO	:	H		L	4	
	20.02	20.02	3	<b>∆</b> 0,2	<0.02	3	A Si	40.02	1 1	40.02	STORES STORES	I de Me	_1	
	20	MIO	5,	He	Mn	, ,	<b>₹</b>	7	1	E	STATE OF THE PARTY	אפרשוט	5	
<li>(T) = Target analyte</li>	40.02	20.02	5	<b>∆</b> 0.2	<0.02		<b>≙</b> 01	<0.02		40.02		vernica	17:22	
jet anal	×	7	,	9	Pd		<u>ک</u>	Ş	:	Z.		Con		
yte	40.2	\$0.02		A) (2)	<0.02	10.00	3	<0.02	40.02	2002		יטא וכף-		
	Sc	Sm	•	2	RЪ	1	<u> </u>	Re	1.1	Ç.		MU		
	<b>40.02</b>	40.02		<b>∆</b>	<b>∆</b> 0,02	20.02	3	40.02	10.02	2003		Jg/mL)		
	Ta	ç		ę	Z	30	>	S.	č	2	Spiletolin		ı	
	Ð.02	40.02	40.04	3	40.2	20.02	3	<b>∆</b> 0.02	7.03	3				
	Ti	Sn	111	1	7	11	3	Te	10					
	<0.02	40.02	20.07	3	<b>₩</b>	20.02	3	<0.02	20.02	500	Age of the owner that the			
	Zt	Zn		<	<b>¥</b>	~	7	d	*					
	<0.02	<0.02	20.02	3	40.02	20.02		40.02	70.02		MATERIAL SECTION AND ADDRESS OF THE PERSON A			

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57048

2 of 2

### 800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



## Certified Reference Material CRM

R: 8/5/24

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number: 57182

Solvent:

24002546

Nitric Acid

Lot#

2%

Nitric Acid

Formulated By:

Lawence Barry

110923

Revenue

1 40.0

Description: Lot Number: 110923 Lead (Pb)

Recommended Storage: **Expiration Date:** 110926 Ambient (20 °C)

Nominal Concentration (µg/mL): NIST Test Number: **6UTB** 10000

Weight shown below was diluted to (mL): Cot 2000.02 Nominal 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Purity Uncertainty Assay Target

IN029 PBD122016A1 RW# Number Conc. (µg/mL) 10000 99.999 38 Purity (%) 0.10 62.5 36 32.0006 Weight (g) 32.0040 Weight (g) Conc. (µg/mL) 10001.1 20.0 10099-74-8 0.05 mg/m3 intryns-rat 93 mg/kg 3128

Actual Actual

Uncertainty Expanded

Reviewed By:

Pedro L. Rentas

110923

+/- (µg/mL) CAS#

OSHA PEL (TWA) SDS information

# OSHA PEL (TWA) LD50 TSIN SRM

 Lead(II) nitrate (Pb) 1.0E7 [1] Spectrum No.1 [ 17.284 sec]:58182.D# [Count] [Linear]



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace Me	Metals	Verifica	tion	by ICP-	SW (	µg/mL)			ш			
4	40.02	8	<0.02	Dy	A).02	HF	A).02		<b>4</b> 0.02	Z:	A),02		P	-	<0.02	- d0.02   Se	- d0.02   Se		
8	<b>4</b> 0.02	ರಿ	40.2	Ē,	40.02	Но	40.02	둗	<b>40.02</b>	\$	40.02		Re	Re		<b>△</b> 0.02	<0.02 Si <0.02	<0.02 Si <0.02	
As	402	දි	40.02	멸	40.02	5	40.02	Mg	<0.01	ဝွ	40.02		짪		40.02	<0.02 Ag .	<0.02 Ag <0.02		40.02 Ag 40.02 TI 40.02
Ва	40.02	రి	<b>∆</b> 0.02	S	40.02	F	40.02	M	<0.02	골	40.02	_	중_		40.02	<0.02 Na	<0.02 Na <0.2	<0.02   Na   <0.2   Th	<0.02   Na   <0.2   Th   <0.02
Ве	40.01	ភ	0.02	င္အ	40.02	ॠ	0,2	9H	<b>∆0.2</b>	שי	40,02	<u></u>	<u>~</u>		40,02	40.02 Sr .	40.02 Sr .	<0.02 Sr <0.02 Tm	<0.02 Sr <0.02 Tm
₽.	<b>40.02</b>	င	40.02	පි	40,02	E	40.02	Mo	<0.02	₽	40.02		Ď.		40.02	40.02 S	<0.02 S <0.02	<0.02 S <0.02 Sn	40.02 S 40.02 Sn 40.02
<u> </u>	A0.02	δ	<b>40.02</b>	Au	40.02	7	T	Æ	<0.02	×	40.2	_	S		<0.02	<0.02 Ta .	√0.02 Ta √0.02	<0.02 Ta <0.02 Ti	<0.02 Ta <0.02 Ti

## Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Sor I Mill

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \*Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

  Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Sodium Chloride, Crystal BAKER ANALYZED® A.C.S. Reagent





Material No.: 3624-01

Batch No.: 0000281938

Manufactured Date: 2021-06-07

Retest Date: 2026-06-07

**Revision No.: 1** 

### M SAZO RSZ

### **Certificate of Analysis**

Test	Specification	Result
Assay (NaCl) (by Ag titrn)	≥ 99.0 %	100.0 %
pH of 5% Solution at 25°C	5.0 - 9.0	6.3
Insoluble Matter	≤ 0.005 %	0.003 %
lodide (I)	≤ 0.002 %	< 0.002 %
Bromide (Br)	≤ 0.01 %	< 0.01 %
Chlorate and Nitrate (as NO <sub>3</sub> )	≤ 0.003 %	< 0.001 %
ACS - Phosphate (PO <sub>4</sub> )	≤ 5 ppm	< 5 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.004 %	< 0.004 %
Barium (Ba)	Passes Test	Passes Test
ACS - Heavy Metals (as Pb)	≤ 5 ppm	< 5 ppm
Iron (Fe)	≤ 2 ppm	< 1 ppm
Calcium (Ca)	≤ 0.002 %	< 0.001 %
Magnesium (Mg)	≤ 0.001 %	< 0.001 %
Potassium (K)	≤ 0.005 %	0.001 %

For Laboratory, Research, or Manufacturing Use
Meets Reagent Specifications for testing USP/NF monographs
Country of Origin: USA
Packaging Site: Paris Mfg Ctr & DC



### Hydroxylamine Hydrochloride, Crystal BAKER ANALYZED® A.C.S. Reagent

Suitable for Mercury Determination (hydroxylammonium chloride)

MY251





Material No.: 2196-01 Batch No.: 0000215387

Manufactured Date: 2018/06/27

Retest Date: 2025/06/25 Revision No: 1

### Certificate of Analysis

Meets ACS Reagent Chemical Requirements,

Test	Specification	Result
Assay (NH2OH+HCl) (by KMnO4 titrn)	>= 96.0 %	99.1
Clarity of Alcohol Solution	Passes Test	PT
Residue after Ignition	<= 0.050 %	0.017
Titrable Free Acid (meq/g)	<= 0.25	0.19
Ammonium (NH4)	Passes Test	PT
Sulfur Compounds (as SO4)	<= 0.005 %	< 0.003
Trace Impurities – ACS – Heavy Metals (as Pb)	<= 5 ppm	4
Trace Impurities – Iron (Fe)	<= 5 ppm	< 3
Trace Impurities – Mercury (Hg)	<= 0.050 ppm	< 0.005

For Laboratory, Research or Manufacturing Use

Country of Origin:

CN

Packaging Site:

Paris Mfg Ctr & DC



Phillipsburg, NJ 9001:2015, FSSC22000
Paris, KY 9001:2008
Mexico City, Mexico 9001:2008
Gliwice, Poland 9001:2015, 13485:2012
Selangor, Malaysia 9001:2008
Dehradun, India, 9001:2008, 14001:2004, 13485:2003
Mumbai, India, 9001:2015, 17025:2005
Panoli, India 9001:2015

James Tethier
Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA 19087, U.S.A. Phone: 610.386.1700

Sodium Chloride, Crystal BAKER ANALYZED® A.C.S. Reagent





M4399 Supplud - 07.08.19

Material No.: 3624-05 Batch No.: 0000187425 Manufactured Date: 2017/08/03

Retest Date: 2024/08/01

### Certificate of Analysis

Meets ACS Reagent Chemical Requirements,

Test	Specification	Result
Assay (NaCl) (by Ag titrn)	>= 99.0 %	99.8
pH of 5% Solution at 25°C	5.0 - 9.0	5.8
ACS – Insoluble Matter	<= 0.005 %	0.003
lodide (I)	<= 0.002 %	< 0.002
Bromide (Br)	<= 0.01 %	< 0.01
Chlorate and Nitrate (as NO3)	<= 0.003 %	< 0.003
ACS – Phosphate (PO <sub>4</sub> )	<= 5 ppm	< 5
Sulfate (SO <sub>4</sub> )	<= 0.004 %	< 0.004
Barium (Ba)	Passes Test	PT
ACS - Heavy Metals (as Pb)	<= 5 ppm	< 5
Iron (Fe)	<= 2 ppm	< 2
Calcium (Ca)	<= 0.002 %	< 0.002
Magnesium (Mg)	<= 0.001 %	< 0.001
Potassium (K)	<= 0.005 %	< 0.005

For Laboratory, Research or Manufacturing Use Meets Reagent Specifications for testing USP/NF monographs

Country of Origin:

Packaging Site:

Paris Mfg Ctr & DC

PS 08-16-19



Phillipsburg, NJ 9001:2008, 14001:2004, FSSC 22000 Paris, KY 9001:2008 Mexico City, Mexico 9001:2008 Deventer, The Netherlands 9001:2008, 14001:2004, 13485:2003 Gliwice, Poland 9001:2008, 13485:2012 Selangor, Malaysia 9001:2008 Dehradun, India, 9001:2008, 14001:2004, 13485:2003 Mumbai, India, 9001:2008

James Techie Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.573.2600 Avantor Performance Materials, LLC.

3477 Corporate Parkway. Center Valley, PA 18034. U.S.A. Phone: 610.573.2600 . Fax: 610.573.2610



M4913- 16



### Certificate of Analysis

1 Reagent Lane Fair Lawn, NJ 07410 201.796.7100 tel 201.796.1329 fax

Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System Standard ISO9001:2015 by SAI Global Certificate Number CERT – 0120632

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	P279	Quality Test / Release Date	01/12/2021
Lot Number	210306		
Description	POTASSIUM PERMANGANATE, A.C.S.	The second secon	
Country of Origin	United States	Suggested Retest Date	Jan/2026

N/A			
Result Name	Units	Specifications	Test Value
APPEARANCE		REPORT	Dark purple to purple green crystals
ASSAY	%	>= 99	99.3
CHLORIDE & CHLORATE	%	<= 0.005	<0.005
IDENTIFICATION	PASS/FAIL	= PASS TEST	pass test
INSOLUBLE MATTER	%	<= 0.2	<0.2
MERCURY (Hg)	ppm	<= 0.05	<0.004
SULFATE (SO4)	%	<= 0.02	<0.02

Julian Burton

Julian Burton - Quality Control Manager - Fair Lawn



### Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com M5062 M5063

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

### 1.0 ACCREDITATION / REGISTRATION

**INORGANIC VENTURES** is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



### 2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Mass Spec Solution

Catalog Number:

MSHG-10PPM

Lot Number:

S2-HG709270

Matrix:

10% (v/v) HCI

Value / Analyte(s):

10 μg/mL ea:

Mercury

Starting Material:

Hg metal

Starting Material Lot#:

1959

Starting Material Purity:

99.9994%

### 3.0 CERTIFIED VALUES AND UNCERTAINTIES

**Certified Value:** 

 $10.001 \pm 0.053 \,\mu g/mL$ 

Density:

1.020 g/mL (measured at 20 ± 4 °C)

### **Assay Information:**

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Hg	ICP Assay	3133	160921
Hg	EDTA	928	928
Ha	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value, X<sub>CRM/RM</sub>, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) (X_i)$ 

 $\mathbf{X_i}$  = mean of Assay Method i with standard uncertainty  $\mathbf{u_{char}}$  i

w<sub>i</sub> = the weighting factors for each method calculated using the inverse square of

the variance.

 $\mathbf{w_i} = (1/u_{chari})^2 / (\Sigma (1/(u_{chari})^2)$ 

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{its}^2 + u_{ts}^2)^{1/2}$ 

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$  where  $u_{char}$  i are the errors from each characterization method

u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

### Characterization of CRM/RM by One Method

Certified Value,  $X_{CRM/RM}$ , where one method of characterization is used is the mean of individual results:

X<sub>CRM/RM</sub> = (X<sub>a</sub>) (u<sub>char a</sub>)

Xa = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = U<sub>CRM/RM</sub> = k (u<sup>2</sup>char a + u<sup>2</sup>bb + u<sup>2</sup>lts + u<sup>2</sup>ts) 1/2

k = coverage factor = 2

u<sub>char a</sub> = the errors from characterization

ubb = bottle to bottle homogeneity standard uncertainty

u<sub>lts</sub> = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

### 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

### 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

```
O Ag
          0.000011 M Eu <
                            0.000201 O Na
                                              0.000004 M Se <
                                                               0.015915 O Zn <
                                                                                 0.001510
0
   Al
          0.000001 O Fe
                            0.000001 M Nb <
                                              0.000201 O Si
                                                                0.000005 M Zr <
                                                                                 0.000201
M
   As <
          0.000402 M Ga <
                            0.000201 M Nd <
                                              0.000201 M Sm <
                                                               0.000201
M
   Au <
          0.003631 M Gd <
                            0.000201 M Ni <
                                              0.000402 M
                                                        Sn <
                                                               0.001007
M
   B <
          0.001208 M
                    Ge <
                            0.000201 M Os <
                                              0.000605 M
                                                        Sr <
                                                               0.000201
M Ba <
          0.000201 M Hf <
                            0.000201 O P <
                                              0.032370 M
                                                        Ta <
                                                               0.000201
M
  Be <
          0.000201 s
                                   M Pb <
                    Hq <
                                              0.000201 M Tb <
                                                               0.000201
M Bi <
          0.000201 M
                    Ho <
                            0.000201 M Pd <
                                              0.000403 M
                                                        Te <
                                                               0.002216
0
  Ca
          0.000007 M In <
                            0.000201 M Pr <
                                              0.000201 M Th <
                                                               0.000201
M
  Cd <
          0.000201 M Ir
                            0.000201 M
                                      Pt <
                                              0.000402 M Ti <
                                                               0.000402
                                              0.000201 O TI <
M
  Ce <
          0.000201 O K
                            0.000020 M
                                      Rb <
                                                               0.016508
  Co <
M
          0.000201 M La <
                            0.000201 M
                                      Re <
                                              0.000201 M Tm <
                                                               0.000201
  Cr <
0
          0.003021 O Li <
                            0.000107 M
                                      Rh <
                                              0.000201 M U <
                                                               0.008058
M
  Cs <
          0.001208 M Lu <
                            0.000201 M Ru <
                                              0.000201 M V <
                                                               0.000201
M
  Cu <
          0.000402 O
                    Mg
                            0.000001 O
                                      S <
                                             0.053950 M W <
                                                               0.000604
M Dy <
          0.000201 M Mn <
                            0.000604 M Sb <
                                             0.001208 M Y <
                                                               0.000201
M Er <
          0.000201 M Mo
                           0.000009 M Sc <
                                             0.000201 M Yb <
                                                               0.000201
```

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

### 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

### 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

**Atomic Weight; Valence; Coordination Number; Chemical Form in Solution -** 200.59 +2 4 Hg(OH)(aq) 1+ **Chemical Compatibility -** Stable in HNO3. Avoid basic media forming insoluble carbonate. The sulfide, basic carbonate, oxalate, phosphate, arsenite, arsenate and iodide are insoluble in water.

**Stability -** 2-100 ppb levels not stable in 1% HNO3 / LDPE container, stable in 10% HNO3 packaged in borosilicate glass. 1-100 ppm levels stable in 7% HNO3 packaged in borosilicate glass. 1000-10,000 ppm solutions are chemically stable for years in 5-10% HNO3 / LDPE container.

**Hg Containing Samples (Preparation and Solution) -** Metal (soluble in HNO3); Oxide (Soluble in HNO3); Ores and Organic based (The literature has more references to the preparation of Hg containing samples than any other element. Please consult the literature for your specific sample type, since such preparations are prone to error. Or e-mail our technical staff and we will contact you to discuss your particular sample preparation questions in further detail.).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 202 amu	9 ppt	n/a	186W16O
ICP-OES 184.950 nm	0.03 / 0.005 μg/mL	1	
ICP-OES 194.227 nm	0.03 / 0.005 µg/mL	1	V
ICP-OES 253.652 nm	0.1 / 0.03 µg/mL	1	Ta, Co, Th, Rh, Fe,
			U

### 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

### 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

### 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

### 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

September 22, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- September 22, 2026
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

Sealed TCT	Bag	Open Date	:		

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS Certificate Prepared By:

Uyen Truong
Supervisor, Product Documentation

Mya Truong

### Certificate Approved By:

Michael Booth Director, Quality Control Michael 2 Booth

### Certifying Officer:

Paul Gaines Chairman / Senior Technical Director Paul R Laines

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

M.5192 R: 06/17/2

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Ammonium molybdate (Mo) Compound Nominal Concentration (µg/mL): m/z-> M/z-> Recommended Storage: m/z-> Volume shown below was diluted to (mL): 2.0E6 1.0E6 1.0E5 2.0E5 2000 1000 **NIST Test Number: Expiration Date:** Part Number: Lot Number: Description: [1] Spectrum No.1 110 210 0 58142 Number Part **BTU9** 1000 57042 Ambient (20 °C) 051722 051725 Molybdenum (Mo) 022222 Fot 120 220 20 [ 8.594 sec]:57042.D# [Count] [Linear] 3000.41 0.1000 Factor Dilution 130 230 30 5E-05 300.0 Vol. (mL) 0.058 Initial Flask Uncertainty Balance Uncertainty Pipette (mL) Conc. (µg/mL) Uncertainty 0.084 240 140 40 MKBQ8597V Ammonium hydroxide Nominal Lot # 0.5% 1000 250 150 50 Conc. (µg/mL) 10001.0 Initial (III) 15.0 160 260 60 Conc. (µg/mL) Ammonium hydroxide 1000.0 Final 170 70 Formulated By: Reviewed By: Uncertainty +/- (µg/mL) Expanded 2.1 180 80 13106-76-8 (Solvent Safety Info. On Attached pg.) Lawrence Barry OSHA PEL (TWA) Pedro L. Rentas 5 mg(Mo)/m3 190 90 SDS Information 200 100 orl-rat 333 mg/kg 051722 051722 3134 SRM TSIN

Printed: 6/16/2022, 1:36:08 PM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

		6	J !	B	Be		Z.	As	0	ç	A	September 1		
		20.02	0.00	A 83	0.01	10.02	4	0.2	20.02	4	40.0℃	The same of the sa		
						_		_						
				3	<u>₽</u>	3	.,	(e)	á		F.			
		40.02	20.02	3	40.02	20.02		A 00	202		40.02			
		Au	ç	,	G G	G	į	ij	H	,	Dγ			
		0.02	20.02	000	40.02	<0.02	10.02	3	<0.02	10:01	4000			
		8	4	' ;	£1	Ļ	E	5	픙		Hf			
		80	40.02	1	7	<0.02	20.02	3	A).02	20.02	A003		I acc I	Tracal
	I	Z	Mo	116	Ę	M	Sw	:		E	I		יוכנמוט	Aptol
Э	70.02	3	Н	107	3	40.02	10.05		40.02	20.02	200		ACITIO	Vorifi
(T)= Target analyte	ŀ	<u> </u>	7	٠,	J .	P	SO.	, ;	Z Z	2			שנוטו	<u>.</u>
t analyt	H			_				_	_				υy	
Ö	7.07	3	8,02	70.02		0.02	€0.02	10.02	3	20.02			Cr-N	3
	30	3	Sm	Ku	, ;	몽	Rh	?	0	7			S S	5
	20.02	2	40.02	<0.02	10.02	3	<0.02	20.02	3	40.02			g/mL)	/
	12	3 (	n	Sr	140	Ş	Ag	3[	?	Ş				
	<0.02	20.02	200	<0.02	10.2	3	<0.02	20.02	3	۵,2		The second secon		
	Ti	1 2	S	Im	111	;	=	16	3	7				A CO. LEGISLAND
	<0.02	10.02	3	40.02	20.02	3	<0.02	20.02		0.02				
	12	1	7,	Y	10	4	<	_	: :	W				
	<0.02	20.02	3	<0.02	20.02		<b>40.02</b>	<0.02	0.00	c0 02		The state of the s		

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57042


2 of 2

R: [0/18/221

Certified Reference Material CRM

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

5							ļ	SRM	3165		 								 
2000			100121		100121	1		z v											
		1	100		100			1 pg.) LD50	orl-rat 630 mg/kg										
2							uo .	tached	orl-rat 6				100			200			
		B	osito	1	tas		ormatic	o. Un At TWA)					F			Ň			
		200	Giovanni Esposito	C Pa	Pedro L. Rentas		SDS Information	OSHA PEL (TWA)	1.0 mg/m3				0			00			
		B	Gio	B	Ped		0)	(Solvent Safety Info. On Attached pg.)  # OSHA PEL (TWA) LD50					06			190			
		vie		. 1			Ç	CAS#	7803-55-6							0			
		Liorannie	ted By:	14	d By:		pa	mry /mL)					80			180			
)		五	Formulated By:	No	Reviewed By:		Expanded	uncertainty +/- (µg/mL)	2.1							0			
)			Nitric Acid		1=	ŋ	1	lal Jg/mL)	0.0				70			170			
			Nitric				Ė	Conc. (	1000.0										
	Solvent:	Nitric Acid	0.09	(mL)			1	Conc. (µg/mL) Conc. (µg/mL)	10000.4				9			160			260
	So	Nitr	0	_			2		1 1	inear									
	Lot #	20370011	2.0%				lo di constanti	(mL) Pipette (mL) Conc. (µg/mL)	1000	Inti [L			50			150			250
	_	200	.,		certainty	tainty		L) Conc.		Cor									
					Balance Uncertainty	Flask Uncertainty	- Incord	ipette (m	0.084	23.D#			40			140			240
					5E-05 B	0.06 F	::	I. (mL) F	300.0	34.243 sec]:58023.D# [Count] [Linear]									
					5			_		3 sec			30			130			230
		2		(Ç)		3000.4	O.	Factor	0.1000	2.243									
		57023 100121 Vanadium (V)		100124 Ambient (20 °C) <b>1000</b>	ω.	(mL):	t	Number	070721	E			20			120			220
)		57023 100121 Vanadiu		100124 Ambient 1000	<b>6UTB</b>	uted to		- 1	1 1	0 -						<u></u>			, cv
						Volume shown below was diluted to (mL):	Part	Number	58123	[1] Spectrum No.1			10			110			210
		Part Number: Lot Number: Description:		Expiration Date: Recommended Storage: Nominal Concentration (µg/mL):	NIST Test Number:	pelow				Speci						٢			N
	ORT:	Part N Lot N Desc		Expirati ended tration	T Test I	shown			date (V)	Ξ	 	1111							
	1T REP			ecomm Concen	SIN	Volume			etavana	2.0E6	1.0E6		٨	2.0E7	1.0E7	٨	5.0E8	2.5E8	Å,
	WEIGH			R				punc	nium Me	, w	,		V-2/H	W	,	~-z/w	ш	(V	W/z-v
	CERTIFIED WEIGHT REPORT:			ž				Compound	1. Ammonium Metavanadate (V)										
	빙								<del>-</del> -										

Printed: 11/18/2021, 11:15:07 PM

## Certified Reference Material CRM



Absolute Standards, Inc.

www.absolutestandards.com

800-368-1131



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS);

								-				1					STATE OF THE OWNER, SALES		
							I race M	letals	Verifica	tion	by ICP-N	IS (E	g/mL)						
					MONTH STREET,		STATE OF STREET	THE PROPERTY OF	Photograph and a series of the										
Ι	<0.02	PO	<0.02	Dy	<0.02	Hf	<0.02	Li	<0.02	ž	<0.02	Pr	<0.02	Se	<0.2	Tb	<0.02	M	<0.00>
Sb	<0.02	Ca	<0.2	Er	<0.02	Но	<0.02	Lu	<0.02	<sup>Q</sup> N	<0.02	Re	<0.02	Si	<0.02	Te	<0.02	: :	<0.0>
As	<0.2	Ů	<0.02	Eu	<0.02	In	<0.02	Mg	<0.01	Os	<0.02	Rh	<0.02	Ag	<0.02	I	<0.02	>	L
Ва	<0.02	Cs	<0.02	PS	<0.02	'n	<0.02	Mn	<0.02	Pd	<0.02	Rb	<0.02	, a	<0.2	Th	<0.02	Υ Υ	CO 0>
Be	<0.01	ڻ	<0.02	Ga	<0.02	Fe	<0.2	Hg	<0.2	Д	<0.02	Ru	<0.02	Sr	<0.02	T	<0.05	>	2002
Bi	<0.02	ပ္	<0.02	Э	<0.02	La	<0.02	Мо	<0.02	Ł	<0.02	Sm	<0.02	S	<0.02	S	<0.00	, Z	20.02
В	<0.02	Cu	<0.02	Αn	<0.02	Pb	<0.02	PN	<0.02	×	<0.2	Sc	<0.02	Ta	<0.02	Ë	<0.05	7.	20.0>
				1		No. of Concession, Name of Street, or other Persons and Street, or other P											-	į	20:05

(T)= Target analyte

Certified by:

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



<sup>\*</sup> All standard containers are meticulously cleaned prior to use.

Printed: 11/18/2021, 11:15:07 PM

<sup>\*</sup> Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions.

<sup>\*</sup> Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



CERTIFICATE OF ANALYSIS

Christiansburg, VA 24073 · USA Inorganicventures.com

R: 7/6/22 M5231

tel: 800.669.6799 - 540.585.3030 fax: 540.585.3012 info@inorganicventures.com

### **ACCREDITATION / REGISTRATION** 1.0

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



### 2.0 PRODUCT DESCRIPTION

Product Code:

Multi Analyte Custom Grade Solution

Catalog Number:

IV-STOCK-12

Lot Number:

R2-MEB695520

Matrix

5% (v/v) HNO3

Value / Analyte(s):

10 µg/mL ea:

Barium,

Beryllium,

Bismuth,

Cerium,

Cobalt,

Indium,

Lithium,

Nickel,

Lead,

Uranium

### **CERTIFIED VALUES AND UNCERTAINTIES** 3.0

ANALYTE Barium, Ba	CERTIFIED VALUE 10.00 ± 0.05 µg/mL	ANALYTE Beryllium, Be	CERTIFIED VALUE 10.00 ± 0.05 µg/mL
Bismuth, Bi	10.00 ± 0.05 μg/mL	Cerium, Ce	10.00 ± 0.04 μg/mL
Cobalt, Co	10.00 ± 0.05 μg/mL	Indium, In	10.00 ± 0.04 μg/mL
Lead, Pb	10.00 ± 0.04 μg/mL	Lithium, Li	10.00 ± 0.04 µg/mL
Nickel, Ni	10.00 ± 0.04 μg/mL	Uranium, U	10.00 ± 0.05 μg/mL

Density:

1.023 g/mL (measured at 20 ± 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Ва	ICP Assay	3104a	140909
Ва	Gravimetric		See Sec. 4.2
Be	ICPAssay	3105a	090514
Be	Calculated		See Sec. 4.2
Bi	ICPAssay	3106	991212
Bi	Calculated		See Sec. 4.2
Ce	ICPAssay	3110	090504
Ce	EDTA	928	928
Co	ICPAssay	3113	190630
Co	EDTA	928	928
Co	Calculated		See Sec. 4.2
In	ICPAssay	3124a	110516
In	EDTA	928	928
In	Calculated		See Sec. 4.2
Li	ICPAssay	3129a	100714
Li	Calculated		See Sec. 4.2
Li	Gravimetric		See Sec. 4.2
Ni	ICPAssay	3136	120619
Ni	EDTA	928	928
Ni	Calculated		See Sec. 4.2
Pb	ICPAssay	3128	101026
Pb	EDTA	928	928
Pb	Calculated		See Sec. 4.2
U	ICPAssay	3164	080521
U	Calculated		See Sec. 4.2
1922 April 1921 1922 1923 1924 1925 1925 1925 1925 1925 1925 1925 1925		AREA W. 1911 SERVED CONTROL MANAGEMENT	

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by One Method

Xa = mean of Assay Method A with

 $u_{
m lts}$  = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty

X<sub>CRM/RM</sub> = (X<sub>a</sub>) (u<sub>char a</sub>)

k = coverage factor = 2

uchar a = the errors from characterization u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u^2_{char a} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{1/2}$ 

Characterization of CRM/RM by Two o	More Methods
-------------------------------------	--------------

Certified Value, X<sub>CRM/RM</sub>, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) (X_i)$ 

 $X_i$  = mean of Assay Method i with standard uncertainty  $u_{char\ i}$   $w_i$  = the weighting factors for each method calculated using the inverse square of the variance

 $w_i = (1/u_{char i})^2 / (\Sigma(1/(u_{char i})^2))$ 

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{1/2}$ 

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$  where  $u_{char}$  are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

 $u_{lts}$  = long term stability standard uncertainty (storage)  $u_{ts}$  = transport stability standard uncertainty

### Certified Abundance:

### IV's Certified Abundance

Isotope	Atom %
Uranium 238U	99.8 ± 0.1
Uranium 235U	$0.19 \pm 0.05$

### TRACEABILITY TO NIST 4.0

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRWRM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class Aglassware used in the manufacturing and quality control of CRM/RMs.

### 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

ΝΙ/Δ

### 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

### 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRWRM is negligible. After opening the sealed TCT bag transpiration of the CRWRM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

### 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

### 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

### 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

### 11.0 CERTIFICATION, LOT EXPIRATION, PERIOD OF VALIDITY AND REVISION HISTORY

### 11.1 Certification Issue Date

August 04, 2020

- The certification is valid within the measurement uncertainty specified provided the CRMRM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRMRM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- August 04, 2024
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRWRM can be supported by long term stability studies conducted on properly stored and handled CRWRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_
- This CRWRM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRWRM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 11.4 Revision Status

- Revision 1 - Revised on Wednesday, Oct 14, 2020 by utruong. Revision was made for the following reason: Added missing isotopic abundance for Uranium..

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Michael Booth Director, Quality Control Michael 2 Booth

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

3

Certified Reference Material CRM


www.absolutestandards.com

800-368-1131

Absolute Standards, Inc.



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

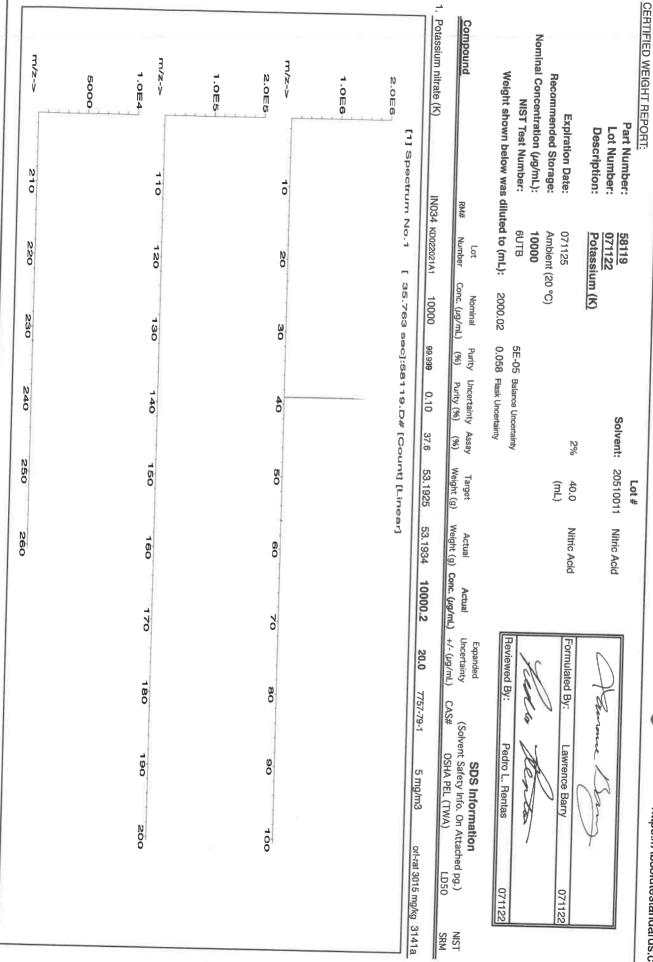

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Physical Characterization:	Al <0.02 Cd <0.02 Dy Sb <0.02 Ca <0.02 Er As <0.2 Ce <0.02 En Ba <0.02 Cs <0.02 Gd Be <0.01 Cr <0.02 Ga Bi <0.02 Cu <0.02 Ga Bi <0.02 Cu <0.02 Ga	
23 10,002 43	<0.022         Hf         <0.022         Li         <0.022         Ni         <0.022         Pr         <0.023         Se         <0.22         Tb         <0.022         W         <0.022           <0.022	Trace Metals Verification by ICP-MS (ug/ml)

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

 $^{\star}$  Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions. \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58119



### QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program" R: 4120/21

Instructions for QATS Reference Material: Inorganic ICV Solutions

### **QATS LABORATORY INORGANIC REFERENCE MATERIAL** INITIAL CALIBRATION VERIFICATION SOLUTIONS (ICV1, ICV5, AND ICV6)

These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION: For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** Read instructions carefully before opening bottle(s) and proceeding with

the analyses.

Contains Metals in Dilute Acidic or Cyanide in Basic Aqueous Solutions **HAZARDOUS MATERIAL** 

> Safety Data Sheets Available Upon Request

### (A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014". "ICV5-0415", and "ICV6-0400", respectively.

### (B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

> QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY **APTIM Federal Services, LLC** 2700 Chandler Avenue - Building C Las Vegas, NV 89120

### (C) ANALYSIS OF SAMPLES

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in µg/L (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

ICV1-1014

For ICP-AES analysis, use a 10-fold dilution by pipetting 10 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (y/y) nitric acid.

Page 1 of 2



RMs ICV 1, 5, 6 SFAM.docx



### QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

### Instructions for QATS Reference Material: Inorganic ICV Solutions

ICV1-1014

For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.

ICV5-0415

For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting 1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K<sub>2</sub>Cr<sub>2</sub>O<sub>7</sub> and 5% (v/v) nitric acid.

ICV6-0400

For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6 concentrate into a 100 mL volumetric flask and dilute to volume with Type II water. Distill this solution along with the samples before analysis. The cyanide concentrate is prepared from K<sub>3</sub>Fe(CN)<sub>6</sub>, Type II water, and 0.1 % sodium hydroxide, and will decompose rapidly if exposed to light.

NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.

### (D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS

	ICV1-1014	
Element	Concentration (µg/L) (after 10-fold dilution)	Concentration (µg/L) (after 50-fold dilution)
Al	2500	500
Sb	1000	200
As	1000	200
Ba	520	100
Be	510	100
Cd	510	100
Ca	10000	2000
Cr	520	100
Co	520	100
Cu	510	100
Fe	10000	2000
Pb	1000	200
Mg	6000	1200
Mn	520	100
Ni	530	110
K	9900	2000
Se	1000	200
Ag	250	50
Na	10000	2000
Ti	1000	210
V	500	100
Zn	1000	200

	ICV5-0415		ICV6-0400
Element	Concentration (µg/L) (after 100-fold dilution)	Analyte	Concentration (µg/L) (after 100-fold dilution)
Hg	4.0	CN-	99



### Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

### 1.0 ACCREDITATION / REGISTRATION

**INORGANIC VENTURES** is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



### 2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution

Catalog Number: 6020CAL-1

Lot Number: S2-MEB711244

Matrix: 5% (v/v) HNO3

tr. HF

Value / Analyte(s): 20 µg/mL ea:

Silver, Aluminum, Arsenic, Barium, Beryllium, Calcium, Cadmium, Cobalt, Chromium, Copper, Potassium, Iron, Magnesium, Manganese, Sodium, Nickel, Lead, Antimony, Selenium, Thallium, Zinc Vanadium,

### 3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE Aluminum, Al	CERTIFIED VALUE 20.01 ± 0.08 μg/mL	ANALYTE Antimony, Sb	CERTIFIED VALUE 20.01 ± 0.12 μg/mL
Arsenic, As	20.01 ± 0.18 μg/mL	Barium, Ba	20.01 ± 0.11 μg/mL
Beryllium, Be	20.01 ± 0.14 μg/mL	Cadmium, Cd	20.01 ± 0.11 μg/mL
Calcium, Ca	20.01 ± 0.10 μg/mL	Chromium, Cr	20.01 ± 0.16 μg/mL
Cobalt, Co	20.01 ± 0.11 μg/mL	Copper, Cu	20.01 ± 0.10 μg/mL
Iron, Fe	20.01 ± 0.09 μg/mL	Lead, Pb	20.01 ± 0.11 μg/mL
Magnesium, Mg	19.99 ± 0.10 μg/mL	Manganese, Mn	20.01 ± 0.10 μg/mL
Nickel, Ni	20.01 ± 0.11 μg/mL	Potassium, K	20.01 ± 0.10 μg/mL
Selenium, Se	20.02 ± 0.14 μg/mL	Silver, Ag	20.02 ± 0.09 μg/mL
Sodium, Na	20.01 ± 0.10 μg/mL	Thallium, Tl	20.01 ± 0.13 μg/mL
Vanadium, V	20.01 ± 0.11 μg/mL	Zinc, Zn	20.01 ± 0.11 μg/mL

### **Assay Information:**

58	say information:			
	ANALYTE	METHOD	NIST SRM#	SRM LOT#
	Ag	ICP Assay	3151 999c	160729
	Ag	Volhard		999c
	Al	ICP Assay	3101a	140903
	Al	EDTA	928	928
	As	ICP Assay	3103a	100818
	Ba	ICP Assay	3104a	140909
	Ba	Gravimetric	2405-	See Sec. 4.2
	Be	ICP Assay	3105a	090514
	Ca	ICP Assay	3109a	130213
	Ca	EDTA	928	928
	Cd	ICP Assay	3108	130116
	Cd	EDTA	928	928
	Co	ICP Assay	3113	190630
	Co	EDTA	928	928
	Cr	ICP Assay	3112a	170630
	Cu	ICP Assay	3114	121207
	Cu	EDTA	928	928
	Fe	ICP Assay	3126a	140812
	Fe	EDTA	928	928
	Fe	Calculated		See Sec. 4.2
	K	ICP Assay	3141a	140813
	K	Gravimetric		See Sec. 4.2
	Mg	ICP Assay	3131a	140110
	Mg	EDTA	928	928
	Mn	ICP Assay	3132	050429
	Mn	EDTA	928	928
	Na	ICP Assay	3152a	120715
	Na	Gravimetric		See Sec. 4.2
	Ni	ICP Assay	3136	120619
	Ni	EDTA	928	928
	Pb	ICP Assay	3128	101026
	Pb	EDTA	928	928
	Se	ICP Assay	3149	100901
	Se	Calculated		See Sec. 4.2
	TI	ICP Assay	3158	151215
	TI	Calculated		See Sec. 4.2
	V	ICP Assay	3165	160906
	V	EDTA	928	928
	Zn	ICP Assay	3168a	120629
	Zn	EDTA	928	928

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods Characterization of CRM/RM by One Method Certified Value, X<sub>CRM/RM</sub>, where two or more methods of characterization are Certified Value, X<sub>CRM/RM</sub>, where one method of characterization used is the weighted mean of the results: is used is the mean of individual results: $X_{CRM/RM} = \Sigma(w_i) (X_i)$ $X_{CRM/RM} = (X_a) (u_{char} a)$ X<sub>i</sub> = mean of Assay Method i with standard uncertainty u<sub>char i</sub> Xa = mean of Assay Method A with $\mathbf{w_i}$ = the weighting factors for each method calculated using the inverse square of u<sub>char a</sub> = the standard uncertainty of characterization Method A $\mathbf{w_i} = (1/u_{\text{char i}})^2 / (\Sigma (1/(u_{\text{char i}})^2)$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 a + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$ k = coverage factor = 2 k = coverage factor = 2 $\mathbf{u_{char}} = \left[\sum ((\mathbf{w_i})^2 (\mathbf{u_{char}}_i)^2)\right]^{1/2}$ where $\mathbf{u_{char}}_i$ are the errors from each characterization method u<sub>char a</sub> = the errors from characterization u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty $\mathbf{u_{bb}}$ = bottle to bottle homogeneity standard uncertainty ults = long term stability standard uncertainty (storage) u<sub>lts</sub> = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty u<sub>ts</sub> = transport stability standard uncertainty

### 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

### 5.0 TRACE METALLIC IMPURITIES (TMI ) DETERMINED BY ICP-MS AND ICP-OES (μg/mL)

### 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

### 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit <a href="www.inorganicventures.com/TCT">www.inorganicventures.com/TCT</a>

**HF Note:** This standard should not be prepared or stored in glass.

Low Silver Note: This solution contains "LOW" levels of Silver. Please store this entire bottle inside a sealed glass jar.

### 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

### 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

### 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganic ventures.com; info@inorganic ventures.com

### 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

October 20, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- October 20, 2026
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: <sub>-</sub>	
--	--

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

Michael 2 Booth

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Approved By:

Michael Booth Director, Quality Control

### **Certifying Officer:**

Paul Gaines

Chairman / Senior Technical Director

Paul R Laines

www.absolutestandards.com

CERTIFIED WEIGHT REPORT:

Part Number:

57056

Solvent:

20510011

Nitric Acid

200

40.0

Nitric Acid

Description: Lot Number:

072122 Barium (Ba)

Certified Reference Material CRM

Riograph 33

Lot #

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Formulated By: Liovannie Giovanni Esposito appeal 2

072122

Reviewed By: Pedro L. Rentas 072122

IN023 BAD022019A1 RM# Number 5 Conc. (µg/mL) Nominal 1000 99.999 Purity 8 Uncertainty Assay Purity (%) 0.10 52.3 <u>8</u> Weight (g) 3.82417 Target Weight (g) Conc. (µg/mL) 3.82426 Actual 1000.0 Actual +/- (µg/mL) Uncertainty Expanded 2.0 10022-31-8 CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) SDS Information 0.5 mg/m3 orl-rat 355 mg/kg 3104a SRM TSIN

1. Barium nitrate (Ba)

Nominal Concentration (µg/mL):

1000

Ambient (20 °C) 072125

**NIST Test Number:** 

Recommended Storage:

**Expiration Date:** 

Weight shown below was diluted to (mL):

2000.02

0.058 Flask Uncertainty

5E-05 Balance Uncertainty

m/z-> **1/2-**2 17/2-Y 2.5E6 5.0E6 2.0E5 1.0ES 2.0E6 1.OE6 [1] Spectrum No.1 210 110 0 220 120 N O [ 12.514 sec]:58156.D# [Count] [Linear] 130 230 30 140 240 4 250 150 Ö. 160 260 00 170 8 180 80 190 90 200 100

## Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

						•	Traca M.	otolo	Varifica	+ion	ו מטן ייץ	1 37	1					l	
							1	נמונו	۱^		ביים עמ	2	pg/mr)						
					No. of Lot, House, etc., in case, or window,													ı	
IA IA	<0.02	ొ	<0.02	δ	<0.02	HF	<0.02	ï	<0.02	Z	<0.02	占	<0.00 0.00 0.00 0.00 0.00 0.00 0.00 0.0	3	25.	É	89	100	000
Sb	<0.02	ටී	<0.2	Ţ,	CD 02	H	2007	1	2000	11.16	000	£		3 8	1	2	70.02	A	70.02
A	4	,	100	i	100	2	70.00	7	70.0>	D.	70.02	2	40.02	2	<0.02	E .	<0.05	ם	<0.02
AS	7.02	3	Z0:02	2	<0.02	드	<0.02	Mg	₹0.07	ő	<0.02	Rh	<0.00	Ag	2007	F	50 9	77	6
Ha	€	ێ	2002	3	5000	,1	000	>	200	i		1	***************************************	0	70.05	1	70.07	>	70:05
	4	3	*0.00	3	7000	=	70.05	IMIM	70:0>	2	<0.02	Rb	Q.02	Z	8	Ę	200	5	2007
Be	<0.01	Ö	<0.02	Ğ	<0.02	Ę.	<0.2	Ho	<0.2	۵	200	å	6	į,	1 6	Ę	0.00	; ;	70:05
ä	200	ځ	0000	Č	000	,		0 ,			10.04	7	70.07	วี	70'05	E	70.05	>-	\$0.05
7	70.07	3	Z0.02	5	20102	2	40.02	Wo	₹0.05	Ž,	<0.02	Sm	<0.02	v.	2002	Ca	2000	7	000
20	Q0.05	Č	<0.00	Ап	200	á	200	FIN	000	2	0	7		,	10:00	2	70:07	77	70.02
1			2010		7000	7 0	70.05	DAT	Z0:0>	4	787	S	<0.02	2	202	Ë	200	,	5000

Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.



Certified by:

2 of 2

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

<sup>\*</sup> Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions. Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com 031523 031523 Giovanni Esposito Pedro L. Rentas Liovanni Formulated By: Reviewed By: Certified Reference Material CRM Nitric Acid Nitric Acid Solvent: 21110221 Lot # 60.0 (mL) % 5E-05 Balance Uncertainty 0.058 Flask Uncertainty 3000.41 Ambient (20 °C) Calcium (Ca) Weight shown below was diluted to (mL): 031523 031526 10000 **6UTB** Recommended Storage: Nominal Concentration (µg/mL): Part Number: Lot Number: Description: **Expiration Date:** NIST Test Number: CERTIFIED WEIGHT REPORT:

Compound	RM#	Lot Number	Nominal Purity Conc. (µg/mL) (%)	Punty (%)	Purity Uncertainty Assay (%) Purity (%) (%)		Target Weight (g)	Actual Weight (g)	Expanded Actual Actual Uncertainty (Sc Weight (g) Conc. (µg/mL) +/- (µg/mL) CAS#	Expanded Uncertainty +/- (ug/mL)	(Solv	SDS Information (Solvent Safety Info. On Attached pg.)  NS# OSHA PEL (TWA) LD50	Attached pg.) LD50	NIST
1. Calcium carbonate (Ca)	IN014	INO14 caboragezat	10000 99.999	666.66	0.10	38.9	75.1990	75.2093	10001.4	20.0	471-34-1	5 mg/m3	ort-rat	3109a
[1] S <sub>1</sub>	[1] Spectrum No.1		4.00	8ec]:6	12.514 sec]:58120.D# [Count] [Linear]	<u> </u>	unti (Line	ari						
1.0E4														
m/z->	0	.0		000	.0	400400	0	0	2		0		001	
2. 4 4														
m/z->	0	120		90	140		150	160	071	0	180	190		
6.0E4														
m/z->	019	220		230	240		250	260						

Printed: 3/16/2023, 1:45:15 PM





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

						Trace Me	tals	Verificat	ioi	by ICP-N	MS (	$(\mu g/m\Gamma)$		r				
SHEW SHEET	STATE OF THE PARTY OF				SIGNATURE .	STON SAFETY SAGE	S. Parlie	THE SHARE SHARE	Series .		Sec.	STREET, STREET	- 100 mm	THE PERSON NAMED IN	THE PERSON			
707	ප	<0.02	δ	40.05	H	<0.02	II.	<0.02	Z	<0.02	ď	<0.02	Se	<0.2	13	<0.02	≥	<0.02
700	రో	H	卢	₹0.02	윒	20.02	3	<0.02	ź	<0.02	2	<0.02	ន	<0.02	Į.	40.02	Þ	₹0.05
07	ඊ	<b>40.02</b>	超	<0.02	Я	<0.02	Mg	40.01	ő	<0.02	쥪	<0.02	Ag	<0.02	F	<0.02	>	<0.02
707	ర	<0.02	පි	<0.02	片	<0.02	Mn	<0.02	Z	<0.02	2	<0.02	ž	<0.2	Ę	<0.02	¥9	40.02
100	Ö	<0.02	ජි	40.02	Ŗ	<0.2	Hg	40.2	م	<0.02	æ	<0.02	స	<0.02	Ę,	<0.02	¥	₹0.05
707	රි	40.02	පි	₹0.02	3	₹0.02	Wo	<0.02	五	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	2	₹0.02
707	ਰੋ	<0.02	Αū	<0.02	2	<0.02	PN	<0.02	×	40.2	S	<0.02	Ta	<0.02	Ξ	<0.02	Z	40.02
	6.00 6.00 6.00 6.00 6.00 6.00		3 5 5 5 5 5	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	Cd	Cd	Cd	Cd	Cd	Cd         -0.02         Dy         -0.02         Hf         -0.02         Li         -0.02           Ca         T         En         -0.02         Ho         -0.02         Li         -0.02           Ce         -0.02         Eu         -0.02         in         -0.02         Mg         -0.02           Cr         -0.02         Gd         -0.02         Fe         -0.02         Mn         -0.02           Co         -0.02         Ge         -0.02         Fe         -0.02         Mo         -0.02           Cu         -0.02         Au         -0.02         Fe         -0.02         Mo         -0.02	Cd         -60.02         Dy         -60.02         Hf         -60.02         Li         -60.02         Ni           Ca         T         En         -60.02         Ho         -60.02         Lu         -60.02         Nh           Ca         -60.02         Eu         -60.02         In         -60.02         Mn         -60.02         Pd           Cr         -60.02         Ga         -60.02         Fe         -60.2         Hg         -60.2         Pr           Co         -60.02         Ga         -60.02         La         -60.02         Rr         -60.02         Rr           Cu         -60.02         Au         -60.02         Pr         -60.02         Rr	Cd         -6.002         Dy         -6.002         Hf         -6.002         Li         -6.002         Ni         -6.002           Ca         T         En         -6.002         Ho         -6.002         Lu         -6.002         Nh         -6.002           Ce         -6.002         Eu         -6.002         In         -6.002         Mg         -6.012         Nh         -6.002           Cr         -6.002         Gd         -6.002         Fe         -6.02         Mn         -6.02         Pd         -6.02           Cr         -6.002         Gg         -6.002         Fe         -6.02         Hg         -6.02         Pr         -6.02           Cu         -6.002         Au         -6.002         In         -6.002         R         -6.002           Cu         -6.002         Au         -6.002         Ph         -6.002         R         -6.002	Cd         -6.002         Dy         -6.002         Hf         -6.002         Li         -6.002         Ni         -6.002         Pr           Ca         T         Ea         -6.002         Ho         -6.002         Lu         -6.002         Nb         -6.002         Rc           Ce         -6.002         Eu         -6.002         Ir         -6.002         Mn         -6.002         Rb         -6.002         Rb           Cr         -6.002         Ga         -6.002         Fe         -6.02         Hg         -6.02         Pr         -6.02         Ru           Co         -6.002         Ga         -6.002         La         -6.002         Rr         -6.002         Rr           Co         -6.002         Ga         -6.002         Pr         -6.002         Rr         -6.002         Rr           Cu         -6.002         Au         -6.002         Pr         -6.002         Rr         -6.002         Sr	Cd         -0.02         Dy         -0.02         Hf         -0.02         Li         -0.02         Ni         -0.02         Pr         -0.02           Ca         T         Ba         -0.02         Ho         -0.02         Lu         -0.02         Nb         -0.02         Rb         -0.02           Ce         -0.02         Bu         -0.02         Ir         -0.02         Mg         -0.01         Os         -0.02         Rb         -0.02           Cr         -0.02         Ga         -0.02         Mn         -0.02         Pr         -0.02         Ru         -0.02           Cr         -0.02         Ga         -0.02         Hg         -0.2         Pr         -0.02         Ru         -0.02           Cr         -0.02         Ga         -0.02         Hg         -0.2         Pr         -0.02         Ru         -0.02           Cu         -0.02         Au         -0.02         Nd         -0.02         Rr         -0.02           Cu         -0.02         Au         -0.02         Nd         -0.02         Rr         -0.02           Cu         -0.02         Au         -0.02         Nd         -0.02 <th>Cd         -d002         Dy         -d002         Hf         -d002         Li         -d002         Ni         -d002         Re         -d002         Si           Ca         T         Ea         -d002         Ho         -d002         Lu         -d002         Nb         -d002         Re         -d002         Si           Ca         -d002         Ea         -d002         Hr         -d002         Mn         -d002         Rh         -d002         Na           Ca         -d002         Ga         -d002         Hg         -d02         Pr         -d002         Ru         -d002         Na           Ca         -d002         Ga         -d002         Hg         -d002         Pr         -d002         Sn         -d002         Sr           Ca         -d002         Ga         -d002         Hg         -d002         Rr         -d002         Sn         -d002         Sr         -d002         Sr           Ca         -d002         Au         -d002         Nd         -d002         Rr         -d002         Sr         -d002         Sr         -d002         Sr         -d002         Sr         -d002         Sr         -d002</th> <th>Cd         -0.02         Dy         -0.02         Hf         -0.02         Li         -0.02         Ni         -0.02         Pr         -0.02         Se         -0.02           Ca         T         Eu         -0.02         Ho         -0.02         Lu         -0.02         Nb         -0.02         Rb         -0.02         Si         -0.02           Ce         -0.02         Eu         -0.02         In         -0.02         Mn         -0.02         Rb         -0.02         Na         -0.02           Cr         -0.02         Ga         -0.02         Ir         -0.02         Hg         -0.02         Ru         -0.02         Na         -0.02           Cr         -0.02         Ga         -0.02         Hg         -0.02         Ru         -0.02         Sr         -0.02           Cr         -0.02         Ga         -0.02         Hg         -0.02         Rr         -0.02         Sr         -0.02           Cr         -0.02         Fr         -0.02         Nr         -0.02         Rr         -0.02         Sr         -0.02           Cr         -0.02         Fr         -0.02         Rr         -0.02         Sr</th> <th>Cd         4002         Dy         4002         H         4002         Li         4002         Ni         4002         Pr         4002         Se         402         Th           Ca         T         Ea         4002         Ha         4002         Lu         4002         Nb         4002         Rb         4002         Tr           Ca         4002         Eu         4002         Ha         4002         Pd         4002         Rb         4002         Tr           Cr         4002         Ga         4002         Hg         402         Pr         4002         Ru         4002         Tr          Cr         4002         Ga         4002         Hg         402         Pr         4002         Ru         4002         Tr          Cr         4002         Ga         4002         Hg         402         Pr         4002         Sr         4002         Tr          Cr         4002         Au         4002         Rr         4002         Rr         4002         Sr         4002         Sr         4002           Cu         4002         Au         4002         Rr         4002         Rr         4002</th>	Cd         -d002         Dy         -d002         Hf         -d002         Li         -d002         Ni         -d002         Re         -d002         Si           Ca         T         Ea         -d002         Ho         -d002         Lu         -d002         Nb         -d002         Re         -d002         Si           Ca         -d002         Ea         -d002         Hr         -d002         Mn         -d002         Rh         -d002         Na           Ca         -d002         Ga         -d002         Hg         -d02         Pr         -d002         Ru         -d002         Na           Ca         -d002         Ga         -d002         Hg         -d002         Pr         -d002         Sn         -d002         Sr           Ca         -d002         Ga         -d002         Hg         -d002         Rr         -d002         Sn         -d002         Sr         -d002         Sr           Ca         -d002         Au         -d002         Nd         -d002         Rr         -d002         Sr         -d002         Sr         -d002         Sr         -d002         Sr         -d002         Sr         -d002	Cd         -0.02         Dy         -0.02         Hf         -0.02         Li         -0.02         Ni         -0.02         Pr         -0.02         Se         -0.02           Ca         T         Eu         -0.02         Ho         -0.02         Lu         -0.02         Nb         -0.02         Rb         -0.02         Si         -0.02           Ce         -0.02         Eu         -0.02         In         -0.02         Mn         -0.02         Rb         -0.02         Na         -0.02           Cr         -0.02         Ga         -0.02         Ir         -0.02         Hg         -0.02         Ru         -0.02         Na         -0.02           Cr         -0.02         Ga         -0.02         Hg         -0.02         Ru         -0.02         Sr         -0.02           Cr         -0.02         Ga         -0.02         Hg         -0.02         Rr         -0.02         Sr         -0.02           Cr         -0.02         Fr         -0.02         Nr         -0.02         Rr         -0.02         Sr         -0.02           Cr         -0.02         Fr         -0.02         Rr         -0.02         Sr	Cd         4002         Dy         4002         H         4002         Li         4002         Ni         4002         Pr         4002         Se         402         Th           Ca         T         Ea         4002         Ha         4002         Lu         4002         Nb         4002         Rb         4002         Tr           Ca         4002         Eu         4002         Ha         4002         Pd         4002         Rb         4002         Tr           Cr         4002         Ga         4002         Hg         402         Pr         4002         Ru         4002         Tr          Cr         4002         Ga         4002         Hg         402         Pr         4002         Ru         4002         Tr          Cr         4002         Ga         4002         Hg         402         Pr         4002         Sr         4002         Tr          Cr         4002         Au         4002         Rr         4002         Rr         4002         Sr         4002         Sr         4002           Cu         4002         Au         4002         Rr         4002         Rr         4002

(T) = Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



Certified by:

Printed: 3/16/2023, 1:45:15 PM

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

All standard containers are meticulously cleaned prior to use. the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



800-368-1131 www.absolutestandards.com	100	Å		•	Sertified .	Refere	Since Mai	Certified Reference Material CRM	1/203 (	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~		ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ANAB ISO 17034 Accredited AR-1539 Certificate Number ttps://Absolutestandards.com	credited Number rds.com
CERTIFIED WEIGHT REPORT:						1	Lot#			る				
Fart Number: Lot Number: Description:		57182 061522 Lead (Pb)			Solvent:		20510011	Nitric Acid		Hieram	ranvie Ed	peate		
Expiration Date:		081525				%	40.0	Nitric Acid		Formulated By:	Giovann	Giovanní Esposito	061522	
Recommended Storage: Nominal Concentration (µg/mL):		Ambient (20 °C) 10000	Ő				(TE)			Ph	May 1	C/S		
NIST Test Number: 6UTB Weight shown below was diluted to (mL):	r: 6U as diluted		2000.02	5E-05 B 0.058 F	5E-05 Balance Uncertainty 0.058 Flask Uncertainty	inty f				Reviewed By:	Pedro L	Pedro L. Rentas	061522	
Compound	RM#	Lot Number C	Lot Nominal Purity Uncertaint Number Conc. (µg/ml.) (%) Purity (%)	Purity (	×	- 1	Target Weight (g)	Expanded Actual Actual Uncertainty Weight (g) Conc. (µg/mL) +/- (µg/mL)	Actual	Expanded Uncertainty (4+-(µg/mL) CAS#	SD: (Solvent Safe S# OSHA	SDS information (Solvent Safety Info. On Attached pg.)  # OSHA PEL (TWA) LDSC	l pg.) LD50	NIST

SRM

1. Lead(II) nitrate (Pb)	INO29 PBD122016A1	10000	88.888	0.10	62.5	32.0006	32.0041 10001.1		20.0	10099-74-8	0.05 mg/m3	intryne-rat 83 mo/kg 3128	3128
1.0E7	[1] Spectrum No.1	17.284 sec]:58182.D# [Count] [Linear]	ec]:58	82.D*	Cour	nt] [Line		1				p h	
S.0E8													
m/z->> 2.0€6	0 P	O		.0		0.00	9	02		08	0	100	
1.0E6													
m/z->	1100	190		04	i) Er	150	160	170	, T	180	001	000	
5.0ES													
Å	220	230		240		250	260						

Lot # 061522

# Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

						Ī	Trace Me	stals	Verifica	tion	by ICP-	SM	(ma/m)		,				
Section 1	May be seen and	į	WORNING STREET	Name of Street, or other Persons and Street,	3-5-40. 1. 1. 1. 3-2. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1. 1.	-	THE PROPERTY OF THE PARTY OF TH	CAMPBOOK					2	Commence of the last					
₹	<0.02	ਝ	<0.02	Ď	<0.02	HŁ	<0.02	Ľ	<0.02	ž	<0.02	ď	2002	3	202	4	200		000
Sp	<0.02	ථ	<0.2	ď	200	H	200	ž	969	1	9	è	2000	3	100	2	20.02	*	7mm>
V V	ç	d	1 6	,		2	777	3	70:05	ON T	70.02	2	7070>	7	₹0.02	<u>e</u>	\$0.02	Þ	<b>40.02</b>
ĉ	7.02	3	Z0:02	S S	Q0:05	크	8002	Mg	<b>Q</b> .01	ර	<b>40.02</b>	Rh	<b>40.02</b>	Ao	<b>CD CD</b>	F	200	2	8
Ba	<0.02	రో	<0.02	3	<0.02	4	<0.02	M	<0.02	Pd	2002	40	8	0 2	6	į	70:00	- E	70'05
Be	<0.01	Ö	<0.02	S	<0.02	Ę,	402	H	5	. 0	600		7000	2 0	707	= 6	20.02	Q.	Z0.02
ž	2000	S	200	2	8	-	9 6	9	700	- é	20.02	1	70'05	ă	<b>40.002</b>	Ħ	<b>40.02</b>	×	<0.02
i	200	3 6	70.00	5 .	20.02	3	70:05	WIO	<0.02	Σ,	<0.02	SH	<0.02	S	<0.02	Sn	₹0.02	Z	40.02
	70.05	3	70'02	Au	<0.02	£	T	ž	40.02	×	\$ \$	S	<0.02	Ę	<b>CD 02</b>	Ę	29	2	8

Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.



Certified by:

Lot # 061522

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). All standard containers are meticulously cleaned prior to use.

All Standards should be stored with caps tight and under appropriate laboratory conditions. Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

www.absolutestandards.com

Certified Reference Material CRM

R : 03 | 17 | 12



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Diovanne

Nitric Acid

Solvent: 20510011

#ioj

Nitric Acid

350.0 (m)

7.0%

092122 092122 Giovanni Esposito Pedro L. Rentas Formulated By: Reviewed By:

٠.		
SDS Information	(Solvent Safety Info, On Attached pg.)	L) CAS# OSHA PEL (TWA) LD50
Expanded	Actual Actual Uncertainty	1/- (vg/mL)
	Actual	Conc. (ug/mL)
		_
1	arget	Weight (g)
	Assay	9
1	unity Unkertality Assay	runty (%)
Dringer	runcy (85)	R
Nominal	Conc (un/ml)	COLLEG (ARRYTHL)
ŧ	Number	
	RM#	
	Compound	

5E-05 Balance Uncertainty 0.12 Flask Uncertainty

5000.1

Weight shown below was diluted to (mL):

NIST Test Number:

Ambient (20 °C)

10000 **6UTB** 

092125

Expiration Date: Recommended Storage: Nominal Concentration (µg/mL):

Iron (Fe) 092122

Description: Lot Number:

Part Number:

CERTIFIED WEIGHT REPORT:

128 128	orl-rat 7500mg/kg 3126a	no Em/gm c	1409-09-0	Ш										
			20.0 7430.80.6		0.10 100.0 50.0034 50.0111 10001.5	50.0111	50.0034	100.0	0.10	98.985	10000	3 2224912-500	IN34	Iron (Fe)
SKE	LUSO	COLOR FEET (TWA)	L COLON											
2	(34)	OCHA DEI (TAKA)	CAC#	(  m/m/) -/+	Conc. (vo/ml.)	Weight (g)	Weight (g)	(%)	Purity (%)	<u>8</u>	Conc. (µg/mL)	Number	KMH	
Į.	7 00 00	Uncertainty Assay Target Actual Actual Uncertainty (Solvient Safesy Info On Actual	(Soh	Uncertainty	Actual	Actual	y Uncertainty Assay Target	Assay	Uncertainty	Purity	Nominal	5		Compound
										-	-	- made		

		110-10 SEE4912-000	2000	99.985	0.10	100.0	50.0034	50.0111 10001.5	10001.5	20.0	7439-89-6	5 mg/m3	orl-rat 7500mg/kg 3126a
2.064	1) Spectrum No.1	[1] Spectrum No.1 [ 30.763 sec]:58126.D# [Count] [Linear]	[Count] [Linear]					_					
1.054								_					
m/z->	10-1	50	0 8		-6		.00	-09	02		08	. 06	100
5.0E7	110	120	130		140		150	160	170		180	0 61	500
S.0E7	0.6												
L	1	220	230		240		250	260					

## Certified Reference Material CRM





# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace Me	stals	Verificat	ion b	y ICP-MS	gu)	/mL)						
STORY .	000				200		404				NAME OF TAXABLE PARTY.								
æ	40.02	3	70.05	ŝ	70'0>	Ē	70102	3	Z0702	ž	<0.10	£	<b>₹0.02</b>	š	402	e	<b>40.02</b>	*	40.02
S.	<0.02	రే	<b>4</b> 02	山	<0.02	He	<b>40.02</b>	3	<0.02	ź	<0.02	Re	<0.02	ૹ	<b>40.02</b>	<u>6</u>	<0.02	n	<0.02
As	Ø.2	ප	<0.02	큡	<0.02	멸	<0.02	Mg	<0.01	ő	<0.02	꿆	<0.02	Ag	<0.02	F	<0.02	>	<0.02
Ba	<b>40.02</b>	ඊ	Ø.02	3	<0.02	ㅂ	<b>40.02</b>	Ma	<0.10	몺	<0.02	8	<0.02	Š	40.2	Ē	<0.02	χ.	<0.02
Be	<b>₩</b>	ŏ	<b>40.05</b>	පී	<0.02	£	40.2	Hg	40.2	Δ.	<0.02	Ru	<0.02	Ŗ	<0.02	뎚	<0.02	٨	<0.02
Ä	<b>40.02</b>	රි	Ø.10	ප	40.10	ጟ	<b>40.02</b>	Mo	<b>40.02</b>	£	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	Z	<0.05
В	<0.02	ರ	<0.10	Απ	<0.02	£	<0.02	R	<0.02	M	<0.2	ß	<0.02	Ta	<0.02	F	<0.02	Z	<0.02

(T)= Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



Certified by:

The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

2 of 2

### 800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



## Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT

Part Number:

Description: Lot Number:

58119 120822 Potassium (K)

Solvent: 20510011 Nitric Acid

Lot #

Javanva

アイクラクスで

60.0 <u>a</u>

2%

Nominal Concentration (µg/mL):

NIST Test Number:

**6UTB** 10000 Ambient (20 °C) 120825

Recommended Storage:

Expiration Date:

Weight shown below was diluted to (mL):

3000.4

5E-05 Belance Uncertainty

0.06 Flask Uncertainty

ဋ

Nominal

Nitric Acid

Formulated By:

Giovanni Esposito

120822

Reviewed By:

Expanded

SDS Information

Pedro L. Rentas 120822

											35 763 6	[1] Spectrum No.1   35 763 colleget Out Out Out Out Out Out Out Out Out Ou	
orl-rat 3015 mg/kg 314	orl-rat 30	5 mg/m3	7757-79-1	20.0	10001.1 20.0 7757-79-1	79.8075	79.7990	37.6	0.10	99.999	10000	IN034 KD022021A1 10000 99.989 0.10 37.6 79.7990 79.8075	Potassium nitrate (K)
g.) NIST	ttached pç	Actual Uncertainty (Solvent Safety Info. On Attached pg.) Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA) LD50	(Soh	Uncertainty +/- (µg/mL)	Actual Conc. (µg/mL)	Actual Weight (g)	Target Weight (g)	(%)	Uncertainty Purity (%)	Purity (%)	Nominal Purity Uncertainty Assay Target Conc. (µg/mL) (%) Purity (%) (%) Weight (g)	Lot Nominal Purity Uncertainty Assay Target Actual RM# Number Conc. (ug/mL) (%) Purity (%) (%) Weight (g) Weight (g) C	Compound

m/z->	5000	m/z->	1.005	m/z->	1.056	2.000
ņ		110		ō		
220		20		N.		
M)						
N 0		130		0		
N 4-		<b>1</b> .		4.		
ō		Ō		<u>0</u> -		į
N I		1 0		<b>S</b> .		
N D		160		0		-
		170		8		
		al Li				
		180		80		
		190		<b>5</b> 0		
		0		J		
		200		100		

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Bi Be	
	4000 4000 4000 4000 4000 4000	
	<b>585888</b> 8	
Œ	40.02 40.02 40.02 40.02 40.02 40.02	
	등 유 명 전 함 표 것	
	\$	
	3234483	1.
	402 402 402 402 402	Trace Me
	NA BA BA L L	etals
(T) = Tar	40.00 40.00 40.00 40.00 40.00 40.00 40.00	Verifica
Target analyte	K P P Z O K N	ation
alyte	4022 4022 4022 4022 7	by ICP-
	S B B B B B	SW
	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	(Jm/gu)
	Ja Sr Na Se Se	
	402 402 402 402 402 402 402 402 402 402	
	计划证证证证	
	4000 4000 4000 4000 4000	
	55~\$<□≤	
	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \*Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58119

Lot # 120822

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: Part Number: Lot Number: Description: 58024 060523 Chromium (Cr) 21110221 Lot # Nitric Acid Solvent: Lavense

2.0% 40.0 Nitric Acid

(III)

Formulated By:

Lawrence Barry

060523

060523

TSIN

Nominal Concentration (µg/mL): Recommended Storage: **Expiration Date:** 1000 Ambient (20 °C) 060526

 Chromium(III) nitrate nonahydrate (Cr) 58124 Compound Volume shown below was diluted to (mL): NIST Test Number: Number Part **BTU9** 071122 Number Lot 2000.02 0.1000 Factor Dilution Vol. (mL) Pipette (mL) Conc. (µg/mL) 0.058 5E-05 200.0 Initial Flask Uncertainty **Balance Uncertainty** Uncertainty 0.084 Nominal 1000 Conc. (µg/mL) Conc. (µg/mL) 10000.1 Initial 1000.0 Final Reviewed By: +/- (µg/mL) Uncertainty Expanded 2.2 7789-02-8 CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) Pedro L. Rentas 0.5 mg(Cr)/m3 **SDS Information** P20

ori-rat 3250 mg/kg 3112a SRM

m/z->	N. 55	m/z-> 5.0E5	5.0E5	m/z->	5000	1.0 M
						(
N 0		110		<b>o</b> .		
220		120		N. O		
				2		(
230		16. O		0		( ( (
						(
240		40		<b>b</b> .		
						(
250		<b>1</b>		6		
						<u>.</u>
26 0		80		0		
		4		70		
		170		Ó		
		نه ش-		<b>©</b> _		
		180		90		
				90		
		190 200				
		N O-		100		

Part # 58024

Lot # 060523



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			_				_			=
	B	ᄧ	Ве	В	As	Sb	Δ	Monthly		
	A).02	<b>4</b> 0.02	40,01	<b>A</b> .02	<b>40.2</b>	△0.02	△0.02			
	δ	පි	Ω	င္တ	දි	ర్జ	Ω			
	<b>40.02</b>	<b>40.02</b>	)	40.02	40.02	40,2	△0.02			
	Æ	ဥ	වූ	ନ୍ଥ	멸	녆	Dy	80		
	<b>40.02</b>	40.02	40.02	<0.02	40.02	40.02	40.02	mineral differences		
	3	Ľ	स्र	Ħ	ď	ᅜ	Ж	Sheriff tool		
	<b>40.02</b>	40.02	40.2	A).02	<0.02	40.02	40.02		I race M	1
	폺	Мо	В.	Ķ	ВМ	Ē	П	MISSON ISSUE	Metals	1
3	A0.02	40.02	40.2	40.02	40,01	<b>∆</b> .02	40.02	SI RECEIPTOR	Verification	
Towns and the	~	ን	70	굕	ô	₹	3	SHEWNING.	Clon	-
	<b>∆</b> 0.2	40.02	40.02	40,02	40.02	40.02	40.02	THE PARTY OF THE P	by ICP-M	
	Sc	Sm	잗	공	Rh	æ	Pr		S (Hi	5
	<0.02	<0.02	<0.02	40.02	40,02	40.02	<0.02		g/mL)	
	Ta	S	ñ	Z.	Ą	Si.	Se			
	40.02	<0.02	40.02	402	<b>40.02</b>	40.02	402			
	==	Sn	Tm	3	ᄇ	급	176			
	40,02	40.02	40,02	40,02	<0.02	40,02	<0.02	Contract Contraction		
	Zr	Zn	~	뀱	۷	Ϥ	W	可能を発展		
	<0.02	<b>&lt;</b> 0.02	<0.02	<0.02	40.02	<b>△0.02</b>	<0.02	SALES OF SALES		

(I)= larget analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

## Certified Reference Material CRM

R: 10/23/23 M5697



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com



CERTIFIED WEIGHT REPORT						Lot #	Solvent:						
Part Number: Lot Number:		58029 102523				24002546	Nitric Acid				Ι,		
Description:		Copper (Cu)	ব							1000	Commence of the Commence of th		
						2.0%	40.0	Nitric Acid	Formulated By:		Benson Chan	102523	
Expiration Date:	••	102526					(ml.)		١	2	6		
Recommended Storage:		Ambient (20 °C)	(၃						1	*	N.		
Nominal Concentration (µg/mL):		1000							K	S. S.	Crea !		
NIST Test Number:		6UTB		5E-05	Balance Uncertainty	nly		1	Reviewed By:		Pedro L. Rentas	102523	
Volume shown below was diluted to (mL):	was dilute	d to (mL):	200002	0.058	Flask Uncertainty			ı					
									Expanded		SDS Information	uc	
	Part	Lot	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Uncertainty	(Solver	(Solvent Safety Info. On Attached pg.)	tached pg.)	NIST
Compound	Number	Number	Factor	Vol. (mL)	Pipette (mL) C	onc. (ug/mL)	Vol. (mL) Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) Conc. (µg/mL)		+/- (ng/mL)	CAS#	OSHA PEL (TWA)	LD50	SRM
Copper(II) nitrate trihvdrate (Cu)	58129	58129 100223 0.1000	0.1000	200.0	0.084	1000	10000.1	1000.0	6.0	10031-43-3	1 ma/m3	ori-rat 794 mo/kg	3114
,											l		

1.0E6	[1] Spectrum No.1	L'ON L'O		422 sec]:5	[ 33.422 sec]:58029.D# [Count] [Linear]	Sound (Lir	near]	1000				
5.0E5	(A)											
m/z->		0	O	OE	04	909	9	, v	O C	06	00	
2.5E7												
m/z-> 2.0E7	0		120	130	041	150	160	170	000 F	190	000	
1.067												
<-Z/L	210		220	230	240	250	860					

Printed: 10/26/2023, 1:20:31 PM

## Absolute Standards, Inc.

www.absolutestandards.com 300-368-1131





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

## Certified Reference Material CRM

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Verification by ICP-MS (μg/mL)	Ni   <0.02   Pr   <0.02   Se   <0.2   Tb   <0.02   W	40.02 Nb <0.02 Re <0.02 Si <0.02 Te <0.02 U <0.02	Os <0.02   Rb <0.02   Ag <0.02   T1 <0.02   V	Pd <0.02 Rb <0.02 Na <0.2 Th <0.02 Yb	P <0.02 Ru <0.02 Sr <0.02 Tm <0.02 Y	Pt <0.02 Sm <0.02 S <0.02 Sn <0.02 Zn	K <0.2 Sc <0.02 Ta <0.02 Ti <0.02 Zr
Trace	L	0.02	_	<0.02		_	
	H	Ho	ᄪ	느	-F	۳.	£
	<0.02	<0.02	<0.02	<0.02	<b>40.02</b>	<0.02	<0.02
	Δy	西	超	3	ర్	පී	Ρū
	<0.02	<0.2	<0.02	<0.02	<0.02	<0.02	Ę-m
	3	రౌ	೮	ರೆ	ರ	රි	ਹੋ
	<0.02	₹0:05	40.2	<0.02	<0.01	<0.02	<0.02
	IA	SP PS	As	Ba	æ	Ä	m

(T) = Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.





Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

## Certified Reference Material CRM

A: 10/23/23 M5698

ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com

Part Number:	58025				Lot # 24002546	Solvent: Nitric Acid			9		r
Lot Number: Description:	102623 Manganese (Mn)	(Mn)						The state of the s	The second second		
					2.0%	0.09	Nitric Acid	Formulated By:	Benson Chan	102623	_
Expiration Date:	102626					(mF)		8	9		
Recommended Storage:	Ambient (20 °C)	ပွ						1	A.		
Nominal Concentration (µg/mL):	1000							July 10	Rosa		
NIST Test Number:	6UTB		5E-05	Balance Uncertainty	ainty			Reviewed By:	Pedro L. Rentas	102623	
Volume shown below was diluted to (mL):	ted to (mL):	3000.41	0.058	Flask Uncertainty	ž.		•				1
								Expanded	SDS Information	_	
Part	Lot	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Uncertainty	(Solvent Safety Info. On Attached pg.)	ached pg.)	NIST
Number	Number	Factor	Vol. (mL)	Pipette (mL)	Conc. (ug/mL)	Conc. (ug/mL)	Pipette (т.L.) Conc. (уд/т.L.) Conc. (уд/т.L.) сопс. (уд/т.L.) +/- (уд/т.L.)		CAS# OSHA PEL (TWA)	LD50	SRM

orl-rat >300mg/kg 3132

5 mg/m3

20694-39-7

2.1

1000.0

100001

1000

0.084

300.0

0.1000

071123

1. Manganese(II) nitrate tetrahydrate (Mn) 58125

	100		000		
	9		0		
	, O		180		
	0		170		
					0
	9		, and the second		90
	0		150		250
	0		140		240
	30		130		530
	ON		8		880
	.0		0		010
	r		-		a
2.5E6	7.0E8	5.0E7	V	5.067	т/z->
**	è	W.	Ē	MF	Ë
	2.5 6	10 20 30 40 50 80	10 20 30 40 50 60 70 80 90 E8	10 20 30 40 50 60 70 80 90 80 E8 110 120 130 140 150 160 170 180 190	10 20 30 40 80 60 70 90 90 170 110 120 130 140 150 160 170 190



Certified Reference Material CRM

Absolute Standards, Inc.

www.absolutestandards.com

300-368-1131

ANAB ISO 17034 Accredited AR-1539 Certificate Number

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace M	letals	Verification	tion	by ICP-I	4S (µg	J/mL)						
	THE REAL PROPERTY.	STATE OF	CANCEL CANCEL	THE STATE	SCHOOLS STATE OF	No.	SPECIFICATION SPECIFICATION OF THE PERSON NAMED IN COLUMN TWO IN COLUMN TO THE PERSON NAMED IN C	STATE OF THE PERSON	<b>SERVINIMENS</b>	Wante fallen	SCHOOL SANGERS	W-2000	Applications.	Section Section					Control of the Contro
A!	<0.02	පි	<0.02	፭	<0.02	HŁ	<0.02	3	<0.02	ž	<0.02	뇹	<0.02	S	<0.2	J.P.	<0.02	3	<0.02
&	<0.02	రే	<0.2	西	<0.02	Ho	20.0≥	٦	₹0.02	£	<0.02	2	<0.02	Š	<0.02	Te	<0.02	ם	<0.02
As	<0.2	ర	<0.02	超	<0.02	ų	<0.02	Mg	₹0.01	ő	<0.02	뙶	<0.02	Ag	<0.02	F	<0.02	>	<b>40.02</b>
Ba	<0.02	ర	<0.02	3	<0.02	H	<0.02	Mn	H	Pd	<0.02	Rb	<0.02	Na B	<0.2	T.	<0.02	χp	₹0.02
Be	40.01	ඊ	<0.02	Ö	<b>40.02</b>	굕	40.2	Hg	<0.7	۵,	<0.02	Ru	<0.02	Sr	<0.02	Ę	<0.02	×	<0.02
Bi	₹0.02	රි	<0.02	පි	<0.02	r <sub>a</sub>	<0.02	Mo	<b>40.02</b>	Z,	<0.02	Sm	<0.02	S	₹0.02	Sn	<0.02	Zn	<0.02
В	<0.02	₫	<0.02	Αu	<0.02	Pb	<0.02	PN	<0.02	×	<0.2	Sc	<0.02	Ę	<0.02	F	<0.02	77	<b>40.02</b>
																			1

(T) = Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

the balances that are calibrated with weights traceable to NIST (see above).

Printed: 10/26/2023, 1:20:32 PM

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com



## M5768 [M576] (B) R:1/3/24 Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Magnesium nitrate hexahydrate (Mg) IN030 марозгозат Compound Nominal Concentration (µg/mL): m/z-> ~-z/m m/z-> Weight shown below was diluted to (mL): Recommended Storage: 2.0≡4 1.OE4 5.0E5 1.0E6 1000 2000 NIST Test Number: **Expiration Date:** Part Number: Lot Number: Description: [1] Spectrum No.1 110 210 0 쭕 **BTUB** 58112 091823 10000 Ambient (20°C) (M5+18), (M5+16) 091826 Magnesium (Mg) Number 120 ğ 20 [ 19.923 sec]:58112.D# [Count] [Linear] Conc. (µg/mL) 2000.02 0.058 Flask Uncertainty 10000 Nominal 130 230 30 5E-05 Balance Uncertainty 99.999 Purity Uncertainty Assay 8 Purity (%) (%) 140 0.10 240 40 Solvent: 24002546 Nitric Acid 8.51 150 234.9118 Weight (g) Target Lot # Ē Weight (g) Conc. (µg/mL) 234.9126 Nitric Acid Actual 160 260 0 10000.0 Actual 170 6 +/- (µg/mL) Expanded Uncertainty Reviewed By: Formulated By: 20.0 180 80 13446-18-9 (Solvent Safety Info. On Attached pg.)
# OSHA PEL (TWA) LD50 Pedro L. Rentas Lawrence Barry 190 **SDS Information** Ö Z 200 100 orl-rat 5440 mg/kg 3131a 091823 091823 SRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	555	В	Ве	Ва	As	Sb	A		
						_			
	∆0.02	0.02	40.01	<0.02	<b>∆0.2</b>	<0.02	<0.02		
	Ĉ.	ဝ	Ω	Ŝ	ද	ದ್	Ω		
	<b>∆</b> 0.02	<0.02	<0.02	<0.02	40.02	40.2	<0.02		
	Αu	ရွာ	က္အ	8	탇	耳	Dy		
	<b>₹0,02</b>	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02		
	73	L <sub>a</sub>	Fe	F	ħ	Ho	Hf		ı
	<0.02	40,02	40.2	<0.02	<0.02	<0.02	<0.02	I acc	-1
	Z.	Mo	Hg	Mn	Mg	ŗ	5	Mergis	2
)	<0.02	<0.02	<0.2	<0.02	<b>⊷</b> ]	<0.02	<0.02	Verifica	No.
	×	7.	Р	Pd	S <sub>O</sub>	Ş	Z		
	40.2	40.02	40.02	<0.02	<0.02	40.02	<0.02	יטע וכד-ו	3
	Sc	Sm	Ru	Rb	Rh	Re	Pr	AU (F	
	<0.02	<0.02	<0.02	40.02	40.02	<0.02	<0.02	g/mL)	
	Ta	CO.	Sr	Na	δķ	Σ:	Se		١
	<0.02	<0.02	<0.02	<0.2	<0.02	<0.02	40.2		
	Ti	Sn	Im	Th	∄	Te	-Tι		
	<0.02	0.02	0.02	40.02	40.02	40.02	<0.02		
	Zr	Z	ĸ	4,4	٧	u	¥		
	<0.02	40.02	40.02	40.02	A).02	<0.02	40.02		

(1) = larget analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com



## Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Part Number: 57004 102523 02/09/24 Lot # Solvent:

24002546 Nitric Acid

2.0% (IE)

Nominal Concentration (µg/mL):

NIST Test Number:

BTU<sub>9</sub> 1000

Volume shown below was diluted to (mL):

2000.02

0.058

Flask Uncertainty Balance Uncertainty

5E-05

Number

Number Lot

Vol. (mL.)

Part

Dilution Factor

hitia

Uncertainty

Recommended Storage:

Ambient (20 °C) 102526

**Expiration Date:** 

Lot Number: Description:

Beryllium (Be)

40.0

Nitric Acid

Benson Chan

102523

Formulated By:

Reviewed By:

Pedro L. Rentas 102523

Pipette (mL) Conc. (µg/mL) Nominal Conc. (µg/mL) Conc. (µg/mL) Final +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) SDS Information LD50 NIST SRM





800-368-1131



## Certified Reference Material CRM

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace M	etals	Verificat	cation	by ICP-M	(J) S	ua/mL)						
	TATES AND AND		District Color	STATE OF THE PERSON		Section and		SOMETHINGS.	NAME OF STREET	SAMOOGE STATE	SECOND SPINSO	No. of Concession, Name of Street, or other Persons and Street, or other P	. 18						
F	<0.02	3	<0.02	Ďλ	<0.02	HL	<0.02	Li	<0.02	z	<0.02	Ā	<0.02	Se	<0.2	T.	<0.02	M	<0.02
Sp	<0.02	ථ	<b>40.2</b>	占	₹0.02	He	<0.02	3	<0.02	£	<0.02	Re	<0.02	Š	<0.02	ę	₹0.02	Þ	<0.02
As	<0.7	ඊ	<0.02	립	<b>₩</b>	ដ	<b>40.02</b>	Mg	10.0>	ő	<0.02	Rh	<0.02	Ag	<0.02	F	<0.02	>	<b>40.02</b>
Ba	<0.02	ర	<0.02	3	<0.02	ㅂ	<0.02	Mn	<0.02	2	<0.02	8	<0.02	ž	40.2	Ħ	<0.02	2	<0.02
æ	Т	ర	<b>40.02</b>	ő	<b>40.02</b>	£	<0.7	Hg	<02	Δ,	<0.02	Ru	<0.02	š	<0.02	Tm	₹0.02	×	<b>40.02</b>
洒	<0.02	රි	<0.02	ප	<0.02	ឌ	<b>40.02</b>	Mo	<0.02	武	<0.02	Sm	<0.02	S	<0.02	S	<0.02	2	<0.02
æ	<0.02	ื	<0.02	Au	<0.02	£	₹0.02	PK	<0.02	M	<0.2	S	<b>40.02</b>	Ta	<0.02	F	<0.02	Z	<b>40.02</b>

(T) = Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

### Certified by:



All standard containers are meticulously cleaned prior to use.

2 of 2

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

<sup>\*</sup> Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

122



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

## CERTIFIED WEIGHT REPORT:

Part Number: Description: Lot Number: 57050 071123 Tin (Sn)

Salvents: 21110221

Nitric Acid Hydrochloric acid

Lot #

22D0562008

Nominal Concentration (µg/mL): Recommended Storage: **NIST Test Number:** Expiration Date: 1000 Ambient (20 °C) 071126

Weight shown below was diluted to (mL): **BTU9** 499.93

RM#

Number

Conc. (µg/mL) Nominal

(%)

Uncertainty Assay
Purity (%) (%)

Weight (g)

Target

ρţ

0.058 Flask Uncertainty 5E-05 Balance Uncertainty

> 10.0 30.0

3 6%

Nitric Acid

Formulated By:

Benson Chan

071123

Hydrochloric acid

Reviewed By:

Pedro L. Rentas

071123

Weight (g)	ACTUAL	
Conc. (µg/ml.)	Actual Ur	
'- (µg/mL)	certainty	xpanded
CAS# OSHA PEL (TWA) LD50	(Solvent Safety	SUS
PEL (TWA)	y Info. On Attache	Information
LD50	d pg.)	
SRM	TSIN	

1. Ammonium hexafluorostannate(IV) (Sn) m/z-> ---x/m --Z/111 2.5E4 5.0E4 1.0ES 2.0E6 2.5E5 S.OEG [1] Spectrum No.1 210 110 0 IN010 SND042023A1 120 220 N [ 15.034 sec]:58150.D# [Count] [Linear] 1000 230 130 8 240 140 0.10 40 44.2 250 150 Ö 1.13107 1.13286 160 260 60 1001.6 170 70 2.0 180 80 16919-24-7 190 90 7 mg/m3 200 100 ₹ 3161a

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Al Shaper	I
	4000 4000 4000 4000 4000 4000 4000 400	
	58555	ı
	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	
	A C C C E E P	
	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	
	HH Ho Hr Fe	
	40.02 40.02 40.02 40.02 40.02	Irace N
	Mo Min Li	1etal:
e1 = U	40.02 40.02 40.02 40.02 40.02	s Verific
T) = Tamet anak/a	× 7 × 8 8 8 × 1	ation
	44444	by CP-
	S R R R R P	7) SM
	40.02 40.02 40.02 40.02 40.02	Ja/mL)
	Z S Z Z S	
	40.02 40.02 40.02 40.02 40.02 40.02	
	T T T T T	
	40.02 40.02 40.02 40.02 40.02	
	* * * * * * * * * * * * * * * * * * *	
	000 000 000 000 000 000	

(I) = larget analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.
\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM

R: 02109124





ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com 091923 091923 (Solvent Safety Info On Attach SDS Information Pedro L. Rentas Lawrence Barry Formulated By: Reviewed By: Expanded Nitric Acid Final Nitric Acid 40.0 (III) hital 24002546 2.0% Nominal Balance Uncertainty Flask Uncertainty 5E-05 0.058 Initial 2000.02 Dilution Ambient (20 °C) Cobalt (Co) Volume shown below was diluted to (mL): 57027 091923 091926 ĕ 1000 **6UTB** Part Description: **Expiration Date:** Recommended Storage: Nominal Concentration (ug/mL): NIST Test Number: Part Number: Lot Number: CERTIFIED WEIGHT REPORT:

						TANK BURNE	10000	CHICAGO CONTROL CONTRO	URCH LABILLY	ianioc)	(Solvent Safety Into, On Attached pg.)	rttached pg.)	202
Compound	Number	Number	Factor	Vol. (mL)	Pipette (mL) C	conc. (ug/ml.)	Conc. (µg/mL)	Conc. (ug/ml.)	+/- (ng/mL)	CAS#	Number Number Factor Vol. (mL) Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA)	1050	SRM
Cobatt(II) nitrate hexahydrate (Co) 58127 050923 0.1000 200.0	58127	050923	0.1000		0.084	1000	10000	100001 100001	9.0	10008.000	000	700	
							20000		7:5	100c0-22-9	O.UZ ING/ITI3	STEE 10020-22-9 0.02 mg/ms on-rat 691 mg/kg 3113	3113
2000	Z Ezz	1.0	9 4 DAG 45	Cau. Co	CHARLE WAS	[1] Spectrum No.1 F at year, near, n							

1.0E6	5.0E5	m/z->	5.0E7	1.0E8	5.0E7
				Ī	
		.0		0	
		0		120	
L 34-243 Secj.baok7.D# [Count] [Linear]		Ō		130	
		.0		140	
		.09		150	
		. <b>O</b>		160	
				170	
		02			
		80		160	
		00		180	
		100		200	

Lot # 091923

250

240

230

220

010

W/Z->

## Certified Reference Material CRM





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace M	etals	Verifical	tion	by ICP-M	4S (F	ig/mL)						
1							STREET, STREET	No section lives	ALL DESCRIPTION OF THE PERSON	10.000	Market Mark	MINNSH.	San Salar Salar	NAME OF TAXABLE PARTY.	Service of the last	SECOND SECOND		THE PERSON NAMED IN	STREET, SQUARE,
IV	<0.02	ಶ	1	Š	40.02 Dy 40.02	Ħ	<0.02	П	<0.02	Z	<0.02	Æ	<0.02	B	<0.2	£	<0.02	A	<0.02
ౙ	<b>40.02</b>	రే	<b>40</b> 7	占	<0.02	H9	<0.02	.3	₹005	Ź	₹0.02	2	<0.02	Š	40.02	T <sub>e</sub>	40.05	ם	40.02
As	<b>Q</b> 5	ප	40.02	呂	<b>40.02</b>	ų	<0.02	Mg	10.05	ඊ	₹0.02	뙲	<0.02	Ag	<b>40.02</b>	F	<0.02	>	Ø.02
쯃	<b>40.02</b>	చ	<b>40.02</b>	3	<b>4002</b>	ㅂ	<0.02	Ma	<0.02	콘	₹000	2	<b>40.02</b>	N <sub>a</sub>	40.2	Ę	20:0>	Ŗ	Ø.02
2	¥0.01	ඊ	<b>20.0</b> 2	త్ర	<b>40.02</b>	હ	40.2	쁀	\$ 20	تم	₹0.02	콥	40.02	Şt	<b>40.02</b>	Tm	Ø.02	7	Ø.02
遥	<b>40.02</b>	රි	۳	Ğ,	<b>4002</b>	ដ	<0.02	Mo	<b>40.02</b>	Æ	<b>20'0</b> >	S	<0.02	S	<b>40.02</b>	Sn	40.02	Zn	Ø.02
æ	<0.02	ට්	<0.02	Αn	<0.02	윤	Z0'0>	P	<0.02	м	40.2	S	<0.02	Fee Fee	<b>40,02</b>	Ħ	Ø.02	72	Ø.02

(T)= Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.



Lot # 091923

All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



### 02/00/24 Certified Reference Material CRM

W 580



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Nominal Concentration (µg/mL): Recommended Storage: NIST Test Number: Expiration Date: Part Number: Description: Lot Number: 57033 111323 Arsenic (As) **BTUB** 1000 111326 Ambient (20 °C) 5E-05 Balance Uncertainty 24002546 Lot# 2.0% Nitric Acid Solvent: 80.0 Nitric Acid Formulated By: Reviewed By: Therence Pedro L. Rentas Lawrence Barry

1. Arsenic (As)

58133

020522

0.1000

400.0

0.084

1000

10001.0

1000.0

2.0

7440-38-2

0.5 mg/m3

orl-rat 500 mg/kg 3103a

Number Part

Number Lot

Vol. (mL)

Pipette (mL) Conc. (µg/mL)

Conc. (µg/mL) Conc. (µg/mL)

+/- (µg/ml.) Uncertainty Expanded

(Solvent Safety Info. On Attached pg.) OSHA PEL (TWA)

LD50

NIST SRM

SDS Information

111323

111323

Dilution Factor

initial

Uncertainty

Nominal

Initial

Final

Compound

Volume shown below was diluted to (mL):

4000.0

0.06

Flask Uncertainty

-z/x->	500	m/z->	N IN IN	m/z-> 5.0≣4	1.0厘5	2.0E5
						3
Ŋ		110		ō		[] Speatrum No.1
						Z 0.1
N N N O		120		N.		á
230		130		3 0		[ 34.433 sec]:57033.D# [Count] [Linear]
		A second		er West A best		90]:570
240		140		ò		33.D#
N 0				50		[Count]
Ö		0		0		[Lines
N O		160		0.0		ā
		170		70		
		180		80		
				- W		
		190		90		
		N				
		200		100		

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	- H H H > /0 >	8	-
	As Sb Ba Bi Bi		
	4002 4002 4002 4002 4002		
	5 8 ជ ង 8 ជ ប		
	402 402 402 402 402 402 402 402 402 402		
	<b>₹</b> ७८८ = = ⊅		
	6000 6000 6000 6000		
	322428		
	40.02 40.02 40.02 40.02 40.02	Trace N	
	N H M L L	letals	
9	40.2 40.2 40.2 40.2 40.2	Verifica	
= Target	M R P B O R R	E S S	
Target analyte	40.02 40.02 40.02 40.02	by ICP-N	
	S R R R R R	id) St	
R	4444 444 444 444 444 444 444 444 444 4	g/mL)	
	Ta Sr Na Sc		
	40.2 40.2 40.2 40.2 40.2 40.2		
	######################################		
(e)	40.02 40.02 40.02 40.02 40.02 40.02		
	Z Z Y Z < C &		
	40.02 40.02 40.02 40.02 40.02		

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:



- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- \* All standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

R102109124

MURIC

Solvent: 21110221

Nitric Acid

Lot #

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number: **Lot Number:** 

57115 041723

Description:

Phosphorous (P)

**Expiration Date:** 

041726

Nominal Concentration (µg/mL): Recommended Storage: NIST Test Number: 10000 Ambient (20 °C)

**BTUB** 

5E-05 Balance Uncertainty

Weight shown below was diluted to (mL): 2000.02

Number 5 Conc. (µg/mL) Nominal 0.058 Flask Uncertainty Purity 3 Uncertainty Assay Purity (%) E Target

1. Ammonium dihydrogen phosphate (P)

IN008 PV082019A1

10000

99,999

0.10

27.5

RM#

Compound

22%

40.0

Nitric Acid

Formulated By:

Lawrence Barry

041723

into

Reviewed By:

Pedro L. Rentas

Expanded SDS Information 041723

Weight (g) 72.7287 Weight (g) Conc. (ug/mL) 72.7289 Actual 10000.0 Actual +/- (µg/mL) Uncertainty 20.0 7722-76-1 CAS# (Solvent Safety Info. On Attached pg.)

# OSHA PEL (TWA) LD50 5 mg/m3 orl-rat >2000mg/kg 3186 NIST SRM

Part # 57115

1 of 2

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

	Γ						, .		Г	
	F	3 <u>5</u>	i Re	, 5	AS —	9	# ≥			
	20.02	20.02	10.0	20.02	202	20.02	40.02	A STATE OF THE PERSON NAMED IN		
	2	, S	ť	ů	£	. E	S			
	A),02	A0.02	A)02	40.02	<b>6</b> 002	40.2	<b>40.02</b>	MANAGE SHAFTER		
	æ	ှင့	୍ଷଳ	8	먑	É	Dy	Section 2		
	A0.02	A.02	0.02	<b>∆</b> 0,02	40.02	40.02	<b>40.02</b>	William Constitution		
	3	5	놂	r r	ıl	H	Hf	1	1	
	<b>∆</b> 0,02	40,02	<b>6</b> 22	40.02	40.02	40.02	<b>40.02</b>		Trace Me	
	Æ	Mo	Hg	Mn	Mg	Ţ	Е		letals	I
Townst analytic	<b>40.02</b>	A),02	402	40.02	0.01	<b>40.02</b>	<0.02		Verifica	
	~	ጀ	۳	2	Ŝ	₹	Z		tion	
	<b>A</b>	40,02	7	40.02	40.02	40.02	40,02		by ICP-N	
	Sc	Sm	R <sub>L</sub>	25	R.	æ	27	Į.	E SI	
	40.02	40.02	40.02	40.02	40.02	A 02	40.02	ľ	g/mL)	100
	T <sub>B</sub>	S	Ş	Z	¥	S	&			
	40.02	<b>∆</b> .02	<b>6.02</b>	<u>\$</u>	<b>∆</b> 0,02	40.02	40.2			
	17	Sh	T	₽	ㅂ	Te	4L			
	<0.02	<0.02	<0.02	<b>∆</b> 0.02	<b>40,02</b>	40,02	40,02	Machine Marie		
	Zr	Zn	Υ.	\$	<	Ϥ	W			
	<0.02	<b>6002</b>	A).02	∆.02	<b>\$0.0</b> 2	A0.02	40.02	TO THE REAL PROPERTY.		

(I)= larget analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \*Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.
\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\*All Standards should be stored with caps tight and under appropriate laboratory conditions.
\*Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

2 of 2

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM

109/24

M5817

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number: Lot Number: 071123 57116

Solvent:

071123

**ASTM Type 1 Water** 

Burense

Formulated By:

Lawrence Barry

071123

Lot #

**Expiration Date:** Description: 071126 Sulfur (S)

Nominal Concentration (µg/mL): NIST Test Number: 10000 Ambient (20 °C)

Recommended Storage:

EU1B

Weight shown below was diluted to (mL): 1999.48 Nominal 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Reviewed By: Pedro L. Rentas SDS Information

 Ammonium sulfate (S) IN117 SLBR7225V 10000 99.9 0.10 24.3 82.4675 82,4682 10000.1 20.0 7783-20-2 Z orl-rat 4250mg/kg 3181

Number Ĕ Conc. (µg/mL) Purity 8 Uncertainty Assay Purity (%) 8 Weight (g) Target Weight (g) Conc. (µg/mL) Actual Actual +/- (µg/mL) OSHA PEL (TWA)

Expanded

071123

Uncertainty (Solvent Safety Info. On Attached pg.)
# OSHA PEL (TWA) LD50 SRM NIST

m/z->	1.005	m/z-> 2.0E5	2.5E5	5.0E5	1000	2000
0		110		0		
N N O		120		20		
230		130		<b>3</b> 0		
24		140		40		
250		150		50		
260		190		8		
		170		70		
		180		8.		
		190		90		
		200		100		

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	BE BE BE
	002 002 002 002
	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
•	594445
	40.22 40.22 40.22 40.22
	<b>≥ 유요요 프 무 ▽</b>
	40.02 40.02 40.02 40.02 40.02
	8 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4
	40,02 40,02 40,02 40,02 40,02 40,02
	Li Li Mg Mn Hg
(T)= Tarnet analyte	Verifica
onak.	K P P B S S N
5	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$
	S S S S S S S S S S S S S S S S S S S
	(µg/mL)
	Ta Sr Na Se
	40.22 40.02 40.02 40.02 40.02 7 7 40.02
	To T
	60000000000000000000000000000000000000
	Z
	666666666666666666666666666666666666666

Physical Characterization:

(1)= larger analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

109124 M.5818

Solvent: 24002546 Nitric Acid

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number:

Lot Number: Description: 57014 122023

Silicon (SI)

Nominal Concentration (µq/mL): Recommended Storage: 1000 Ambient (20 °C)

**Expiration Date:** 

122026

2%

40.0 (mL)

Nitric Acid

Formulated By:

Aleah O'Brady

122023

122023

Areah o Brasky

Compound			Weight shown below was diluted to (mL): 1999.48 0.058 Flask Uncertainty	NIST Test Number	The second secon
RM#			elow was diluted	Number:	
Number	Lot		d to (mL):	8TUB	
Conc. (µg/mL)	Nominal		1999.48		
(%)	Purity		0.058	5E-05	
Purity (%)	Nominal Purity Uncertainty Assay		Flask Uncerta	5E-05 Balance Uncertainty	
8	Assay		unty	artainty	
Weight (g)	Target				
Weight (g)	Actual				
Conc. (ug/mL)	Actual				
+/- (ug/mL)	Uncertainty	Expanded		Reviewed By:	/
CAS#	(Solve				
OSHA PEL (TWA)	Lot Nominal Purity Uncertainty Assay Target Actual Actual Uncertainty (Solvent Safety Info. On Attac	SDS Information		Pedro L. Rentas	1

						10000	12000			00000	3 3 16 3		
				1							4	INIONO CITAGORIA	amonism beyefluorosilicate (C)   Nicon succession   Apple   Ap
	П												
	E	COLIS LEE (1887)	5	Tribulary	Course Organisa	(B) 200 Bross	183 million		The state of the state of		400		
200		NUMP NUMBER Conc. (143/ml.) (%) Purity (%) (%) Weight (a) Weight (b) Conc (143/ml.) CAS# OCUA DCI (75/ml.)	HOACH	+1/1 (12/11)	Come (sector)	Weight (a)	Weight (a)	8	8) All a	98	Conc. (Ja/mL)	KM# Number	ALI PARTICION DE LA CONTROL DE
		•									,	Disk No.	
Z	Attached po.)	Uncertainty (Solvent Sallety Inio, On Attached pg.)	(SOIVE)	Uncertainty	ACTUAL	ACCUAL	raiger	Masay	טואיפו עמוורץ	r writy	recommend family of the control of t		
	A A A A A A A A A A A A A A A A A A A	THE PLEASE OF	1011				Townsh	2000	Incortaint.		Zomina	2	

*	orl-mus 70 mg/kg	2.5 mg/m3	2.0 16919-19-0	2.0	1000.0	13.8855	13.8854	14.4	0.10	99.999	1000	IN009 SID082022A1	Ammonium hexafluorosilicate (Si) IN009 sido82022A1 1000 99.999 0.10 14.4 13.8854 13.8855 1000.0
	Esc	COMA TEL CINA)	CAS#	(ASA) +/- (ASA)	רטות. (ששיוור)	(A) THEISTA	(B) Millione	(101)	fact frience	(00)	400	(A) mediu (A) must (w) (w) (w) mediu (A) mediu (A) conc.	

92 II	CAS#		CAS# OSHA PEL (TWA) LD50 SRM  1919-19-0 2.5 mg/m3 orl-mus 70 mg/kg NA	1. Ammonium hexafluorosilicate (Si) IN009 siposzozza1 1000 98.899 0.10 14.4 13.8854 13.8855 1000.0 2.0 169	Compound  RM# Number Conc. (µg/mL) (%) Purity (%) (%) Weight (g) Weight (g) Conc. (µg/mL) +/- (µg/mL)
		Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA)  1000.0 2.0 16919-19-0 2.5 mg/m3	Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA)  1000.0 2.0 18919-19-0 2.5 mg/m3	10 14.4 13.8	(%) (%) Weigh
Conc. (µg/mL) +/- (µg/mL) 1000.0 2.0 10	Conc. (µg/mL) +/- (µg/mL) CAS#  1000.0 2.0 16919-19-0			3854 13.8855	ht (g) Weight (g)
2.0 10	2.0 16919-19-0			1000.0	Conc. (µg/mL) +
	CAS#			2.0	/- (µg/mL)

m/z->	5.085	m/z->	1.0E6	2.0E6	2500	5000
210		1		Ö.		
N				3		
220		ก 0		<b>N</b> .		
230		130		(a)		
		Ψ				
N 40		4		4		
250		150		(n		
ö		Ö		<b>6</b>		*
N 00		160		6) O		
		**************************************		.d.		
		170		70		
		180 80		<b>8</b> .		
		90		0		
		200		100		

Part # 57014

1 of 2



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Ţ.	<b>5</b>	B	ķ	7 5	# :	As	30	2	A	i	Ī	
ŀ	_	_	_			_	_	_	1			
70.02	3	<u> 0</u> 02	10.05	20.02	3 1	8	20.02		40.02	The state of the s		
2	?	င	7	, Ç	3 8	<u>ئ</u>	S.	1	2			
\$0.02	3	A).02	<0.02	20.02	3 6	3	40.2	40.04	20.02	住地に なる 日本の		
A		ಕ್ಕ ಕಾ	G	ğ	2 5	न इ	Ē,	5	7	2000 mg/mg/		
20.02		A) (3)	A)22	40.52	60.02	3	40.02	20.02	000			
Ğ	! }		<b>'</b>	H	۱ ا	7	픙	111	AB.			٠
40.02	40.0	3	<b>60.2</b>	40.02	20.02	3	<b>∆</b> .02	20.02	000	SOMEON PROPERTY.	Hace M	,
Nd	10.00	5	8H	Mn	. 00		Ē	E	1		verais	
<0.02	10.07	3	<b>6</b> 20	40,02	10.03	2	<b>∆</b> 0,02	20.02			Verifica	11
×	2	Ş	٦	Pd	ç	,	\$	2	1		HOD	
40.2	20.02	3	∆.02	40,02	40.02		8.00	20.02		ŀ	by ICP-I	
જ	300	2	₽	R	2	!	<b>7</b>	7		ļ	E S	
40.02	20.02	3	40.02	20.0≥	40.02		8	<0.02		ľ	g/mL)	
Ta	v	,	S.	Z	A A		2	Se				I
<b>&amp;</b> .02	20.02	3	83.6	40.2	40.02		-1	40.2		-		
Ħ	Sn	,	ď	Ħ	Ħ	,	7	7				
40.02	20.02		20.02	40.02	40.02	20.02	3	40.02		The Real Property lies		
Z	70	,	<b>~</b>	\$	<	-	=======================================	¥				
<b>∆</b> 0.02	40.02	1010	<b>A</b>	40.02	40.02	10.02	3	40.02	O) SOUTHWOOD			

(T) = Target analyte

### **Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

\* Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

2 02/na

ング

Solvent: 24002546

Nitric Acid

F Lot #

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT

Part Number: Lot Number: 58030

Description:

111623 Zinc (Zn)

Ambient (20 °C) 111626

**Expiration Date:** 

Nominal Concentration (µg/mL): Recommended Storage:

**NIST Test Number:** 

**BTU9** 1000

5E-05 Balance Uncertainty 0.06 Flask Uncertainty

Weight shown below was diluted to (mL):

3000.4

5

Nominal

Purity

Uncertainty Assay

Target

Actual

Actual

Uncertainty

Expanded

<u>%</u> 60.0 <u>a</u>

Nitric Acid

Formulated By: Benson Chan

111623

Reviewed By: Pedro L. Rentas

111623

Zinc nitrate hexahydrate (Zn) Compound [1] Spectrum No.1 [ 31.103 sec]:58130.D# [Count] [Linear] IN016 ZNE032021A1 RM# Number Conc. (µg/ml.) 1 000 99.999 8 Purity (%) 0.10 24.3 3 Weight (g) 12.3475 Weight (g) Conc. (µg/ml.) 12.3502 1000.2 +/- (µg/mL) 2.0 10196-18-6 CAS# OSHA PEL (TWA) orl-rat 1190mg/kg 3168



(Solvent Safety Info. On Attached pg.)
# OSHA PEL (TWA) LD50 **SDS** Information SRM SRM

200

100

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	BE BE S S A	Г	
	4002 4002 4002 4001 4002 4002		
	585855		
	40.02 40.02 40.02 40.02 40.02		
	26 G G E E D		
	000000000000000000000000000000000000000		
	田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田田		
	40.00 40.00 40.00 40.00 40.00 40.00	Trace Me	
	Mo Mg LL	letals	
Threat and the	40.02 40.02 40.02 40.02 40.02	Verifica	
	X Y T R Q S Y X	tion	
	40.22 40.22 40.22 40.22	by ICP-	
	S E E E E F	Š	
	66666666666666666666666666666666666666	(ug/mL)	
	Ta Sr Za Ag		
	402 402 402 402 402		
		1	
	000 000 000 000 000 000 000 000 000		
100	22×2<=		
	\$ 7 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8		

(I) = larget analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

<sup>\*</sup> All standard containers are meticulously cleaned prior to use.
\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All standards should be stored with caps tight and under appropriate laboratory conditions.

<sup>\*</sup> Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).





MS947 MS948 MS949 MS950 MS951 MS952

Material No.: 9530-33 Batch No.: 22G2862015 Manufactured Date: 2022-06-15 Retest Date: 2027-06-14

Revision No.: 0

### Certificate of Analysis

Test	Specification	Result
ACS - Assay (as HCl) (by acid-base titrn)	36.5 - 38.0 %	
ACS - Color (APHA)	≤ 10	37.9 %
ACS - Residue after Ignition	≤ 3 ppm	5
ACS - Specific Gravity at 60°/60°F	1.185 – 1.192	< 1 ppm
ACS - Bromide (Br)	≤ 0.005 %	1.191
ACS – Extractable Organic Substances	≤ 5 ppm	< 0.005 %
ACS - Free Chlorine (as Cl <sub>2</sub> )		< 1 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.5 ppm	< 0.5 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.05 ppm	< 0.03 ppm
Sulfite (SO <sub>3</sub> )	≤ 0.5 ppm	< 0.3 ppm
Ammonium (NH <sub>4</sub> )	≤ 0.8 ppm	0.3 ppm
Trace Impurities – Arsenic (As)	≤ 3 ppm	< 1 ppm
Trace Impurities – Aluminum (AI)	≤ 0.010 ppm	< 0.003 ppm
	≤ 10.0 ppb	1.3 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 3.0 ppb
Trace Impurities – Barium (Ba)	≤ 1.0 ppb	0.2 ppb
Trace Impurities - Beryllium (Be)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Bismuth (Bi)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Boron (B)	≤ 20.0 ppb	< 5.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities - Calcium (Ca)	≤ 50.0 ppb	163.0 ppb
Trace Impurities - Chromium (Cr)	≤ 1.0 ppb	0.7 ppb
Trace Impurities - Cobalt (Co)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities – Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities – Gallium (Ga)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities ~ Germanium (Ge)	≤ 3.0 ppb	< 2.0 ppb
Trace Impurities – Gold (Au)	≤ 4.0 ppb	
Heavy Metals (as Pb)	≤ 100 ppb	0.6 ppb
Trace Impurities - Iron (Fe)	≤ 15 ppb	< 50 ppb
	- 12 khn	6 ppb

>>> Continued on page 2 >>>





Material No.: 9530-33 Batch No.: 22G2862015

Test	Specification	Result
Trace Impurities ~ Lead (Pb)	≤ 1.0 ppb	< 0.5 ppb
Trace Impurities - Lithium (Li)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities - Magnesium (Mg)	≤ 10.0 ppb	2.9 ppb
Trace Impurities – Manganese (Mn)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities - Mercury (Hg)	≤ 0.5 ppb	0.1 ppb
Trace Impurities – Molybdenum (Mo)	≤ 10.0 ppb	< 3.0 ppb
Trace Impurities - Nickel (Ni)	≤ 4.0 ppb	< 0.3 ppb
Trace Impurities - Niobium (Nb)	≤ 1.0 ppb	0.8 ppb
Trace Impurities – Potassium (K)	≤ 9.0 ppb	< 2.0 ppb
Trace Impurities - Selenium (Se), For Information Only		< 1.0 ppb
Trace Impurities - Silicon (Si)	≤ 100.0 ppb	< 10.0 ppb
Trace Impurities – Silver (Ag)	≤ 1.0 ppb	0.5 ppb
Trace Impurities – Sodium (Na)	≤ 100.0 ppb	2.3 ppb
Trace Impurities - Strontium (Sr)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Tantalum (Ta)	≤ 1.0 ppb	1.6 ppb
Trace Impurities - Thallium (TI)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities - Tin (Sn)	≤ 5.0 ppb	4.0 ppb
Trace Impurities - Titanium (Ti)	≤ 1.0 ppb	1.5 ppb
Trace Impurities – Vanadium (V)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Zinc (Zn)	≤ 5.0 ppb	0.8 ppb
Trace Impurities - Zirconium (Zr)	≤ 1.0 ppb	0.3 ppb

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





Material No.: 9530-33 Batch No.: 22G2862015

Test

Specification

Result

For Laboratory, Research, or Manufacturing Use Product Information (not specifications):
Appearance (clear, fuming liquid)
Meets ACS Specifications Storage Condition: Store below 25 °C.

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC





### QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: Inorganic ICV Solutions

### QATS LABORATORY INORGANIC REFERENCE MATERIAL INITIAL CALIBRATION VERIFICATION SOLUTIONS (ICV1, ICV5, AND ICV6)

These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION:

For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** 

Read instructions carefully before opening bottle(s) and proceeding with

the analyses.

Contains Metals in Dilute Acidic or Cyanide in Basic Aqueous Solutions HAZARDOUS MATERIAL

> Safety Data Sheets Available Upon Request

### (A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014", "ICV5-0415", and "ICV6-0400", respectively.

### (B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided

> QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY **APTIM Federal Services, LLC** 2700 Chandler Avenue - Building C Las Vegas, NV 89120

### (C) ANALYSIS OF SAMPLES

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in µg/L (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

ICV1-1014

For ICP-AES analysis, use a 10-fold dilution by pipetting 10 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric

Page 1 of 2









### QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

### Instructions for QATS Reference Material: Inorganic ICV Solutions

ICV1-1014

For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.

ICV5-0415

For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting 1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K<sub>2</sub>Cr<sub>2</sub>O<sub>7</sub> and 5% (v/v) nitric acid.

ICV6-0400

For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6 concentrate into a 100 mL volumetric flask and dilute to volume with Type II water. Distill this solution along with the samples before analysis. The cyanide concentrate is prepared from K₃Fe(CN)₅, Type II water, and 0.1 % sodium hydroxide, and will decompose rapidly if exposed to light.

NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.

### (D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS

	ICV1-1014			
Element	Concentration (µg/L) (after 10-fold dilution)	Concentration (µg/L)		
Al	2500	(after 50-fold dilution		
Sb	1000	500		
As	1000	200		
Ba	520	200		
Be	510	100		
Cd	510	100		
Ca	10000	100		
Cr	520	2000		
Co		100		
Cu	520	100		
Fe	510	100		
Pb	10000	2000		
Mg	1000	200		
Mn	6000	1200		
Ni	520	100		
K	530	110		
Se	9900	2000		
Ag	1000	200		
Na	250	50		
TI	10000	2000		
V	1000	210		
Zn	500	100		
	1000	200		

	ICV5-0415		ICV6-0400
Element	Concentration (µg/L) (after 100-fold dilution)	Analyte	Concentration (µg/L) (after 100-fold dilution
Hg	4.0	CN-	99



Certified Reference Material CRM

Lot #

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

 Nickel(II) nitrate hexahydrate (Ni) Nominal Concentration (µg/mL): m/z-> Weight shown below was diluted to (mL): Recommended Storage: NIST Test Number: **Expiration Date:** Part Number: Lot Number: Description: [1] Spectrum No.1 210 110 0 N033 NIM052023A1 RM# 6UTB 57028 041124 1000 Ambient (20 °C) 041127 Nickel (Ni) Number <u>6</u> 220 20 [ 12.374 sec]:58128.D# [Count] [Linear] Conc. (µg/mL) Nominal 249.85 100 230 130 30 0.002 Flask Uncertainty 5E-05 Balance Uncertainty 99.999 Purity Uncertainty Assay 8 Purity (%) 0.10 240 140 40 **Solvent:** 24002546 8 2% 250 150 Weight (g) 50 1.2369 Target 1 5.0 Nitric Acid Nitric Acid Weight (g) 1.2369 Actual 260 160 60 Conc. (µg/mL) 1000.0 Actual 170 0 Reviewed By: +/- (µg/mL) Formulated By: Uncertainty Expanded 2.0 180 80 13478-00-7 CAS# (Solvent Safety Info. On Attached pg.) Pedro L. Rentas Brian Geddes 190 90 OSHA PEL (TWA) SDS Information 1 mg/m3 200 100 orl-rat 1620 mg/kg 041124 041124 3136 NIST SRM

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

								Ггасе Ме	tals	Verifica	tion	by ICP-I	Sh (	μg/mL)						
>	1		1	40.02	Dy	<0.02	HH.	<0.02	11	<0.02	Z.	T	Pr	<0.02	Se	<0.2	4T	<0.02	*	<0.02
Sb	6 <0.02	2 Ca		<0.2	퍾	<0.02	Но	<0.02	Ē	<0.02	\$	<0.02	Re	40.02	S:	<0.02	Te	<0.02	ď	40.02
≥			_	<0.02	臣	<0.02	F	<0.02	Mg	40.01	ဝွ	<0.02	R.	<0.02	Ag	<0.02	∄	<0.02	<	40.02
Ba				<0.02	වු	<0.02	۲	<0.02	M	<0.02	Pd	<0.02	RЪ	<0.02	Na.	40.2	Ħ	<0.02	\$	40.02
Ве	_			<0.02	G	<0.02	Fe	<0.2	Hg	40.2	Þ	<0.02	Ru	40.02	S.	<0.02	Tm	<0.02	×	40.02
Bi				<0.02	දු	<0.02	La	<0.02	Mo	<0.02	¥	<0.02	Sm	40.02	S	<0.02	Sn	<0.02	Zn	40.02
В	H		r	<0.02	Au	<0.02	Pв	<0.02	M	<0.02	×	<0.2	Sc	<0.02	Ta	<0.02	11	<0.02	Zr	<0.02
										(T) - Towas analys		that								

= larget analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard

Certified by:

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

<sup>\*</sup> All standard containers are meticulously cleaned prior to use.

<sup>\*</sup> Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

<sup>\*</sup> Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



## Certified Reference Material CRM

M5962 R! 06/14/24



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/z->		i,	m/z->		10 c	÷ is	1. Selenium (Se)	Compound		<		Nominal Co	Re			CERTIFIED WEIGHT REPORT	מדודודה שובום
210	1.008	2.008	110	1.008	/z-> 10	[1] Spectrum No.1				Volume shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:		Lot Number: Description:	Part Number:	1 11000H
0			0		Ū	Z	58134	Number	Part	as dilute					in in in	_	
220			120		N 0	r.	071223	Number	Lot	d to (mL):	6UTB	1000	Ambient (20 °C)		060624 Selenium (Se)	57034	
Ŋ			4		ω	3.702	0.1000	Factor	Dilution	2000.07			<u>೦</u>		Se)		
230			130		90	sec]:58	200.0	Val. (mL	Initial	0.100	5E-05						
240			140		40	33.702 sec]:58034.D# [Count] [Linear]	0.084	Vol. (mL) Pipette (mL) Conc. (µg/mL)	Uncertainty	Flask Uncertainty	Balance Uncertainty						
250			150		50	Count) [L	1000	Conc. (µg/mL)	Nominal	ťγ	ainty			2.0%	24007540	24002546	
260			160		. 60	inear 2	10002.5	Conc. (µg/mL	Initial				(mL)	40.0	No.	Solvent:	
o							1000.0	Conc. (µg/mL) Conc. (µg/mL)	Final					Nitric Acid			(1)
			170		70		2.2	.) +/- (µg/mL)	Uncertainty	Expanded	Reviewed By:	K	N	Formulated By:	M		10
			180		80		7782-49-2	C	(So		y:	200	11	Ву:			
			190		90		2 0.2 mg/m3	OSHA PEL (TWA)	(Solvent Safety Info. On Attached pg.)	SDS Information	Pedro L. Rentas	leenes		Benson Chan	M		
			200		100			NA)	). On Atta	rmation	ntas	,	/	5			
			-		J		orl-rat 6700 mg/kg	LDS0	ched pg.)		060624			060624			
							3149	SRM	NIST		4			4-1		_	

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							I race M	1etals	Verifica	lion	oy ICP-M	S (H	g/mL)						
Al	<0.02	CG	<0.02	Dγ	<0.02	HH	<0.02	11	<0.02	Z.	<0.02	Pr	<0.02	Se	H	16	40.02	W	40,02
SЪ	<0.02	ದ್ದ	<0.2	퍜	<0.02	н	<0.02	Į	<0.02	₽	<0.02	Re	<0.02	S:	<0.02	Te	<0.02	U	<0.02
As	<0.2	ಕಿ	<0.02	핃	<0.02	Ħ	<0.02	Mg	<0.01	°	<0.02	Rh	40.02	Ag	<0.02	∄	40.02	۷	<0.02
Ва	<0.02	င္တ	<0.02	æ	<0.02	ŀ	<0.02	Mn	<0.02	Pd	40.02	₽.	<0.02	Na	<0.2	Ħ	<0.02	ታ	<0.02
Ве	40.01	ť	40.02	Ga	<0.02	F	<0.2	Hg	A02	P	<0.02	Ru	40.02	Sr	<0.02	Tm	<0.02	¥	<0.02
Bi	40.02	င္ပ	<0.02	ଦୁ	<0.02	Ľ	<0.02	Mo	<0.02	7	<0.02	Sm	40.02	S	<0.02	Sn	40.02	Zn	<0.02
В	<0.02	Cι	<0.02	Au	<0.02	Рь	<0.02	M	<0.02	×	40.2	Sc	<0.02	Ta	<0.02	Ħ	<0.02	Z	<0.02

(T) = Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
  \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- \* All standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

  \* Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).





M5963 M5964 M5965 M5966 M5967 M5968

Material No.: 9606-03 Batch No.: 24B1362001 Manufactured Date: 2024-01-25 Retest Date: 2029-01-23

Revision No.: 0

### Certificate of Analysis

Test	Specification	Result
Assay (HNO3)	69.0 - 70.0 %	69.6 %
Appearance	Passes Test	Passes Test
Color (APHA)	≤ 10	5
Residue after Ignition	≤ 2 ppm	< I ppm
Chloride (CI)	≤ 0.08 ppm	< 0.03 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.10 ppm	< 0.03 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.2 ppm	< 0.2 ppm
Trace Impurities - Aluminum (AI)	≤ 40.0 ppb	< 1.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Barium (Ba)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Boron (B)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 50 ppb	< 1 ppb
Trace Impurities ~ Calcium (Ca)	≤ 50.0 ppb	< 0.2 ppb
Trace Impurities - Chromium (Cr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Germanium (Ge)	≤ 20 ppb	< 10 ppb
Trace Impurities - Gold (Au)	≤ 20 ppb	< 5 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Trace Impurities - Iron (Fe)	≤ 40.0 ppb	< 1.0 ppb
Trace Impurities - Lead (Pb)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Magnesium (Mg)	≤ 20 ppb	< 1 ppb
Trace Impurities - Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Nickel (Ni)	≤ 20.0 ppb	< 5.0 ppb

>>> Continued on page 2 >>>





Material No.: 9606-03 Batch No.: 24B1362001

Test	Specification	Result
Trace Impurities - Niobium (Nb)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities – Potassium (K)	≤ 50 ppb	< 10 ppb
Trace Impurities – Silicon (Si)	≤ 50 ppb	< 10 ppb
Trace Impurities - Silver (Ag)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Sodium (Na)	≤ 150.0 ppb	< 5.0 ppb
Trace Impurities - Strontium (Sr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Tantalum (Ta)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Thallium (TI)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Tin (Sn)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Titanium (Ti)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Vanadium (V)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Zinc (Zn)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Zirconium (Zr)	≤ 10.0 ppb	< 1.0 ppb
Particle Count - 0.5 µm and greater	≤ 60 par/ml	3 par/ml
Particle Count - 1.0 µm and greater	≤ 10 par/ml	1 par/ml

Nitric Acid 69% **CMOS** 





Material No.: 9606-03 Batch No.: 24B1362001

**Test** 

Specification

Result

For Microelectronic Use

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC





M5963 M5964 M5965 M5966 M5967 M5968

Material No.: 9606-03 Batch No.: 24B1362001 Manufactured Date: 2024-01-25 Retest Date: 2029-01-23

Revision No.: 0

### Certificate of Analysis

Test	Specification	Result
Assay (HNO3)	69.0 - 70.0 %	69.6 %
Appearance	Passes Test	Passes Test
Color (APHA)	≤ 10	5
Residue after Ignition	≤ 2 ppm	< I ppm
Chloride (CI)	≤ 0.08 ppm	< 0.03 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.10 ppm	< 0.03 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.2 ppm	< 0.2 ppm
Trace Impurities - Aluminum (AI)	≤ 40.0 ppb	< 1.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Barium (Ba)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Boron (B)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 50 ppb	< 1 ppb
Trace Impurities ~ Calcium (Ca)	≤ 50.0 ppb	< 0.2 ppb
Trace Impurities - Chromium (Cr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Germanium (Ge)	≤ 20 ppb	< 10 ppb
Trace Impurities - Gold (Au)	≤ 20 ppb	< 5 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Trace Impurities - Iron (Fe)	≤ 40.0 ppb	< 1.0 ppb
Trace Impurities - Lead (Pb)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Magnesium (Mg)	≤ 20 ppb	< 1 ppb
Trace Impurities - Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Nickel (Ni)	≤ 20.0 ppb	< 5.0 ppb

>>> Continued on page 2 >>>





Material No.: 9606-03 Batch No.: 24B1362001

Test	Specification	Result
Trace Impurities - Niobium (Nb)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities – Potassium (K)	≤ 50 ppb	< 10 ppb
Trace Impurities – Silicon (Si)	≤ 50 ppb	< 10 ppb
Trace Impurities - Silver (Ag)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Sodium (Na)	≤ 150.0 ppb	< 5.0 ppb
Trace Impurities - Strontium (Sr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Tantalum (Ta)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Thallium (TI)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Tin (Sn)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Titanium (Ti)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Vanadium (V)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Zinc (Zn)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Zirconium (Zr)	≤ 10.0 ppb	< 1.0 ppb
Particle Count - 0.5 µm and greater	≤ 60 par/ml	3 par/ml
Particle Count - 1.0 µm and greater	≤ 10 par/ml	1 par/ml

Nitric Acid 69% **CMOS** 





Material No.: 9606-03 Batch No.: 24B1362001

**Test** 

Specification

Result

For Microelectronic Use

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC



Refine your results. Redefine your industry.

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

## Certificate of Analysis M5976, M5977 R : 02/22/24 P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

info@inorganicventures.com

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 **PRODUCT DESCRIPTION**

**Product Code:** 

Single Analyte Custom Grade Solution

Catalog Number:

CGMO1

Lot Number:

T2-MO720876

Matrix:

**H2O** 

tr. NH40H

Value / Analyte(s):

1 000 µg/mL ea:

Molybdenum

Starting Material:

Ammonium Molybdate

Starting Material Lot#:

2361

Starting Material Purity: 99.9893%

## 3.0 **CERTIFIED VALUES AND UNCERTAINTIES**

**Certified Value:** 

 $998 \pm 7 \, \mu g/mL$ 

Density:

1.000 g/mL (measured at 20 ± 4 °C)

## Assav Information:

**Assay Method #1** 

998 ± 4 µg/mL

ICP Assay NIST SRM 3134 Lot Number: 130418

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

## Characterization of CRM/RM by Two or More Methods

Certified Value, X<sub>CRWRM</sub>, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) \{X_i\}$ 

X<sub>i</sub> = mean of Assay Method : with standard uncertainty uchar i

wi = the weighting factors for each method calculated using the inverse square of

 $w_i = (1/u_{chari})^2 / (\Sigma (1/(u_{chari})^2)$ 

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{cs})^{1/2}$ 

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{1/2}$  where  $u_{char}$  are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

u<sub>(s</sub> = transport stability standard uncertainty

## Characterization of CRM/RM by One Method

Certified Value, X<sub>CRM/RM</sub>, where one method of characterization is used is the mean of individual results;

X<sub>CRM/RM</sub> = (X<sub>a</sub>) (u<sub>char a</sub>)

X<sub>a</sub> = mean of Assay Method A with

ucher a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u^2_{chara} + u^2_{bb} + u^2_{ts} + u^2_{ts})^{\frac{1}{2}}$ 

k = coverage factor = 2

uchar a = the errors from characterization

u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

## 4.1 Thermometer Calibration

 All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

## 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

## 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

```
0.008000 M Zn
M Ag <
          0.000590 M Eu <
                           0.000300 M Na
                                            0.000879 M Se <
                                                                               0.000598
M AI
          0.000563 M Fe <
                          0.006500 M Nb <
                                            0.029000 i
                                                       Si <
                                                                     M Zr <
                                                                               0.001800
M As <
         0.002100 M Ga <
                          0.000300 i
                                     Nd <
                                                   M Sm <
                                                              0.000300
M
   Au <
         0.000300 M Gd <
                          0.000300 M Ni <
                                            0.008000 M Sn <
                                                              0.008900
М
   B <
         0.003300 M
                    Ge <
                          0.000300 M Os <
                                            0.000590 M Sr
                                                              0.000175
                           0.001800 i
М
   Ba
          0.001689 M
                    Hf <
                                     P <
                                                   М
                                                      Ta <
                                                             0.004200
M
  Be <
         0.000890 M Hg <
                          0.003300 M Pb <
                                            0.000300 M
                                                      Tb <
                                                              0.000300
         0.000890 M Ho < 0.000300 M Pd <
M Bi <
                                            0.001800 M
                                                      Te <
                                                             0.021000
  Ca
         0.006334 M In < 0.032000 M Pr <
0
                                            0.013000 M Th <
                                                             0.000300
O Cd <
         0.026000 M Ir < 0.000300 M Pt <
                                            0.000300 O Ti <
                                                             0.032000
M Ce <
         0.008300 M K
                           0.130213 M Rb
                                            0.004575 M TI
                                                             0.001266
M Co
         0.000598 M La < 0.000300 M Re <
                                            0.000300 M Tm <
                                                              0.000300
                           0.000059 M Rh <
M Cr
         0.000527 O Li
                                            0.000300 M U <
                                                             0.005300
M Cs
         0.000527 M Lu <
                           0.000300 M Ru <
                                            0.079000 M V <
                                                             0.000890
М
   Cu
         0.002252 M Mg
                           0.000563 i
                                     S <
                                                   M W
                                                             0.087982
М
   Dy <
         0.000300 M
                    Mn <
                           0.005900 M
                                     Sb
                                            0.001513 M Y <
                                                             0.000300
М
  Er <
         0.000300 s
                    Mo <
                                  M
                                     Sc <
                                            0.001200 M Yb <
                                                             0.000300
```

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

## 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

## 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 95.94 +6 6,7,8,9 [MoO4]-2(chemical form as received)

Chemical Compatibility -Mo is received in a NH4OH matrix giving the operator the option of using HCl or HF to stabilize acidic solutions. The [MoO4]-2 is soluble in concentrated HCl [MoOCl5]-2, dilute HF / HNO3 [MoOF5]-2 and basic media [MoO4]-2. Stable at ppm levels with some metals provided it is fluorinated. Do not mix with Alkaline or Rare Earths when HF is present. Stable with most inorganic anions provided it is in the [MoO4]-2 chemical form.

**Stability -** 2-100 ppb levels stable (alone or mixed with all other metals that are at comparable levels) as the [MoOF5]-2 for months in 1% HNO3 / LDPE container. 1-10,000 ppm single element solutions as the [MoO4]-2 chemically stable for years in 1% NH40H in a LDPE container.

Mo Containing Samples (Preparation and Solution) -Metal (Soluble in HF / HNO3 or hot dilute HCl); Oxide (soluble in HF or NH4OH); Organic Matrices (Dry ash at 450EC in Pt0 and dissolve oxide with HF or HCl).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 95 amu	3 ppt	n/a	40Ar39K16O,79Br1
			6O,190Os2+,190Pt
			2+
ICP-OES 202.030 nm	0.008 / 0.0002 µg/mL	1	Os, Hf
ICP-OES 203.844 nm	0.012 / 0.002 μg/mL	1	
ICP-OES 204.598 nm	0.012 / 0.001 µg/mL	1	Ir, Ta

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRWRM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

- 10.1 ISO 9001 Quality Management System Registration
  - QSR Certificate Number QSR-1034
- 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"
  - Chemical Testing Accredited / A2LA Certificate Number 883.01
- 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"
  - Reference Material Producer Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

## 11.1 Certification Issue Date

July 17, 2022

- The certification is valid within the measurement uncertainty specified provided the CRMRM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

## 11.2 Lot Expiration Date

- July 17, 2027
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

## 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_
- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS Certificate Prepared By:

Uyen Truong Supervisor, Product Documentation

Meyer Trusing

## **Certificate Approved By:**

Michael Booth Director, Technical Michael 2 Booth

## **Certifying Officer:**

Paul Gaines Chairman / Senior Technical Director Paul R Saine

## Certificate of Analysis 6652M , 8782M

MORGANIC NE NE SE SEGENE YOU TREST

info@inorganicventures.com P: 800-669-6799/540-585-3030 P: 540-585-3030 R:2/22/24

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com



## ACCREDITATION / REGISTRATION

Number QSR-1034). the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (GSR Certificate INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for

## PRODUCT DESCRIPTION

Catalog Number:

Single Analyte Custom Grade Solution Product Code:

CGTN

2% (v/v) HNO3 :xintsM T2-TI719972 Lot Number:

muineill 1 000 hg/mL ea: Value / Analyte(s): tr. HF

Starting Material Lot#: 2094 Starting Material: Ti Metal

Starting Material Purity: 99.9975%

1002 ± 5 µg/mL Certified Value: **CERTIFIED VALUES AND UNCERTAINTIES** 

1.012 g/mL (measured at 20  $\pm$  4 °C) Density:

Assay Information:

ICP Assay NIST SRM 3162a Lot Number: 130925 1002 ± 4 µg/mL Assay Method #1

The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance  $\frac{1}{1000}$ 

Certified Value, X<sub>CRM/RM</sub>, where one method of characterization is used is the mosn of individual results:

XCRANGAM =  $(x_a)$  (ucher a) X =  $x_a$  mass of Keesy Method A with  $x_a$  =  $x_a$  the standard uncertainty of

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expressed at approximately the 95% confidence level using a coverage factor of  $K=\Sigma$ .

Characterization of CRM/RM by One Method Characterization of CRM/RM by Two or More Methods

4.0 TRACEABILITY TO NIST

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration

## 4.2 Balance Calibration

used for testing are annually compared to master weights and are traceable to NIST. - All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRWIRMs.

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below, solutions tested by ICP-MS were analyzed in an III bA-Bitter of ore each element, is reported below, solutions tested by ICP-MS were analyzed in an III bA-Bitter of the properties of the properties

e2 M 078220.0 > gN O 882000.0 > u3 M 8g < 0.000536 M Eu <

## ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to

Page 2 of 4

INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

> uR M 882000.0

> 9A M 886 0.000.0

> bq M 882000.0 > rq M 888200.0 > rq M 682000.0 > dg M 271100.0

> q O f81200.0 > dq M f82800.0

> iN O 882000.0 > aO M 841200.0

> dN O 322500.0 > N M 862000.0

M - Checked by ICP-MS

Mn < Mg < Li <

> 0H

> 6H

ΉŁ

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

M 976800.0 > 8 | 34500.0 M 576800.0 > 8 M 782600.0

by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

> mT M 882000.0 > U M 882000.0 > V M 682000.0 W M

> 6T M 882000.0 > AT M 882000.0

sT M 034450.0 > dT M E70100.0

s 852000.0 M 882000.0

O.000269 O

O.043560 O

n2 M 068010.0 89Z000.0 > mS M 89Z000.0

> II

JS

674000.0 228610.0

892000.0 892000.0

0.000268

699630.0

0.001341

892000.0

0.010560

960000'0

960000.0

73260.0 > nZ O 402100.0 038540.0 > nZ O 267400.0

## 5.0 TRACE METALLIC IMPURITIES (TMI ) DETERMINED BY ICP-MS AND ICP-OES (µg/ml)

7.7 Storage and Handling Recommendations

oM M 882000.0

0.000268 M K 0.000268 M K 0.000268 M K

0.000872 O Fe > 0.008586 M Ga <

O 892000.0

O S37000.0 M 882000.0

M 882000.0

M 603100.0

M 885800.0

M £83200.0 > 00 M GG8020 O.004577 M Gd <

INTENDED USE

W Et < O Cn <

O B <

IA O

## 4.1 Thermometer Calibration

volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is - This product is traceable to MST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRMINM uncertainty error and the measurement, weighing and

## Page 3 of 4

- Chemical Testing - Accredited / AZLA Certificate Number 863.01

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- QSR Certificate Number QSR-1034

1.01 ISO 9001 Qualify Management System Registration

## MOITATY STANDARD DOCUMENTATION 0.01

Homogeneity data indicate that the end user should take a minimum ample size of 0.0.2 m L to assume

This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. The Coth series alongs mirror and the constant and the country of the Coth series alongs mirror and the country of the Coth series alongs mirror and the country of the coth series alongs and the country of the coth series along the c

## HOMOGENEITY

Please refer to the Safety Data Sheet for information regarding this CRWRM.

## NOITAMROANI SUOGRASAH HF Note: This standard should not be prepared or stored in glass.

Ollinger		C INTOTINATION (ICP-OEC p	Idoseones	
ss radial/axial view):	are given	Estimated D.L. Estimated D.L.	Technique/Line	
Interferences (Underline 11 )	Order	idq 41	ICP-MS 48 amu	
Interferences (underlined indicates severe) 32S16O, 32S14N,	A/N	add		
14N160180,				
14N17N2, 36Ar12C,				
48Ca, [96X=2				
7-Vool (no				
(where X = Zr, Mo, Ru)]		10000 () 1900 ()	ICP-OES 323.452 nm	
Ce, Ar, Ni		Jm/gu Se000.0 \ +200.0	ICP-0ES 334.941 nm	
		m/pu 820000.0 \ 8500.0	ICP-0ES 336.121 nm	
ла, Та, Сг, U М М9 Ω-	1 1		Mote: This start and F	II-
W, Mo, Co		In/gy 4500000 \ cocos-	nous prepries entre shou	•

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/a

1:1:1 H2O / HF./ H2SO4 or fuse ash with pyrosulfate if oxide is as plastic pigment and likely in brookite Volentily), Oxide - Northere are repetation; and sociation; restore (Dissolved by heating in 1737 HZO / HF / HZSO4); Oxide - Northere history (~800EC) brookite (fuse in Pt0 with KZSZO7); Ores (fuse in Pt0 with KZSZO7); Ores (fuse in Pt0 with KZSZO7); Ores (fuse in Pt0 with KZSZO7); Oxes (fuse in Pt0 with KZZZO7); Oxe TI Containing Samples (Preparation and Solution) - Metal (Soluble in H2O / HF caution -powder reacts

HNO3 / LDPE container. 1-10,000 ppm single element solutions as the Ti(F)6-2 chemically stable for years in 2-5% HNO3 / trace HF in an LDPE container. with a fendency to hydrolyze forming the hydrated oxide in all dilute acids except HE.

Stability - 2-100 ppb levels stable (Alone or mixed with all other metals) as the Ti(F)6-2 for months in 1%

HNO3 / LDPE container. 1-10.000 ppm sincle element solutions as the Ti(F)8-2 chemically stable for year media. Unstable at ppm levels with metals that would pull F-away (i.e. Do not mix with Alkaline or Rare Earths or high levels of transition elements unless they are fluorinated). Stable with most inorganic anions with a tendency to hydrolyze forming the hydrafed oxide in all dilute adds except HF. Chemical Compatibility - Soluble in concentrated HCI, HF, H3PO4 H2SO4 and HNO3. Avoid neutral to basic Atomic Weight, Valence; Coordination Number; Chemical Form in Solution - 47.87 +4 6 Ti(F)6-2

- For more information, visit www.inorganicventures.com/TCT

reported density. Do not pipette from the container. Do not refurn removed aliquots to container. - After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$  -  $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the renorded density. Do not biselfe from the container. Do not return removed alticular to container.

A write society in the secied 101 bag, trainspleader of the order two files order two files of the concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss. - While stored in the sealed TCT bag, transpiration of this CRWRM is negligible. After opening the sealed TCT bag, transpiration in a negligible in the capture managed in the capture

- Store between approximately  $4^{\circ}$  - 30° C while in sealed TCT bag.

Page 4 of 4

Chairman / Senior Technical Director

- Sealed TCT Bag Open Date:

NAMES AND SIGNATURES OF CERTIFYING OFFICERS

- The date after which this CRM/RM should not be used.

CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

norganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.859.5790; 540.855.3030, Fax: 540.555.3012; Inorga - Reference Material Producer - Accredited / A2LA Certificate Number 883.02 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- This CRMRM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRMRM being stored and handled in accordance with the instructions given in Sec. 7.1.

stability studies conducted on properly stored and handled CRWRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability. - The lot expiration date reflects the period of time that the stability of a CRMRM can be supported by long term

- The certification is valid within the measurement uncertainty specified provided the CRWRM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified it instructions in Sec 7.1 are not followed or if the CRWRM is damaged, confaminated, or otherwise modified.

Thomas Kozikowski Manager, Quality Control Certificate Approved By:

thibils Validity

- June 17, 2027 11.2 Lot Expiration Date

June 17, 2022 11.1 Certification Issue Date

Paul Gaines Certifying Officer:

0.Sr

0.11

CERTIFIED WEIGHT REPORT:

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



## K S981 Reference Material CRM R S981







ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

		060724				060724			ached pg.) NIST	LD50 SRM	S S S S S S S S S S S S S S S S S S S	1		
	Capeate	Giovanni Esposito	2	V	lord	Pedro L. Rentas		SDS Information	(Solvent Safety Info. On Attached pg.)	OSHA PEL (TWA)				
	Lievannie		1	!	N. P.				(Solve	CAS#	13520-83-7			
	Lieva	Formulated By:			13	Reviewed By:		Expanded	Uncertainty	+/- (ug/mL)	2.5			
		Nitric Acid				1-	ij		Final	Conc. (ug/mL)	1000.0			
Solvent:	Nitric Acid	40.0	(mf.)						Initial	Vol. (mL) Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) Conc. (µg/mL)	10001.5		near]	
Lot #	24002546	2.0%				sinty			Nominal	Conc. (ug/mL)	1000		2.D# [Count] [Linear]	
0						Balance Uncertainty	Flask Uncertainty		Uncertainty	Pipette (mL)	0.084		92.D# [c	
KI U						5E-05	0.100		Initial	Vol. (mL)	200.0		sec]:570	
	=	3		(၃			2000.07		Dilution	Factor	0.1000		[ 23.254 sec]:5709	
	57092 060724 Uranium (11)		060727	Ambient (20 °C)	1000	<b>6UTB</b>	d to (mL):		Lot	Number	58192 041524			
			**	- 24	<u></u>	:-	was dilute		Part	Number	58192		trum N	
CERTIFIED WEIGHT REPORT:	Part Number: Lot Number: Description:		Expiration Date:	Recommended Storage:	Nominal Concentration (µg/mL):	NIST Test Number:	Volume shown below was diluted to (mL):			Compound	1. Uranyl nitrate hexahydrate (U)		[1] Spectrum No.1	

1.0E6	5.0E5	m/z-> 5.0E4	2.5E4	m/z->	S.OES	\.\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
[1] Spectrum No.1		0		011		C
		O		120		000
[ 23.264 sec]:57092.D# [Count] [Linear]		Og		130		.0
7082.D <b>*</b> [C		0		140		
ount] [Line		80		081		
ar]		O e		160		
		, 2		170		
		990		-@ -		
		Oe		081		
		100		200		

Lot # 060724





ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace M	etals	Verificat	ion	by ICP-M	VIS CE	(lm/p/							
	SUPPLIES IN THE REAL PROPERTY.	September 1	Treatment and the last		MINISTER STATES		STATE OF STREET		THE REAL PROPERTY.				5							
Ψ	<0.02	3	<0.02	à	<0.02	HŁ	<0.02	13	<0.02	ž	808	å	W CV		9					
ŝ	<0.02	చ	<0.2	ď.	8	2	5		000	: 5	20.00	-	70'05	8	7'0>	9	40.02 40.02	*	<b>40.02</b>	-
٧٠	ç	ç	200	1 ;	30:00	3	70.00	3	70.05	2	<0.02	<b>3</b>	<0.02	Š	<b>₹005</b>	Te	<b>40.02</b>	מ	_	-
ĉ	707	3	2000	립 -	Ø.02	5	<b>40.02</b>	W	10.05	ő	<b>40.02</b>	R	Ø002	Αo	29	F	5	2	40	_
Ba	<b>40.02</b>	ඊ	<0.02	3	<0.02	4	<0.02	Mn	<0.05	ď	29	á	5	٠,	2000	= 6	20:02	>	20.02	_
æ	<0.01	ඊ	<0.02	පී	<0.02	F.	<0.2	Η¢	200		5 6	2 4	20.02	Z C	7.00	= ,	<b>40.02</b>	ç	40.02	_
ä	<0.02	රි	<0.02	පී	<0.02	2	<0.02	٤	23	٥.	20:00	Į į	70.02	j (	<0.02	8	<0.02	<b>&gt;</b> -	Ø.02	-
æ	<0.02	ő	<0.05	Ā	200	á	6	N.	20:00	; <u>}</u>	70:05	H C	70.05	0	40.02 40.02	S.	<b>40.02</b>	Zu	₹0.05	_
The same of					70:00	,	20.02	DAT.	Z0:02	4	702	Š	<0.02 <0.02	Ĕ	5	F	2007	-	2000	-

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.





\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Printed: 6/7/2024, 3:58:45 PM

CERTIFIED WEIGHT REPORT:

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



## Certified Reference Mater



fied Refe	rence Mai	fied Reference Material CRM	C		ANAB IS AR-153 https://ab	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	dited
¥	Z #107	7	2	2/11/0	<b>&gt;</b>		
Solvent:	Solvent: 24002546 Nitric Acid	Nitric Acid		A CONTRACTOR OF THE PARTY OF TH			
2%	40.0	Nitric Acid		Formulated By:	Benson Chan	031524	
	(III)			M	Hento		
Uncertainty				Reviewed By:	Pedro L. Rentas	031524	

Part Number: Lot Number:		19		Solvei	Solvent: 24002546 Nitric Acid	46 Nitr	ic Acid		A STATE OF THE STA	1		
Description:	Strontium (Sr)	(Sr)		C)	2% 40.0		Nitric Acid	, Itt	Formulated Bv:	Benson Chan	8	031524
Expiration Date:	031527							I	7	1		
Recommended Storage:	Ambient (20 °C)	(2)							1	A Company	1	
Nominal Concentration (µg/mL):	1000								June 1	Kena	΄ Δ	
NIST Test Number:	6UTB		5E-05 Ba	5E-05 Balance Uncertainty	<u>~</u>			Œ	Reviewed By:	Pedro L. Rentas		031524
Weight shown below was diluted to (mL); 2000.07	as diluted to (mL):	2000.07	0.100 Fla	0.100 Flask Uncertainty				I				
									Expanded	SDS Information	mation	
	Lot	Nominal	Purity U	Nominal Purity Uncertainty Assay	say Target		Actual Act	Actual U	Uncertainty	(Solvent Safety Info. On Attached pg.)	On Attached pg.)	TSIN
Compound	RM# Number Conc. (µg/mL) (%) Purity (%) (%)	Conc. (ug/mL)	(%)	urity (%) (9	6) Weight (g)		Weight (g) Conc. (µg/mL) +/- (µg/mL)	ug/mL) +	-/- (ug/mL) CAS#	# OSHA PEL (TWA)	NA) LD50	SRM

1. Strontium nitrate (Sr)		IN017 SRZ022018A1	1000	89.997	0.10	41.2	4.85470	4.85502	1000.1	2.0	10042-76-9	NA	orl-rat >2000mg/kg 3153a
5.0EG	[1] Spect	[1] Spectrum No.1	[ 14.495 sec]:58138.D# [Count] [Linear]	sec]:581	38.D#	Coun	nt] [Linea						
2.5E6												-90-000 Market Market	
m/z->⊶ 1.0E6	•	10 20		OG	0		.00	09	0,		80	. <u>0</u>	100
5.0ES	unggap a militing di danggap kili.												
m/z-≫ 5.0E6		110 120		130	041		150	160	0.71		180	081	200
2.5E6													
V-z/H	4	220		230	240	14	250	260					



Absolute Standards, Inc.

www.absolutestandards.com

800-368-1131



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	THE SHAPE OF THE S	<0.02	200	200	2 2	200	3 8	3 5
	Name of the last	W	1	->	- <del>K</del>	· >	Z,	1 2
	THE RESERVE THE PERSON NAMED IN	<0.02	<0.02	<0.02	2002	<b>40.02</b>	200	200
	DESCRIPTION OF	9	Te	E	É	Į,	5	Ë
	Shorty-suggestion	<0.2	<0.02	<0.02	<0.2	ļ F	<0.02	<b>40.0</b> 2
		Se	Si	Ag	Z	Š	<b>V</b>	Ę
(Jm/br/		<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	₹0.02
AS (	SIMI	Æ	Re	묎	8	Ru	Sm	Š
by ICP-I	Married Scin	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	40.5
ition		ž	ź	ő	몺	Д	ፈ	M
Verifica	New Contraction of the	<0.02	<0.02	<0.01	<0.02	<0.2	<0.02	<0.02
stals		3	5	Mg	Mn	Hg	Wo	ğ
race Me		<0.02	<0.02	<0.02	<0.02	40.2	<0.02	<0.02
-		Hŧ	Ho	描	긔	Æ	2	윤
		<0.02	<0.02	<0.02	<0.02	₹0.05	<b>40.02</b>	<0.02
	- Contract	Ďλ	占	超	3	త్	පී	Αn
	MILE SHAPE	<0.02	40.5	<0.02	<0.02	<0.02	<0.02	<0.02
	WE SHAME	ਲ	రి	ඊ	ర	ڻ	රි	ਹੋ
	NAME OF STREET	<0.02	<0.02	<0.2	<0.02	<0.01	<0.02	<0.02
	Market Market	₹	Sp	As	Ba	æ	B.	В

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



Certified by:

Lot # 031524

1. P

1 \*

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

<sup>\*</sup> Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM

| MS982 | R: 6/11/24







ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

			Comment Comment of the second	Nitric Acid Formulated By: Benson Chan 071423	7		flesh Mento	Reviewed By: Pedro L. Rentas 071423		Expanded SDS Information	Final Uncertainty (Solvent Safety Info. On Attached pg.) NIST	Vol. (ml.) Pipette (ml.) Conc. (µg/ml.) Conc. (µg/ml.) Conc. (µg/ml.) +/- (µg/ml.) CAS# OSHA PEL (TWA) LD50 SRM
Solvent:	Nitric Acid			40.0	(mL)						Initial	Conc. (µg/mL
Lot #	21110221			2.0%				ainty	£,		Nominal	Conc. (µg/mL)
								Balance Uncertainty	Flask Uncertainty		Uncertainty	Pipette (mL)
								SE-05	0.058		Initial	Vol. (mL)
			(Zr)			(),(			2000.02		Dilution	Factor
	57040	071423	Zirconium (Zr)		071426	Ambient (20 °C)	1000	6UTB	id to (mL):		Lot	Number
									was dilute		Part	Number
CERTIFIED WEIGHT REPORT:	Part Number:	Lot Number:	Description:		Expiration Date:	Recommended Storage:	Nominal Concentration (µg/mL):	NIST Test Number:	Volume shown below was diluted to (mL):			Compound

Zirconyl chloride	1. Zirconyl chloride octahydrate (Zr)	58140	58140 070621	0.1000	200.0	0.084	1000	10000.3 1000.0		2.2	13520-92-8	NA	NA	¥ Z
	[1] Spec	[1] Speatrum No.1		[ 41.153 sec]:57040.D# [Count] [Linear]	ec]:570	40.0# [	Count (L	inear						
<b>16</b>	5.0 E6													
7,4% 1.0E	/z-:	0	O N	00		0	00	0	0.7	•	0	0	00	
ú)	6.0E7													
™.Z~3	0	011	0 20 0	08		04	97	160	170	4~	081	160	000	
ΰ	5.0E7													
K-2/LL		0 10	220	230		240	250	280						

Lot # 071423



## Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			<b>P</b>		_	_	_	-	-	_			
			N. Commence	<0.05	-	<b>40.02</b>	200	70.00	Ø.02	50 67	70.05	\$0.05 \$	€
				W	:	<b>&gt;</b>	>	-	g R	>	1	Zu	7.
			The state of the s	<0.02	000	Z0'0>	<0.02		Z0:02	CD 02		<b>40.02</b>	900
				£	Ę	2	F	E	- -	Ē		E S	ľ
				97	200	70.05	& 9.02	ç	703	80.02	8	70'05	<b>40.02</b>
		ı	Ì	2	<i>57</i>	5	Ag	ź	2	ķ	6	2	Ē
	(m)		000	Z0'0Z	<0.05	200	\$0.02 \$0.02	200	70.05	Q.02	200	70:02	Q.02
	/6/1)		ŀ	L;	Re		ž	Rh	1	2	Ę		Sc
	y ICP-MS	CONTRACTOR OF THE PERSONS	800	70.00	<b>40.02</b>	5	70.05	20.05		Q0:02	200	3010	Q.2
	ion b		Ž	75	ź	ć	5	2	,	<u>.</u>	Ā	: :	4
	Verificat		SUCH	*0.0*	€0.02	5	10.07	<0.02	ç	705	₹0.02	2	70.02
I	stals		E	i	3	Ma	TA S	Mn	ń	70	W	22	DAI
	Trace Me		<0.00		<b>40.02</b>	200	1000	20.05 Q	5	707	Ø.02	2000	70:05
l			Hf	:	Ho	٤,		<u> </u>	Ľ	2		ď	2
			<0.02	900	70705	<0.02 <0.02		<b>40.02</b>	2002	***************************************	<b>40.02</b>	2002	W.O.
			À	, 4	ā	超	į	3	څ	;	<b>8</b>	Αn	
		SHOOTING SALLS	<0.02	ç	70.7	<0.02	9	Z0:02	<0.02		<b>₹0.02</b>	<b>Q</b> 002	
		TO SHARE	ප	ç	3	ථ	ć	ڙ	ඊ	,	3	ਹੋ	
		CHARLES CONTROL OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN	<0.02	200	70:00	97	200	70'02	€0.01	000	70.05	₹0.05	
		THE PERSON	<b>A</b>	£.	3	As	D.	Pa	<b>8</b>	ë	<b>5</b>	m	

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

## Certified by:

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated, the preparation of all standards

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions. \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).







Printed: 6/7/2024, 3:58:47 PM

Lot # 071423

Part # 57040

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



## R; 01/03/24 M6033 Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/z->	1.006	2.016	m/z->	N O	5.0E6	m/z->	1.1.1.	2.5E5	6-6	5.0E5	Aluminum nitrate nonahydrate (Al)	Compound	Weight shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:	Fyniret	Des	Fan Lot	CERTIFIED WEIGHT REPORT:
210			110			10				[1] Spectrum No.1	11	RM#	below was dilut	Number:	(µg/mL):	Storage:	Evniration Data:	Description:	Fart Number:	
220			120			20				_	IN022 ALM112021A1	Lot Number Co		6UTB	10000	Ambient (20 °C)	011636	Aluminum (Al)	011623	)
230			130			30				5.014 sec]:	10000 99.999	Nominal Purity Conc. (µg/mL) (%)	2000.02 0.05	5E-0		<u>.</u>				
240			140			40				15.014 sec]:58113.D# [Count] [Linear]	9 0.10 7.30	Purity Uncertainty Assay (%) Purity (%) (%)	0.058 Flask Uncertainty	5E-05 Balance Uncertainty			2%		Solvent:	<b>&gt;</b>
250			150			50				Count] [Line	0 273.9779	ay Target ) Weight (g)		<b>y</b>		(1117)			it: 20510011	
260			160			60				»ar]	274.0078 1	Actual Weight (g) Con					Nitric Acid		Nitric Acid	
			170			70					10001.1 2	Actual Unce Conc. (µg/mL) +/- (		Revi			Form	7	~e	7
			180			80					20.0 7784-27-2	Expanded (Si Uncertainty (Si +/- (µg/mL) CAS#		Reviewed By:	tach		Formulated By:	200 A contract	L'internation of	
			190			90					2 mg/m3	SUS Information Support Safety Info. On Attacon OSHA PEL (TWA)		Pedro L. Rentas	pena		Giovanni Esposito	(	7	
			200			100						Attached		38	8		sito		e de	
											orl-rat 3671 mg/kg 3101a	pg.) NIST LD50 SRM		011623			011623			

Nitric Acid 69%

Rew. 1 — 08/0/12025 Pare 1 — 16034, M6034 m6035, M6038, m6036, Certificate of Analysis





Material No.: 9606-03 Batch No.: 24D1062002

Manufactured Date: 2024-03-26 Retest Date: 2029-03-25

Revision No.: 0

Test	Specification	Result
Assay (HNO <sub>3</sub> )	69.0 - 70.0 %	69.7 %
Appearance	Passes Test	Passes Test
Color (APHA)	≤ 10	5
Residue after Ignition	≤ 2 ppm	1 ppm
Chloride (Cl)	≤ 0.08 ppm	< 0.03 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.10 ppm	< 0.03 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.2 ppm	< 0.2 ppm
Trace Impurities - Aluminum (Al)	≤ 40.0 ppb	< 1.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Barium (Ba)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities ~ Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Bismuth (Bi)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Boron (B)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 50 ppb	< 1 ppb
Trace Impurities - Calcium (Ca)	≤ 50.0 ppb	2.3 ppb
Trace Impurities - Chromium (Cr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Germanium (Ge)	≤ 20 ppb	< 10 ppb
Trace Impurities - Gold (Au)	≤ 20 ppb	< 5 ppb
Heavy Metals (as Pb)	≤ 100 ppb	100 ppb
Trace Impurities - Iron (Fe)	≤ 40.0 ppb	< 1.0 ppb
Trace Impurities – Lead (Pb)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Magnesium (Mg)	≤ 20 ppb	< 1 ppb
Trace Impurities – Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Nickel (Ni)	≤ 20.0 ppb	< 5.0 ppb

>>> Continued on page 2 >>>





Material No.: 9606-03 Batch No.: 24D1062002

n Result	Result
< 1.0 ppb	< 1.0 ppb
16 ppb	16 ppb
< 10 ppb	< 10 ppb
< 1.0 ppb	< 1.0 ppb
< 5.0 ppb	< 5.0 ppb
< 1.0 ppb	< 1.0 ppb
< 5.0 ppb	< 5.0 ppb
< 5.0 ppb	< 5.0 ppb
< 10.0 ppb	< 10.0 ppb
< 1.0 ppb	< 1.0 ppb
< 1.0 ppb	< 1.0 ppb
< 1.0 ppb	< 1.0 ppb
< 1.0 ppb	< 1.0 ppb
10 par/ml	
3 par/ml	3 par/ml

Nitric Acid 69% CMOS





Material No.: 9606-03 Batch No.: 24D1062002

Test Specification Result

For Microelectronic Use

Country of Origin: USA

Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Croak
Director Quality Operations, Bioscience Production

## 800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



## Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number:

58111 122223

Sodium (Na)

Lot Number: Description:

Nominal Concentration (µg/mL):

**NIST Test Number:** 

**6UTB** 10000

Weight shown below was diluted to (mL):

3000.4

0.06 Flask Uncertainty 5E-05 Balance Uncertainty

RW#

Number Lot

Nominal

Purity

Uncertainty Assay Purity (%)

Target

Actual

8

38

Recommended Storage:

Ambient (20 °C)

122226

**Expiration Date:** 

Lot # M5807

Solvent:

24002546 Nitric Acid

2%

60.0 (III)

Nitric Acid

Formulated By: 13817 P Aleah O'Brady Back

Reviewed By: Pedro L. Rentas

122223

22223

Actual Uncertainty Expanded (Solvent Safety Info. On Attached pg.) **SDS Information** TSIN

CAS#

SE

1. Sodium nitrate (Na) IN036 NAV01201511 Conc. (µg/mL) 10000 98.999 0.10 26.9 111.5406 Weight (g) Weight (g) Conc. (µg/mL) 111.5479 10000.7 +/- (µg/mL) 20.0 7631-99-4 OSHA PEL (TWA) 5 mg/m3 ori-rat 3430 mg/kg 3152a

1 m/z-> 17/z-Y m/z-> N.5E6 5.0E6 2.5E6 5.0E6 2.5E5 5.0E5 [1] Spectrum No.1 210 110 0 220 120 NO. [ 8.935 sec]:58111.D# [Count] [Linear] 130 230 30 140 240 6 150 250 50 160 260 0 170 70 180 80 190 90 100 200

Part # 58111



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	AS BE BE	
	40.2 40.2 40.2 40.0 40.0 40.0 40.0 40.0	
	585855	
	40.02 40.02 40.02 40.02 40.02 40.02	
	돌 유 교 교 및 전 및 전 및 전 및 전 및 전 및 전 및 전 및 전 및 전	
	4422	
	27. 24 年 27. 24. 24. 24. 24. 24. 24. 24. 24. 24. 24	
	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Trace M
	Mo Mg Lu	fetals
(T) = Tar	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Verifica
) = Target analyte	N N O B o K N	ation
ılytе	4000 4000 4000 4000 4000 4000	by ICP-
	S R R R R	NO C
	444	(m/)
	T <sub>a</sub> S <sub>7</sub> S <sub>8</sub>	
	402 402 402 402 402	
	in Signal in the	ı
	40.02 40.02 40.02 40.02	
	**************************************	
	600000000000000000000000000000000000000	

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Certificate of Analysis
M5738 M5739 M5740 M5741 M5742

Refine your results. Redefine your industry.

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

## 1.0 **ACCREDITATION / REGISTRATION**

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 **PRODUCT DESCRIPTION**

**Product Code:** 

Multi Analyte Custom Grade Solution

Catalog Number:

6020ISS

Lot Number:

S2-MEB709511

Matrix:

7% (v/v) HNO3

Value / Analyte(s):

10 µg/mL ea:

Bismuth,

Holmium,

Indium,

6-Lithium.

Rhodium,

Scandium,

Terbium,

Yttrium

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE 6-Lithium, Li6 **CERTIFIED VALUE**  $10.00 \pm 0.03 \,\mu g/mL$ 

**ANALYTE** 

**CERTIFIED VALUE**  $10.00 \pm 0.05 \,\mu g/mL$ 

Bismuth, Bi

Indium, In

10.00 ± 0.04 µg/mL

Holmium, Ho Rhodium, Rh

 $10.00 \pm 0.05 \,\mu g/mL$ 10.00 ± 0.07 µg/mL

Scandlum, Sc

10.00 ± 0.04 µg/mL

Terbium, Tb

10.00 ± 0.04 µg/mL

Yttrium, Y

 $10.00 \pm 0.04 \, \mu g/mL$ 

Density:

1.035 g/mL (measured at 20  $\pm$  4 °C)

**Assay Information:** 

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Bi	ICP Assay	3106	180815
Bi	Calculated		See Sec. 4.2
Но	ICP Assay	3123a	090408
Но	EDTA	928	928
In	ICP Assay	3124a	110516
In	EDTA	928	928
In	Calculated		See Sec. 4.2
Li6	Gravimetric		See Sec. 4.2
Rh	ICP Assay	3144	070619
Sc	ICP Assay	3148a	100701
Sc	EDTA	928	928
Tb	ICP Assay	3157a	100518
Tb	EDTA	928	928
Tb	Calculated		See Sec. 4,2
Υ	ICP Assay	3167a	120314
Υ	EDTA	928	928
Υ	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

	· ·
Characterization of CRM/RM by Two or More Methods	Characterization of CRM/RM by One Method
Certified Value, X <sub>CRM/RM</sub> , where two or more methods of characterization are used is the weighted mean of the results:	Certified Value, X <sub>CRWRM</sub> , where one method of characterization is used is the mean of individual results:
$\begin{split} & \textbf{X}_{\text{CRM/RM}} = \Sigma\{w_i\}  \{X_i\} \\ & \textbf{X}_i = \text{mean of Assay Method I with standard uncertainty } \textbf{u}_{\text{char I}} \\ & \textbf{w}_i = \text{the weighting factors for each method calculated using the inverse square of the variance:} \\ & \textbf{w}_i = (1/u_{\text{char I}})^2 /  (\Sigma(1/u_{\text{char I}})^2) \end{split}$	X <sub>CRM/RM</sub> = (X <sub>a</sub> ) (u <sub>cher a</sub> )  X <sub>a</sub> = mean of Assay Method A with  u <sub>cher a</sub> = the standard uncertainty of characterization Method A
CRM/RM Expanded Uncertainty ( $\pm$ ) = $U_{CRM/RM}$ = $k$ ( $u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ta}$ ) $^{1/2}$ $k$ = coverage factor = 2 $u_{char} = (2((w_i)^2 (u_{char})^2)]^{1/2}$ where $u_{char}$ i are the errors from each characterization method $u_{bb}$ = bottle to bottle homogeneity standard uncertainty $u_{lts}$ = long term stability standard uncertainty (storage) $u_{tb}$ = transport stability standard uncertainty	CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char\ a} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{1/2}$ $k = coverage\ factor = 2$ $U_{char\ a} = the\ errors\ from\ characterization$ $U_{bb} = bottle\ to\ bottle\ homogeneity\ standard\ uncertainty$ $U_{tts} = long\ term\ stability\ standard\ uncertainty\ (storage)$ $U_{ts} = transport\ stability\ standard\ uncertainty$

## **Certified Abundance:**

## **IV's Certified Abundance**

<u>Isotope</u>	Atom %
Lithium Li6	95.6 ± 0.3
Lithium Li7	$4.4 \pm 0.1$

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

## **4.1 Thermometer Calibration**

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

## 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

## 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI ) DETERMINED BY ICP-MS AND ICP-OES (μg/mL)

N/A

## 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

## 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

## 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

## 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

## 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

## 11.1 Certification Issue Date

September 03, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

## 11.2 Lot Expiration Date

- September 03, 2026
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRWRM can be supported by long term stability studies conducted on properly stored and handled CRWRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

## 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_
- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

**Certificate Approved By:** 

Michael Booth Director, Quality Control Michael 2 Both

## **Certifying Officer:**

Paul Gaines Chairman / Senior Technical Director

RD: 07/14/2022

## QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-MS ICS

## QATS LABORATORY INORGANIC REFERENCE MATERIAL INTERFERENCE CHECK SAMPLE SET FOR ICP-MS (ICSA WITH ICSB)

**NOTE:** These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

**APPLICATION:** For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** Read instructions carefully before opening bottle(s) and proceeding with the analyses.

Contains Heavy Metals
HAZARDOUS MATERIAL

Safety Data Sheets Available Upon Request

## (A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more bottles of an Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-0803" and for the ICSAB mixture use "ICSA-0803+ICSB-0803".

<u>CAUTION:</u> The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.** 

## (B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to the Contracting Officer, Ross Miller at <a href="miller.ross@epa.gov">miller.ross@epa.gov</a>. If directed by Ross Miller, return the chain of custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY
APTIM Federal Services, LLC
2700 Chandler Avenue - Building C
Las Vegas, NV 89120

## (C) ANALYSIS OF SAMPLES

This interference check sample set is to be used to verify elemental isobaric correction factors of inductively coupled plasma-mass spectrometers (ICP-MS). This reference material set consists of two (2) concentrated solutions. The ICSA solution contains several interferent elements and species; for a complete listing refer to the CLP SOW. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, Tl, Se, V, and Zn. This instruction sheet provides the nominal values for the ICP-MS ICS Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:





## QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-MS ICS

ICSB: M5874

ICSA-0803, Inferferents: Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO<sub>3</sub>. Analyze this solution by ICP-MS.

ICSB-0803, Analytes, mixed with ICSA-0803, Interferents: Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO<sub>3</sub>. Analyze this ICSAB solution by ICP-MS.

## (D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-MS ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

ICSA: M5873

	Table 1.		VALUES" FOI 303, AND ICSA				MS
Element	CRQL	Part A (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)	Part A +Part B (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)
Al	20.0	[100000]			[100000]		
Sb	2.0	(1.5)	-2.5	5.5	(22.0)	18.0	26.0
As	1.0	(0.1)	-1.9	2.1	19.0	16.2	21.9
Ba	10.0	(1.2)	-18.8	21.2	(22.0)	2.0	42.0
Be	1.0	(0)	-2.0	2.0	19.0	16.2	21.9
Cd	1.0	(0.7)	-1.3	2.7	20.0	17.0	23.0
Ca	500	[100000]			[100000]		
С		[200000]			[200000]		
CI		[1000000]			[1000000]		
Cr	2.0	(21.0)	17.0	25.0	40.0	34.0	46.0
Co	1.0	(1.0)	-1.0	3.0	20.0	17.0	23.0
Cu	2.0	(8.0)	4.0	12.0	(25.0)	21.0	29.0
Fe	200	[100000]			[100000]		
Pb	1.0	(4.0)	2.0	6.0	25.0	21.3	28.8
Mg	500	[100000]			[100000]		
Mn	1.0	(7.0)	5.0	9.0	27.0	23.0	31.1
Мо		[2000]			[2000]		
Ni	1.0	(6.0)	4.0	8.0	24.0	20.4	27.6
Р		[100000]			[100000]		
K	500	[100000]			[100000]		
Se	5.0	(0.3)	-9.7	10.3	(19.0)	9.0	29.0
Ag	1.0	(0)	-2.0	2.0	18.0	15.3	20.7
Na	500	[100000]			[100000]		
S		[100000]			[100000]		
TI	1.0	(0)	-2.0	2.0	21.0	17.9	24.2
Ti		[2000]			[2000]		
V	5.0	(0.5)	-9.5	10.5	(19.0)	9.0	29.0
Zn	5.0	(11.0)	1.0	21.0	(29.0)	19.0	39.0

[] Indicates analytes that do not require ICP-MS determination in the ICS.

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value  $\pm$  2 times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value  $\pm$  15 percent of the listed certified value.

RD: 07/14/2022

## QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-MS ICS

## QATS LABORATORY INORGANIC REFERENCE MATERIAL INTERFERENCE CHECK SAMPLE SET FOR ICP-MS (ICSA WITH ICSB)

**NOTE:** These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

**APPLICATION:** For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** Read instructions carefully before opening bottle(s) and proceeding with the analyses.

Contains Heavy Metals
HAZARDOUS MATERIAL

Safety Data Sheets Available Upon Request

## (A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more bottles of an Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-0803" and for the ICSAB mixture use "ICSA-0803+ICSB-0803".

<u>CAUTION:</u> The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.** 

## (B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to the Contracting Officer, Ross Miller at <a href="miller.ross@epa.gov">miller.ross@epa.gov</a>. If directed by Ross Miller, return the chain of custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY
APTIM Federal Services, LLC
2700 Chandler Avenue - Building C
Las Vegas, NV 89120

## (C) ANALYSIS OF SAMPLES

This interference check sample set is to be used to verify elemental isobaric correction factors of inductively coupled plasma-mass spectrometers (ICP-MS). This reference material set consists of two (2) concentrated solutions. The ICSA solution contains several interferent elements and species; for a complete listing refer to the CLP SOW. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, Tl, Se, V, and Zn. This instruction sheet provides the nominal values for the ICP-MS ICS Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:





## QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-MS ICS

ICSB: M5874

ICSA-0803, Inferferents: Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO<sub>3</sub>. Analyze this solution by ICP-MS.

ICSB-0803, Analytes, mixed with ICSA-0803, Interferents: Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO<sub>3</sub>. Analyze this ICSAB solution by ICP-MS.

## (D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-MS ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

ICSA: M5873

	Table 1.		VALUES" FOI 303, AND ICSA				MS
Element	CRQL	Part A (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)	Part A +Part B (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)
Al	20.0	[100000]			[100000]		
Sb	2.0	(1.5)	-2.5	5.5	(22.0)	18.0	26.0
As	1.0	(0.1)	-1.9	2.1	19.0	16.2	21.9
Ba	10.0	(1.2)	-18.8	21.2	(22.0)	2.0	42.0
Be	1.0	(0)	-2.0	2.0	19.0	16.2	21.9
Cd	1.0	(0.7)	-1.3	2.7	20.0	17.0	23.0
Ca	500	[100000]			[100000]		
С		[200000]			[200000]		
CI		[1000000]			[1000000]		
Cr	2.0	(21.0)	17.0	25.0	40.0	34.0	46.0
Co	1.0	(1.0)	-1.0	3.0	20.0	17.0	23.0
Cu	2.0	(8.0)	4.0	12.0	(25.0)	21.0	29.0
Fe	200	[100000]			[100000]		
Pb	1.0	(4.0)	2.0	6.0	25.0	21.3	28.8
Mg	500	[100000]			[100000]		
Mn	1.0	(7.0)	5.0	9.0	27.0	23.0	31.1
Мо		[2000]			[2000]		
Ni	1.0	(6.0)	4.0	8.0	24.0	20.4	27.6
Р		[100000]			[100000]		
K	500	[100000]			[100000]		
Se	5.0	(0.3)	-9.7	10.3	(19.0)	9.0	29.0
Ag	1.0	(0)	-2.0	2.0	18.0	15.3	20.7
Na	500	[100000]			[100000]		
S		[100000]			[100000]		
TI	1.0	(0)	-2.0	2.0	21.0	17.9	24.2
Ti		[2000]			[2000]		
V	5.0	(0.5)	-9.5	10.5	(19.0)	9.0	29.0
Zn	5.0	(11.0)	1.0	21.0	(29.0)	19.0	39.0

[] Indicates analytes that do not require ICP-MS determination in the ICS.

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value  $\pm$  2 times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value  $\pm$  15 percent of the listed certified value.

www.absolutestandards.com



## Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Nominal Concentration (µg/mL): Recommended Storage: Volume shown below was diluted to (mL): **NIST Test Number: Expiration Date:** Part Number: Lot Number: Description: 57051 120523 BTU9 1000 120526 Ambient (20 °C) Antimony (Sb) 3000.41 0.058 5E-05 Flask Uncertainty Balance Uncertainty 24002546 Lot # 2.0% M.5802 Nitric Acid Solvent: 0.00 MSBOS Nitric Acid Formulated By: Reviewed By: Pedro L. Rentas Lawrence Barry 120523 120523

1. Antimony (Sb)

58151

100923

0.1000

300.0

1000

10001.4

1000.0

7440-36-0

0.5 mg/m3

orl-rat 7000 mg/kg 3102a

Number Part

Number Ď

Vol. (ml.)

Pipette (ml.) Conc. (µg/ml.)

Conc. (µg/mL)

Conc. (µg/ml.)

+/- (µg/mt.) Uncertainty Expanded

CAS#

(Solvent Safety Info. On Attached pg.) OSHA PEL (TWA)

LD50

SRM NIST SDS Information

Final

Dilution Factor

Initial

Uncertainty

Nominal

Compound

-2/m	1.057	m/z-> 2.0E7	2. 6 8	5.0E5	2.0 E	6.OE6
				to describe the second		
210		10		ō		
220		±		N		
0		N		N		
230		130		30		
240		.d.				
		140		ò		
0		180		50		
N O						
0		180		9		
		170		70		
		180		<b>8</b> .		
		190		8		
				Constitution occurs to the contract of the con		
		200		100		

Part # 57051



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	-	Г	-					_					II	ľ	-	
		9	9	_	8		200	8	<u></u>	9	-	2	ı	I		
		70.0>	2 1	200	10.05		200	6	3	-	1	8				
		2	2 8	3	ζ.	9	ر ا	ξ	2	ದಿ		2		l		
		20.02	600	3	<u>8</u>	400	3	70.05	3	8	-	40.02				
	Ī	Aμ	. Ç	9	වී	٤	5	E E	1	Į,	1	Ž	Target State			
		<b>∆</b> 022	70.02	3	<b>∆</b> 002	2000	3	20.02		_ ∆0,02	2000	2002				
		3	2	1	ď,	=	7	5	1	H	111	HF.				
		<b>₽</b>	20.02	3	<u> </u>	20.02	3	A.03	-	200	2000	400		FI ace Iv	1300	
		Z	Mo		T.	MD		Z	l s	=	_			SECON	+2	I
(T) = Tamet analyte		40.00	20.02		<u>A</u>	40.02		<u>0</u> 01	4000	3	20.02	200		ACHILLA		
	Ŀ	~	7		Ð	Pd	!	ဂ္ဂ	M	Z	2			COL	)	
akao	20.6	3	40,02	40.00	3	A0.02		2002	20.00	3	20.02			DY ICE-N		
	Ę	ç	Si	M	<b>B</b>	25		굣	700	9	7			S	10	
	20.02	3	20.02	20.02	3	<b>∆</b> 0,02	40.04	3	20.02	3	8			g/mL)		
	Ē	3	S	IC	2	Z	26	A	2	?	Š		ı			ı
	20.05	3	<b>40.0</b> 2	70.0>	3	<u>A</u>	20.02	3	20.02		02	Section Control Control				
	E	3 1	S	I	1	<b>=</b>	11	3	ie.	į	J					
	20.02	0.00	A 62	40.02		A 83	20.02	3	<b>∆0.02</b>	-	900					
	177	1	7 <sub>n</sub>	7	: ;	ş	_	4	9		W	Company				
	40.02	10.01	3	80.02	20.04	3	20.02	3	80.02	20.04	2000					

(1) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.
\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
\* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Printed: 1/16/2024, 3:48:48 PM

Part # 57051

Lot # 120523

Certified Reference Material CRM

M6030



AR-1539 Certificate Number https://Absolutestandards.com ANAB ISO 17034 Accredited

R = 8 | 5 | 24

www.absolutestandards.com

CERTIFIED WEIGHT REPORT:

800-368-1131

Absolute Standards, Inc.

Part Number: Solvent: 24002546 Lot # Nitric Acid

Lot Number: Description: 57047 122823 Silver (Ag)

Recommended Storage: **Expiration Date:** 1000 122826

Weight shown below was diluted to (mL): 4000.30

1. Silver nitrate (Ag)

IN035 J0612AGA1

1000.0

0.10

63.7

6.27992

6.27998

1000.0

2.0

7761-88-B

10 ug/m3

Z

3151

Nominal Concentration (µg/mL): NIST Test Number: **6UTB** Ambient (20 °C) 0.058 Flask Uncertainty 5E-05 Balance Uncertainty

2% <u>E</u> 80.0 Nitric Acid

Formulated By:

Benson Chan

122823

122823

Reviewed By: Pedro L. Rentas

Compound RM# Number 헏 Conc. (µg/mL) Nominal Purity Uncertainty Assay 8 Purity (%) 38 Weight (g) Target Weight (g) Conc. (µg/mL) Actual Actual +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) SDS Information NIST SRM

m/z-> m/z-> W-2/m 5.0E6 5.0E5 1.0≡6 2.5E6 5.0E6 1.0€7 [1] Spectrum No.1 210 110 0 120 NNO NO [ 14.044 sec]:58147.D# [Count] [Linear] 230 130 30 140 240 ò 150 250 50 260 160 00 170 0 180 0 190 000 200 100

www.absolutestandards.com



							race Me	letals	Verificat	tion	by ICP-I	S	ug/mL)						
	The state of the s						The Park of the	, J											
A	<0.02	Ω	<0.02	Dy	<0.02	出	<0.02	Ľ	<0.02	Z	<0.02	7	<0.02	Se	<0.2	4	40.02	W	<0.02
4S	40.02	ဂ္ဂ	40.2	덬	40.02	Ж	40.02	Li	<0.02	3	40.02	₽ Re	<b>4</b> 0.02	S:	40.02	ď	A 0.02	a	\$0.02
As	40.2	Ç	<0.02	땹	<0.02	In	<0.02	Mg	<0.01	တ္တ	40.02	짜	<0.02	Agr	7	∄	<0.02	<	40.02
Ва	<0.02	రి	40,02	8	<0.02	듁	40.02	Mn	<0.02	Pd	<0.02	R.	40.02	N	40.2	∄	<u>\$</u>	상	<0.02
Ве	40.01	Ω	<0.02	හු	<0.02	ਲੋਂ	40.2	Hg	40.2	Þ	40.02	R	A0.02	Ž,	40,02	ď	<b>♦</b> 0.02	<	40.02
쯨	<0.02	င္ပ	40.02	ନ	40.02	5	<b>&lt;</b> 0.02	Mo	<0.02	77	40.02	Sin	<b>△</b> 0.02	c/a	40.02	S	A) (2)	Z <sub>n</sub>	40.07
В	<0.02	δ	<0.02	Au	<0.02	광	<0.02	Z	<0.02	*	40.2	Sc	<0.02	ī	<0.02	Ħ	<0.02	2	<0.02

Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

## Certified Reference Material CRM

MS473 MS474 MS475

Nitric Acid

Solvent: 20510011

Lot #



Absolute Standards, Inc.

www.absolutestandards.com

Strontium (Sr) 082922 56138

> Lot Number: Description:

Part Number:

CERTIFIED WEIGHT REPORT:

Ambient (20 °C) 082925

**Expiration Date:** 

10000 Recommended Storage: Nominal Concentration (µg/mL):

6UTB NIST Test Number:

5E-05 Balance Uncertainty

Suran

Pedro L. Rentas Reviewed By:

082922

082922

Lawrence Barry

Formulated By:

Nitric Acid

20.0 (mL)

%

0.058 Flask Uncertainty 1000.12 Weight shown below was diluted to (mL):

Expanded Uncertainty Weight (g) Conc. (ug/mL)

Actual

Weight (g)

8

Purity (%)

8

Conc. (µg/mL)

Number

RM#

Nominal

Ę

Target

Purity Uncertainty Assay

OSHA PEL (TWA) CAS#

SDS Information (Solvent Safety Info. On Attached pg.)

NIST SRM

+/- (µg/mL)

orl-rat >2000mg/kg 3153a LD50 ž 10042-76-9

20.0 100001

24.2758

24.2756

41.2

0.10

99.997

10000

IN017 SRZ022018A1

Strontium nitrate (Sr)

Compound

[1] Spectrum No.1

5.0E6

2.5E6

[ 14.495 sec]:58138.D# [Count] [Linear]

0

100

06

80

50

04

30

20

0

W/z->

1.0E6

5.0E5

80

180

200

190

170

160

150

140

130

120

110

W/z->

5.0E6

2.5E6

260

250

240

230

210

~-z/w

Printed: 9/21/2022, 11:20:01 PM

www.absolutestandards.com





https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS);

Al <a. colspan="8">         Cd         <a. colspan="8">         Al         <a. colspan="8"><a. colspan="8"><a.< th=""><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>Trace Me</th><th><b>detals</b></th><th>Verification</th><th>tion</th><th>by ICP-N</th><th>MS (</th><th>(Jm/b/)</th><th></th><th></th><th></th><th></th><th></th><th></th></a.<></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.></a.>								Trace Me	<b>detals</b>	Verification	tion	by ICP-N	MS (	(Jm/b/)						
<ul> <t< th=""><th></th><th></th><th></th><th></th><th></th><th>Company of</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>A COLOR</th><th></th><th>NA CONTRACTOR</th><th>ı</th><th></th><th>ı</th><th>THE REAL PROPERTY.</th></t<></ul>						Company of								A COLOR		NA CONTRACTOR	ı		ı	THE REAL PROPERTY.
<0.02	ΑI	<0.02	ප	<0.02	Š	<0.02	田	<0.02	Ξ	<0.02	ž	<0.02	ŀ.	<0.02	Se	<0.2	TP	<0.02	≱	<0.02
<0.2	SP	<0.02	రా	<0.2	丏	<0.02	He	<0.02	Ľ	<0.02	ĝ	<0.02	Re	<0.02	Si	<0.02	Te	<0.0>	Ω	<0.02
<0.02	As	<0.2	రొ	<0.02	뤕	<0.02	垣	<0.02	Mg	<0.01	ő	<0.02	R.	<0.02	Ag	<0.02	E	<0.02	>	<0.02
<0.01	Ba	<0.02	చ	<0.02	3	<0.02	1	<0.02	Ā	<0.02	몺	<0.02	Rb	<0.02	Na	<0.2	Ę	<0.02	Yb	<0.02
<0.02	Be	<0.01	ರ	<0.02	පී	<0.02	먑	<0.2	Hg	<0.2	Ь	<0.02	Ru	<0.02	Sr	Τ	Tm	<0.02	¥	<0.02
<0.02	Bi	<0.02	ථ	<0.02	පී	<0.02	La	<0.02	Mo	<0.02	五	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	Zp	<0.02
	В	<0.02	ı	<0.02	Au	<0.02	Pb	<0.02	PN	<0.02	×	<0.2	Š	<0.02	Ta	<0.02	Ë	<0.02	Zr	<0.02

(T)= Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards

All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

<sup>\*</sup> Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions. \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

M6023

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

		Weight shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:	Expiration Date:		Description:	Lot Number:	Part Number:	CERTIFIED WEIGHT REPORT:
Lot		ted to (mL):	8TUB	1000	Ambient (20 °C)	062727		Thalllum (TI)	062724	57081	
Nominal		2000.1			၀ (၄)						
Purity Uncertainty Assay		0.10 Flask Uncertainty	5E-05 Balance Uncertainty				2%			Solvent:	
Target						(mL)	40.0			Solvent: 24002546	Lot #
Actual							Nitric Acid			Nitric Acid	
Actual											
Uncertainty	Expanded		Reviewed By:	Juna	1		Formulated By:	4	TO ST	>	
(Solvent Safety Info. On Attached pg.)	SDS Information		Pedro L. Rentas	" human	A A		Aleah O'Brady	0	San O To asign	7	
ched pg.) NIST			062724				062724			,	
7											

RW#

Number

Conc. (µg/mL) (%)

Purity (%) (%)

Weight (g) Weight (g) Conc. (µg/mL) +/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM

~-Z/III	5.0E5	1.0E6	m/z->	5000	1.0€4	1.0E6	2.OE6	
N			-1				El opegrum No.	
210			10		ö		3	
220			120		N O			
							4 0	
230			130		<b>9</b>		[ ]4.044 sec]:57081.D# [Count] [Linear]	
240			<u> </u>		4		57081.	
ō			140		40		<u> </u>	
250			<b>1</b>		OI.			
							000000000000000000000000000000000000000	
N			160		60			
			4		70			
			170		0			
			180		80			100
			190		90			or any
			200		100			
			ŏ		ŏ			See all see al
								0

Part # 57081



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

		Œ	DI	; <u>;</u>	H.	Da	į	As	30	2	2				
		40.02	20.02	3 8	A) 01	20.02	e de	<u>A</u>	70.0>	3	40.02				
	ŀ	5	S	2	,	CS	, {	3	2	>	5				
		40.00	40.02	20.02	3	<0.02	20.02	3	202	>	40.02				
		A II	දි	Ç,	?	ପୁ	į	ij	목	,	DV				
	20,02	3	<b>♦</b> 0.02	20.02	3	<b>♦</b> 0.02	20.02	3	40.02		A0.02	Towns of the last			
(T) = Target analyte	100	5	L	2	1	Ħ	Б	- -	Ho	1	H				
	70.02	3	<b>∆</b> .02	7.05	5	<b>∆</b> .02	20.02	3	A).02		40.02			Tace M	
		ź.	Mo	9H		š	₩ <u></u>		Į,	ı	1.4	Service III		S	
	20.02	3	A 0.02	40.2	,	A 0.02	AJ.01	2	&.02 20.02	40.04	2003	450 E 3 00 W	200	Verifica	
	F	4 ;	<b>P</b>	70	· ¦	전	င္တ	,	Z	142	Z.			₹. 5	
	2.05	0.01	3	<0.02	1000	<b>40</b> 02	<0.02	,	<b>∆</b> 0.02	20.00	3		200	200	
	Sc	E	3	R	,	子	공	1	R.	2	2		4	このこ	
	A0.02	20.0%	3	<0.02	40.04	2000	40.02	10101	2000	20.02	3000		/HI /Br		
	Ta	ū	n	Sr	TAG	Z .	Ag	Ş	2	č					
	40,02	20.02	3	∆.02	7.07	3	∆ 20.02	40.04	3	46					
	11	DC	?	ď	120	i	Ħ	č	ş-1	10					ı
	40.02	20.02	3	40.02	70.02	2	H	70.02	3	<b>∆</b> 0.02					
	Zr	120	1	×	ID	Ś	<	0	1	\$					
	40.02	<b>40.02</b>		A).02	20,02		A) (2)	70.02	3	<u>&amp;</u>	THE RESIDENCE AND PARTY OF THE				

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).