

Prep Standard - Chemical Standard Summary

Order ID : P4103

Test : Diesel Range Organics

Prepbatch ID : PB163522,

Sequence ID/Qc Batch ID: FF091924,FF092024,

Standard ID :

EP2538,EP2540,PP23454,PP23518,PP23611,PP23612,PP23613,PP23614,PP23615,PP23616,PP23617,

Chemical ID :

E2865,E3551,E3759,E3768,E3787,E3792,E3793,E3794,P11950,P11960,P13103,P13107,P13206,P13207,P13208,P13 209,P13210,P13211,P13217,P13218,



Extractions STANDARD PREPARATION LOG

Recipe ID 3868	NAME METHELENE CHLORIDE+ACETONE	<u>NO.</u> EP2538	<u>Prep Date</u> 09/17/2024		Prepared By Rajesh Parikh	<u>ScaleID</u> None	PipetteID None	Supervised By RUPESHKUMAR SHAH 09/17/2024
FROM	8000.00000ml of E3793 + 8000.0000	00ml of E37	94 = Final Qu	antity: 1600.00	0 ml			

Recipe				Expiration	Prepared			Supervised By
ID	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipetteID	RUPESHKUMAR
3923	Baked Sodium Sulfate	<u>EP2540</u>	09/17/2024	01/03/2025	Rajesh Parikh	Extraction_SC	None	SHAH
						ALE_2 (EX-SC-2)		09/17/2024
FROM	4000.00000gram of E3551 = Final C	uantity: 400	0.000 gram			(LX-30-2)		



Recipe ID 3609	NAME 20 PPM DRO SPIKE SOLUTION (RESTEK)	<u>NO.</u> PP23454	Prep Date 06/10/2024	Expiration Date 12/08/2024	Prepared By Yogesh Patel	<u>ScaleID</u> None	PipetteID None	Supervised By Ankita Jodhani 06/12/2024
<u>FROM</u>	1.00000ml of P11950 + 1.00000ml of	P11960 + 4	18.00000ml of	E3759 = Fina	Quantity: 50.00	00 ml		
Recipe				Expiration	Prepared			<u>Supervised By</u>

Recipe				Expiration	Prepared			Supervised By
ID	NAME	<u>NO.</u>	Prep Date	Date	By	<u>ScaleID</u>	PipetteID	Ankita Jodhani
147	20 PPM DRO Surrogate Spike Solution	<u>PP23518</u>	07/15/2024	01/08/2025	Yogesh Patel	None	None	07/16/2024
<u>FROM</u>	1.00000ml of P13206 + 1.00000ml of Quantity: 200.000 ml	f P13207 +	1.00000ml of	P13208 + 1.00	000ml of P13209	9 + 196.00000n	nl of E3768 =	Final
	Quantity. 200.000 mil							



Recipe ID 433	<u>NAME</u> 100/100 PPM DRO (Restek)	<u>NO.</u> PP23611	Prep Date 08/14/2024	Expiration Date 02/13/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 08/19/2024
<u>FROM</u>	1.00000ml of P13103 + 1.00000ml of	f P13107 + 1	1.00000ml of l	P13210 + 7.000	000ml of E3787	= Final Quantii	ty: 10.000 ml	
Pacina				Expiration	Propared			

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipettelD	Ankita Jodhani
3796	100/100 PPM DRO STD (CPI)	PP23612	08/14/2024	02/13/2025	Yogesh Patel	None	None	
								08/19/2024
FROM	1.00000ml of P13211 + 1.00000ml of	P13217 + ⁻	1.00000ml of I	D13218 + 7.000	00ml of E3787	= Final Quantif	y: 10.000 ml	
							-	



Recipe ID 435	NAME 50 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23613	Prep Date 08/15/2024	Expiration Date 02/13/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 08/19/2024
FROM	0.50000ml of E3787 + 0.50000ml of	PP23611 =	Final Quantity	/: 1.000 ml				

<u>Recipe</u> <u>ID</u> 437	NAME 20 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23614	<u>Prep Date</u> 08/15/2024	Expiration Date 02/13/2025	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	PipettelD None	<u>Supervised By</u> Ankita Jodhani 08/19/2024
FROM	0.80000ml of E3787 + 0.20000ml of I	PP23611 =	Final Quantity	y: 1.000 ml	<u> </u>			00,10,2021



Recipe ID 438	NAME 10 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23615	Prep Date 08/15/2024	Expiration Date 02/13/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 08/19/2024
FROM	0.90000ml of E3787 + 0.10000ml of I	PP23611 =	Final Quantity	y: 1.000 ml				

<u>Recipe</u> <u>ID</u> 439	NAME 5 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23616	<u>Prep Date</u> 08/15/2024	Expiration Date 02/13/2025	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	<u>Supervised By</u> Ankita Jodhani 08/19/2024
FROM	0.90000ml of E3787 + 0.10000ml of l	PP23613 =	Final Quantity	y: 1.000 ml	I			50,10,2021



Recipe ID 3797	NAME 50 PPM DRO ICV STD (CPI)	<u>NO.</u> PP23617	<u>Prep Date</u> 08/15/2024	Expiration Date 02/13/2025	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 08/19/2024
<u>FROM</u>	0.50000ml of E3787 + 0.50000ml of	PP23612 =	Final Quantity	y: 1.000 ml				



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3382-05 / Sand, Purified (cs/4x2.5kg)	0000243821	12/31/2024	04/30/2020 / RAJESH	04/28/2020 / RAJESH	E2865
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	PC19631-100 / SODIUM SULFATE, ANHYDROUS, PEST GRADE, 1	313201	01/03/2025	01/03/2024 / Rajesh	07/20/2023 / Rajesh	E3551
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24D1962005	12/08/2024	06/08/2024 / Rajesh	05/31/2024 / Rajesh	E3759
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24E2462004	01/08/2025	07/08/2024 / Rajesh	06/21/2024 / Rajesh	E3768
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24G0862022	02/13/2025	08/13/2024 / Rajesh	08/07/2024 / Rajesh	E3787
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9262-03 / Hexane,	24C1862008	03/11/2025	09/12/2024 /	09/11/2024 /	E3792
	Ultra-Resi (cs/4x4L)			Rajesh	Rajesh	



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	9005-05 / Acetone Ultra (cs/4x4L)	24E0761004	03/11/2025	09/12/2024 / Rajesh	09/11/2024 / Rajesh	E3793
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24G2362009	03/17/2025	09/17/2024 / Rajesh	09/03/2024 / Rajesh	E3794
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	12/10/2024	06/10/2024 / yogesh	07/11/2022 / Yogesh	P11950
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	12/10/2024	06/10/2024 / yogesh	07/11/2022 / Yogesh	P11960
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0204859	02/14/2025	08/14/2024 / yogesh	01/12/2024 / Yogesh	P13103
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0204859	02/14/2025	08/14/2024 / yogesh	01/12/2024 / Yogesh	P13107



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13206
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13207
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13208
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	01/15/2025	07/15/2024 / yogesh	01/17/2024 / Ankita	P13209
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	02/14/2025	08/14/2024 / yogesh	01/17/2024 / Ankita	P13210
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000	101122	02/14/2025	08/14/2024 / yogesh	01/17/2024 / Ankita	P13211



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
CPI International	Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml	514983	02/14/2025	08/14/2024 / yogesh	01/31/2024 / Ankita	P13217
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #

Sand Purified Washed and Ignited



Material No.: 3382-05 Batch No.: 0000243821 Manufactured Date: 2018/04/09 Retest Date: 2025/04/07

Revision No: 1

Certificate of Analysis

Test	Specification	Result
Substances Soluble in HCI	<= 0.16 %	0.01

For Laboratory, Research or Manufacturing Use Meets Reagent Specifications for testing USP/NF monographs

Country of Origin:	US
Packaging Site:	Paris Mfg Ctr & DC





For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone: 610.386.1700



PRODUCTOS QUIMICOS MONTERREY, S.A. DE CY. MIRADOR 201, COL. MIRADOR MONTERREY, N.L. MEXICO CP 64070 TEL +52 81 13 52 57 57 WWW.pqm.com.mx

CERTIFICATE OF ANALYSIS

				NA.CO
SPECIFICATION NUMBER :	-		E DATE:	Na ₂ SO ₄ ABR/21/2023
	313201 RE		E 1./A I E.	ADR/2 1/2023
TEST	SPECI	FICATIONS	LOT V	ALUES
Assay (Na ₂ SO ₄)	Min. 99	1.0%	99.7 %	
pH of a 5% solution at 25°C	5.2 - 9.	2	6.1	
Insoluble matter	Max. 0.	01%	0.005	1
Loss on ignition	Max. 0.	5%	0.1 %	16
Chloride (Cl)	Max. 0.	001%	<0.001	0/
Nitrogen compounds (as N)	Max. 5	ppm	<0.001 <5 ppn	
Phosphate (PO ₄)	Max. 0.		9 X	
Heavy metals (as Pb)	Max. S		<0.001 %	
Iron (Fe)	Max, 0,	9 R ·	<5 ppn <0.001	
Calcium (Ca)	Max. 0.	01%	0.002 %	
Magnesium (Mg)	Max. 0.	005%	0.002 9	
Potassium (K)	Max. 0.		0.003 %	
Extraction-concentration suit	ability Passes	test	Passes	*
Appearance	Passes		Passes	
Identification	Passes	test	Passes	test
Solubility and foreing matter		test	Passes	: test
Retained on US Standard No.		h	0.1 %	
Retained on US Standard No.	60 sieve Min. 94	a/ ₀	97.3 %	
Through US Standard No. 60	sieve Max. 5%	46	2.5 %	
Through US Standard No. 100) sieve Max. 10	1%	0.1 %	
an second a second s	CON	MENTS	ಕ್ಷಿತ್ರಾಲೆಗೂ ಕಾರ್ಯಕ್ರಿ ಪ್ರದೇಶಕರ್ಷ ಪ್ರದೇಶಕ	
91 <i>0</i> 91			n+	15 HANDOWNI
			- he "	
			1	
		QC: Ph	C Irma Belma	res

If you need further details, please call our factory or contact our local distributor.

Read. by R: 017/293 E3551

RE-02-01, Ed. 1

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)





Material No.: 9266-A4 Batch No.: 24D1962005 Manufactured Date: 2024-03-16 Expiration Date: 2025-06-15 Revision No.: 0

Certificate of Analysis

Test	Specification	Result	
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL	.) ≤ 5	< 1	
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL) ≤ 10	8	
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for wate	r) ≥ 99.8 %	99.9 %	
Color (APHA)	≤ 10	5	
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm	
Titrable Acid (µeq/g)	≤ 0.3	< 0.1	
Chloride (Cl)	≤ 10 ppm	< 5 ppm	
Water (by KF, coulometric)	≤ 0.02 %	< 0.01 %	

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG24C16563

E 3759

Alloak

Jamie Croak Director Quality Operations, Bioscience Production

PO: PO1-8886 PRODUCT CODE: SHIP DATE: 6/21/2024

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)






Material No.: 9266-A4 Batch No.: 24E2462004 Manufactured Date: 2024-04-10 Expiration Date: 2025-07-10 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	3
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	3
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Titrable Acid (µeq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	5 ppm
Water (by KF, coulometric)	≤ 0 . 02 %	< 0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG24D10725



floak
Janue Croak Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700 Page 1 of 1 Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)





Material No.: 9266-A4 Batch No.: 24G0862022 Manufactured Date: 2024-06-05 Expiration Date: 2025-09-04 Revision No.: 0


Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	3
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	4
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	≥ 99.8 %	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.3 ppm
Titrable Acid (µeq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	≤ 0.02 %	< 0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC Manufacturer source batch: MG24F05012

E 3787



Hexanes (95% n-hexane) BAKER RESI-ANALYZED® Reagent For Organic Residue Analysis





Material No.: 9262-03 Batch No.: 24C1862008 Manufactured Date: 2024-01-30 Expiration Date: 2025-04-30 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	< 1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1
ECD-Sensitive impurities (as Ethylene Dibromide) - Single impurity Peak (ng/mL)	≤ 5	1
Assay (Total Saturated C6 Isomers) (by GC, corrected for water)	≥ 99.5 %	99.7 %
Assay (as n-Hexane) (by GC, corrected for water)	≥ 95 %	98 %
Color (APHA)	≤ 1 0	5
Residue after Evaporation	≤ 1.0 ppm	0.4 ppm
Substances Darkened by H2SO4	Passes Test	Passes Test
Water (by KF, coulometric)	≤ 0.05 %	< 0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC

Recd by RP on 09/11/24 E 3192



100

Director Quality Operations, Bioscience Production

Acetone CMOS





Material No.: 9005-05 Batch No.: 24E0761004 Manufactured Date: 2024-05-02 Retest Date: 2029-05-01 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay ((CH ₃) ₂ CO) (by GC, corrected for water)	≥ 99.5 %	99.8 %
Color (APHA)	≤ 10	< 5
Residue after Evaporation	≤ 5 ppm	< 1 ppm
Titrable Acid (µeq/g)	≤ 0.3	0.1
Titrable Base (µeq/g)	≤ 0.5	0.1
Water (H2O)	≤ 0.5 %	0.1 %
Solubility in H₂O	Passes Test	Passes Test
Chloride (Cl)	≤ 0.2 ppm	< 0.2 ppm
Phosphate (PO4)	≤ 0.05 ppm	< 0.05 ppm
Trace Impurities – Aluminum (Al)	≤ 50.0 ppb	< 5.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 5.0 ppb
Trace Impurities – Barium (Ba)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Boron (B)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Cadmium (Cd)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Calcium (Ca)	≤ 25.0 ppb	3.6 ppb
Trace Impurities – Chromium (Cr)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Germanium (Ge)	≤ 10.0 ppb	< 10.0 ppb
Trace Impurities – Gold (Au)	≤ 20 ppb	< 5 ppb
Trace Impurities - Iron (Fe)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Lead (Pb)	≤ 10.0 ppb	< 10.0 ppb
Trace Impurities – Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Magnesium (Mg)	≤ 20 ppb	< 1 ppb
Trace Impurities – Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb

>>> Continued on page 2 >>>

Recd. by RP cm 9/11/24 E 3793

Acetone CMOS





Material No.: 9005-05 Batch No.: 24E0761004

Test	Specification	Result
Trace Impurities – Molybdenum (Mo)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Nickel (Ni)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Niobium (Nb)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities – Potassium (K)	≤ 10.0 ppb	< 10.0 ppb
Trace Impurities – Silicon (Si)	≤ 50 ppb	< 10 ppb
Trace Impurities – Silver (Ag)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Sodium (Na)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Strontium (Sr)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Tantalum (Ta)	≤ 50.0 ppb	< 5.0 ppb
Trace Impurities – Thallium (TI)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Tin (Sn)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Titanium (Ti)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Vanadium (V)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Zinc (Zn)	≤ 20.0 ppb	7.9 ppb
Trace Impurities – Zirconium (Zr)	≤ 10.0 ppb	< 1.0 ppb
Particle Count – 0.5 µm and greater (Rion KS42AF)	≤ 100 par/ml	8 par/ml
Particle Count – 1.0 µm and greater (Rion KS42AF)	≤ 8 par/ml	2 par/ml

Acetone CMOS





Material No.: 9005-05 Batch No.: 24E0761004

Test	Specification	Result	
1050	Specification	Result	

For Microelectronic Use

Country of Origin: USA Packaging Site: Paris Mfg Ctr & DC

Muhelle Bales

Michelle Bales Sr. Manager, Quality Assurance

1 610 306 1 300

110 Benner Circle Bellefonte, PA 16823-8812 Tel: (800)356-1688 Fax: (814)353-1309	er Circle \ 16823-8812 356-1688 353-1309	Certific	Certificate of Analysis	nalysi			
www.restek.com	tek.com						ACCREDITED ISO/IEC 17025 Accredited Testing Laboratory Certificate #3222.02
		FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE. This Reference Material is intended for Laboratory Use Only as a standard the qualitative and/or quantitative determination of the analyte(s) listed	USE ONLY-RE, is intended for Labo	AD SDS PRIO	E.		
Catalog No. :	31266		Lot No.: A0186840	840		- - - -	
)					I	t	_
Description :	Florida TRPH Standard	ndard				210	140/ 2
	Florida TRPH Sta	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul	, 1mL/ampul			r II C	162 /
Container Size :	2 mL		Pkg Amt: > 1 mL				
Expiration Date :	July 31, 2029		Storage: 25°C r	25°C nominal	i		
Handling:	Sonicate prior to use.	<u>se.</u>	Ship: Ambient	nt			
				CERTI	IFIE D	VALUE	ш С
Elution Order	Co	Compound	Grav. Conc. (weight/volume)	Conc. volume)	Expanded Uncertainty (95% C.L.; K=2)	Incertainty (=2)	
1 n-Octa CAS # Purity	n-Octane (C8) CAS # 111-65-9 Purity 99%	(Lot SHBN3807)	505.0	μg/mL +/- +/- +/-	2.9995 12.5465 15.0390	baller 1. Tw/Bή 1. Tw/Bή	Gravimetric Unstressed Stressed
2 n-Decs CAS # Purity	n-Decane (C10) CAS # 124-18-5 Purity 99%	(Lot SHBN8619)	503.0	μg/mL +/- +/- +/-	- 2.9877 - 12.4968 - 14.9795	μg/mL (μg/mL 1	Gravimetric Unstressed Stressed
3 n-Dode CAS # Purity	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	(Lot SHBN7174)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	μg/mL 1 μg/mL 1	Gravimetric Unstressed Stressed
4 n-Tetra CAS # Purity	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	(Lot STBK2282)	505.0	μg/mL +/- +/- +/-	- 2.9995 - 12.5465 - 15.0390	hg/mL 1 hg/mL 1	Gravimetric Unstressed Stressed
5 n-Hexa CAS # Purity	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	(Lot SHBM4146)	504.7	µg/mL +/- +/- +/-	- 2.9978 - 12.5390 - 15.0301	րց/mL կց/mL կց/mL	Gravimetric Unstressed Stressed
6 n-Octa CAS # Purity	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	(Lot VZKOJ)	504.4	μg/mL +/- +/- +/-	- 2.9960 - 12.5316 - 15.0212	hg/mL hg/mL	Gravimetric Unstressed Stressed
7 n-Eico: CAS # Purity	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	(Lot MKCF7888)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	µg/mL µg/mL	Gravimetric Unstressed Stressed

RES

CERTIFIED REFERENCE MATERIAL

ACCREDITED ISO 17034 Accredited Veference Material Producer Certificate #3222.01

110 Benner Circle Bellefonte, PA 16823-8812

01-Aug-2020 rev.

Solvent:	17	16	15	14	13	12	11	10	و	∞
lt: Hexane CAS # Purity	n-Tetrac CAS # Purity	n-Octati CAS # Purity	n-Hexat CAS # Purity	n-Tetrat CAS # Purity	n-Dotria CAS # Purity	n-Triacc CAS # Purity	n-Octac CAS # Purity	n-Hexac CAS # Purity	n-Tetrac CAS # Purity	n-Docos CAS # Purity
110-54-3 99%	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	n-Docosane (C22) CAS # 629-97-0 Purity 99%
	(Lot PADGI)	(Lot 0000127235)	(Lot U25B014)	(Lot OML4N)	(Lot BCBW0661)	(Lot MKCN9321)	(Lot BCCG0084)	(Lot MKCD4540)	(Lot MKCN2863)	(Lot MKCL8918)
	504.7	504.4	504.0	504.5	505.0	505.0	504.5	504.0	503.5	504.5
	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL
	+ + +	+/- +/-	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +
	2.9978 12.5390 15.0301	2.9960 12.5316 15.0212	2.9936 12.5216 15.0093	2.9966 12.5340 15.0241	2.9995 12.5465 15.0390	2.9995 12.5465 15.0390	2.9966 12.5340 15.0241	2.9936 12.5216 15.0093	2.9906 12.5092 14.9944	2.9966 12.5340 15.0241
	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	ից/mL կց/mL կց/mL	µg/mL µg/mL	µg/mL µg/mL
	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed

01-Aug-2020 rev.

01-Aug-2020	
) rev.	

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223)

Carrier Gas: hydrogen-constant pressure 10 psi.

Temp. Program: 40°C (hold 2 min.) to 330°C @ 10°C/min. (hold 10 min.) Inj. Temp:

250°C **Det. Temp:** 330°C

Det. Type:



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Attraction Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022 Balance: 1128360905

িক গঠ Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015 Registered Quality System Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- GC/MS, LC/MS, RI, and/or melting point. Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD
- correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. parent compound in solution. ≻
- Purity of isomeric compounds is reported as the sum of the isomers

Purity values are rounded to the nearest whole number. Certified Uncertainty Value Notes:

٠ uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula: The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- standard temperature conditions. www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at nonstored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time
- . Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions as specified below. conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- are available by contacting Restek Technical Service at www.restek.com/Contact-Us. separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed,
- . that the minimum packaged amount can be sufficiently transferred The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure

Manufacturing Notes:

٠ using NIST traceable weights, and/or dilutions with Class A glassware. Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily

Handling Notes:

most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with information, with the knowledge/understanding that open product stability is subject to the specific handling and which includes complete instructions. the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through

110 Benner Circle Bellefonte, PA 16823-8812 Tel: (800)356-1688 Fax: (814)353-1309	er Circle \ 16823-8812 356-1688 353-1309	Certific	Certificate of Analysis	nalysi			
www.restek.com	tek.com						ACCREDITED ISO/IEC 17025 Accredited Testing Laboratory Certificate #3222.02
		FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE. This Reference Material is intended for Laboratory Use Only as a standard the qualitative and/or quantitative determination of the analyte(s) listed	USE ONLY-RE, is intended for Labo	AD SDS PRIO	E.		
Catalog No. :	31266		Lot No.: A0186840	840		- - - -	
)					I	t	_
Description :	Florida TRPH Standard	ndard				210	140/ 2
	Florida TRPH Sta	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul	, 1mL/ampul			r II C	162 /
Container Size :	2 mL		Pkg Amt: > 1 mL				
Expiration Date :	July 31, 2029		Storage: 25°C r	25°C nominal	i		
Handling:	Sonicate prior to use.	<u>se.</u>	Ship: Ambient	nt			
				CERTI	IFIE D	VALUE	ш С
Elution Order	Co	Compound	Grav. Conc. (weight/volume)	Conc. volume)	Expanded Uncertainty (95% C.L.; K=2)	Incertainty (=2)	
1 n-Octa CAS # Purity	n-Octane (C8) CAS # 111-65-9 Purity 99%	(Lot SHBN3807)	505.0	μg/mL +/- +/- +/-	2.9995 12.5465 15.0390	baller 1. Tw/Bή 1. Tw/Bή	Gravimetric Unstressed Stressed
2 n-Decs CAS # Purity	n-Decane (C10) CAS # 124-18-5 Purity 99%	(Lot SHBN8619)	503.0	μg/mL +/- +/- +/-	- 2.9877 - 12.4968 - 14.9795	μg/mL (μg/mL 1	Gravimetric Unstressed Stressed
3 n-Dode CAS # Purity	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	(Lot SHBN7174)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	μg/mL 1 μg/mL 1	Gravimetric Unstressed Stressed
4 n-Tetra CAS # Purity	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	(Lot STBK2282)	505.0	μg/mL +/- +/- +/-	- 2.9995 - 12.5465 - 15.0390	hg/mL 1 hg/mL 1	Gravimetric Unstressed Stressed
5 n-Hexa CAS # Purity	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	(Lot SHBM4146)	504.7	µg/mL +/- +/- +/-	- 2.9978 - 12.5390 - 15.0301	րց/mL կց/mL կց/mL	Gravimetric Unstressed Stressed
6 n-Octa CAS # Purity	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	(Lot VZKOJ)	504.4	μg/mL +/- +/- +/-	- 2.9960 - 12.5316 - 15.0212	hg/mL hg/mL	Gravimetric Unstressed Stressed
7 n-Eico: CAS # Purity	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	(Lot MKCF7888)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	µg/mL µg/mL	Gravimetric Unstressed Stressed

RES

CERTIFIED REFERENCE MATERIAL

ACCREDITED ISO 17034 Accredited Veference Material Producer Certificate #3222.01

110 Benner Circle Bellefonte, PA 16823-8812

01-Aug-2020 rev.

Solvent:	17	16	15	14	13	12	11	10	و	∞
lt: Hexane CAS # Purity	n-Tetrac CAS # Purity	n-Octati CAS # Purity	n-Hexat CAS # Purity	n-Tetrat CAS # Purity	n-Dotria CAS # Purity	n-Triacc CAS # Purity	n-Octac CAS # Purity	n-Hexac CAS # Purity	n-Tetrac CAS # Purity	n-Docos CAS # Purity
110-54-3 99%	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	n-Docosane (C22) CAS # 629-97-0 Purity 99%
	(Lot PADGI)	(Lot 0000127235)	(Lot U25B014)	(Lot OML4N)	(Lot BCBW0661)	(Lot MKCN9321)	(Lot BCCG0084)	(Lot MKCD4540)	(Lot MKCN2863)	(Lot MKCL8918)
	504.7	504.4	504.0	504.5	505.0	505.0	504.5	504.0	503.5	504.5
	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL
	+ + +	+/- +/-	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +
	2.9978 12.5390 15.0301	2.9960 12.5316 15.0212	2.9936 12.5216 15.0093	2.9966 12.5340 15.0241	2.9995 12.5465 15.0390	2.9995 12.5465 15.0390	2.9966 12.5340 15.0241	2.9936 12.5216 15.0093	2.9906 12.5092 14.9944	2.9966 12.5340 15.0241
	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	ից/mL կց/mL կց/mL	µg/mL µg/mL	µg/mL µg/mL
	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed

01-Aug-2020 rev.

01-Aug-2020	
) rev.	

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223)

Carrier Gas: hydrogen-constant pressure 10 psi.

Temp. Program: 40°C (hold 2 min.) to 330°C @ 10°C/min. (hold 10 min.) Inj. Temp:

250°C **Det. Temp:** 330°C

Det. Type:



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Attraction Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022 Balance: 1128360905

িক গঠ Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015 Registered Quality System Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- GC/MS, LC/MS, RI, and/or melting point. Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD
- correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. parent compound in solution. ≻
- Purity of isomeric compounds is reported as the sum of the isomers

Purity values are rounded to the nearest whole number. Certified Uncertainty Value Notes:

٠ uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula: The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- standard temperature conditions. www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at nonstored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time
- . Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions as specified below. conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- are available by contacting Restek Technical Service at www.restek.com/Contact-Us. separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed,
- . that the minimum packaged amount can be sufficiently transferred The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure

Manufacturing Notes:

٠ using NIST traceable weights, and/or dilutions with Class A glassware. Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily

Handling Notes:

most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with information, with the knowledge/understanding that open product stability is subject to the specific handling and which includes complete instructions. the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through



110 Benner Circle Bellefonte, PA 16823-8812 Tel: 1-814-353-1300 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus





FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.


This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. :	31266	Lot No.:	A0204859	- P13103 7 Yp
Description :	Florida TRPH Standard			
	Florida TRPH Standard 500µg/	mL, Hexane, 1mL/amp	ul	P13112 JO1/12/2024
Container Size :	2 mL	Pkg Amt:	> 1 mL	P1312 J01/12/2024
Expiration Date :	December 31, 2030	Storage:	25°C nominal	
Handling:	Sonicate prior to use.	Ship:	Ambient	

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc <i>.</i> (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBP9758	99%	504.4 μg/mL	+/- 13.0305
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	503.6 μg/mL	+/- 13.0098
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	503.6 μg/mL	+/- 13.0098
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	504.0 μg/mL	+/- 13.0201
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	504.0 μg/mL	+/- 13.0201
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	504.1 μg/mL	+/- 13.0230
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	504.0 μg/mL	+/- 13.0204
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	503.6 μg/mL	+/- 13.0098
9	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	504.0 μg/mL	+/- 13.0201
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	504.0 μg/mL	+/- 13.0201
11	n-Octacosane (C28)	630-02-4	BCCG0084	99%	504.0 μg/mL	+/- 13.0201
12	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	504.0 μg/mL	+/- 13.0204
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	504.0 μg/mL	+/- 13.0201
14	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	504.4 μg/mL	+/- 13.0305
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	504.0 μg/mL	+/- 13.0201
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	503.8 μg/mL	+/- 13.0152
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.6 μg/mL	+/- 13.0098

Solvent: Hexane CAS# 110-54-3 Purity 99%

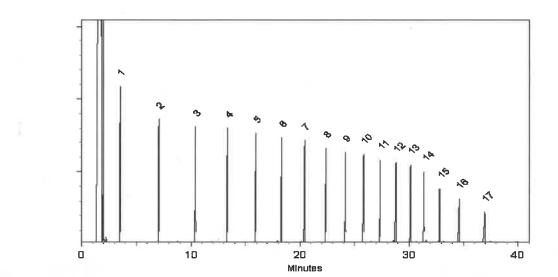

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dakota Parson - Operations Technician I

Date Mixed:

B442140311

Manufactured under Restek's ISO 9001:2015 **Registered Quality System** Certificate #FM 80397

Gunghe & Billord Jennifer Pollino - Operations Tech III - ARM QC

Date Passed:

01-Dec-2023

hydrogen-constant pressure 10 psi. Temp. Program: 40°C (hold 2 min.) to 330°C

@ 10°C/min. (hold 10 min.) Inj. Temp:

250°C

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223) **Carrier Gas:**

Det. Temp: 330°C

Det. Type: FID

Split Vent: 2 ml/min.

Inj. Vol 1µl

29-Nov-2023

Balance Serial #



General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A
 correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the
 parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

 The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage stability}^2 + u_{shipping stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

• The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

• Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle Bellefonte, PA 16823-8812 Tel: 1-814-353-1300 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus





FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.


This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. :	31266	Lot No.:	A0204859	- P13103 7 Yp
Description :	Florida TRPH Standard			
	Florida TRPH Standard 500µg/	mL, Hexane, 1mL/amp	ul	P13112 JO1/12/2024
Container Size :	2 mL	Pkg Amt:	> 1 mL	P1312 J01/12/2024
Expiration Date :	December 31, 2030	Storage:	25°C nominal	
Handling:	Sonicate prior to use.	Ship:	Ambient	

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc <i>.</i> (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBP9758	99%	504.4 µg/mL	+/- 13.0305
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	503.6 μg/mL	+/- 13.0098
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	503.6 μg/mL	+/- 13.0098
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	504.0 μg/mL	+/- 13.0201
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	504.0 μg/mL	+/- 13.0201
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	504.1 μg/mL	+/- 13.0230
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	504.0 μg/mL	+/- 13.0204
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	503.6 µg/mL	+/- 13.0098
9	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	504.0 μg/mL	+/- 13.0201
10	n-Hexacosanc (C26)	630-01-3	MKCQ4814	99%	504.0 μg/mL	+/- 13.0201
11	n-Octacosane (C28)	630-02-4	BCCG0084	99%	504.0 μg/mL	+/- 13.0201
12	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	504.0 μg/mL	+/- 13.0204
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	504.0 μg/mL	+/- 13.0201
14	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	504.4 μg/mL	+/- 13.0305
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	504.0 μg/mL	+/- 13.0201
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	503.8 μg/mL	+/- 13.0152
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.6 μg/mL	+/- 13.0098

Solvent: Hexane CAS# 110-54-3 Purity 99%

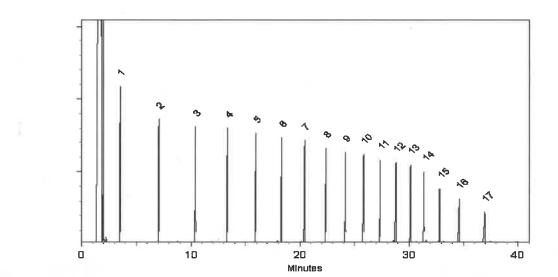

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dakota Parson - Operations Technician I

Date Mixed:

B442140311

Manufactured under Restek's ISO 9001:2015 **Registered Quality System** Certificate #FM 80397

Gunghe & Billord Jennifer Pollino - Operations Tech III - ARM QC

Date Passed:

01-Dec-2023

hydrogen-constant pressure 10 psi. Temp. Program: 40°C (hold 2 min.) to 330°C

@ 10°C/min. (hold 10 min.) Inj. Temp:

250°C

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223) **Carrier Gas:**

Det. Temp: 330°C

Det. Type: FID

Split Vent: 2 ml/min.

Inj. Vol 1µl

29-Nov-2023

Balance Serial #



General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A
 correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the
 parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

 The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage stability}^2 + u_{shipping stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

• The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

• Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	ł Refere	ance Mate	Certified Reference Material CRM				ANAB I AR-15: https://Ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol 2	Part Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	in Date: storage: ug/mL): est ID#: mbined and	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	lainity rity				Formulated By Reviewed By:	Bi	Prashant Chauhan	DATE 101122 DATE	
Compound		æ	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 1:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 °C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Inject	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	NA r B =	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		2 FC 11	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				■ 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		S C V R	5 c v n 1589 {23.538 m 143:1958 1172072.0	10 2 1 2 8 2 1 2 0	172.0		
ы та со со со со со со со со со со со со со			m (*)	97 147 147 147				\$ 0 0 3 3 0	8					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60 6								000008						1126)
м м м м м м м м м м м м м м м м м м м								788899				\rangle			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								10 10 10 10 10 10 10 10 10 10 10 10 10 1				<		p13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500390	• • • 2					4J	1
				1944 - 100 g mba) - 100 a 200 g				4 0 0 0 0 0	90					421211	421
n n n n n n n n n n n n n n n n n n n n								30000	·····					10	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k +						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9									, , , , , , , , , , , , , , , , , , ,						
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	44 44	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 546 362	184 210 326 245			
T ## e # D	19,81 08,5	後 後 - 5 1 - - - - - - - - - - - - -	19 (P) 19	5 5 5 5 7 7		na ar s e	No-April American	₫ [2 · · >] 3	8.8 6.8 8.8	203 324 245	14	23.2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		 The certil Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under a	ric measureme veights traceabi appropriate iai	ats unless other le to NIST (see a boratory conditi	wise stated. (bove). ons.					
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auyar, C.E., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuatin ngton, DC, (g and Express 1994).	ng the Uncertai	ary of NIST Mer	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	ł Refere	ance Mate	Certified Reference Material CRM				ANAB I AR-15: https://Ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Ser L	Part Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	in Date: storage: ug/mL): est ID#: mbined and	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	lainity rity				Formulated By Reviewed By:	Bi	Prashant Chauhan	DATE 101122 DATE	
Compound		æ	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (ug/mL)	(Solvent cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 1:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 °C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Inject	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	NA r B =	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		2 FC 11	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				a 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		S C F R	5 c v n 1589 {23.538 m 143:1958 1172072.0	10 2 1 2 8 2 1 2 0	172.0		
ы на со со со со со со со со со со со со со			m (*)	97 107 101				\$ 0 0 3 3 0	8					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60								000008						1126)
м м м м м м м м м м м м м м м м м м м								788899				\rangle			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								10 10 10 10 10 10 10 10 10 10 10 10 10 1				<		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500390	• • • 2					4J	1
				1944 - 100 g mba) - 100 a 200 g				4 0 0 0 0 0	90					421211	421
n n n n n n n n n n n n n n n n n n n n								30000	·····					10	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k +						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9									, , , , , , , , , , , , , , , , , , ,						
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	44 44	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 546 362	184 210 326 245			
T ## e # D	19,81 08,5	後 後 - 5 1 - - - - - - - - - - - - -	19 (P) 19	5 5 5 5 7 7		na ar s e	No-April American	₫ [2 · · >] 3	8.8 6.8 8.8	203 324 245	14	23.2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		 The certil Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under a	ric measureme veights traceabi appropriate iai	ats unless other le to NIST (see a boratory conditi	wise stated. (bove). ons.					
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auyar, C.E., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuatin ngton, DC, (g and Express 1994).	ng the Uncertai	ary of NIST Mer	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	ł Refere	ance Mate	Certified Reference Material CRM				ANAB I AR-15: https://Ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol 2	Part Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	in Date: storage: ug/mL): est ID#: mbined and	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	lainity rity				Formulated By Reviewed By:	Bi	Prashant Chauhan	DATE 101122 DATE	
Compound		æ	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (ug/mL)	(Solvent cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 1:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 °C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Inject	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	NA r B =	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		2 FC 11	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				■ 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		S C V R	5 c v n 1589 {23.538 m 143:1958 1172072.0	10 2 1 2 8 2 1 2 0	172.0		
ы та со со со со со со со со со со со со со			m (*)	97 147 147 147				\$ 0 0 3 3 0	8					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60								000008						1126)
м м м м м м м м м м м м м м м м м м м								788899				\rangle			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								10 10 10 10 10 10 10 10 10 10 10 10 10 1				<		p13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500390	• • • 2					4J	1
				1944 - 100 g mbu) - 100 u - 100 g				4 0 0 0 0 0	90					421211	421
n n n n n n n n n n n n n n n n n n n n								30000	·····					10	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k +						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9									, , , , , , , , , , , , , , , , , , ,						
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	44 44	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 546 362	184 210 326 245			
T ## e # D	19,81 08,5	後 後 - 5 1 - - - - - - - - - - - - -	19 (P) 19	5 5 5 5 7 7		na ar s e	No-April American	₫ [2 · · > ¹ 3	8.8 6.8 8.8	203 324 245	14	23.2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		 The certil Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Shandards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Shandards, after operating are provide should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under a	ric measureme veights traceabi appropriate iai	ats unless other le to NIST (see a boratory conditi	wise stated. (bove). ons.					
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auyar, C.E., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuatin ngton, DC, (g and Express 1994).	ng the Uncertai	ary of NIST Mer	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	ł Refere	ance Mate	Certified Reference Material CRM				ANAB I AR-15: https://Ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Ser L	Part Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	in Date: storage: ug/mL): est ID#: mbined and	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	lainity rity				Formulated By Reviewed By:	Bi	Prashant Chauhan	DATE 101122 DATE	
Compound		æ	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 1:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 °C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Inject	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	NA r B =	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		2 FC 11	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				■ 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		S C V R	5 c v n 1589 {23.538 m 143:1958 1172072.0	10 2 1 2 8 2 1 2 0	172.0		
ы та со со со со со со со со со со со со со			m (*)	97 147 147 147				\$ 0 0 3 3 0	8					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60 6								000008						1126)
м м м м м м м м м м м м м м м м м м м								788899				\rangle			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								10 10 10 10 10 10 10 10 10 10 10 10 10 1				<		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500390						4J	1
				1944 - 100 g mbu) - 100 u - 100 g				4 0 0 0 0 0	90					421211	421
n n n n n n n n n n n n n n n n n n n n								30000	·····					10	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k +						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								44 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	, , , , , , , , , , , , , , , , , , ,						
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	44 44	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 546 362	184 210 326 245			
T ## e # D	19,81 08,5	後 後 - 5 1 - - - - - - - - - - - - -	19 (P) 19	5 5 5 5 7 7		na ar s e	No-April American	₫ [2 · · > ¹ 3	8.8 6.8 8.8	203 324 245	14	23.2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		 The certil Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Shandards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Shandards, after operating are provide should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under a	ric measureme veights traceabi appropriate iai	ats unless other le to NIST (see a boratory conditi	wise stated. (bove). ons.					
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auya, C.L., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuatin ngton, DC, (g and Express 1994).	ng the Uncertai	ary of NIST Mer	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	ł Refere	ance Mate	Certified Reference Material CRM				ANAB I AR-15: https://Ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol 2	Part Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	in Date: storage: ug/mL): est ID#: mbined and	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	lainity rity				Formulated By Reviewed By:	Bi	Prashant Chauhan	DATE 101122 DATE	
Compound		æ	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (ug/mL)	(Solvent cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 1:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 °C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Inject	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	NA r B =	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		2 FC 11	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				■ 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		S C V R	5 c v n 1589 {23.538 m 143:1958 1172072.0	10 2 1 2 8 2 1 2 0	172.0		
ы та со со со со со со со со со со со со со			m (*)	97 147 147 147				\$ 0 0 3 3 0	8					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60 6								000008						1126)
м м м м м м м м м м м м м м м м м м м								788899				\rangle			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								10 10 10 10 10 10 10 10 10 10 10 10 10 1				<		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500390	• • • 2					4J	1
				1944 - 100 g mbu) - 100 u - 100 g				4 0 0 0 0 0	90					421211	421
n n n n n n n n n n n n n n n n n n n n								30000	·····					10	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k +						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								44 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	, , , , , , , , , , , , , , , , , , ,						
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	44 44	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 546 362	184 210 326 245			
T ## e # D	19,81 08,5	後 後 - 5 1 - - - - - - - - - - - - -	19 (A) 19	5 5 5 5 7 7		na ar s e	No-April American	₫ [2 · · >] 3	8.8 6.8 8.8	203 324 245	14	23.2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		 The certil Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under a	ric measureme veights traceabi appropriate iai	ats unless other le to NIST (see a boratory conditi	wise stated. (bove). ons.					
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auyar, C.E., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuatin ngton, DC, (g and Express 1994).	ng the Uncertai	ary of NIST Mer	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2				Certifiec	ł Refere	ance Mate	Certified Reference Material CRM				ANAB I AR-15: https://Ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ccredited Number ards.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Sotvent(s): Methylene chloride	Lot# 105345			Sol 2	Part Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	in Date: storage: ug/mL): est ID#: mbined and	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	lainity rity				Formulated By Reviewed By:	Bi	Prashant Chauhan	DATE 101122 DATE	
Compound		æ	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	(Solvent cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	ed pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 1:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	D X 0.25µm fi	98.7 Jim thick	0.2 ness) Tem	99.0 1p 1 = 50°	0.20471 °C (1min.), T	0.20482 Temp 2 = 30	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Inject	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	NA r B =	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		2 FC 11	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	5				a 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		S C F R	5 c v n 1589 {23.538 m 143:1958 1172072.0	10 2 1 2 8 2 1 2 0	172.0		
ы та со со со со со со со со со со со со со			m (*)	97 147 147 147				\$ 0 0 3 3 0	8					012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60								000008						1126)
м м м м м м м м м м м м м м м м м м м								788899				\rangle			-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								10 10 10 10 10 10 10 10 10 10 10 10 10 1				<		P13214	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								500390	• • • 2					4J	1
				1944 - 100 g mbu) - 100 u - 100 g				4 0 0 0 0 0	90					421211	421
n n n n n n n n n n n n n n n n n n n n								30000	·····					10	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20								20000	k +						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9								44 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	, , , , , , , , , , , , , , , , , , ,						
00 00 00 00 00				Augusta 10 - 10 - 10 - 10 - 10				3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	44 44	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	230 546 362	184 210 326 245			
T ## e # D	19,81 08,5	後 後 - 5 1 - - - - - - - - - - - - -	19 (A) 19	5 5 5 5 7 7		na ar s e	No-April American	₫ [2 · · >] 3	8.8 6.8 8.8	203 324 245	14	23.2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			
		 The certil Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Shandards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Shandards, after operating are provide should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the state ampule, should I	a balances balances i value, un be stored w	gravimetric : that are call less otherwis fith caps tight	c and volumetr librated with w ise stated. pht and under a	ric measureme veights traceabi appropriate iai	ats unless other le to NIST (see a boratory conditi	wise stated. (bove). ons.					
		NIST Te	- curculation were ence: 1 ayer, p.v. and Auya, C.L., 'outgeness or Evantang and Expressing the Uncertainty of MIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	usr, p.v. anu hu U.S. Government	Printing C	u moeunes r Office, Washi	or Evanuatin ngton, DC, (g and Express 1994).	ng the Uncertai	ary of NIST Mer	ssurement Kesu				
Dout # 70070															

Printed: 1/16/2024, 3:48:47 PM

	Santa	5580 Skylane Blvd Santa Rosa, CA 95403	Manuf	Manufacturer's Quality System Andited & Registered
	Ľ)	(707)525-5788		by TUV USA to ISO 9001:2015
INTERNATIONAL	(800) (707)	(800)878-7654 Toll Free (707)545-7901 Fax	e Date Received:	ved:
	Certific	Certificate of Analysis	VSiS Rev 0	Page 1 of 1
Catalog No.: Lot No.: Storage: 7-110400-05 514983 < -10 Degrees C	Solvent: Hevane	Exp. Date: 11/20/2028 TRPH 5	Exp. Date: Description: Description: 11/20/2028 TRPH Standard (C8-C40), 500 mg/L, 1 ml	ption: g/L, 1 ml
Compound	CAS No.		Compound Lot No.	Concentration, mod.
decane (C10)	124-18-5	7.66	415.7.2P	498.5 ± 6.92
docosane (C22)	629-97-0	98.8	420.9.1P	499.4 ± 6.93
dodecane (C12)	112-40-3	7.99	416.9.3P	502 ± 6.97
dotriacontane (C32)	544-85-4	76	425.9.2.2P	499.6 ± 8.53
eicosane (C20)	112-95-8	8.00	419.7.IP	501 ± 6.95
hexacosane (C26)	630-01-3	99.3	422.7.2.1P	501 ± 6.95
hexatriacontane (C36)	630-06-8	86	427.29.1.1P	499.3 ± 8.53
n-hexadecane (C16)	544-76-3	99.45	368.271.1P	498.7 ± 6.91
octacosane (C28)	630-02-4	1.99.1	423.24.1P	500.5 ± 6.95
n-octadecane (C18)	593-45-3	99.5	418.29.1P	499.5 ± 6.92
octane (C8)	111-65-9	99.4	385.7.2.1P	498.5 ± 6.92
octatriacontane (C38)	7194-85-6	95	428.1.2P	500.2 ± 6.94
tetracontane (C40)	4181-95-7	67	429.7.2P	499.6 ±6.93
n-tetracosane (C24)	646-31-1	99.5	421.7.1P	499.5 ± 6.93
n-tetradecane (C14)	629-59-4	99.3	417.9.IP	500 ± 6.94
tetratriacontane (C34)	14167-59-0	96.1	426.7.2.2P	499.7 ± 8.53
triacontane (C30)	638-68-6	99.5	424.7.1.1P	500 ± 6.94
		Q	212610	ET I'
Let the standard warm to room temperature and sonicate before opening.	ъò	CL-	p 13224	01 1 3 1 1 - Y *Not a certified value
Oundrea 2 In an Ill.	10,	All weights are tra Concentration (co	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence)	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) values
Certified By:		listed are determir	listed are determined gravimetriclly.	

5580 Skylane Blvd

Andrea Schaible Chemist

Certified By:

	Santa	5580 Skylane Blvd Santa Rosa, CA 95403	Manuf	Manufacturer's Quality System Andited & Registered
	Ľ)	(707)525-5788		by TUV USA to ISO 9001:2015
INTERNATIONAL	(800) (707)	(800)878-7654 Toll Free (707)545-7901 Fax	e Date Received:	ved:
	Certific	Certificate of Analysis	VSiS Rev 0	Page 1 of 1
Catalog No.: Lot No.: Storage: 7-110400-05 514983 < -10 Degrees C	Solvent: Hevane	Exp. Date: 11/20/2028 TRPH 5	Exp. Date: Description: Description: 11/20/2028 TRPH Standard (C8-C40), 500 mg/L, 1 ml	ption: g/L, 1 ml
Compound	CAS No.		Compound Lot No.	Concentration, mod.
decane (C10)	124-18-5	7.66	415.7.2P	498.5 ± 6.92
docosane (C22)	629-97-0	98.8	420.9.1P	499.4 ± 6.93
dodecane (C12)	112-40-3	7.99	416.9.3P	502 ± 6.97
dotriacontane (C32)	544-85-4	76	425.9.2.2P	499.6 ± 8.53
eicosane (C20)	112-95-8	8.00	419.7.IP	501 ± 6.95
hexacosane (C26)	630-01-3	99.3	422.7.2.1P	501 ± 6.95
hexatriacontane (C36)	630-06-8	86	427.29.1.1P	499.3 ± 8.53
n-hexadecane (C16)	544-76-3	99.45	368.271.1P	498.7 ± 6.91
octacosane (C28)	630-02-4	1.99.1	423.24.1P	500.5 ± 6.95
n-octadecane (C18)	593-45-3	99.5	418.29.1P	499.5 ± 6.92
octane (C8)	111-65-9	99.4	385.7.2.1P	498.5 ± 6.92
octatriacontane (C38)	7194-85-6	95	428.1.2P	500.2 ± 6.94
tetracontane (C40)	4181-95-7	67	429.7.2P	499.6 ±6.93
n-tetracosane (C24)	646-31-1	99.5	421.7.IP	499.5 ± 6.93
n-tetradecane (C14)	629-59-4	99.3	417.9.IP	500 ± 6.94
tetratriacontane (C34)	14167-59-0	96.1	426.7.2.2P	499.7 ± 8.53
triacontane (C30)	638-68-6	99.5	424.7.1.1P	500 ± 6.94
		Q	212610	ET I'
Let the standard warm to room temperature and sonicate before opening.	ъò	CL-	p 13224	01 1 3 1 1 - Y *Not a certified value
Oundrea 2 In an Ill.	10,	All weights are tra Concentration (co	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence)	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) values
Certified By:		listed are determir	listed are determined gravimetriclly.	

5580 Skylane Blvd

Andrea Schaible Chemist

Certified By: