

Prep Standard - Chemical Standard Summary

Order ID : Q1207

Test : Diesel Range Organics

Prepbatch ID : PB166348,

Sequence ID/Qc Batch ID: FE012925,

Standard ID :

EP2578,EP2580,PP23913,PP23935,PP23961,PP23962,PP23963,PP23964,PP23965,PP23966,PP23967,

Chemical ID :

E2865,E3551,E3822,E3828,E3846,E3848,E3871,P11958,P11959,P13104,P13109,P13213,P13218,P13219,P13492,P1 3493,P13494,P13495,



Extractions STANDARD PREPARATION LOG

Recipe ID 2017	NAME 1:1 ACETONE/METHYLENE CHLORIDE	<u>NO.</u> EP2578	Prep Date 01/06/2025		<u>Prepared</u> <u>By</u> Rajesh Parikh	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By RUPESHKUMAR SHAH 01/06/2025
FROM	8000.00000ml of E3846 + 8000.0000	00ml of E384	48 = Final Qu	antity: 16000.0	100 ml			

<u>Recipe</u> <u>ID</u>	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipettelD</u>	<u>Supervised By</u> RUPESHKUMAR
3923	Baked Sodium Sulfate	<u>EP2580</u>	01/17/2025	07/01/2025	Rajesh Parikh	Extraction_SC	None	SHAH
						ALE_2		01/17/2025
FROM	4000.00000gram of E3551 = Final G	uantity: 400	0.000 gram			(EX-SC-2)		
	-	-	-					



Recipe ID 3609	NAME 20 PPM DRO SPIKE SOLUTION (RESTEK)	<u>NO.</u> PP23913	Prep Date 10/25/2024	Expiration Date 04/23/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	PipetteID None	Supervised By Ankita Jodhani 10/25/2024
<u>FROM</u>	1.00000ml of P13104 + 1.00000ml of	P13109 + 4	48.00000ml of	f E3822 = Fina	l Quantity: 50.00	00 ml		
Recipe				Expiration	Prepared			Supervised By

Recipe				Expiration	Prepared			Supervised By
ID	NAME	<u>NO.</u>	Prep Date	Date	By	<u>ScaleID</u>	PipetteID	Ankita Jodhani
147	20 PPM DRO Surrogate Spike Solution	<u>PP23935</u>	11/01/2024	04/23/2025	Yogesh Patel	None	None	11/04/2024
FROM	1.00000ml of P13492 + 1.00000ml of Quantity: 200.000 ml	f P13493 +	1.00000ml of	- P13494 + 1.000	000ml of P1349	5 + 196.00000n	nl of E3822 =	Final
	Quantity. 200.000 mil							



Recipe ID 433	NAME 100/100 PPM DRO (Restek)	<u>NO.</u> PP23961	Prep Date 11/13/2024	Expiration Date 05/09/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 11/13/2024
<u>FROM</u>	1.00000ml of P11958 + 1.00000ml of	P11959 + 1	.00000ml of F	213213 + 7.000	000ml of E3828	= Final Quantit	y: 10.000 ml	
Pacino				Expiration	Propared			Supervised By

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipettelD	Ankita Jodhani
3796	100/100 PPM DRO STD (CPI)	PP23962	11/13/2024	02/14/2025	Yogesh Patel	None	None	
								11/13/2024
FROM	1.00000ml of P13213 + 1.00000ml of	f P13218 + ⁻	1.00000ml of	P13219 + 7.00	000ml of E3828	= Final Quanti	ty: 10.000 ml	



Recipe ID 435	NAME 50 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23963	Prep Date 11/13/2024	Expiration Date 05/09/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 11/13/2024
FROM	0.50000ml of E3828 + 0.50000ml of l	PP23961 =	Final Quantit	y: 1.000 ml				

<u>Recipe</u> <u>ID</u> 437	NAME 20 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23964	Prep Date 11/13/2024	Expiration Date 05/09/2025	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 11/13/2024
FROM	0.80000ml of E3828 + 0.20000ml of	I PP23961 =	Final Quantit	y: 1.000 ml				11/13/2024



Recipe ID 438	NAME 10 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23965	Prep Date 11/13/2024	Expiration Date 05/09/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 11/13/2024
FROM	0.90000ml of E3828 + 0.10000ml of I	PP23961 =	Final Quantit	y: 1.000 ml				

<u>Recipe</u> <u>ID</u> 439	NAME 5 PPM ICC DRO STD (Restek)	<u>NO.</u> PP23966	Prep Date 11/13/2024	Expiration Date 05/09/2025	Prepared By Yogesh Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Ankita Jodhani 11/13/2024
FROM	0.90000ml of E3828 + 0.10000ml of l	PP23963 =	Final Quantity	y: 1.000 ml				11/13/2024



Recipe ID 3797	NAME 50 PPM DRO ICV STD (CPI)	<u>NO.</u> PP23967	Prep Date 11/13/2024	Expiration Date 02/14/2025	<u>Prepared</u> <u>By</u> Yogesh Patel	<u>ScaleID</u> None	PipetteID None	Supervised By Ankita Jodhani 11/13/2024
FROM	0.80000ml of E3828 + 0.50000ml of	PP23962 =	Final Quantit	y: 1.000 ml				



CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3382-05 / Sand, Purified (cs/4x2.5kg)	0000243821	06/30/2025	04/30/2020 / RAJESH	04/28/2020 / RAJESH	E2865
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	PC19631-100 / SODIUM SULFATE, ANHYDROUS, PEST GRADE, 1	313201	07/01/2025	01/03/2024 / Rajesh	07/20/2023 / Rajesh	E3551
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	2412662006	04/23/2025	10/24/2024 / Rajesh	10/24/2024 / Rajesh	E3822
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24G0862003	05/09/2025	11/09/2024 / Rajesh	11/04/2024 / Rajesh	E3828
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9254-03 / Acetone, Ultra Resi (cs/4x4L)	24H2762008	06/26/2025	12/26/2024 / Rajesh	12/13/2024 / Rajesh	E3846
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24K1762005	06/18/2025	12/18/2024 / Rajesh	12/09/2024 / Rajesh	E3848



ug/ml

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	24K1762005	07/14/2025	01/14/2025 / Rajesh	12/27/2024 / Rajesh	E3871
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	05/13/2025	11/13/2024 / yogesh	07/11/2022 / Yogesh	P11958
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	05/13/2025	11/13/2024 / yogesh	07/11/2022 / Yogesh	P11959
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0204859	04/25/2025	10/25/2024 / yogesh	01/12/2024 / Yogesh	P13104
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0204859	04/25/2025	10/25/2024 / yogesh	01/12/2024 / Yogesh	P13109
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000	101122	05/13/2025	11/13/2024 / yogesh	01/17/2024 / Ankita	P13213



CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
CPI International	Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml	514983	02/14/2025	08/14/2024 / yogesh	01/31/2024 / Ankita	P13218
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
CPI International	Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml	514983	05/13/2025	11/13/2024 / 01/31/2024 / yogesh Ankita		P13219
Supplier	ItemCode / ItemName	Lot # Expiration Date		Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	05/01/2025	11/01/2024 / yogesh	07/24/2024 / yogesh	P13492
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute 72072 / Standards, Inc. n-Tetracosane-d50, 1000 ug/ml		101122	05/01/2025	11/01/2024 / yogesh	07/24/2024 / yogesh	P13493
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute 72072 / Standards, Inc. n-Tetracosane-d50, 1000 ug/ml		101122	05/01/2025	11/01/2024 / yogesh	07/24/2024 / yogesh	P13494
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	05/01/2025	11/01/2024 / yogesh	07/24/2024 / yogesh	P13495

Sand Purified Washed and Ignited



Material No.: 3382-05 Batch No.: 0000243821 Manufactured Date: 2018/04/09 Retest Date: 2025/04/07

Revision No: 1

Certificate of Analysis

Test	Specification	Result
Substances Soluble in HCI	<= 0.16 %	0.01

For Laboratory, Research or Manufacturing Use Meets Reagent Specifications for testing USP/NF monographs

Country of Origin:	US
Packaging Site:	Paris Mfg Ctr & DC





For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone: 610.386.1700



PRODUCTOS QUIMICOS MONTERREY, S.A. DE CY. MIRADOR 201, COL. MIRADOR MONTERREY, N.L. MEXICO CP 64070 TEL +52 81 13 52 57 57 WWW.pqm.com.mx

CERTIFICATE OF ANALYSIS

	DIUM SULFATE CRYS CS (CODE RMB3375)			NA.CO
SPECIFICATION NUMBER :	-		E DATE:	Na ₂ SO ₄ ABR/21/2023
	3201	N.a.L.a.M.O	E 1./A I E.	ADR/2 1/2023
TEST	SPECI	FICATIONS	LOT V	ALUES
Assay (Na ₂ SO ₄)	Min. 99	1.0%	99.7 %	
pH of a 5% solution at 25°C	5.2 - 9.	2	6.1	
Insoluble matter	Max. 0.	01%	0.005	1
Loss on ignition	Max. 0.	5%	0.1 %	16
Chloride (Cl)	Max. 0.	001%	<0.001	0/
Nitrogen compounds (as N)	Max. 5	ppm	<0.001 <5 ppn	
Phosphate (PO ₄)	Max. 0.		<0.001	
Heavy metals (as Pb)	Max. S			
Iron (Fe)	Max, 0,	9 R ·	<5 ppn <0.001	
Calcium (Ca)	Max. 0.	01%	0.002 %	
Magnesium (Mg)	Max. 0.	005%	0.002 9	
Potassium (K)	Max. 0.		0.003 %	
Extraction-concentration suit	ability Passes	test	Passes	*
Appearance	Passes		Passes	
Identification	Passes	test	Passes	test
Solubility and foreing matter		test	Passes	: test
Retained on US Standard No.		h	0.1 %	
Retained on US Standard No.	60 sieve Min. 94	a/ ₀	97.3 %	
Through US Standard No. 60	sieve Max. 5%	46	2.5 %	
Through US Standard No. 100) sieve Max. 10	1%	0.1 %	
an second a second s	CON	MENTS	ಕ್ಷಿತ್ರಾಲೆಗೂ ಕಾರ್ಯಕ್ರಿ ಪ್ರದೇಶಕರ್ಷ ಪ್ರದೇಶಕ	
91 <i>0</i> 91			n+	15 HANDOWNI
			- he "	
			1	
		QC: Ph	C Irma Belma	res

If you need further details, please call our factory or contact our local distributor.

Read. by R: 017/293 E3551

RE-02-01, Ed. 1

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)





Material No.: 9266-A4 Batch No.: 2412662006 Manufactured Date: 2024-08-29 Expiration Date:2025-11-28 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol)Single Impurity Peak (ng/mL)	<= 5	2
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	<= 10	3
Assay (CH ₂ Cl ₂) (by GC, exclusive of preservative, corrected for water)	>= 99.8 %	99.9 %
Color (APHA)	<= 10	5
Residue after Evaporation	<= 1.0 ppm	0.2 ppm
Titrable Acid (µeq/g)	<= 0.3	<0.1
Chloride (Cl)	<= 10 ppm	<5 ppm
Water (by KF, coulometric)	<= 0.02 %	<0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States Packaging Site: Phillipsburg Mfg Ctr & DC



For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)





Material No.: 9266-A4 Batch No.: 24J0862003 Manufactured Date: 2024-09-12 Expiration Date:2025-12-12 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol)Single Impurity Peak (ng/mL)	<= 5	2
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	<= 10	1
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	>= 99.8 %	100.0 %
Color (APHA)	<= 10	5
Residue after Evaporation	<= 1.0 ppm	5 0.2 ppm
itrable Acid (µeq/g)	<= 0.3	<0.1
Chloride (Cl)	<= 10 ppm	<5 ppm
Vater (by KF, coulometric)	<= 0.02 %	<0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States Packaging Site: Phillipsburg Mfg Ctr & DC

E 3828



Acetone

BAKER RESI-ANALYZED® Reagent

For Organic Residue Analysis





Material No.: 9254-03 Batch No.: 24H2762008 Manufactured Date: 2024-04-18 Expiration Date:2027-04-18 **Revision No.: 0**

Certificate of Analysis

Test	Specification	Result
Assay ((CH3)2CO) (by GC, corrected forwater)	>= 99.4 %	100.0 %
Color (APHA)	<= 10	5
Residue after Evaporation	<= 1.0 ppm	0.0 ppm
Substances Reducing Permanganate	Passes Test	Passes Test
Titrable Acid (µeq/g)	<= 0.3	0.2
Titrable Base (µeq/g)	<= 0.6	<0.1
Water (H2O)	<= 0.5 %	
FID-Sensitive Impurities (as 2-Octanol)Single Impurity Peak (ng/mL)	<= 5	<0.1 % 1
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	<= 10	1

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States Packaging Site: Phillipsburg Mfg Ctr & DC



For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Arrandan Daufannanan Bénéantala () m

PO: PO2-798 PRODUCT CODE: SHIP DATE: 12/9/2024

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)





Material No.: 9266-A4 Batch No.: 24K1762005 Manufactured Date: 2024-10-08 Expiration Date:2026-01-07 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol)Single Impurity Peak (ng/mL)	<= 5	T
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	<= 10	2
Assay (CH ₂ Cl ₂) (by GC, exclusive of preservative, corrected for water)	>= 99.8 %	100.0 %
Color (APHA)	<= 10	5
Residue after Evaporation	<= 1.0 ppm	0.5 ppm
Titrable Acid (µeq/g)	<= 0.3	0.0
Chloride (Cl)	<= 10 ppm	<5 ppm
Water (by KF, coulometric)	<= 0.02 %	0.01 %

For Laboratory, Research, or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States Packaging Site: Phillipsburg Mfg Ctr & DC

E 3848



For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials,LLC

100 Matsonford Rd, Suite 200, Radnor, PA, 19087. U.S.A. Phone 610.386. 1700

Page 1 of 1

12127124

Methylene Chloride ULTRA RESI-ANALYZED For Organic Residue Analysis (dichloromethane)

(V avantor



Material No.: 9266-A4 Batch No.: 24K1762005 Manufactured Date: 2024-10-08 Expiration Date:2026-01-07 Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol)Single Impurity Peak (ng/mL)	<= 5	1
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	<= 10	2
Assay (CH2Cl2) (by GC, exclusive of preservative, corrected for water)	>= 99.8 %	100.0%
Color (APHA)	<= 10	5
Residue after Evaporation	<= 1.0 ppm	0.5 ppm
Titrable Acid (µeq/g)	<= 0.3	0.0
Chloride (Cl)	<= 10 ppm	<5 ppm
Water (by KF, coulometric)	<= 0.02 %	0.01 %

For Laboratory,Research,or Manufacturing Use MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States Packaging Site: Phillipsburg Mfg Ctr & DC

Alioak Jamie Croak **Director Quality Operations, Bioscience Production**

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials,LLC

100 Matsonford Rd, Suite 200, Radnor, PA, 19087. U.S.A. Phone 610.386. 1700

Page 1 of 1

110 Benner Circle Bellefonte, PA 16823-8812 Tel: (800)356-1688 Fax: (814)353-1309	er Circle \ 16823-8812 356-1688 353-1309	Certific	Certificate of Analysis	nalysi			
www.restek.com	tek.com						ACCREDITED ISO/IEC 17025 Accredited Testing Laboratory Certificate #3222.02
		FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE. This Reference Material is intended for Laboratory Use Only as a standard the qualitative and/or quantitative determination of the analyte(s) listed	USE ONLY-RE, is intended for Labo	AD SDS PRIO	E.		
Catalog No. :	31266		Lot No.: A0186840	840		- - - -	
)					I	t	_
Description :	Florida TRPH Standard	ndard				210	140/ 2
	Florida TRPH Sta	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul	, 1mL/ampul			r II C	162 /
Container Size :	2 mL		Pkg Amt: > 1 mL				
Expiration Date :	July 31, 2029		Storage: 25°C r	25°C nominal	i		
Handling:	Sonicate prior to use.	<u>se.</u>	Ship: Ambient	nt			
				CERTI	IFIE D	VALUE	ш С
Elution Order	Co	Compound	Grav. Conc. (weight/volume)	Conc. volume)	Expanded Uncertainty (95% C.L.; K=2)	Incertainty (=2)	
1 n-Octa CAS # Purity	n-Octane (C8) CAS # 111-65-9 Purity 99%	(Lot SHBN3807)	505.0	μg/mL +/- +/- +/-	2.9995 12.5465 15.0390	ball definition of the second	Gravimetric Unstressed Stressed
2 n-Decs CAS # Purity	n-Decane (C10) CAS # 124-18-5 Purity 99%	(Lot SHBN8619)	503.0	μg/mL +/- +/- +/-	- 2.9877 - 12.4968 - 14.9795	μg/mL (μg/mL 1	Gravimetric Unstressed Stressed
3 n-Dode CAS # Purity	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	(Lot SHBN7174)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	μg/mL 1 μg/mL 1	Gravimetric Unstressed Stressed
4 n-Tetra CAS # Purity	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	(Lot STBK2282)	505.0	μg/mL +/- +/- +/-	- 2.9995 - 12.5465 - 15.0390	hg/mL 1 hg/mL 1	Gravimetric Unstressed Stressed
5 n-Hexa CAS # Purity	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	(Lot SHBM4146)	504.7	µg/mL +/- +/- +/-	- 2.9978 - 12.5390 - 15.0301	րց/mL կց/mL կց/mL	Gravimetric Unstressed Stressed
6 n-Octa CAS # Purity	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	(Lot VZKOJ)	504.4	μg/mL +/- +/- +/-	- 2.9960 - 12.5316 - 15.0212	hg/mL hg/mL	Gravimetric Unstressed Stressed
7 n-Eico: CAS # Purity	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	(Lot MKCF7888)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	µg/mL µg/mL	Gravimetric Unstressed Stressed

RES

CERTIFIED REFERENCE MATERIAL

ACCREDITED ISO 17034 Accredited Veference Material Producer Certificate #3222.01

110 Benner Circle Bellefonte, PA 16823-8812

01-Aug-2020 rev.

Solvent:	17	16	15	14	13	12	11	10	و	∞
lt: Hexane CAS # Purity	n-Tetrac CAS # Purity	n-Octati CAS # Purity	n-Hexat CAS # Purity	n-Tetrat CAS # Purity	n-Dotria CAS # Purity	n-Triacc CAS # Purity	n-Octac CAS # Purity	n-Hexac CAS # Purity	n-Tetrac CAS # Purity	n-Docos CAS # Purity
110-54-3 99%	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	n-Docosane (C22) CAS # 629-97-0 Purity 99%
	(Lot PADGI)	(Lot 0000127235)	(Lot U25B014)	(Lot OML4N)	(Lot BCBW0661)	(Lot MKCN9321)	(Lot BCCG0084)	(Lot MKCD4540)	(Lot MKCN2863)	(Lot MKCL8918)
	504.7	504.4	504.0	504.5	505.0	505.0	504.5	504.0	503.5	504.5
	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL
	+ + +	+/- +/-	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +
	2.9978 12.5390 15.0301	2.9960 12.5316 15.0212	2.9936 12.5216 15.0093	2.9966 12.5340 15.0241	2.9995 12.5465 15.0390	2.9995 12.5465 15.0390	2.9966 12.5340 15.0241	2.9936 12.5216 15.0093	2.9906 12.5092 14.9944	2.9966 12.5340 15.0241
	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	ից/mL կց/mL կց/mL	µg/mL µg/mL	µg/mL µg/mL
	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed

01-Aug-2020 rev.

01-Aug-2020	
) rev.	

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223)

Carrier Gas: hydrogen-constant pressure 10 psi.

Temp. Program: 40°C (hold 2 min.) to 330°C @ 10°C/min. (hold 10 min.) Inj. Temp:

250°C **Det. Temp:** 330°C

Det. Type:



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Attraction Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022 Balance: 1128360905

িক গঠ Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015 Registered Quality System Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- GC/MS, LC/MS, RI, and/or melting point. Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD
- correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. parent compound in solution. ≻
- Purity of isomeric compounds is reported as the sum of the isomers

Purity values are rounded to the nearest whole number. Certified Uncertainty Value Notes:

٠ uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula: The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- standard temperature conditions. www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at nonstored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time
- . Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions as specified below. conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- are available by contacting Restek Technical Service at www.restek.com/Contact-Us. separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed,
- . that the minimum packaged amount can be sufficiently transferred The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure

Manufacturing Notes:

٠ using NIST traceable weights, and/or dilutions with Class A glassware. Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily

Handling Notes:

most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with information, with the knowledge/understanding that open product stability is subject to the specific handling and which includes complete instructions. the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through

110 Benner Circle Bellefonte, PA 16823-8812 Tel: (800)356-1688 Fax: (814)353-1309	er Circle \ 16823-8812 356-1688 353-1309	Certific	Certificate of Analysis	nalysi			
www.restek.com	tek.com						ACCREDITED ISO/IEC 17025 Accredited Testing Laboratory Certificate #3222.02
		FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE. This Reference Material is intended for Laboratory Use Only as a standard the qualitative and/or quantitative determination of the analyte(s) listed	USE ONLY-RE, is intended for Labo	AD SDS PRIO	E.		
Catalog No. :	31266		Lot No.: A0186840	840		- - - -	
) . (I	t	_
Description :	Florida TRPH Standard	ndard				210	140/ 2
	Florida TRPH Sta	Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul	, 1mL/ampul			r II C	162 /
Container Size :	2 mL		Pkg Amt: > 1 mL				
Expiration Date :	July 31, 2029		Storage: 25°C r	25°C nominal	i		
Handling:	Sonicate prior to use.	<u>se.</u>	Ship: Ambient	nt			
				CERTI	IFIE D	VALUE	ш С
Elution Order	Co	Compound	Grav. Conc. (weight/volume)	Conc. volume)	Expanded Uncertainty (95% C.L.; K=2)	Incertainty (=2)	
1 n-Octa CAS # Purity	n-Octane (C8) CAS # 111-65-9 Purity 99%	(Lot SHBN3807)	505.0	μg/mL +/- +/- +/-	2.9995 12.5465 15.0390	baller 1. Tw/Bή 1. Tw/Bή	Gravimetric Unstressed Stressed
2 n-Decs CAS # Purity	n-Decane (C10) CAS # 124-18-5 Purity 99%	(Lot SHBN8619)	503.0	μg/mL +/- +/- +/-	- 2.9877 - 12.4968 - 14.9795	μg/mL (μg/mL 1	Gravimetric Unstressed Stressed
3 n-Dode CAS # Purity	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	(Lot SHBN7174)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	μg/mL 1 μg/mL 1	Gravimetric Unstressed Stressed
4 n-Tetra CAS # Purity	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	(Lot STBK2282)	505.0	μg/mL +/- +/- +/-	- 2.9995 - 12.5465 - 15.0390	hg/mL 1 hg/mL 1	Gravimetric Unstressed Stressed
5 n-Hexa CAS # Purity	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	(Lot SHBM4146)	504.7	µg/mL +/- +/- +/-	- 2.9978 - 12.5390 - 15.0301	րց/mL կց/mL կց/mL	Gravimetric Unstressed Stressed
6 n-Octa CAS # Purity	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	(Lot VZKOJ)	504.4	μg/mL +/- +/- +/-	- 2.9960 - 12.5316 - 15.0212	hg/mL hg/mL	Gravimetric Unstressed Stressed
7 n-Eico: CAS # Purity	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	(Lot MKCF7888)	503.5	μg/mL +/- +/- +/-	- 2.9906 - 12.5092 - 14.9944	µg/mL µg/mL	Gravimetric Unstressed Stressed

RES

CERTIFIED REFERENCE MATERIAL

ACCREDITED ISO 17034 Accredited Veference Material Producer Certificate #3222.01

110 Benner Circle Bellefonte, PA 16823-8812

01-Aug-2020 rev.

Solvent:	17	16	15	14	13	12	11	10	و	∞
lt: Hexane CAS # Purity	n-Tetrac CAS # Purity	n-Octati CAS # Purity	n-Hexat CAS # Purity	n-Tetrat CAS # Purity	n-Dotria CAS # Purity	n-Triacc CAS # Purity	n-Octac CAS # Purity	n-Hexac CAS # Purity	n-Tetrac CAS # Purity	n-Docos CAS # Purity
110-54-3 99%	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	n-Docosane (C22) CAS # 629-97-0 Purity 99%
	(Lot PADGI)	(Lot 0000127235)	(Lot U25B014)	(Lot OML4N)	(Lot BCBW0661)	(Lot MKCN9321)	(Lot BCCG0084)	(Lot MKCD4540)	(Lot MKCN2863)	(Lot MKCL8918)
	504.7	504.4	504.0	504.5	505.0	505.0	504.5	504.0	503.5	504.5
	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL	µg/mL
	+ + +	+/- +/-	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +	+ + +
	2.9978 12.5390 15.0301	2.9960 12.5316 15.0212	2.9936 12.5216 15.0093	2.9966 12.5340 15.0241	2.9995 12.5465 15.0390	2.9995 12.5465 15.0390	2.9966 12.5340 15.0241	2.9936 12.5216 15.0093	2.9906 12.5092 14.9944	2.9966 12.5340 15.0241
	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	µg/mL µg/mL	ից/mL կց/mL կց/mL	µg/mL µg/mL	µg/mL µg/mL
	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed	Gravimetric Unstressed Stressed

01-Aug-2020 rev.

01-Aug-2020	
) rev.	

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223)

Carrier Gas: hydrogen-constant pressure 10 psi.

Temp. Program: 40°C (hold 2 min.) to 330°C @ 10°C/min. (hold 10 min.) Inj. Temp:

250°C **Det. Temp:** 330°C

Det. Type:



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Attraction Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022 Balance: 1128360905

িক গঠ Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015 Registered Quality System Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- GC/MS, LC/MS, RI, and/or melting point. Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD
- correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. parent compound in solution. ≻
- Purity of isomeric compounds is reported as the sum of the isomers

Purity values are rounded to the nearest whole number. Certified Uncertainty Value Notes:

• uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula: The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

- k is a coverage factor of 2, which gives a level of confidence of approximately 95%.
- standard temperature conditions. www.restek.com/Contact-Us for use recommendations if your shipment was in-transit for more than 7 days at nonstored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time
- . Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions as specified below. conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- are available by contacting Restek Technical Service at www.restek.com/Contact-Us. separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed,
- . that the minimum packaged amount can be sufficiently transferred The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure

Manufacturing Notes:

٠ using NIST traceable weights, and/or dilutions with Class A glassware. Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily

Handling Notes:

most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with information, with the knowledge/understanding that open product stability is subject to the specific handling and which includes complete instructions. the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through



110 Benner Circle Bellefonte, PA 16823-8812 Tel: 1-814-353-1300 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus





FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.


This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. :	31266	Lot No.:	A0204859	- P13103 7 Yp
Description :	Florida TRPH Standard			
	Florida TRPH Standard 500µg/	mL, Hexane, 1mL/amp	ul	P13112 JO1/12/2024
Container Size :	2 mL	Pkg Amt:	> 1 mL	P1312 J01/12/2024
Expiration Date :	December 31, 2030	Storage:	25°C nominal	
Handling:	Sonicate prior to use.	Ship:	Ambient	

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc <i>.</i> (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBP9758	99%	504.4 μg/mL	+/- 13.0305
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	503.6 μg/mL	+/- 13.0098
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	503.6 μg/mL	+/- 13.0098
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	504.0 μg/mL	+/- 13.0201
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	504.0 μg/mL	+/- 13.0201
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	504.1 μg/mL	+/- 13.0230
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	504.0 μg/mL	+/- 13.0204
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	503.6 μg/mL	+/- 13.0098
9	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	504.0 μg/mL	+/- 13.0201
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	504.0 μg/mL	+/- 13.0201
11	n-Octacosane (C28)	630-02-4	BCCG0084	99%	504.0 μg/mL	+/- 13.0201
12	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	504.0 μg/mL	+/- 13.0204
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	504.0 μg/mL	+/- 13.0201
14	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	504.4 μg/mL	+/- 13.0305
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	504.0 μg/mL	+/- 13.0201
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	503.8 μg/mL	+/- 13.0152
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.6 μg/mL	+/- 13.0098

Solvent: Hexane CAS# 110-54-3 Purity 99%

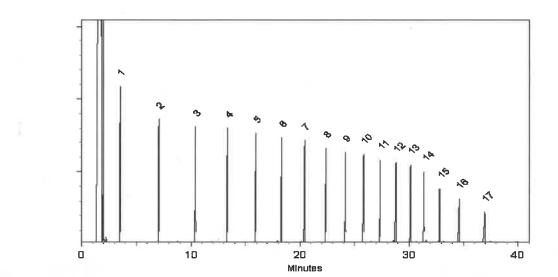

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dakota Parson - Operations Technician I

Date Mixed:

B442140311

Manufactured under Restek's ISO 9001:2015 **Registered Quality System** Certificate #FM 80397

Gunghe & Billord Jennifer Pollino - Operations Tech III - ARM QC

Date Passed:

01-Dec-2023

hydrogen-constant pressure 10 psi. Temp. Program: 40°C (hold 2 min.) to 330°C

@ 10°C/min. (hold 10 min.) Inj. Temp:

250°C

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223) **Carrier Gas:**

Det. Temp: 330°C

Det. Type: FID

Split Vent: 2 ml/min.

Inj. Vol 1µl

29-Nov-2023

Balance Serial #



General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A
 correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the
 parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

 The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage stability}^2 + u_{shipping stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

• The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

• Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle Bellefonte, PA 16823-8812 Tel: 1-814-353-1300 Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus





FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.


This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. :	31266	Lot No.:	A0204859	- P13103 7 Yp
Description :	Florida TRPH Standard			
	Florida TRPH Standard 500µg/	mL, Hexane, 1mL/amp	ul	P13112 JO1/12/2024
Container Size :	2 mL	Pkg Amt:	> 1 mL	P1312 J01/12/2024
Expiration Date :	December 31, 2030	Storage:	25°C nominal	
Handling:	Sonicate prior to use.	Ship:	Ambient	

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc <i>.</i> (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBP9758	99%	504.4 μg/mL	+/- 13.0305
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	503.6 μg/mL	+/- 13.0098
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	503.6 μg/mL	+/- 13.0098
4	n-Tetradecane (C14)	629-59-4	STBK5437	99%	504.0 μg/mL	+/- 13.0201
5	n-Hexadecane (C16)	544-76-3	SHBP8192	99%	504.0 μg/mL	+/- 13.0201
6	n-Octadecane (C18)	593-45-3	UE5NG	98%	504.1 μg/mL	+/- 13.0230
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	504.0 μg/mL	+/- 13.0204
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	503.6 μg/mL	+/- 13.0098
9	n-Tetracosane (C24)	646-31-1	MKCQ8345	99%	504.0 μg/mL	+/- 13.0201
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	504.0 μg/mL	+/- 13.0201
11	n-Octacosane (C28)	630-02-4	BCCG0084	99%	504.0 μg/mL	+/- 13.0201
12	n-Triacontane (C30)	638-68-6	MKCQ9436	97%	504.0 μg/mL	+/- 13.0204
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	504.0 μg/mL	+/- 13.0201
14	n-Tetratriacontane (C34)	14167-59-0	OML4N	99%	504.4 μg/mL	+/- 13.0305
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	504.0 μg/mL	+/- 13.0201
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	503.8 μg/mL	+/- 13.0152
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.6 μg/mL	+/- 13.0098

Solvent: Hexane CAS# 110-54-3 Purity 99%

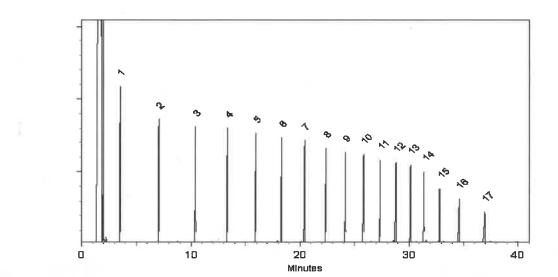

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Dakota Parson - Operations Technician I

Date Mixed:

B442140311

Manufactured under Restek's ISO 9001:2015 **Registered Quality System** Certificate #FM 80397

Gunghe & Billord Jennifer Pollino - Operations Tech III - ARM QC

Date Passed:

01-Dec-2023

hydrogen-constant pressure 10 psi. Temp. Program: 40°C (hold 2 min.) to 330°C

@ 10°C/min. (hold 10 min.) Inj. Temp:

250°C

Column: 30m x 0.25mm x 0.25µm Rtx-5 (cat.#10223) **Carrier Gas:**

Det. Temp: 330°C

Det. Type: FID

Split Vent: 2 ml/min.

Inj. Vol 1µl

29-Nov-2023

Balance Serial #



General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/µECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A
 correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the
 parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

 The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage stability}^2 + u_{shipping stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

• The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

• Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.

Absolute Standards, 800-368-1131 www.absolutestandards.com	Standards, Inc. I estandards.com	2			ľ	Certifiea	Refere	nce Mate	Certified Reference Material CRM				ANAB I: AR-153 https://Ab	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	credited Number Irds.com
CERTIFIED WEIGHT REPORT		Part Number: Lot Number: Description:	72072 101122 n-Tetracosane-d50	me-d50			Methyle	Solvent(s): Methylene chloride	Lot# 105345			Sol	ant Cheuler	101122	
Nom Weight(s) sh	Expiration Date: 101132 Recommended Storage: Amblent (2 Nominal Concentration (<i>ug/mL</i>): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL):	Stopiration Date: Bnded Storage: Iration (µg/mL): NIST Test ID#: vere combined and c	101132 Amblent (20 °C) 1000 6UTB diluted to (mL):	0 °C) 200.0	5E-05 0.058	5E-05 Balance Uncertainty 0.058 Flaak Uncertainty	ainty ty				Formulated By Reviewed By:	and and a	Prashant Chauhan	DATE 101122 DATE	
Compound		S.	Lot RM# Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Assay (%D)	Target Weight(g)	Actual Weight(g)	Expanded Actual Uncertainty Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	Solvent Sa cas#	SDS Information (Solvent Safety Info. On Attached pg.) CAS# 05HA PEL (TWA) LD5	d pg.) LDSO	
1. <u>n-Tetracosane-d50</u> Method GC8MSD-3 275°C. Solit Ratio =	l. <u>n-Tetracosane-d50</u> 2072 PR-26606 1000 98.7 0. Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) 275°C. Solit Ratio = 100:1. Scan Rate = 2 Analysis performed by: Candice Warran	20 I:SPB-5 (30 1 Bate = 2	2072 PR-26606 30m X 0.25mm II 2 Analysis perfo	1000 D X 0.25µm fi wmed hv: Car	98.7 lim thickr	0.2 ness) Tem	99.0 Ip 1 = 50°(0.20471 C (1min.), T	0.20482 emp 2 = 300	1000.6 0°C (9min.),	4.1 Rate = 10°C	16416-32-3 C/min., Injecto	. <u>n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A</u> Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25 <i>µ</i> m film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B= 250°C, Detector B 275°C. Solit Ratio = 100°L. Scan Rate = 2 Analysis conformed hv: Candice Warren	MA B=	
A 2 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5		9 - F	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		2			a 2 2 € 9 2 2 5 5 8		S C S R	5 8 2 3 5 3 8 W	5 c v n 1589 {23.538 m 143:1958 1172072.0	89. 		
ы та со со со со со со со со со со со со со			m (*)	97 197 197 197				90000	8				7	012705	S
9-100-000-00 60 60 60 60 60 60 60 60 60 60 60 60 6								80000)
м м м м м м м м м м м м м м м м м м м								720250	-			5	5		-
10 20 20 20 20 20 20 20 20 20 20 20 20 20								6 0 8 0 8 0				ζ		p13514	5
99 99 99 99 99 99 99 99 99 99 99 99 99 9								50000						FF	1
				the states				4 2 6 2 3 8	00					421411	421
n n n n n n n n n n n n n n n n n n n n				66.6 (5.09.4 (5.09.4 (5.09.4				30000						110	
ca 20 20 20 20 20 20 20 20 20 20 20 20 20				- 1000 (L-1 - 1-1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -				20000	k						
9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9				*****											
00 00 00 00 00				Audiobaligio 104 408 2 404				3 5 7 7			2.3.0 5.4.6 3.6.2 	184 916 956 949	900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900 - 900	40 89 89	
T ## e # D	19,81 08,5	15. 8.8	19 (P) 19	8 8 8 9 8 7	10 10 10 10 10 10 10 10 10 10 10 10 10 1	2 2 2 2	the elements of a second sec	12 - 2 - 3 - 3	8.8 8.8 8.8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	202 224 245	14		E.		
		 The certi Standard Standard Ali Stand 	 The certified value is the concentration catculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NUST (see above). Standards are exciting (+/-) 0.5% of the stated value, unless otherwise stated. MiStandards, after opening amplite should be stored with cass tight and under appropriate laboratory conditions. 	centration calcul vimetrically using 0.5% of the stated ampule, should i	ated from g balances l value, un > stored w	gravimetric a that are callb less otherwise ith caps tight	c and volumetri librated with w ise stated. pht and under a	ic measuremes eights traceabl uppropriate lab	the unless others the NIST (see a oratory condition	vise stated. Ibove). ons.	-	1 2			_
		NIST Te	- curculamy veterence: 1 ayer, p.v. and Auya, C.L., 'outgenes or Evanang and Expressing the Uncertamy of NIST Measurement Kesult,' NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).	ur, p.v. anu hu U.S. Government	Printing C	unoeunes n Mice, Washir	r Evanuaung gton, DC, (1	g and Express	ig the Uncertain	ary of NIST Mea	isurenenî Kesu				
Dort # 70070															

Lot # 101122

1 of 1

Printed: 1/16/2024, 3:48:47 PM

Part # 72072

	Santa R	5580 Skylane Blvd Santa Rosa, CA 95403	Manufi Ay	Manufacturer's Quality System Andited & Registered
	(707)	(707)525-5788		by TUV USA to ISO 9001:2015
	(200)872 (707)5	(707)545-7901 Fax	e Date Received:	:pa
	Certifica	Certificate of Analysis	JySiS Rev 0	Page 1 of 1
Catalog No.: Lot No.: Storage: Z-110400-05 514983 <-10 Degrees C	Solvent: E Hexane 1	Exp. Date: 11/20/2028 TRPH	Exp. Date: Description: Description: 11/20/2028 TRPH Standard (C8-C40), 500 mg/L, 1 ml	ption: g/L, 1 ml
Compound	AS No.	Purity (%)	Compound Lot No.	Concentration, mg/L
decane (C10)	124-18-5	7.66	415.7.2P	498.5 ± 6.92
docosane (C22)	629-97-0	98.8	420.9.1P	499.4 ± 6.93
dodecane (C12)	112-40-3	7.66	416.9.3P	5 02 ± 6.97
dotriacontane (C32)	544-85-4	67	425.9.2.2P	499.6 ± 8.53
eicosane (C20)	112-95-8	8.66	419.7.1P	501 ± 6.95
hexacosane (C26)	630-01-3	6.66	422.7.2.1P	501 ± 6.95
hexatriacontane (C36)	630-06-8	86	427.29.1.1P	499.3 ± 8.53
n-hexadecane (C16)	544-76-3	99.45	368.271.1P	498.7 ± 6.91
octacosane (C28)	630-02-4	99.1	423.24.1P	500.5 ± 6.95
n-octadecane (C18)	593-45-3	99.5	418.29.1P	499.5 ± 6.92
octane (C8)	111-65-9	99.4	385.7.2.1P	498.5 ± 6.92
octatriacontane (C38)	7194-85-6	95	428.1.2P	500.2 ± 6.94
tetracontane (C40)	4181-95-7	26	429.7.2P	499.6 ± 6.93
n-tetracosane (C24)	646-31-1	99.5	421.7.IP	499.5 ± 6.93
n-tetradecane (C14)	629-59-4	99.3	417.9.1P	500 ± 6.94
tetratriacontane (C34)	14167-59-0	96.1	426.7.2.2P	499.7 ± 8.53
triacontane (C30)	638-68-6	99.5	424.7.1.1P	500 ± 6.94
		G	212610	II.
			p 13224	01 31 24 *Not a certified value
Let the standard warm to room temperature and sonicate before opening.	nug			
Oundrea Shrindl	Jul	All weights are tra Concentration (cc listed are determin	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) t listed are determined gravimetricIIv.	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) values listed are determined gravimetricIIv.
Certified By: Andrea Schaible	ole		0	

5580 Skylane Blvd

Andrea Schaible Chemist

	Santa R	5580 Skylane Blvd Santa Rosa, CA 95403	Manufi Ay	Manufacturer's Quality System Andited & Registered
	(707)	(707)525-5788		by TUV USA to ISO 9001:2015
	(201)8/2	00)8/8-/054 1011 Fre (707)545-7901 Fax	e Date Received:	:pa
	Certifica	Certificate of Analysis	JySiS Rev 0	Page 1 of 1
Catalog No.: Lot No.: Storage: Z-110400-05 514983 <-10 Degrees C	Solvent: E Hexane 1	Exp. Date: 11/20/2028 TRPH	Exp. Date: Description: Description: 11/20/2028 TRPH Standard (C8-C40), 500 mg/L, 1 ml	ption: g/L, 1 ml
Compound	AS No.	Purity (%)	Compound Lot No.	Concentration, mg/L
decane (C10)	124-18-5	7.66	415.7.2P	498.5 ± 6.92
docosane (C22)	629-97-0	98.8	420.9.1P	499.4 ± 6.93
dodecane (C12)	112-40-3	7.99	416.9.3P	5 02 ± 6 .97
dotriacontane (C32)	544-85-4	67	425.9.2.2P	499.6 ± 8.53
eicosane (C20)	112-95-8	8.66	419.7.1P	501 ± 6.95
hexacosane (C26)	630-01-3	6.66	422.7.2.1P	501 ± 6.95
hexatriacontane (C36)	630-06-8	86	427.29.1.1P	499.3 ± 8.53
n-hexadecane (C16)	544-76-3	99.45	368.271.1P	498.7 ± 6.91
octacosane (C28)	630-02-4	99.1	423.24.1P	500.5 ± 6.95
n-octadecane (C18)	593-45-3	99.5	418.29.1P	499.5 ± 6.92
octane (C8)	111-65-9	99.4	385.7.2.1P	498.5 ± 6.92
octatriacontane (C38)	7194-85-6	95	428.1.2P	500.2 ± 6.94
tetracontane (C40)	4181-95-7	67	429.7.2P	499.6 ± 6.93
n-tetracosane (C24)	646-31-1	99.5	421.7.IP	499.5 ± 6.93
n-tetradecane (C14)	629-59-4	99.3	417.9.IP	500 ± 6.94
tetratriacontane (C34)	14167-59-0	96.1	426.7.2.2P	499.7 ± 8.53
triacontane (C30)	638-68-6	99.5	424.7.1.1P	500 ± 6.94
		G	212610	II.
			p 13224	01 31 24 *Not a certified value
Let the standard warm to room temperature and sonicate before opening.	200 Marine Marin			
Oundrea Shrindl	July	All weights are tra Concentration (co listed are determin	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) t listed are determined gravimetricIIv.	All weights are traceable through N. I. S. T. Test No. 822/264157-00. Concentration (correct for purity) and uncertainty (95% confidence) values listed are determined gravimetricIIv.
Certified By: Andrea Schaible	ole		0	

5580 Skylane Blvd

Andrea Schaible Chemist

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure (s) are within + /-5% unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2





ISO - 17034



Understanding the Certified Weight Report



Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.



For More Information, Contact:



Page 2 of 2





 ^a All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions. ^b Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994). ^b Ort # 101122 ^c Lot # 101122 	 The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). All standards are cortified (4/-) 0.5% of the stated value, unless otherwise stated. 	1.5 € 1 ⁸ 5.8 38.8 38.8 15.5 23.88 23.82 33.82 33.83 55.88 35.88 (1-5) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1) (2 DG 0 0 0		и 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		7 C C C C C C C C C C C C C C C C C C C		M 8 77 77 77 77 77 77 77 77 77 77 77 77 7		》《日本元》》(1)) 《 11)(1):1)(1):1)(1):1)(1):1)(1):1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(), Temp	10	Lot Nominal Purity Uncertainty Assay Target Actual Compound RM# Number Conc (µg/mL) (%) Purity (%D) Weight(g) Weight(g)	Nominal Concentration (µg/mL): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL): 200.0 0.058 Plask Uncertainty	$\frac{72072}{101122}$ $\frac{101122}{n-1etracosane-d50}$ Methylene chloride 10534 $P \mid 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 101132$	
and under appropriate laboratory conditions. Evaluating and Expressing the Uncertainty of NIST Measurement Result," ton, DC, (1994). 1 of 1 Printed: 7/22/2024, 11:35:29 AM		40 50 80 100 32		2 500 0 0 1			50000	720200 -	80000	9 00 00 00 00 00 00 00 00 00 00 00 00 00	491 493	5 can 1583 {23.538 jair]; [4581]72072.b	300°C (9min.), Rate = 10°C/min., Injector B= 2	2 1000.6 4.1 16416-32-3 N/A	Assay Target (%D) Weight(g)	lty)	AH-1539 Certificate Number https://Absolutestandards.com

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure (s) are within + /-5% unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2





ISO - 17034



Understanding the Certified Weight Report



Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.



For More Information, Contact:



Page 2 of 2





 ^a All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions. ^b Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994). ^b Ort # 101122 ^c Lot # 101122 	 The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). All standards are cortified (4/-) 0.5% of the stated value, unless otherwise stated. 	1.5 € 1 ⁸ 5.8 38.8 38.8 15.5 23.88 23.82 33.82 33.83 55.88 35.88 (1-5) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1) (2 DG 0 0 0		и 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		7 C C C C C C C C C C C C C C C C C C C		M 8 77 77 77 77 77 77 77 77 77 77 77 77 7		》《日本元》》(1)) 《 11)(1):1)(1):1)(1):1)(1):1)(1):1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(), Temp	10	Lot Nominal Purity Uncertainty Assay Target Actual Compound RM# Number Conc (µg/mL) (%) Purity (%D) Weight(g) Weight(g)	Nominal Concentration (µg/mL): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL): 200.0 0.058 Plask Uncertainty	$\frac{72072}{101122}$ $\frac{101122}{n-1etracosane-d50}$ Methylene chloride 10534 $P \mid 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 101132$	
and under appropriate laboratory conditions. Evaluating and Expressing the Uncertainty of NIST Measurement Result," ton, DC, (1994). 1 of 1 Printed: 7/22/2024, 11:35:29 AM		40 50 80 100 32		2 500 0 0 1			50000	720200 -	80000	9 00 00 00 00 00 00 00 00 00 00 00 00 00	491 493	5 can 1583 {23.538 jair]; [4581]72072.b	300°C (9min.), Rate = 10°C/min., Injector B= 2	2 1000.6 4.1 16416-32-3 N/A	Assay Target (%D) Weight(g)	lty)	AH-1539 Certificate Number https://Absolutestandards.com

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure (s) are within + /-5% unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2





ISO - 17034



Understanding the Certified Weight Report



Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.



For More Information, Contact:



Page 2 of 2





 ^a All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions. ^b Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994). ^b Ort # 101122 ^c Lot # 101122 	 The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). All standards are cortified (4/-) 0.5% of the stated value, unless otherwise stated. 	1.5 € 1 ⁸ 5.8 38.8 38.8 15.5 23.88 23.82 33.82 33.83 55.88 35.88 (1-5) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1) (2 DG 0 0 0		и 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		7 C C C C C C C C C C C C C C C C C C C		M 8 77 77 77 77 77 77 77 77 77 77 77 77 7		》《日本元》》(1)) 《 11)(1):1)(1):1)(1):1)(1):1)(1):1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(), Temp	10	Lot Nominal Purity Uncertainty Assay Target Actual Compound RM# Number Conc (µg/mL) (%) Purity (%D) Weight(g) Weight(g)	Nominal Concentration (µg/mL): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL): 200.0 0.058 Plask Uncertainty	$\frac{72072}{101122}$ $\frac{101122}{n-1etracosane-d50}$ Methylene chloride 10534 $P \mid 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 101132$	
and under appropriate laboratory conditions. Evaluating and Expressing the Uncertainty of NIST Measurement Result," ton, DC, (1994). 1 of 1 Printed: 7/22/2024, 11:35:29 AM		40 50 80 100 32		2 500 0 0 1			50000	720200 -	80000	9 00 00 00 00 00 00 00 00 00 00 00 00 00	491 493	5 can 1583 {23.538 jair]; [4581]72072.b	300°C (9min.), Rate = 10°C/min., Injector B= 2	2 1000.6 4.1 16416-32-3 N/A	Assay Target (%D) Weight(g)	lty)	AH-1539 Certificate Number https://Absolutestandards.com

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure (s) are within + /-5% unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2





ISO - 17034



Understanding the Certified Weight Report



Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.



For More Information, Contact:



Page 2 of 2





 ^a All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions. ^b Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994). ^b Ort # 101122 ^c Lot # 101122 	 The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). All standards are cortified (4/-) 0.5% of the stated value, unless otherwise stated. 	1.5 € 1 ⁸ 5.8 38.8 38.8 15.5 23.88 23.82 33.82 33.83 55.88 35.88 (1-5) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1-1) (0, 1-1) (2 DG 0 0 0		и 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9 9		7 C C C C C C C C C C C C C C C C C C C		M 8 77 77 77 77 77 77 77 77 77 77 77 77 7		》《日本元》》(1)) 《 11)(1):1)(1):1)(1):1)(1):1)(1):1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1):1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(1)(), Temp	10	Lot Nominal Purity Uncertainty Assay Target Actual Compound RM# Number Conc (µg/mL) (%) Purity (%D) Weight(g) Weight(g)	Nominal Concentration (µg/mL): 1000 NIST Test ID#: 6UTB Weight(s) shown below were combined and diluted to (mL): 200.0 0.058 Plask Uncertainty	$\frac{72072}{101122}$ $\frac{101122}{n-1etracosane-d50}$ Methylene chloride 10534 $P \mid 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 3 \downarrow 101132$	
and under appropriate laboratory conditions. Evaluating and Expressing the Uncertainty of NIST Measurement Result," ton, DC, (1994). 1 of 1 Printed: 7/22/2024, 11:35:29 AM		40 50 80 100 32		2 500 0 0 1			50000	720200 -	80000	9 00 00 00 00 00 00 00 00 00 00 00 00 00	491 493	5 can 1583 {23.538 jair]; [8581]72072.b	300°C (9min.), Rate = 10°C/min., Injector B= 2	2 1000.6 4.1 16416-32-3 N/A	Assay Target (%D) Weight(g)	lty)	AH-1539 Certificate Number https://Absolutestandards.com