

Prep Standard - Chemical Standard Summary

Order ID : Q1211

Test : Mercury, Metals ICP-TAL

Prepbatch ID : PB166378,PB166596,

Sequence ID/Qc Batch ID: LB134599,LB134616,

Standard ID :

MP83499,MP83691,MP83692,MP83693,MP83694,MP84042,MP84043,MP84044,MP84045,MP84046,MP84047,MP840 48,MP84049,MP84050,MP84051,MP84052,MP84053,MP84054,MP84055,MP84056,MP84057,MP84073,MP84093,MP 84094,MP84095,MP84096,MP84363,MP84364,MP84365,MP84366,MP84367,MP84368,MP84369,MP84370,MP84371, MP84372,MP84373,MP84374,MP84375,MP84376,

Chemical ID :

M4371,M4465,M4916,M5062,M5288,M5295,M5298,M5304,M5472,M5476,M5496,M5497,M5498,M5513,M5516,M5519,M5532,M5658,M5739,M5751,M5789,M5792,M5798,M5799,M5800,M5801,M5802,M5806,M5815,M5817,M5819,M5873,M5874,M5882,M5884,M5960,M5961,M5962,M5976,M5977,M5978,M5981,M5983,M6021,M6023,M6025,M6028,M6032,M6032,M6041,M6055,M6121,M6126,M6127,M6128,W3112,



Recipe ID 170	NAME 1:1HCL	<u>NO.</u> MP83499	<u>Prep Date</u> 12/09/2024		Prepared By Eman Mughal	<u>ScaleID</u> None	PipetteID None	Sarabjit Jaswal
<u>FROM</u>	1250.00000ml of M6121 + 1250.0000	00ml of W31	12 = Final Q	uantity: 2500.00	00 ml			
Pacipa				Expiration	Propared			Supervised By

<u>Recipe</u>				Expiration	Prepared			Supervised By
ID	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipetteID	Sarabjit Jaswal
3965	2:1 H2SO4 : HNO3	<u>MP83691</u>	12/18/2024	06/03/2025	Mohan Bera	None	None	-
								12/18/2024
FROM	1600.00000ml of M6041 + 800.0000	Oml of M612	.6 = Final Qua	antity: 3200.00) ml			



Recipe ID 65	NAME POTASSIUM PERMANGANATE SOLUTION 5 %	<u>NO.</u> MP83692	Prep Date 12/18/2024	Expiration Date 06/18/2025		<u>ScaleID</u> METALS_SCA LE_3 (M SC-3)	Sarabjit Jaswal
FROM	100.00000gram of M4916 + 2000.00	000ml of W	3112 = Final (Quantity: 2000.	000 ml		

<u>Recipe</u> <u>ID</u>	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By
66	POTASSIUM PERSULFATE SOLUTION 5 %	<u>MP83693</u>	12/18/2024	06/18/2025	Mohan Bera	METALS_SCA LE_3 (M SC-3)		Sarabjit Jaswal 12/18/2024
FROM	100.00000ml of M4465 + 2000.0000	Oml of W311	2 = Final Qu	antity: 2000.000) ml			



Recipe ID 67	NAME SODIUM CHLORIDE - HYDROXYL- CHLORIDE	<u>NO.</u> MP83694	Prep Date 12/18/2024	Expiration Date 06/18/2025		<u>ScaleID</u> METALS_SCA LE_3 (M SC-3)		Sarabjit Jaswal
FROM	SOLUTION 2000.00000ml of W3112 + 240.0000	Ogram of M4	4371 + 240.00	000gram of M5	884 = Final Qເ	uantity: 2000.000	0 ml	
Pocino				Expiration	Propared			

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipettelD	Mohan Bera
1122	ICPMS CALIB BLANK(S0/ICB/CCB)	<u>MP84042</u>	01/14/2025	02/07/2025	Sarabjit Jaswal	None	METALS_PIP ETTE_3 (A)	01/16/2025
FROM	25.00000ml of M6121 + 4925.00000	ml of W3112	2 + 50.00000m	nl of M6126 =	Final Quantity: 5	000.000 ml		



Recipe ID 3947	NAME S7(SFAM,6020,200.8)	<u>NO.</u> MP84043	Prep Date 01/14/2025		<u>Prepared</u> <u>By</u> Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipetteID</u> METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025
FROM	1.00000ml of M5476 + 1.00000ml of of M5976 + 10.0000ml of M5978 + + 4.00000ml of M6032 + 4.90000ml 830.60000ml of W3112 + 9.00000ml 9.90000ml of M5806 + 9.90000ml of	10.00000ml of M5298 + of M5751 +	of M6126 + 2 4.90000ml of 9.00000ml of	.00000ml of M M5519 + 5.000 M5819 + 9.000	5815 + 2.00000r 00ml of M6121	ml of M5817 + 4 + 50.00000ml c	4.00000ml of M of M5304 +	

<u>Recipe</u> <u>ID</u>	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By
3948	S6(SFAM,6020,200.8)	<u>MP84044</u>	01/14/2025		Sarabjit Jaswal	None	METALS_PIP ETTE_3 (A)	Mohan Bera 01/16/2025
FROM	l 0.50000ml of M6121 + 1.00000ml of	I M6126 + 48	I 8.50000ml of V	N3112 + 50.00	I I 000ml of MP840	43 = Final Qua	I I	



<u>Recipe</u> <u>ID</u> 3949	<u>NAME</u> S5(SFAM,6020,200.8)	<u>NO.</u> MP84045	Prep Date 01/14/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipetteID</u> METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025
FROM	0.50000ml of M6121 + 1.00000ml of	M6126 + 73	50000ml of V	V3112 + 25.000	000ml of MP840	43 = Final Qua	antity: 100.000	mi
Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	<u>Supervised By</u> Mohan Bera

3954	S4(SFAM,6020,200.8)	<u>MP84046</u>	01/14/2025	02/07/2025	Sarabjit Jaswal	None	METALS_PIP ETTE_3 (A)	01/16/2025		
<u>FROM</u>	0.50000ml of M6121 + 1.00000ml of M6126 + 86.00000ml of W3112 + 12.50000ml of MP84043 = Final Quantity: 100.000 ml									



Recipe ID 3951 FROM	NAME S3(SFAM, 6020,200.8) 0.50000ml of M6121 + 1.00000ml of	<u>NO.</u> <u>MP84047</u> M6126 + 88	Prep Date 01/14/2025 .50000ml of V		Prepared By Sarabjit Jaswal		PipetteID METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025 ml
<u>Recipe</u> <u>ID</u> 3955	NAME S2CONC(SFAM,6020,200.8)	<u>NO.</u> MP84048	Prep Date 01/14/2025	<u>Expiration</u> <u>Date</u> 02/07/2025	Prepared By Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipetteID</u> METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025

 FROM
 0.05000ml of M5476 + 0.05000ml of M5798 + 0.05000ml of M5800 + 0.05000ml of M5801 + 0.05000ml of M5961 + 0.05000ml of M5981 + 0.05000ml of M5983 + 0.05000ml of M6023 + 0.05000ml of M6025 + 0.05000ml of M6028 + 0.05000ml of M6030 + 0.05000ml of M6128 + 0.10000ml of M5496 + 0.10000ml of M5658 + 0.10000ml of M5751 + 0.10000ml of M5802 + 0.25000ml of M5298 + 0.25000ml of M5799 + 0.25000ml of M5819 + 0.25000ml of M5962 + 0.25000ml of M5976 + 0.25000ml of M5978 + 0.25000ml of M6021 + 0.50000ml of M6032 + 2.00000ml of M5815 + 2.0000ml of M5817 + 2.50000ml of M5498 + 2.50000ml of M6121 + 2.50000ml of M6127 + 225.25000ml of W3112 + 5.0000ml of M6126 = Final Quantity: 250.000 ml



Recipe ID 3956	<u>NAME</u> S2(SFAM,6020,200.8)	<u>NO.</u> MP84049	Prep Date 01/14/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipetteID</u> METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025
<u>FROM</u>	0.50000ml of M6121 + 1.00000ml of	M6126 + 98	.00000ml of V	V3112 + 0.500(Doml of MP8404	8 = Final Quar	ntity: 100.000 r	nl
Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u> Mohan Bera

שו	NAME	<u>NO.</u>	Prep Date	Date	<u>BY</u>	ScaleID	PipettelD	Mohan Bera
3957	S1(SFAM,6020,200.8)	<u>MP84050</u>	01/14/2025	02/07/2025	Sarabjit Jaswal	None	METALS_PIP ETTE_3 (A)	01/16/2025
FROM	0.50000ml of M6121 + 1.00000ml of	M6126 + 88	50000ml of \	N3112 + 10 000	000mL of MP840	49 = Final Qua	II	
		10120 - 00		10.000			inity. 100.000	



Recipe ID 3958 FROM	NAME ICV(SFAM) 2.00000ml of M5295 + 98.00000ml o	<u>NO.</u> <u>MP84051</u> f MP84042	Prep Date 01/14/2025 = Final Quan		Prepared By Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipettelD</u> METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025
Recipe ID 3961	NAME CCV	<u>NO.</u> MP84052	Prep Date 01/14/2025	Expiration Date 02/07/2025	Prepared By Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipetteID</u> METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025

 FROM
 0.20000ml of M5513 + 0.50000ml of M5476 + 0.50000ml of M5799 + 0.50000ml of M5981 + 0.50000ml of M5983 + 1.00000ml of M5815 + 1.00000ml of M5817 + 10.0000ml of M6126 + 12.45000ml of M5298 + 12.45000ml of M5519 + 2.00000ml of M6032 + 24.95000ml of M5498 + 24.95000ml of M5806 + 24.95000ml of M6127 + 25.00000ml of M5304 + 4.50000ml of M5751 + 4.50000ml of M5819 + 4.50000ml of M6128 + 4.95000ml of M5496 + 5.00000ml of M5976 + 5.00000ml of M6121 + 830.60000ml of W3112 = Final Quantity: 1000.000 ml



<u>Recipe</u> <u>ID</u> 1142	NAME ICSA ICPMS	<u>NO.</u> <u>MP84053</u>	<u>Prep Date</u> 01/14/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Sarabjit Jaswal	<u>ScaleID</u> None	<u>PipetteID</u> METALS_PIP ETTE_3 (A)	
FROM	10.00000ml of M5873 + 90.00000ml	of MP84042	2 = Final Qua	ntity: 100.000	ml			
Recipe	NAME	NO	Pron Date	Expiration	Prepared By	ScaleID	PinettelD	Supervised By

n Bera /2025
/2025
/2025



<u>Recipe</u> <u>ID</u> 3962	NAME MG 10PPM FOR TUNE	<u>NO.</u> MP84055	Prep Date 01/14/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Sarabjit Jaswal	<u>ScaleID</u> None	PipettelD METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025
<u>FROM</u>	0.01000ml of M6127 + 9.99000ml of	MP84042 =	Final Quanti	ty: 100.000 ml				
Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared Bv	ScaleID	PipettelD	Supervised By

Recipe					<u>Prepareu</u>			Supervised by
ID	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipetteID	Mohan Bera
3894	TUNE 200PPB	<u>MP84056</u>	01/14/2025	02/07/2025	Sarabjit Jaswal	None	METALS_PIP	
							ETTE_3 (A)	01/16/2025
FROM	2.00000ml of M6055 + 2.00000ml of	MP84055 +	96.00000ml c	of MP84042 =	Final Quantity: 1	00.000 ml		



Recipe ID 3903 FROM	NAME ISS 3PPM 5.00000ml of M6126 + 75.00000ml o	<u>NO.</u> <u>MP84057</u> f M5739 + 1	Prep Date 01/14/2025 70.00000ml c		Prepared By Sarabjit Jaswal Final Quantity: 2	<u>ScaleID</u> None 50.000 ml	PipettelD METALS_PIP ETTE_3 (A)	Supervised By Mohan Bera 01/16/2025
Recipe ID 2902	NAME S8 ICPMS	<u>NO.</u> MP84073	Prep Date 01/14/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Janvi Patel	<u>ScaleID</u> None	<u>PipetteID</u> None	Supervised By Mohan Bera 01/16/2025
FROM	1.00000ml of M5496 + 2.50000ml of of M6127 + 79.00000ml of MP84042				0ml of M5497 + :	5.00000ml of M	15806 + 5.0000	0ml



<u>Recipe</u> <u>ID</u> 3880	NAME M&B SPIKE-1	<u>NO.</u> MP84093	Prep Date 01/16/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Janvi Patel	<u>ScaleID</u> None	PipettelD METALS_PIP ETTE_3 (A)	Sarabjit Jaswal
FROM	5.00000ml of M5472 + 5.00000ml of of M5960 + 5.00000ml of M5961 + 5. 5.00000ml of M6023 + 5.00000ml of	00000ml of	M5962 + 5.00	000ml of M598	31 + 5.00000ml	of M5983 + 5.0	0000ml of M60)21 +
<u>Recipe</u> <u>ID</u>	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u> Sarabjit Jaswal

3881	M&B SPIKE-2	<u>MP84094</u>	01/16/2025	02/07/2025	Janvi Patel	None	METALS_PIP ETTE_3 (A)	01/17/2025
<u>FROM</u>	10.00000ml of M5977 + 12.50000ml 5.00000ml of M5496 + 30.00000ml o					32 + 2.50000m	l of M5799 +	



Recipe ID 3882	NAME M&B SPIKE-3	<u>NO.</u> MP84095	Prep Date 01/16/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>By</u> Janvi Patel	<u>ScaleID</u> None	PipettelD METALS_PIP ETTE_3 (A)	
FROM	0.62500ml of M5513 + 12.50000ml o Final Quantity: 50.000 ml	f M5751 + 1	2.50000ml of	M5819 + 12.50	000ml of M612	8 + 11.87500ml	of MP84042	=
Recipe				Expiration	Prepared			Supervised By

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
3900	M&B SPIKE-4	<u>MP84096</u>	01/16/2025	02/07/2025	Janvi Patel	None	METALS_PIP ETTE_3 (A)	01/17/2025
FROM	6.25000ml of M5497 + 6.25000ml of	M5516 + 6.:	25000ml of M	6127 + 6.25000	oml of MP84042	= Final Quant	ity: 25.000 ml	



Recipe ID 68	NAME STANNOUS CHLORIDE SOLUTION	<u>NO.</u> MP84363	Prep Date 02/06/2025	Expiration Date 02/07/2025		<u>ScaleID</u> METALS_SCA LE_3 (M SC-3)		Sarabjit Jaswal
FROM	450.00000ml of W3112 + 50.00000g	am of M588	32 + 50.00000	ml of M5792 =	Final Quantity:	500.000 ml		
Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	PipettelD	<u>Supervised By</u> Sarabiit Jaswal

<u>Recipe</u>				Expiration	Prepared			<u>Supervised By</u>
ID	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipetteID	Sarabjit Jaswal
871	MERCURY INTERMEDIATE B 250PPB WORKING STD.	<u>MP84364</u>	02/06/2025	02/07/2025	Mohan Bera	None	METALS_PIP ETTE_5 (HG	02/10/2025
<u>FROM</u>	1.00000ml of M6126 + 2.50000ml of	M5062 + 96	5.50000ml of V	V3112 = Final	Quantity: 100.00	00 ml	A)	



FROM

ETTE_5 (HG

A)

02/10/2025

Metals STANDARD PREPARATION LOG

Recipe ID 1340	NAME Hg 0.00 PPB STD	<u>NO.</u> MP84365	Prep Date 02/06/2025	Expiration Date 02/07/2025	<u>Prepared</u> <u>Βγ</u> Mohan Bera	<u>ScaleID</u> None	PipettelD METALS_PIP ETTE_5 (HG A)	
FROM	2.50000ml of M6126 + 247.50000ml	of W3112 =	Final Quantii	ty: 250.000 ml				
Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By

2.50000ml of M6126 + 247.30000ml of W3112 + 0.20000ml of MP84364 = Final Quantity: 250.000 ml



Recipe ID 1342 FROM	NAME Hg 2.5 PPB STD 2.50000ml of M6126 + 245.00000ml	<u>NO.</u> <u>MP84367</u> of W3112 +	Prep Date 02/06/2025 2.50000ml of	Expiration Date 02/07/2025 MP84364 = F	Prepared By Mohan Bera inal Quantity: 25	ScaleID None	PipetteID METALS_PIP ETTE_5 (HG A)	Supervised By Sarabjit Jaswal 02/10/2025
Recipe ID 1343 FROM	NAME Hg 5.0 PPB STD 2.50000ml of M6126 + 242.50000ml	<u>NO.</u> <u>MP84368</u> of W3112 +	Prep Date 02/06/2025 5.00000ml of	Expiration Date 02/07/2025	Prepared By Mohan Bera	ScaleID None	PipettelD METALS_PIP ETTE_5 (HG A)	Sarabjit Jaswal



<u>ID</u> 1344 <u>FROM</u>	NAME Hg 7.5 PPB STD 2.50000ml of M6126 + 240.00000ml	<u>NO.</u> MP84369 of W3112 +	Prep Date 02/06/2025 7.50000ml of	<u>Expiration</u> <u>Date</u> 02/07/2025 MP84364 = Fi	Prepared By Mohan Bera	ScaleID None	<u>PipetteID</u> METALS_PIP ETTE_5 (HG A)	Supervised By Sarabjit Jaswal 02/10/2025



<u>Recipe</u> <u>ID</u> 1346	NAME Hg ICV SOLUTION	<u>NO.</u> MP84371	Prep Date 02/06/2025	Expiration Date 02/07/2025	Prepared By Mohan Bera	<u>ScaleID</u> None	PipettelD METALS_PIP ETTE_5 (HG	
FROM	2.50000ml of M5532 + 2.50000ml of	M6126 + 24	5.00000ml of	W3112 = Fina	l Quantity: 250.	000 ml	<u>Α</u>)	
Baging				Expiration	Bronorod			Supervised By

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	PipettelD	Sarabjit Jaswal
1351	ICB (Hg 0.00 PPB SOLUTION)	<u>MP84372</u>	02/06/2025	02/07/2025	Mohan Bera	None	METALS_PIP	2
							ETTE_5 (HG	02/10/2025
FROM	2.50000ml of M5789 + 247.50000ml	of W3112 =	Final Quantit	ty: 250.000 ml			- A) -	



Recipe ID 1358	NAME CCV (Hg 5.0 PPB SOLUTION)	<u>NO.</u> MP84373	Prep Date 02/06/2025	Expiration Date 02/07/2025	Prepared By Mohan Bera	<u>ScaleID</u> None	PipettelD METALS_PIP ETTE_5 (HG	
<u>FROM</u>	485.00000ml of W3112 + 5.00000ml	of M6126 +	10.00000ml c	of MP84364 =	। Final Quantity: १	500.000 ml	A)	

<u>Recipe</u> <u>ID</u>	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u> Sarabjit Jaswal
1352	CCB (Hg 0.00 PPB SOLUTION)	<u>MP84374</u>	02/06/2025	02/07/2025	Mohan Bera	None	METALS_PIP ETTE_5 (HG	
<u>FROM</u>	495.00000ml of W3112 + 5.00000ml	of M5789 =	Final Quantit	ty: 500.000 ml			A)	



Recipe ID 1349 FROM	NAME CRA/CRI (Hg 0.2 PPB SOLUTION) 2.50000ml of M6126 + 247.30000ml	<u>NO.</u> MP84375 of W3112 +	Prep Date 02/06/2025 0.20000ml of	Expiration Date 02/07/2025 MP84364 = F	Prepared By Mohan Bera inal Quantity: 25	ScaleID None	PipettelD METALS_PIP ETTE_5 (HG A)	Sarabjit Jaswal 02/10/2025
Recipe ID 1350 FROM	NAME CHK STD (Hg 7.0 PPB SOLUTION) 2.50000ml of M6126 + 240.50000ml	<u>NO.</u> <u>MP84376</u> of W3112 +	Prep Date 02/06/2025 7.00000ml of	Expiration Date 02/07/2025 MP84364 = F	Prepared By Mohan Bera inal Quantity: 25	<u>ScaleID</u> None 50.000 ml	PipettelD METALS_PIP ETTE_5 (HG A)	Sarabjit Jaswal 02/10/2025



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-2196-01 / Hydroxylamine Hydrochloride, Crystal (cs/4x500g)	0000215387	06/25/2025	07/01/2019 / RICHARD	06/07/2019 / RICHARD	M4371
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3238-05 / Potassium Persulfate (2.5kg)	0000234156	08/06/2025	07/23/2019 / jaswal	07/25/2019 / manojkumar	M4465
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3227-05 / Potassium Permanganate (2.5kg)	210800	03/31/2026	11/30/2022 / mohan	07/28/2021 / mohan	M4916
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	MSHG-10PPM / MERCURY HCI 125mL 10ug/mL	S2-HG709270	09/22/2026	05/28/2022 / mohan	01/27/2022 / mohan	M5062
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58119 / K, 10000 PPM, 500 ml	071122	07/11/2025	09/01/2022 / jaswal	07/21/2022 / jaswal	M5288

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-1 / ICV (ICP/ICPMS) STOCK SOLN	ICV-1014	02/05/2025	08/07/2024 / jaswal	04/20/2021 / bin	M5295



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58126 / Fe, 10000 PPM, 500 ml	020422	02/04/2025	05/02/2023 / jaswal	06/15/2022 / jaswal	M5298
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	6020CAL-1 / Calibration Standard Method 6020	S2-MEB711244	10/20/2026	08/07/2024 / jaswal	04/01/2022 / jaswal	M5304
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57038 / Sr, 1000 PPM, 125 ml	082922	08/29/2025	01/14/2025 / Jaswal	03/16/2023 / jaswal	M5472
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57138 / Sr, 10000 PPM, 125 ml	082922	08/29/2025	07/29/2024 / jaswal	03/16/2023 / jaswal	M5476
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58113 / Al, 10000 PPM, 500 ml	011623	01/16/2026	08/15/2023 / jaswal	03/17/2023 / bin	M5496
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58120 / Ca, 10000 PPM, 500 ml	031523	03/15/2026	03/18/2023 / bin	03/17/2023 / bin	M5497



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58120 / Ca, 10000 PPM, 500 ml	031523	03/15/2026	08/15/2023 / jaswal	03/17/2023 / bin	M5498
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57182 / Pb, 10000 PPM, 125 ml	061522	06/15/2025	03/19/2023 / bin	03/17/2023 / bin	M5513
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58111 / Na, 10000 PPM, 500 ml	022123	11/06/2025	11/06/2024 / kareem	03/17/2023 / bin	M5516
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57119 / Potassium (K) 10,000PPM	120822	12/08/2025	01/08/2024 / bin	03/17/2023 / bin	M5519
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-5 / ICV (HG)STOCK SOLN	ICV5-0415	02/28/2025	01/02/2025 / jaswal	03/30/2023 / mohan	M5532
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58024 / Chromium, Cr, 500 ml, 1000 PPM	060523	06/05/2026	08/28/2023 / jaswal	08/25/2023 / jaswal	M5658



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	6020ISS / 6020ISS, 10 ug/ml, Bi, Ho, In, 6Li, Rh, Sc, TB, Y	T2-MEB709511	09/03/2026	08/07/2024 / jaswal	04/11/2022 / jaswal	M5739
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58029 / Cu, 1000 PPM, 500 ml	071723	07/17/2026	10/01/2024 / Jaswal	08/25/2023 / jaswal	M5751
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	23G1262003	07/30/2025	02/08/2024 / Al-Terek	06/26/2023 / Al-Terek	M5789
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened /	Received Date /	Chemtech
Seidler Chemical	BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L)	22D1462006	08/05/2025	Opened By 02/05/2024 / Al-Terek	Received By 02/24/2022 / Al-Terek	Lot #
Sumplier	KomCode / KomNome		Expiration	Date Opened /	Received Date /	Chemtech

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57004 / Be, 1000 PPM, 125 ml	102523	10/25/2026	02/09/2024 / bin	02/09/2024 / bin	M5798

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57050 / Sn, 1000 PPM, 125 ml	071123	07/11/2026	02/09/2024 / bin	02/09/2024 / bin	M5799



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57027 / CO, 1000 PPM, 125 ml	091923	09/19/2026	05/31/2024 / bin	02/09/2024 / bin	M5800
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57033 / As, 1000 PPM, 125 ml	111323	11/13/2026	02/09/2024 / bin	02/09/2024 / bin	M5801
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57051 / Sb, 1000 PPM, 125 ml	120523	12/05/2026	08/07/2024 / jaswal	01/03/2024 / jaswal	M5802
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58111 / Na, 10000 PPM, 500 ml	122223	12/22/2026	08/01/2024 / Jaswal	01/03/2024 / jaswal	M5806
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57115 / P, 10000 PPM, 125 ml	041723	04/17/2026	05/21/2024 / Jaswal	02/09/2024 / jaswal	M5815
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Abaaluta	57440 / 0 40000 DDM	074400	07/44/0000	00/04/0004	00/00/0004	

Supplier	ItemCode / ItemName	Lot #	Date	Opened By	Received Date / Received By	Lot #
Absolute Standards, Inc.	57116 / S, 10000 PPM, 125 ml	071123	07/11/2026	03/01/2024 / jaswal	02/09/2024 / jaswal	M5817



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58030 / Zinc, Zn, 500 ml, 1000 PPM	111623	11/16/2026	03/20/2024 / jaswal	02/09/2024 / jaswal	M5819

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	PART A / ICSA (ICPMS) STOCK SOLN	CP-MS ICSA-0803	04/30/2025	04/17/2024 / jaswal	07/14/2022 / jaswal	M5873

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	PART B / ICSB (ICPMS) STOCK SOLUTION	CP-MS ICSB-0803	04/30/2025	04/17/2024 / jaswal	07/14/2022 / jaswal	M5874

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3980-01 / Stannous Chloride (cs/4x500g)	232820	08/31/2028	04/30/2024 / mohan	04/25/2024 / mohan	M5882

ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
3A-3624-05 / Sodium Chloride, Crystal cs/4x2.5kg)	0000281938	07/06/2026	04/30/2024 / mohan	04/25/2024 / mohan	M5884
2	A-3624-05 / Sodium hloride, Crystal	A-3624-05 / Sodium 0000281938 chloride, Crystal	ItemCode / ItemNameLot #DateA-3624-05 / Sodium000028193807/06/2026chloride, Crystal000028193807/06/2026	ItemCode / ItemNameLot #DateOpened ByA-3624-05 / Sodium000028193807/06/202604/30/2024 / mohan	ItemCode / ItemNameLot #DateOpened ByReceived ByA-3624-05 / Sodium000028193807/06/202604/30/2024 /04/25/2024 /chloride, Crystalonumber of the content of the c

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57028 / Ni, 1000 PPM, 125 ml	041124	04/11/2027	07/03/2024 / kareem	06/11/2024 / kareem	M5960



Supplier	er ItemCode / ItemName Lot # Expiration Date Opened Date Opened By		Date Opened / Opened By	Received Date / Received By	Chemtech Lot #	
Absolute Standards, Inc.	57028 / Ni, 1000 PPM, 125 ml	041124	04/11/2027	07/02/2024 / Jaswal	06/11/2024 / Jaswal	M5961
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57034 / Se, 1000 PPM, 125 ml	060624			06/14/2024 / Jaswal	M5962
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGMO1-1 / MOLYBDENUM 125mL 1000ug/mL	T2-MO720876	07/17/2027	08/07/2024 / jaswal	02/22/2024 / Jaswal	M5976
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGMO1-1 / MOLYBDENUM 125mL 1000ug/mL	T2-MO720876	07/17/2027	01/16/2025 / JANVI	02/22/2024 / Jaswal	M5977
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGTI1-1 / TITANIUM 125mL 1000ug/mL	T2-TI719972	06/17/2027	08/07/2024 / jaswal	02/22/2024 / Jaswal	M5978
Supplier	ItemCode / ItemName	Lot #	Expiration	Date Opened /	Received Date /	Chemtech

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57092 / U, 1000 PPM, 125 ml	060724	06/07/2027	07/29/2024 / Jaswal	06/11/2024 / Jaswal	M5981



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57040 / Zr, 1000 PPM, 125 ml	071423	07/14/2026	07/29/2024 / Jaswal	06/11/2024 / Jaswal	M5983
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57023 / V, 1000 PPM, 125 ml	062424	06/24/2027	09/28/2024 / jaswal	08/05/2024 / Jaswal	M6021
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57081 / TI, 1000 PPM, 125 ml	0624724	06/27/2027	08/05/2024 / kareem	08/05/2024 / Jaswal	M6023
Quarter	han Qada (han Nama	Lot #	Expiration	Date Opened /	Received Date /	Chemtech
Supplier	ItemCode / ItemName		Date	Opened By	Received By	Lot #
Absolute Standards, Inc.	57082 / Pb, 1000 PPM, 125 ml	061224	11/09/2026	08/05/2024 / Jaswal	08/05/2024 / Jaswal	M6025

ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
57048 / Cd, 1000 PPM, 125 ml	070124	07/01/2027	08/05/2024 / kareem	08/05/2024 / Jaswal	M6028
-	57048 / Cd, 1000 PPM,	57048 / Cd, 1000 PPM, 070124	ItemCode / ItemName Lot # Date 57048 / Cd, 1000 PPM, 07/01/2027	ItemCode / ItemName Lot # Date Opened By 57048 / Cd, 1000 PPM, 070124 07/01/2027 08/05/2024 /	ItemCode / ItemName Lot # Date Opened By Received By 57048 / Cd, 1000 PPM, 070124 07/01/2027 08/05/2024 / 08/05/2024 /

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57047 / Ag, 1000 PPM, 125 ml	122823	12/28/2026	08/05/2024 / kareem	08/05/2024 / Jaswal	M6030




Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57056 / Ba, 1000 PPM, 125 ml	010924	01/09/2027	01/14/2025 / Jaswal	08/05/2024 / Jaswal	M6032
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9673-33 / Sulfuric Acid, Instra-Analyzed (cs/6c2.5L)	23D2462010	03/20/2028	08/16/2024 / mohan	08/16/2024 / mohan	M6041
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	IV-STOCK-12 / ICP-MS TUNING SOLUTION, 125mL	U2-MEB734294	06/21/2028	08/21/2024 / Jaswal	08/19/2024 / Jaswal	M6055
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L)	0000275677	05/13/2025	11/13/2024 / Eman	10/13/2024 / Eman	M6121
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	24D1062002	06/03/2025	12/03/2024 / Janvi	11/12/2024 / Janvi	M6126

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58112 / Mg, 10000 PPM, 500 ml	112124	11/21/2027	01/13/2025 / kareem	01/13/2025 / kareem	M6127



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58025 / Mn, 1000 PPM, 500 ml	101124	10/11/2027	01/13/2025 / kareem	01/13/2025 / kareem	M6128
				1	1	
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #

Certificate of Analysis Thermo Fisher SCIENTIFIC



Page 1 of 1

Certificate of Analysis 1 Reagent Lane Fair Lawn, NJ 07410 Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System 201,796,7100 tel Standard ISO9001:2015 by SAI Global Certificate Number CERT - 0120633 201.796.1329 fax

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	T142	Quality Test / Release Date	08/17/2023							
Lot Number	232820									
Description	STANNOUS CHLORIDE, DIH	STANNOUS CHLORIDE, DIHYDRATE CERTIFIED ACS (Suitable for Mercury Determination)								
Country of Origin	United States	Suggested Retest Date	Aug/2028							
Chemical Origin	Inorganic-non animal									
BSE/TSE Comment	No animal products are used a processing aids, or any other	as starting raw material ingredients, or used material that might migrate to the finished p	in processing, including lubricants, roduct.							

N/A							
Result Name	Units	Specifications	Test Value				
APPEARANCE		REPORT	Clear crystals				
ASSAY	%	Inclusive Between 98 - 103	100.65				
CALCIUM	%	<= 0.005	0.0017				
IDENTIFICATION	PASS/FAIL	= PASS TEST	PASS TEST				
IRON (Fe)	%	<= 0.003	0.0011				
LEAD (Pb)	%	<= 0.01	0.0006				
MERCURY (Hg)	ppm	<= 0.05	<0.05				
POTASSIUM (K)	%	<= 0.005	0.0001				
SODIUM (Na)	%	<= 0.01	<0.01				
SOLUBILITY IN HCL	PASS/FAIL	= PASS TEST	PASS TEST				
SULFATE (SO4)	PASS/FAIL	= P.T. (ABOUT 0.003%)	P.T. (ABOUT 0.003%)				

ut Sabyr

Harout Sahagian - Quality Control Supervisor - Fair Lawn

Note: The data listed is valid for all package sizes of this lot of this product, expressed as an extension of this catalog number listed above. If there are any questions with this certificate, please call at (800) 227-6701.

*Based on suggested storage condition.

m/z->	N. 5 11 0	m/≥-≫ 5.0⊑6	m/z-> 2.0回5 1.0回5	2.0 同の の	1. Barium nitrate (Ba)	Compound	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number: Weight shown below wa	CERTIFIED WEIGHT REPORT: Part A Lot A Desc	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
N		110	10	[1] Spectrum No.1	IN02	RM#	Expiration Date:010927Recommended Storage:Ambient (Il Concentration (µg/mL):1000NIST Test Number:6UTBWeight shown below was diluted to (mL):	<u>PORT:</u> Part Number: Lot Number: Description:	om om
0 0		120	N O		IN023 BAD022019A1 1	Lot Number	20	<u>57056</u> 010924 Barium (Ba)	
).		130	Q O	12.514 sec]:58156.D# [Count] [Linear]	1000 99.999	Nominal Purity Unc Conc. (µg/mL) (%) Pu	5E-05 00.02		R1815
240		140	4 0	56. D# [Cour	0.10 52.3 3	Uncertainty Assay Purity (%) (%) W	2% Balance Uncertainty Flask Uncertainty		ertified Refere १२-५
		150 160	0 0 0	t] [Linear]	3.82417 3.82441	Target Actual Weight (g) Weight (g)	40.0 Nitric Acid (mL)	46	Certified Reference Material CRM 7)२-५
1		0 170	70		1 1000.1	Actual Conc. (µg/mL)			:RM М6032
		180	8- 0		2.0 10022-31-8	Expanded Uncertainty (So +/- (µg/mL) CAS#	Formulated By:	Hiovanni	-
		190 Varian	9 O		0.5 mg/m3	SDS Information (Solvent Safety Info. On Attached pg.) COSHA PEL (TWA) LD51	Giovanni Esposito		AI Al
		200	100		orl-rat 355 mg/kg	n Attached pg.)) LD50	010924	(P)	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
					g 3104a	NIST	<u>2</u> [2]	<u> </u>	Accredited Ite Number Idards.com

Printed: 8/1/2024, 2:13:18 PM

Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	b	a G	į	۲ ۲	Ŗ	As	S	2 2	A			
i di	<u.u2< td=""><td><0.02</td><td>10.01</td><td>5,</td><td>-1</td><td>A 12</td><td><0.02</td><td>20.02</td><td>3</td><td></td><td></td><td></td></u.u2<>	<0.02	10.01	5,	-1	A 12	<0.02	20.02	3			
	ŝ	s S	2	2 8	2	ନ ନ	្ឋ	5	2			
	AU.02	40.02	20.02	10.02	3	A).02	<0.2	20.02	5			
	Au	Ģ	Ga	2	5	맘	Ę	Uy				
	40.02	<0.02	20.02	S0.02	3	40.02	<0.02	<0.02				
	Pb	La	He		- 1	31	Ho	Hf				
	<0.02	<0.02	40.2	<0.02		3	<0.02	40.02	COLUMN TWO IS NOT		Trace M	
	Nd	Mo	Hg	MIN	5	M ₂	£	5	No. of Concession, Name	1 and	Signat	
(T) = Target analyte	<0.02	<0.02	40.2	<0.02	10.01	501	<0.02	<0.02	The second second second		Verifica	
get anal	×	P	P	Pd	Ş	?	Ŋ	R	- and -	1001	tion	
yte	40.2	<0.02	<0.02	<0.02	20.02	3	<0.02	<0.02	日本のない		hy ICP-	
	Sc	Sm	Ru	Rb	KD	1	R	PŦ	11 11 11 11 11 11 11 11 11 11 11 11 11	190	NC /	
	<0.02	<0.02	<0.02	<0.02	20.02		40.02	40.02	War of the particular	har mr	in /ml /	
	Ta	ŝ	ş	Na	Ag	• •	2	Se				
	<0.02	<0.02	<0.02	40.2	20.02	10.02	-h ny	A) 2	ALL AND DE LEVE			
	티	Sn	F	3	TT	į	3	17	NAIMENT			
	40.02	40.02	40.02	<0.02	40.02	10.04	2003	<0.02	NU STORE IN			
	2	Ş, K	×	Ъ	V	c	1:	W				
	<0.02	2013	40.02	<0.02	A0.02	20.02		2003	NUCCERT OF DESCRIPTION OF			

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

in P. S.

Certified by:

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.
 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57056 Lot # 010924

m/z->	1.067	m/z-> 2.0€7	5.014	m/z-≻ 1.0E5	2.5 4	5.0而4	1. Cadmium nitrate tetrahydrate (Cd)	Compound	Weight shov	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL):		CERTIFIED WEIGHT REPORT:	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
		 		0		[1] Spectrum No.1		RM#	Weight shown below was dliuted to (mL):	Expiration Date: nended Storage: ntration (µg/mL):	Part Number: Lot Number: Description:	PORT:	15, Inc. om
		120		Š		-	IN024 CDM092021A1	Lot Number	6UTB uted to (mL):	070127 Ambient (20 °C) 1000	<u>57048</u> <u>070124</u> Cadmium (Cd)		
		130		30 0		12.514 500	1000 99.	Nominal Pu Conc. (µg/mL) (1	2000.07 0.1		(Cd)		R
200		140		À		12.514 sec]:58148.D# [Count] [Linear]	99.999 0.10 36.5	Purity Uncertainty Assay (%) Purity (%) (%)	5E-05 Balance Uncertainty 0.100 Flask Uncertainty		Solvent: 2%		Certified R
		1 () ()		50		Count) [Line	.5 5.4797	say Target 6) Weight (g)	ţy		ent: 24002546 2% 40.0	Lot #	Certified Reference Material CRM S 15 12 4
		160		0 0		ar'j	5.4804	Actual Actual Weight (g) Conc. (µg/mL)			Nitric Acid		terial CRM
		170		70			1000.1	11	Re		5		M6028
		-1 2 C		BO			10022-68-1	Expanded Uncertainty (Solvent +/- (µg/mL) CAS# 0	Reviewed By: Ped	\$	Alloch & B		-
		190 200		90 100				SDS Information (Solvent Safety Info. On Attached pg.) # OSHA PEL (TWA) LD51	Pedro L. Rentas	ento	Brack		ANAB IS AR-153 https://Ab
				-			orl-rat 60.2mg/kg 3108	hed pg.) NIST LD50 SRM	070124		070194		ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

1 of 2

Part # 57048

Lot # 070124

Printed: 8/1/2024, 2:13:25 PM





https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	F	7	B	DC		Ra	AS	- 00	ç	A		I	
	10.04	202	<0.02	10.0>	10.01	3	202	10.02	200	<0.02	CONTRACTOR OF A DATE		
	<u></u>	2	S	ភ្	s ç	ç	ç	2	2	8			
	70.02		40.02	<0.02	20.02	3	<0.02		5	H	STOCK STOCK		
	- Au		ş	Ga	2	5	ę	C	Į,	Ð	0.01		
	<0.02		3	<0.02	20.02	3	40.02	20.02	2	<0.02	PULLING SC VI		
	12	2	2	2	H	7	5	HO	:	Hf	South Revenue		
	40.02	10.02	55	~0,2	<0.02	2	∆.02	<0.02		40.02	A Star & Star		-
	Nd	UTAT	Ş,	Hg	Mn	ί,	Me	Ę	•	E	CONTRACT	ie cais	+30
(T) = Ta	<0.02	20.02	200	40.2 2	<0.02		<0 .01	<0.02		40.02	ALL STREET	VCITICO	くうどれい
D = Target analyte	×	2	2	ð	Pd	! !	õ	Nb		N:	The second second		+:))
vte	4012	20.02	3	A0.02	<0.02		<0.02	<0.02	10.02	c0 0>	一般であるの	DY ICF-	55
	Sc	Ň	2	R	Rb		R	Re		ę		C CIM	
	40.02	20.02		40.02	<0.02	10.00	300	<0.02	10.04	con		ug/mL)	
	Ta	s.	, <u>,</u>	ş	Na	9.0	A۵	<u>8</u>	00	2	SUMPLICATION OF		
	A0,02	<0.02		2003	<0.2	10.01	33	<0.02	10.4	3	III N SOLVER WILL S		
	IJ.	Sa		ł	Ţ,		3	Te	01				
	<0.02	<0.02	10.04	50	<0.02	10.02	3	<0.02	20.05	200			
	27	2	÷	<	4	v	4	d	×		Constant of the		
	<0.02	<0.02	20.02	3	<0.02	20.02	3	40.02	20.02		Strengt Strengt Strengt Strengt		

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

In P. St.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

e24

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	-	Certified Reference Material CRM R : ষ্টি বিশ্ব M6025	CRM ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
CERTIFIED WEIGHT REPORT: Part Number:	57182	Lot # Solvent: 24002546 Nitric	Acid
Description:	Lead (Pb)	2% 40.0 Nitric	Acid Formulated By: Lawence Barry
Expiration Date: Recommended Storage: Nominal Concentration (µq/mL):	110926 Ambient (20 °C) 10000	(mL)	Here ten
NIST Test Number:	6UTB	5E-05 Balance Uncertainty	Reviewed By: Pedro L. Rentas
Weight shown below was diluted to (mL):		2000.02 0.058 Flask Uncertainty	
	Lot	Nominal Purity Uncertainty Assay Target Actual	SDS Information sal Actual Uncertainty (Solvent Safety Info. On Attached pg.)
Compound	RM# Number Con	Purity (%) (%) Weight (g) W	(g) Conc. (µg/mL) +/- (µg/mL) CASi
1. Lead(II) nitrate (Pb)	IN029 PBD122016A1	10000 93.999 0.10 62.5 32.0006 32.0040	040 10001.1 20.0 10099-74-8 0.05 mg/m3
[1] Spectrum No.1 1.0E7	-	17.284 sec]:58182.D# [Count] [Linear]	
5. ດ ຄ			
m/z-> 10	2 0	30 40 50	0 70 80 90
1.006			
m/z-> 110	120	130 140 150 16	160 170 180 190
	h	A30 K40 K50 20	260
Part # 57182 Lot # 110923		1 of 2	Printed: 8/1/2024, 2:13:36 PM

1

Printed: 8/1/2024, 2:13:36 PM

 $\leq \infty$





https://Absolutestandards.com ANAB ISO 17034 Accreditec AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			and the second second				TI acci ilio	Cais	VCITICA			C IA	HALLIN'						
AI	Am	3	AB	7	3	цг	33	:	3	NE	2		200	2					
3		1		1				ţ	10.02	3	10.02	1.1	20.02	ő	70>	01	20.02	¥	<0.02
S	4 0.02	ß	<0.2	ц,	<0.02	Но	40.02	E	<0.02	Å	<0.02	Re	<0.02	Si	A0.02	P	<0.02	9	40.02
As	4 0.2	ĉ	<0.02	E	<0.02	6	<0.02	Mg	<0.01	õ	<0.02	R	<0.02	Ag	40.02	H	40.02	<	20.02
Ba	A0.02	S	40.02	ନ୍ଥ	<0.02	7	40.02	5	30	¥	3	Ŗ	3	ξ,	5	7	5	\$	
5	2	2		2						1					10.00	***	70.02	77	10.02
Be	10.05	۵ ۵	<0.02	Ga	<0.02	F	40,2	ЯH	40.2	٩	<0.02	Ru	<0.02	ş	⊲ 0.02	F	<0.02	~	A0.02
B	A0.02	S	<0.02	ନ୍ନ	<0.02	5	<0.02	Mo	<0.02	7	<0.02	Sm	<0.02	60	40.02	5	<0.02	Zn	Ang N
₿	<0.02	Q	40.02	Au	<0.02	\$	т	M	<0.02	ĸ	<0.2	Sc	<0.02	Ţ	40,02	3	40.02	2	20.02

Physical Characterization:

(T)= Target analyte

Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Son P. Shirt

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
 * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

- the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

M4371

Hydroxylamine Hydrochloride, Crystal BAKER ANALYZED® A.C.S. Reagent Suitable for Mercury Determination (hydroxylammonium chloride)

Rec - 06.07.12



avantor

Material No.: 2196-01 Batch No.: 0000215387 Manufactured Date: 2018/06/27 Retest Date: 2025/06/25 Revision No: 1

Certificate of Analysis

Meets ACS Reagent Chemical Requirements,

Test	Specification	Result
ssay (NH₂OH · HCl) (by KMnO₄ titrn)	>= 96.0 %	99.1
larity of Alcohol Solution	Passes Test	PT
esidue after Ignition	<= 0.050 %	0.017
itrable Free Acid (meq/g)	<= 0.25	0.19
mmonium (NH4)	Passes Test	РТ
ulfur Compounds (as SO4)	<= 0.005 %	< 0.003
race Impurities – ACS – Heavy Metals (as Pb)	<= 5 ppm	4
race Impurities – Iron (Fe)	<= 5 ppm	< 3
race Impurities – Mercury (Hg)	<= 0.050 ppm	< 0.005

For Laboratory, Research or Manufacturing Use

Country of Origin: CN Packaging Site: Paris Mfg Ctr & DC



Phillipsburg, NJ 9001:2015, FSSC22000 Paris, KY 9001:2008 Mexico City, Mexico 9001:2008 Gliwice, Poland 9001:2015, 13485:2012 Selangor, Malaysia 9001:2008 Dehradun, India, 9001:2008, 14001:2004, 13485:2003 Mumbai, India, 9001:2015, 17025:2005 Panoli, India 9001:2015

James Techie

Jamie Ethier Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone: 610.386.1700 Certificate of Analysis **ThermoFisher** S C I E N T I F I C

M4913-16

Page 1 of 1

Certificate of Analysis

1 Reagent Lane Fair Lawn, NJ 07410 201.796.7100 tel 201.796.1329 fax Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System Standard ISO9001:2015 by SAI Global Certificate Number CERT – 0120632

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	P279	Quality Test / Release Date	01/12/2021
Lot Number	210306		
Description	POTASSIUM PERMANGANATE, A.C.S.	· · · · · · · · · · · · · · · · · · ·	
Country of Origin	United States	Suggested Retest Date	Jan/2026

N/A			
Result Name	Units	Specifications	Test Value
APPEARANCE		REPORT	Dark purple to purple green crystals
ASSAY	%	>= 99	99.3
CHLORIDE & CHLORATE	%	<= 0.005	<0.005
IDENTIFICATION	PASS/FAIL	= PASS TEST	pass test
INSOLUBLE MATTER	%	<= 0.2	<0.2
MERCURY (Hg)	ppm	<= 0.05	<0.004
SULFATE (SO4)	%	<= 0.02	<0.02

Julian Buston

Julian Burton - Quality Control Manager - Fair Lawn

Note: The data listed is valid for all package sizes of this lot of this product, expressed as an extension of this catalog number listed above. If there are any questions with this certificate, please call at (800) 227-6701. *Based on suggested storage condition.



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com M5062 M5063

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:	Single Analyte Mass Spec Solution
Catalog Number:	MSHG-10PPM
Lot Number:	S2-HG709270
Matrix:	10% (v/v) HCI
Value / Analyte(s):	10 µg/mL ea: Mercury
Starting Material:	Hg metal
Starting Material Lot#:	1959
Starting Material Purity:	99.9994%
CERTIFIED VALUES	AND UNCERTAINTIES

Certified Value:	10.001 ± 0.053 μg/mL
Density:	1.020 g/mL (measured at 20 \pm 4 °C)

Assay Information:

3.0

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Hg	ICP Assay	3133	160921
Hg	EDTA	928	928
Hg	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods	Characterization of CRM/RM by One Method
Certified Value, X _{CRM/RM} , where two or more methods of characterization are used is the weighted mean of the results:	Certified Value, X _{CRWRM} , where one method of characterization is used is the mean of individual results:
$X_{CRM/RM} = \Sigma(w_i) (X_i)$	$X_{CRM/RM} = (X_a) (u_{char a})$
X _i = mean of Assay Method i with standard uncertainty u _{char i}	X _a = mean of Assay Method A with
w_i = the weighting factors for each method calculated using the inverse square of the variance. $w_i = (1/u_{char} i)^2 / (\Sigma(1/(u_{char} i)^2))$	uchar a = the standard uncertainty of characterization Method A
CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k (u ² _{char} + u ² _{bb} + u ² _{lts} + u ² _{ts}) ^{1/2}	CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k $(u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{\frac{1}{2}}$
k = coverage factor = 2	k = coverage factor = 2
$u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} are the errors from each characterization method	uchar a = the errors from characterization
ubb = bottle to bottle homogeneity standard uncertainty	ubb = bottle to bottle homogeneity standard uncertainty
u _{lts} = long term stability standard uncertainty (storage)	ults = long term stability standard uncertainty (storage)
uts = transport stability standard uncertainty	uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 μm.

0	Ag		0.000011	M	Eu	<	0.000201	0	Na		0.000004	М	Se	<	0.015915	0	Zn	<	0.001510
0	AI		0.000001	0	Fe		0.000001	М	Nb	<	0.000201	0	Si		0.000005	М	Zr	<	0.000201
Μ	As	<	0.000402	Μ	Ga	<	0.000201	Μ	Nd	<	0.000201	М	Sm	<	0.000201				
М	Au	<	0.003631	М	Gd	<	0.000201	M	Ni	<	0.000402	M	Sn	<	0.001007				
Μ	В	<	0.001208	М	Ge	<	0.000201	М	Os	<	0.000605	М	Sr	<	0.000201				
Μ	Ba	<	0.000201	Μ	Hf	<	0.000201	0	Ρ	<	0.032370	M	Та	<	0.000201				
M	Be	<	0.000201	s	Hg	<		Μ	Pb	<	0.000201	M	Tb	<	0.000201				
Μ	Bi	<	0.000201	М	Ho	<	0.000201	Μ	Pd	<	0.000403	М	Te	<	0.002216				
0	Ca		0.000007	Μ	In	<	0.000201	Μ	Pr	<	0.000201	М	Th	<	0.000201				
M	Cd	<	0.000201	М	Ir	<	0.000201	М	Pt	<	0.000402	M	Ti	<	0.000402				
Μ	Ce	<	0.000201	0	Κ		0.000020	М	Rb	<	0.000201	0	ΤI	<	0.016508				
M	Co	<	0.000201	М	La	<	0.000201	Μ	Re	<	0.000201	Μ	Tm	<	0.000201				
0	Cr	<	0.003021	0	Li	<	0.000107	М	Rh	<	0.000201	М	U	<	0.008058				
М	Cs	<	0.001208	М	Lu	<	0.000201	Μ	Ru	<	0.000201	Μ	V	<	0.000201				
М	Cu	<	0.000402	0	Mg		0.000001	0	S	<	0.053950	М	W	<	0.000604				
M	Dy	<	0.000201	M	Mn	<	0.000604	М	Sb	<	0.001208	М	Y	<	0.000201				
Μ	Er	<	0.000201	М	Мо		0.000009	М	Sc	<	0.000201	М	Yb	<	0.000201				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between $4^{\circ} - 24^{\circ}$ C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 200.59 +2 4 Hg(OH)(aq) 1+ Chemical Compatibility - Stable in HNO3. Avoid basic media forming insoluble carbonate. The sulfide, basic carbonate, oxalate, phosphate, arsenite, arsenate and iodide are insoluble in water.

Stability - 2-100 ppb levels not stable in 1% HNO3 / LDPE container, stable in 10% HNO3 packaged in borosilicate glass. 1-100 ppm levels stable in 7% HNO3 packaged in borosilicate glass. 1000-10,000 ppm solutions are chemically stable for years in 5-10% HNO3 / LDPE container.

Hg Containing Samples (Preparation and Solution) - Metal (soluble in HNO3); Oxide (Soluble in HNO3); Ores and Organic based (The literature has more references to the preparation of Hg containing samples than any other element. Please consult the literature for your specific sample type, since such preparations are prone to error. Or e-mail our technical staff and we will contact you to discuss your particular sample preparation guestions in further detail.).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe
ICP-MS 202 amu	9 ppt	n/a	186W16O
ICP-OES 184.950 nm	0.03 / 0.005 µg/mL	1	
ICP-OES 194.227 nm	0.03 / 0.005 µg/mL	1	V
ICP-OES 253.652 nm	0.1 / 0.03 µg/mL	1	Ta, Co, Th ,Rh , Fe,
			U

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

September 22, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- September 22, 2026

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS Certificate Prepared By:

Uyen Truong Supervisor, Product Documentation

Ulya new

Certificate Approved By:


Michael Booth Director, Quality Control

Michael 2 Booth

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Paul R Laine

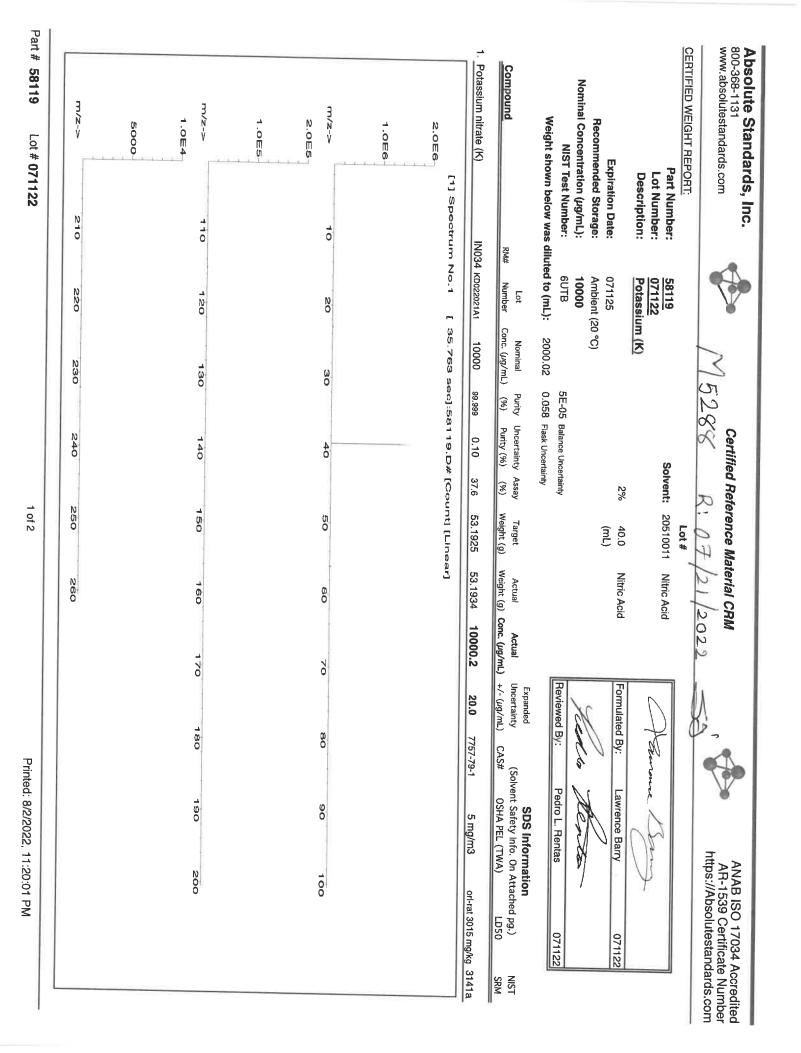

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com		Certified Reference Material CRM	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
Instrumental Analysis by Inc	ductively Couple	Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	
		Trace Metals Verification by ICP-MS (μ g/mL)	
	1		
AI <0.02 Cd <0.02 Sb <0.02	Dy <0.02 Er <0.02	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$
Physical Characterization:		(T)= Target analyte	Certified by:
Homogeneity: No heterogeneity was observed in the preparation of this standard.	observed in the prep	aration of this standard.	Jur 17 Mr.
 * The certified value is the concentration calculated from gravi * Purified acids, 18.2 megohm deionized water, calibrated Clas the preparation of all standards. * All standard containers are meticulously cleaned prior to use. * All standards are prepared gravimetrically using balances that an * Standards are certifed (+/-) 0.5% of the stated value, unless * All standards should be stored with caps tight and under app # Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelin Measurement Result," NIST Technical Note 1297, U.S. Govern 	centration calcula deionized water, o ds. eticulously cleane eticulously using ba netrically using ba 5.5% of the state d with caps tight r, B.N. and Kuyat, r, B.N. and Kuyat,	imetric and volumetric measurements un s A glassware and the highest purity raw re calibrated with weights traceable to Ni otherwise stated. ropriate laboratory conditions. nes for Evaluating and Expressing the Uno nment Printing Office, Washington, D.C. (less otherwise stated. materials are used in IST (see above). certainty of NIST 1994).

I

Part # 58119

Lot # 071122



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program" R : 以120 2 [

Instructions for QATS Reference Material: Inorganic ICV Solutions

QATS LABORATORY INORGANIC REFERENCE MATERIAL INITIAL CALIBRATION VERIFICATION SOLUTIONS (ICV1, ICV5, AND ICV6)

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

- APPLICATION: For use with the CLP SFAM01.0 SOW and revisions.
 - **<u>CAUTION</u>**: Read instructions carefully before opening bottle(s) and proceeding with the analyses.

Contains Metals in Dilute Acidic or Cyanide in Basic Aqueous Solutions HAZARDOUS MATERIAL

> Safety Data Sheets Available Upon Request



(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014", "ICV5-0415", and "ICV6-0400", respectively.

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY APTIM Federal Services, LLC 2700 Chandler Avenue - Building C Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in $\mu g/L$ (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

ICV1-1014 For ICP-AES analysis, use a 10-fold dilution by pipetting 10 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid.

RMs ICV 1, 5, 6 SFAM.docx

Page 1 of 2

QATS Form 20-007F188R00, 04-19-2021



The Quality Assurance Technical Support (QATS) contract is operated by APTIM Federal Services, LLC.



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"


AP11MInstructions for QATS Reference Material: Inorganic ICV SolutionsICV1-1014For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate
into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.ICV5-0415For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting
1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume
with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K2Cr2O7
and 5% (v/v) nitric acid.ICV6-0400For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6
concentrate into a 100 mL volumetric flask and dilute to volume with Type II water.
Distill this solution along with the samples before analysis. The cyanide concentrate
is prepared from K3Fe(CN)6, Type II water, and 0.1 % sodium hydroxide, and will
decompose rapidly if exposed to light.

NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.

(D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS

	ICV1-1014	
Element	Concentration (µg/L) (after 10-fold dilution)	Concentration (µg/L) (after 50-fold dilution)
AI	2500	500
Sb	1000	200
As	1000	200
Ba	520	100
Be	510	100
Cd	510	100
Ca	10000	2000
Cr	520	100
Co	520	100
Cu	510	100
Fe	10000	2000
Pb	1000	200
Mg	6000	1200
Mn	520	100
Ni	530	110
K	9900	2000
Se	1000	200
Ag	250	50
Na	10000	2000
TI	1000	210
V	500	100
Zn	1000	200

	ICV5-0415		ICV6-0400
Element	Concentration (µg/L) (after 100-fold dilution)	Analyte	Concentration (µg/L) (after 100-fold dilution)
Hg	4.0	CN [.]	99

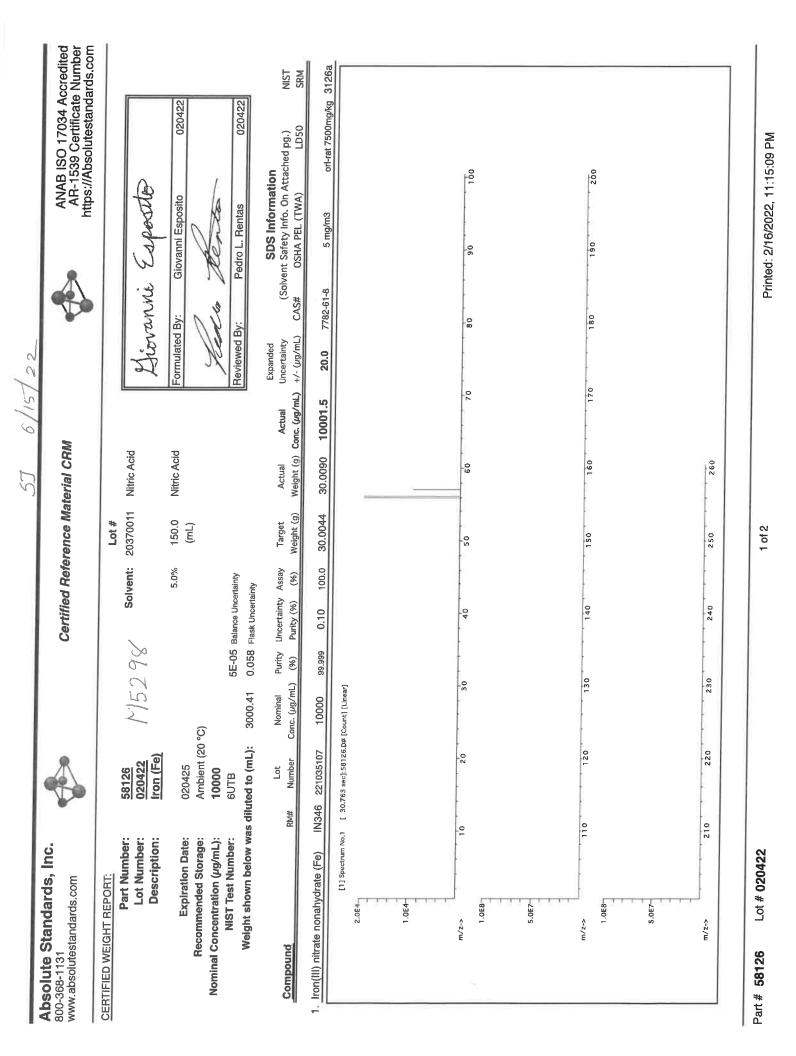

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131





AR-1539 Certificate Number https://Absolutestandards.com ANAB ISO 17034 Accredited

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

000	20	00.00									ALC: NO	LI LI LI LI LI LI		The state of the				
70.07	3	20.02	ĥ	<0.02	Ħ	<0.02	:=	<0.02	ïŻ	<0.10	Å	000-	0	00	Ē			
<0.02	S	<0.2	ц,	2002	ЦО	000	F		; ;		* *	70.02	b o	2.0>	11	<0.02	>	<0.0×
507	c	0.00	i,	10.04	2	70.02	T'I	<0.02	٩Ż	<0.02	Re	<0.02	55	<0.02	ť	2007	11	001
7.02	ŋ	<0.02	립	<0.02	In	<0.02	Mo	/0.01	ć	000	ē				2	10.02	>	20.02
<0.02	ڒ	20.02	2	000			9	10.04	ŝ	70.02	2	<0.02	Ag	<0.02	Ħ	≤0.02	>	<0.0>
	3	70.04	3	<0.UZ	4	<0.02	Mn	<0.10	Ρd	<0.02	Rh	<0.02	٩Ŋ	102	É	200		
<0.01	გ	<0.5	g	<0.02	Ц.	C 02	'n,		¢		1	1000	PLT	7.02	97	<0.02	Υb	<0.0≻
<0.07	ξ	010	ç		,	7.02	217	7.02	<u>ч</u>	<0.02	2	<0.02	S	<0.02	Tm	<0.02	>	100
70.02	3	01.02	35	<0.10	ę	<0.02	мо	<0.02	Ł	<0.02	mS.	2007	U	200	5		' ।	20.00
<0.02	õ	<0.10	Υn	<0.02	fd	<0.02	NA	20.02	1		5	70.02	2	20.02	Ч	<0.02	Z Z	×0.0
							DLT	20,02	4	202	22	<0.02	<u>e</u>	000	ï	2007	1	òç

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

Sur P

- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.
 - All standard containers are meticulously cleaned prior to use. *
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 - * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
 - * All Standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Multi Analyte Custom Grade Solution	on
6020CAL-1	
S2-MEB711244	
5% (v/v) HNO3 tr. HF	
20 µg/mL ea: Silver, Arsenic, Beryllium, Cadmium, Chromium, Iron, Magnesium, Sodium, Lead, Selenium,	Aluminum, Barium, Calcium, Cobalt, Copper, Potassium, Manganese, Nickel, Antimony, Thallium,
Vanadium,	Zinc
	6020CAL-1 S2-MEB711244 5% (v/v) HNO3 tr. HF 20 µg/mL ea: Silver, Arsenic, Beryllium, Cadmium, Chromium, Iron, Magnesium, Sodium, Lead, Selenium,

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE Aluminum, Al	CERTIFIED VALUE 20.01 ± 0.08 µg/mL	ANALYTE Antimony, Sb	CERTIFIED VALUE 20.01 ± 0.12 μg/mL
Arsenic, As	20.01 ± 0.18 μg/mL	Barium, Ba	20.01 ± 0.11 μg/mL
Beryllium, Be	20.01 ± 0.14 μg/mL	Cadmium, Cd	20.01 ± 0.11 μg/mL
Calcium, Ca	20.01 ± 0.10 μg/mL	Chromium, Cr	20.01 ± 0.16 μg/mL
Cobalt, Co	20.01 ± 0.11 μg/mL	Copper, Cu	20.01 ± 0.10 μg/mL
Iron, Fe	20.01 ± 0.09 μg/mL	Lead, Pb	20.01 ± 0.11 μg/mL
Magnesium, Mg	19.99 ± 0.10 μg/mL	Manganese, Mn	20.01 ± 0.10 μg/mL
Nickel, Ni	20.01 ± 0.11 μg/mL	Potassium, K	20.01 ± 0.10 μg/mL
Selenium, Se	20.02 ± 0.14 μg/mL	Silver, Ag	20.02 ± 0.09 μg/mL
Sodium, Na	20.01 ± 0.10 μg/mL	Thallium, Tl	20.01 ± 0.13 μg/mL
Vanadium, V	20.01 ± 0.11 μg/mL	Zinc, Zn	20.01 ± 0.11 μg/mL

1.026 g/mL (measured at 20 \pm 4 °C)

Density:

Density:	1.026 g/mL (measi	ared at 20 ± 4 °C)	
Assay Informatio	n:		
ANALYTE	METHOD	NIST SRM#	SRM LOT#
Ag	ICP Assay	3151	160729
Ag	Volhard	999c	999c
AI	ICP Assay	3101a	140903
AI	EDTA	928	928
As	ICP Assay	3103a	100818
Ва	ICP Assay	3104a	140909
Ва	Gravimetric		See Sec. 4.2
Be	ICP Assay	3105a	090514
Са	ICP Assay	3109a	130213
Са	EDTA	928	928
Cd	ICP Assay	3108	130116
Cd	EDTA	928	928
Co	ICP Assay	3113	190630
Co	EDTA	928	928
Cr	ICP Assay	3112a	170630
Cu	ICP Assay	3114	121207
Cu	EDTA	928	928
Fe	ICP Assay	3126a	140812
Fe	EDTA	928	928
Fe	Calculated		See Sec. 4.2
К	ICP Assay	3141a	140813
К	Gravimetric		See Sec. 4.2
Mg	ICP Assay	3131a	140110
Mg	EDTA	928	928
Mn	ICP Assay	3132	050429
Mn	EDTA	928	928
Na	ICP Assay	3152a	120715
Na	Gravimetric		See Sec. 4.2
Ni	ICP Assay	3136	120619
Ni	EDTA	928	928
Pb	ICP Assay	3128	101026
Pb	EDTA	928	928
Se	ICP Assay	3149	100901
Se	Calculated		See Sec. 4.2
TI	ICP Assay	3158	151215
ТІ	Calculated		See Sec. 4.2
V	ICP Assay	3165	160906
V	EDTA	928	928
Zn	ICP Assay	3168a	120629
Zn	EDTA	928	928

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods Certified Value, X _{CRM/RM} , where two or more methods of characterization are	Characterization of CRM/RM by One Method Certified Value, X _{CRM/RM} , where one method of characterization
used is the weighted mean of the results:	is used is the mean of individual results:
$X_{CRM/RM} = \Sigma(w_i) (X_i)$	X _{CRM/RM} = (X _a) (u _{char a})
X _i = mean of Assay Method i with standard uncertainty u _{char i}	X _a = mean of Assay Method A with
w_i = the weighting factors for each method calculated using the inverse square of the variance: $w_i = (1/u_{chari})^2 / (\Sigma(1/(u_{chari})^2)$	u _{char} a = the standard uncertainty of characterization Method A
CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k (u ² _{char} + u ² _{bb} + u ² _{lts} + u ² _{ts}) ^{1/2}	CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k (u ² char a + u ² bb + u ² lts + u ² ts) ¹
k = coverage factor = 2	k = coverage factor = 2
$\mathbf{u_{char}} = \left[\sum ((\mathbf{w_i})^2 (\mathbf{u_{char}})^2)\right]^{\frac{1}{2}}$ where $\mathbf{u_{char}}$ are the errors from each characterization method	u _{char a} = the errors from characterization
ubb = bottle to bottle homogeneity standard uncertainty	u _{bb} = bottle to bottle homogeneity standard uncertainty
u _{lts} = long term stability standard uncertainty (storage)	ults = long term stability standard uncertainty (storage)
u _{te} = transport stability standard uncertainty	ute = transport stability standard uncertainty

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

4.0

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° \pm 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit www.inorganicventures.com/TCT

HF Note: This standard should not be prepared or stored in glass.

Low Silver Note: This solution contains "LOW" levels of Silver. Please store this entire bottle inside a sealed glass jar.

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

October 20, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- October 20, 2026

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Michael Booth Director, Quality Control

Michael 2 Booth

Certifying Officer:


Paul Gaines Chairman / Senior Technical Director

Paul R Line



-	٨	

1 0

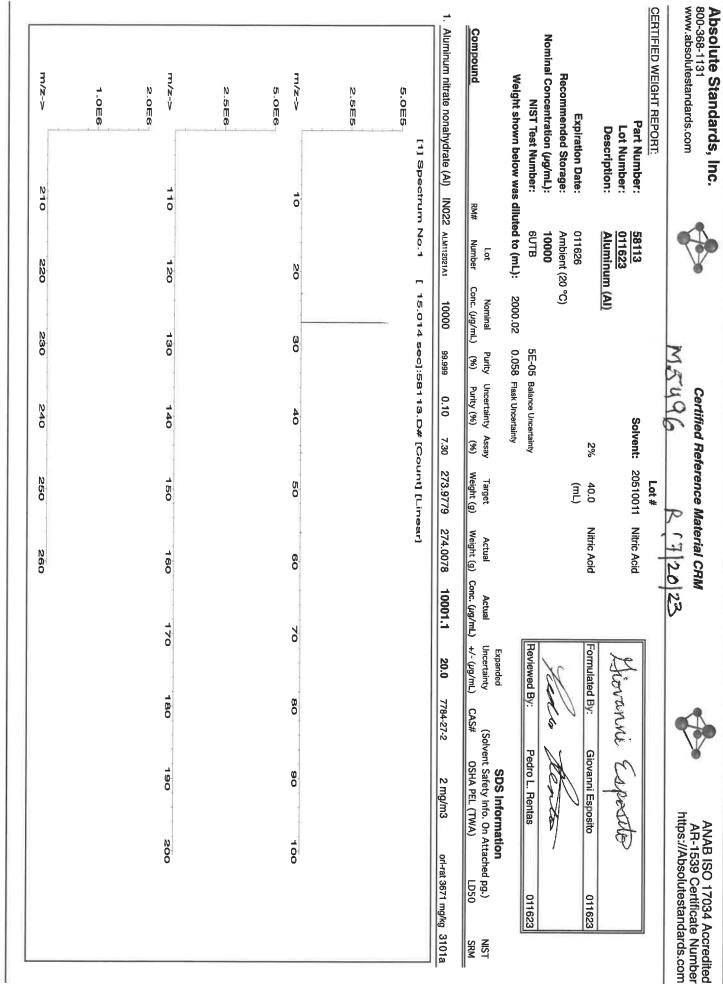

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	031523	on ttached pg.) NIST LD50 SRM ont-rat >2000mo/kg 3109a	Ő	O O N
ANA	Ped X Gio	SDS Information (Solvent Safety Info. On Attached pg.) COSHA PEL (TWA) LD5(COSHA PEL (TWA) onl-rat >2000	-0 0	190 200
MUXCITI	Formulated By: Reviewed By:	Expanded Uncertainty +/- (µg/mL) CAS: 20.0 471-34	Q R	170
120		Actual Actual Weight (g) Conc. (ug/mL) 75.2093 10001.4	So	1900 1900 1900
Certified Reference Material CRM	Lot # Solvent: 21110221 2% 60.0 (mL) Uncertainty sentainty	Uncertainty Assay Target Purity (%) (%) Weight (g) 0.10 38.9 75.1990	0.D# [Count] [Line	140 150 240 250
NV5497	5E-05 Balance 00.41 0.058 Flask Un	Nominal Purity Uncertainty Conc. (<i>ug/m</i> L) (%) Purity (%) 10000 99.999 0.10	30 30 30 30 30 30 30 30 30 30 30 30 30 3	- 30 5 7 30 7 30
	58120 031523 031526 031526 Ambient (20 10000 6UTB 6UTB 6UTB	Lot A RM# Number Con	10 To 1 12	220
Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	CERTIFIED WEIGHT REPORT: Part Number: 58120 Lot Number: 031523 Description: 031526 Expiration Date: 031526 Recommended Storage: Ambient (2 Nominal Concentration (µg/mL): 10000 NIST Test Number: 6UTB Weight shown below was diluted to (mL):	Compound 1. Calcium carbonate (Ca)	2.0E4 1.0E4 3.0E4 5.0E4 2.5E4	T.OES 1.0ES 5.0E4 m/2-> 2 m/2-> 2 Part # 58120 Lot # 031523

_

Absolute Standards, inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM



Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	<0.02	3	<0.02	ĥ	<0.02	Hf	<0.02	Ц	<0.02	z	<0.02	Ł	<0.02	ŝ	<0.2	£	<0.02	×	<0.02
_	<0.02	లి	٣	固	40.02	Bo	40.02	3	<u>60.05</u>	ź	<0.02	Se	<0.02	ŝ	<0.02	Te	<0.02	Þ	40.02
	40 12	ථ	40.02	a	40.02	h	<0.02	Mg	±0.01	ő	20 .0>	2	<0.02	Ag	<0.02	F	<0.02	>	<0.02
_	€0.05	ඊ	<0.02	3	40.02	놰	<0.02	Å	€0.02	æ	<0.02	å	<0.02	Na	<0.2	Ę	<0.02	ይ	40.02
	<0.01	q	<0.02	g	40.02	Ę	402	Hg	<0.2	۵.	<0.02	Ru	<0.02	S	€0.02	Ę	<0.02	×	<0.02
	≤0.02	გ	<u>60.02</u>	ප්	40.02	3	0.02	Mo	<0.02	æ	<0.02	Sn	<0.02	S	<0.02	Sn	<0.02	Ŋ	<0.02
	≤0.02	ð	<u>60.05</u>	Au	000	£	<0.02	PN	<u>40.02</u>	Å	40.2	ŝ	<0.02	T.	≤0.02	Ę	<0.02	2	2002

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58120 Lot # 031523

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	031523	on ttached pg.) NIST LD50 SRM ont-rat >2000mo/kg 3109a	Ő	O O N
ANA	Ped X Gio	SDS Information (Solvent Safety Info. On Attached pg.) COSHA PEL (TWA) LD5(COSHA PEL (TWA) onl-rat >2000	-0 0	190
MUXCITI	Formulated By: Reviewed By:	Expanded Uncertainty +/- (µg/mL) CAS: 20.0 471-34	Q R	170
120		Actual Actual Weight (g) Conc. (ug/mL) 75.2093 10001.4	So	1900 1900 1900
Certified Reference Material CRM	Lot # Solvent: 21110221 2% 60.0 (mL) Uncertainty sentainty	Uncertainty Assay Target Purity (%) (%) Weight (g) 0.10 38.9 75.1990	0.D# [Count] [Line	140 150 240 250
NV5497	5E-05 Balance 00.41 0.058 Flask Un	Nominal Purity Uncertainty Conc. (<i>ug/m</i> L) (%) Purity (%) 10000 99.999 0.10	30 30 30 30 30 30 30 30 30 30 30 30 30 3	- 30 5 7 30 7 30
	58120 031523 031526 031526 Ambient (20 10000 6UTB 6UTB 6UTB	Lot A RM# Number Con	10 To 1 12	220
Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	CERTIFIED WEIGHT REPORT: Part Number: 58120 Lot Number: 031523 Description: 031526 Expiration Date: 031526 Recommended Storage: Ambient (2 Nominal Concentration (µg/mL): 10000 NIST Test Number: 6UTB Weight shown below was diluted to (mL):	Compound 1. Calcium carbonate (Ca)	2.0E4 1.0E4 3.0E4 5.0E4 2.5E4	T.OES 1.0ES 5.0E4 m/2-> 2 m/2-> 2 Part # 58120 Lot # 031523

_

Absolute Standards, inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM



Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	<0.02	3	<0.02	ĥ	<0.02	Hf	<0.02	Ц	<0.02	z	<0.02	Ł	<0.02	ŝ	<0.2	£	<0.02	×	<0.02
_	<0.02	లి	٣	固	40.02	Bo	40.02	3	<u>60.05</u>	ź	<0.02	Se	<0.02	ŝ	<0.02	Te	<0.02	Þ	40.02
	40 12	ථ	40.02	a	40.02	h	<0.02	Mg	±0.01	ő	20 .0>	2	<0.02	Ag	<0.02	F	<0.02	>	<0.02
_	€0.05	ඊ	<0.02	3	40.02	놰	<0.02	Å	€0.02	æ	<0.02	å	<0.02	Na	<0.2	Ę	<0.02	ያ	40.02
	<0.01	q	<0.02	ß	40.02	Ę	402	Hg	<0.2	۵.	<0.02	Ru	<0.02	S	€0.02	Ę	<0.02	×	<0.02
	≤0.02	გ	<u>60.02</u>	ප්	40.02	3	0.02	Mo	<0.02	æ	<0.02	Sn	<0.02	S	<0.02	Sn	<0.02	Ŋ	<0.02
	≤0.02	ð	<u>60.05</u>	Au	000	£	<0.02	PN	<u>40.02</u>	Å	40.2	ŝ	<0.02	T.	≤0.02	Ę	<0.02	2	2002

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58120 Lot # 031523

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com				Certified R	Certified Reference Material CRM	aterial CRI	R 103/17	H/2		AN AF https	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	Accredited ate Number ndards.com
CERTIFIED WEIGHT REPORT: Part Number: Lot Number: Description:	r: <u>57182</u> r: <u>061522</u> n: <u>Lead (Pb</u>)	-		Solvent:	Lot # It: 20510011	Nitric Acid		Lievannie	/ nui E	apertite		
Expiration Date:061525Recommended Storage:Ambient (2)Nominal Concentration (ug/mL):10000NIST Test Number:6UTBWeight shown below was diluted to (mL):	e: 061525 e: Ambient (20 °C)): 10000 n: 6UTB rs diluted to (mL): 20	0 °C) 2000.02	5E-05 B 0.058 F	2% 5E-05 Balance Uncertainty 0.058 Flask Uncertainty	2% 40.0 mty (mL)	Nitric Acid		Formulated By:		Giovanní Esposito	061522	য় য
Compound	Lot RM# : Number	Nominal Conc. (µg/mL)	Purity (%)	Uncertainty Assay Purity (%) (%)	ay Target) Weight (g)	Actual Weight (g)	Actual Conc. (µg/mL)	Expanded Uncertainty +/- (µg/mL) C	Solvent S CAS# 0S	SDS information (Solvent Safety Info. On Attached pg.) COHA PEL (TWA)	tion Attached pg.) LD50	NIST
1. Lead(II) nitrate (Pb)	IN029 PBD122016A1	10000	99,999	0.10 62.5	5 32.0006		10001.1		φ	0.05 ma/m3	introne	
[1] Speci	[1] Spectrum No.1 [17.284 s	90]:58	85.D#	17.284 sec]:58182.D# [Count] [Linear]	(upe						11
ສ ອ ອ												
2.0E6	20	O.		40	80	Co	20	Ö Ø	0	*	100	
1.0E6												
rn/z->	110	130		140	150	160	170	180		0	002	
ы С. С. Ш. С.												
R A E	210 220	530		N 0	250	260						
Part # 57182 Lot # 061522					1 of 2				Printed: 3	Printed: 3/16/2023, 1:45:32 PM	45:32 PM	

-

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

F																	
	d <0.02	Ŋ	<0.02	Hf	<0.02	Li	<0.02	in in	<0.02	đ	4000	3	C.04	14	WWV	-	000
		d	000	14	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			;		:		2	10	10	70.02	*	ZULUS
_		đ	20.02	2		3	<0.02	q	<0.02	g	40.02	ŝ	<u>60.05</u>	Te	\$0.02	Ŋ	≤0.02
02 ₹07	` 	đ	<0.02	9	0.02	Mg	<0.01	ő	<0.02	4a	<0.02	Åø	2007	F	200	1	Ş
_	_	5	2007	1	200	1	000	i				9		17	70.02	>	70702
		3	70.70	4		UIW	20'02	P2	<0.02	2	40.02	Ra	5 9 9	đ	≤0.02	\$	20.02
	_	g	0.02	Ъ.	€02	Нg	<0.2	9	2002	n d	2007	2	2007	e	000		
	_	Ċ		,		0		•			70.00	5	70.02	111	70.02	H	20102
		5		ġ	<0.02	Wo	<0.02	Z .	<u>6</u> .62	SB	40.02	s	<0.02	Sn	<000>	Zn	2007
		Au Au	<0.02	£	F	72	2007	2	500	0	~~~~~	ŧ				1	10.01
							70.00	4	10	20	20.02	13		q	8.U2	3	808

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

In P M.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57182 Lot # 061522

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	, Inc.	¢			Certified	Reference	Certified Reference Material CRM	RM		2	2	ANAB ISO 17034 Accredited AR-1539 Certificate Number	4 Accredited
		5			M	SAD . I	(IRW	R Les/	101120	でい		https://Absolutestandards.com	andards.com
CERTIFIED WEIGHT REPORT: Part Number: Lot Number:	ber: ber:	<u>58111</u> 022123 Soding Av	1		Solvent:	Lot # 21110221	Nitric Acid		F J	anna an	- China -	t t	
Expiration Date: 022126 Recommended Storage: Ambient (2 Nominal Concentration (µg/mL): 10000 NIST Test Number: 6UTB Weight shown below was diluted to (m1):	Date: "age: "mL): ther: w was dilute	022126 022126 Ambient (20 °C) 10000 6UTB 6UTB	and c) 2001 41	5E-05 D C	2% 5E-05 Balance Uncertainly	60.0 (mL)	Nitric Acid		Formulated By:	. \$	Lawrence Barry	022123	
Compound	RM#		Nominal Conc. (µg/mL)		raak uncertainty Assay Uncertainty Assay Purity (%) (%)	Target Weight (g)	Actual Weight (g) C	Actual Conc. (µg/mi.)	Expanded Uncertainty +/- (ug/mL)	(Solv CAS#	SDS Information ent Safety Info. On Attac OSHA PEL (TWA)	SDS Information Solvent Safety Info. On Attached pg.)	NIST
1. Sodium nitrate (Na)	1N036	IN036 NAV01201511	10000	666.66	0.10 26.9	111.5406	111.5410	10000.0	20.0	7631-99-4	5 mg/m3	ort-rat	3152a
5.0E倍	[1] Spectrum No.1		8.935	3:[Daa	8.935 sec]:58111.D# [Count] [Linear]	ount] [Lir	lear]					o b	
0 10 10 10 10 10 10 10 10 10 10 10 10 10					÷								
m/≥-> 5.0E6	9	30		0	9	O a	0	2	0	S	0.6	100	
С 7 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1													
m/z->	011	120		000	140	150	160	170	p	180	190	80	
2.5E6													_
<-z/ш	810 0	220		630	240	250	260						_
Part # 58111 Lot # 022123	123					1 of 2					Printed: 3/16/20	Printed: 3/16/2023, 1:45:29 PM	1

-

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	<0.02	B	<0.02	λ	≤0.02	Hf	<0.02	Ľ	<0.02	N	<0.02	놊	<0.02	3	€02	E.	4002	M	W W
Sb Sb	40.02	లో	<0.2	西	40.02	Ю	40.02	2	<0.02	ź	<0.02	æ	<0.0>	3	0.02	4	40.02		2002
	402	ථ	<0.02	펿	40.02	ä	<0.02	Mg	10.0>	ර	<0.02	Rh	20.0>	Az	0 ,02	F	2002	> >	000
	<0.02	ථ	<0.02	3	0.02	ч	<0.02	Ma	<0.02	Pd	<0.0>	R.	<0.02	e N	F-	Ē	200	\$	
_	10.0>	ප	<0.02	පී	40.02	Fe	402	Hg	402	۵.	<0.02	Ru	2002	ð,	- UU	ļ	WW WW	2 >	
_	40.02	ර	<0.02	ප්	40.02	ŗ	<0.02	Wo	<0.02	۶.	4002	Ş	<00V>	1		3		- 2	
	\$0.02	8	<0.02	n¥.	40.02	2	40.02	PN	4002		40.2	3		s e		5 F		5 4	

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

2 2

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

m/z->	5 0 0 0	m/z-> 1.0⋿4	1.065	m/z-> 2.065	1.000	N.OE	1. Potassium nitrate (K)	Compound	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number: Weight shown below wa	CERTIFIED WEIGHT REPORT: Part I Lot I Des	800-368-1131 www.absolutestandards.com
210 220		110 120		10		[1] Spectrum No.1 [IN034 KD022021A1	RM# Number	Expiration Date:120825Recommended Storage:Ambient (20 °C)Il Concentration (µg/mL):10000NIST Test Number:6UTBWeight shown below was diluted to (mL):30	<u>PORT:</u> Part Number: <u>58119</u> Lot Number: <u>120822</u> Description: <u>Potassium (K)</u>	om
230		130		۵ O			10000 . 9	Nominal P Conc. (µg/mL)	20 °C) 3000.4	am (K)	
240		140		4. 0.		35.763 sec]:58119.D# [Count] [Linear]	99.999 0.10 37.6	Purity Uncertainty Assay (%) Purity (%) (%)	29 5E-05 Balance Uncertainty 0.06 Flask Uncertainty	Solvent:	Certified R
N U U		150		ທ. ດັ		čount] [Line	.6 79.7990	ay Target 5) Weight (g)	2% 60.0 (mL)	Lot # nt: 20510011	Certified Reference Material CRM
N 20		160		0		er)		Actual / Weight (g) Conc	Nitric Acid	Nitric Acid	terial CRM
		170		70			10001.1 20.0	Expanded Actual Uncertainty Conc. (µg/mL) +/- (µg/mL)	Revie	re	R R: 0
		180		8 O			.0 7757-79-1	CAS	Formulated By:	tovanni	RINA
		190		8 0			5 mg/m3	SDS Information (Solvent Safety Info. On Attached pg.) # OSHA PEL (TWA) LD5(Giovanni Esposito	Especito	at v
		200		10.00		·	orl-rat 3015 mg/kg	mation On Attached pg.) (A) LD50	120822	Ğ	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
							lei I	NIST			4 Accredite cate Numb andards.co

Part # 58119 Lot # 120822

1 of 2

Printed: 3/16/2023, 1:45:22 PM

	Printed: 3/16/2023, 1:45:22 PM	Printed: 3						2 of 2							0822	Lot # 120822		Part # 58119	Par
				above) of NIS	to NIST (see above). 9 Uncertainty of NIST 9.C. (1994).	le to N the Ur 1, D.C.	Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).	weight d. ry cond i and E: fice, W	ated with ise state laborator valuating rinting Of	e calibr: otherw opriate es for E ment P	Standards are prepared gravimetrically using balances that are calibrated with weights trace Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressi Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washing	balance ed valu t and u it, C.E., 297, U.	Insignation of the standard for the stan	metrica 0.5% of d with (r, B.N. echnica	Standards are prepared gravimetrically using balances that ar Standards are certifed (+/-) 0.5% of the stated value, unless All standards should be stored with caps tight and under app Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelin Measurement Result," NIST Technical Note 1297, U.S. Govern	e prepa e certifi should leferend t Result	idards an Idards an Idards an Itandards ertainty F Isuremen	* Star * All s Mea	
			tated. sed in	rwise s Is are u	s unless otherwise stated. raw materials are used in	ents ur rity rav	The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Purified acids, 18.2 megohim deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.	the hi	ind volum sware and	netric a A glas:	om gravir Ited Class	lated fr , calibra	ion calcu ed water	centrat deioniz ds.	The certified value is the concert Purified acids, 18.2 megohim deic the preparation of all standards. All the preparation of all standards.	value is 18.2 I ion of a	certified fied acids preparat	* The * Puri-	
	s.																		
							:	:					÷						
	in P. M.	1								ndard.	Homogeneity: No heterogeneity was observed in the preparation of this standard.	paration	d in the pr	observe	eneity was	heterog	geneity: No	Homo	
	Certified by:														ation:	acteriz	Physical Characterization:	Phys	
					, B		ulyte	(T) = Target analyte	(T) = Ta						œ				
4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	40,02 40,02 40,02 40,02 V 40,02 V V 60,02 V V 60,02 V V S Cr	ᅻᇟᆋᇽᇽᆇᇽ	4000 12 10 10 10 10 10 10 10 10 10 10 10 10 10	Ta Sr Na Sr Sr	44444 8888888888	Sch Rate Street	T 22 22 22 22 22 22 22 22 22 22 22 22 22	K J P Z Q J N	4 4 4 4 4 4 4 4 4 4 4 4 4 5 5 5 5 5 5 5	Mo Nd	4 4 4 4 4 4 4 8 8 8 8 8 8 8 8	월 27 월 4 월 8 표	888888888	<u>ት</u> ዓ ያ ያ ዋ ካ	40.02 40.020	58558 <u>5</u> 5	40.02 40.020	Al Sb Ba Be Bi Bi	
				[]	(µg/mL)	S	Verification by ICP-M	ation		Metals	Trace M								
							(S):	ICP-M	ometry (Spectr	Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	ed Plas	y Couple	uctive	is by Ind	Analys	umental	Instr	
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	ANAB IS AR-1539 https://Abs	V				CRM	Certified Reference Material CRM	rence	fied Refe	Certi			V		, inc.	dards.con	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	Absolute : 800-368-1131 www.absolute	

Printed: 3/16/2023, 1:45:22 PM



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: Inorganic ICV Solutions

QATS LABORATORY INORGANIC REFERENCE MATERIAL INITIAL CALIBRATION VERIFICATION SOLUTIONS (ICV1, ICV5, AND ICV6)

These instructions are for advisory purposes only. If any apparent conflict exists between these NOTE: instructions and the analytical protocol or your contract, disregard these instructions.

- **APPLICATION:** For use with the CLP SFAM01.0 SOW and revisions.
 - Read instructions carefully before opening bottle(s) and proceeding with M5528 ph CAUTION: the analyses.

Contains Metals in Dilute Acidic or Cyanide in Basic Aqueous Solutions HAZARDOUS MATERIAL

> Safety Data Sheets Available Upon Request

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014", "ICV5-0415", and "ICV6-0400", respectively.

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY **APTIM Federal Services, LLC** 2700 Chandler Avenue - Building C Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in µg/L (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

For ICP-AES analysis, use a 10-fold dilution by pipetting 10 mL of the ICV1 ICV1-1014 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid.

RMs ICV 1, 5, 6 SFAM (1)

Page 1 of 2

QATS Form 20-007F188R00, 04-19-2021



The Quality Assurance Technical Support (QATS) contract is operated by APTIM Federal Services, LLC.



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: Inorganic ICV Solutions

- ICV1-1014 For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.
- **ICV5-0415** For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting 1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K₂Cr₂O₇ and 5% (v/v) nitric acid.
- **ICV6-0400** For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6 concentrate into a 100 mL volumetric flask and dilute to volume with Type II water. Distill this solution along with the samples before analysis. The cyanide concentrate is prepared from K₃Fe(CN)₆, Type II water, and 0.1 % sodium hydroxide, and will decompose rapidly if exposed to light.

NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.

(D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS

	ICV1-1014	
Element	Concentration (µg/L) (after 10-fold dilution)	Concentration (µg/L) (after 50-fold dilution)
AI	2500	500
Sb	1000	200
As	1000	200
Ba	520	100
Be	510	100
Cd	510	100
Ca	10000	2000
Cr	520	100
Co	520	100
Cu	510	100
Fe	10000	2000
Pb	1000	2000
Mg	6000	1200
Mn	520	100
Ni	530	110
K	9900	2000
Se	1000	2000
Ag	250	
Na	10000	2000
TI	1000	210
V	500	
Zn	1000	<u>100</u>

	ICV5-0415		ICV6-0400
Element	Concentration (µg/L) (after 100-fold dilution)	Analyte	Concentration (µg/L) (after 100-fold dilution)
Hg	4.0	CN [.]	99

m/z->	N.5 6	m/z-≯ 5.0E5	ភ. ០ ពេទ្ធ	m/z-> 1.0≣6	5000	1.0트4	1. Chromium(III) nitrate nonahydrate (Cr)	Compound	Volume sho	Expiration Date: Recommended Storage: Nominal Concentration (ug/mL):	Par De	CERTIFIED WEIGHT REPORT:	www.absolutestandards.com
N O		110		1		[1] Spectrum No.1		Pa	Volume shown below was diluted to (mL):	Expiration Date: nended Storage: ntration (µg/mL):	Part Number: Lot Number: Description:	0	3
220		120		N. O		-	58124 071122	Part Lot Number Number	filuted to (mL):	060526 Ambient (20 °C) 1000	<u>58024</u> 060523 Chromium (Cr)		A
230		130		ů. O		31,393 80	0.1000	Dilution Factor	2000.02		1 (Cr)		MS
240		140				c]:57024.	200.0 0.084	Initial Uncertainty Vol. (mL) Pipette (mL)	0.058 Flask U				MS658
				ð.		31,393 sec]:57024.D# [Count] [Línear]	084 1000	Uncertainty Nominal Pipetta (mL) Conc. (µg/mL)	Flask Uncertainty		21110221 2.0%	Lot #) A
N 50		1 の の		S		t] [Linear]	10 10000.1	nał Initial g/mL) Conc. (µg/mL)		(mL)	221 Nitric Acid % 40.0	# Solvent:	
200		160		0		ş	0.1 1000.0	al Final rg/mL) Conc. (µg/mL)		Ľ	Acid .0 Nitric Acid	ent:	123
		170		70			0.0 2.2	Expanded al Uncertainty ig/mL) +/- (µg/mL)	Lineviewed by.	X	Acid Formulated By:		1
		180		8- 0-		1	7789-02-8) CAS		a la	Horner		
		190		Ŷ				jolvent Os		ten	Lawrence Barry		Y
		20- 00-		100			0.5 mg(Cr)/m3 ort-	SDS Information nt Safety Info. On Attac OSHA PEL (TWA)		Ø	nce Barry		AH-15: https://Ab
		0		o			ort-rat 3250 mg/kg	ched pg.) LDS0	00000	00050	060523		AH-1539 Certificate Number https://Absolutestandards.com
							g 3112a	NIST		٥ <u> </u>	[ω]	1	te Numbe dards.com

Part # 58024 Lot # 060523

1 of 2

Printed: 8/24/2023, 4:18:27 PM

Absolute Standards, Inc. Certified Reference 800-368-1131 Image: Certified Reference www.absolutestandards.com Image: Certified Reference Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	andards.cor	s by Indu	ictive	y Coupled	Plasn	na Mass S	Spectr C	Certified Reference Material Ci	ICP-M	IS):	ateria	I CRM					¥	크	ANAB AR-11 ttps:///	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	034 Acc lificate N standar	lumbe ds.corr
the stype of the style						Trace N	Metals	s Verification	ation	হ	ICP-MS		/g/mL)									
AI <0.02		40,02	Dv	40.02	H	<0.02	E	40.02	- N	- -	20		A) 02	8	a)	-	-			3		
		40.02	Er Dy	<0.02	Ho	<0.02	달드	4)02 4)02	N N	A0.02	88	<u>ም</u> ፡	40.02 0.02	<u>8</u> %	40.02 00.02	ਜ ਸ	4 4	c ¥		<0.02		
	_	<0.02	말	<0.02	5	<0.02	Mg	<0.01	² 0	<0.02	.02	Rh	40.02	Ag	<0.02	1	<0.02			<0.02		
Ba 40.02	ନ ଜ	-T -T	ନ୍ଦ୍ର ହ	A 0.02	₹ ¹ =="	4. 6. B	H. Ma	A. A.	p Pd	A A 3 3	38	장	A A 3 3	ç N	A A 1	13	A.2	4 15		0.02 0		
		40.02	2 ଜ ା	40.02	363	4 4 A	N M ;	8 8 8	× 77 ·	A 40 12	រ ន រ	Sc Sm	40.02 2002	Ta s	4 4 A A	11 S 🔒						
								(T)=	(T)= Target analyte	anatyte												
Physical Characterization:	aracteriz	ation:															C	Certified by:	by:		a	
Homogeneity: No heterogeneity was observed in the preparation of this standard.	No heteroge	meity was o	observe	d in the preps	aration (of this stand	lard.										1	14	1		ľ	
 * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards. * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated. * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). 	ad value is ds, 18.2 n ation of all are prepar are prepar are certife ds should ds should ent Result.	he conc megohm d Ill standarc are me ars are me are are are me ars are me ars are me ars are me ars are me ars are me are are are me are are are me are	entrat leioniz ls. sticulou etrica .5% of .5% of .5	ed water, c ed water, c usly cleane ully using ba f the state f the state f the state and Kuyat, a Note 122	ted fro calibrat d prior alanced d value and un and un 97, U.S	red Class, ted Class, that are that are that are der appro Guideline Guideline	A glass A glass calibra priate s for E nent P	nd volume sware and ited with ites stated laborator, ivaluating vinting Off	the hi weight cond y cond fice, W	ighest p ighest p is trace itions. xpressir /ashingt	ments ourity able tr able the ton, D.	unless raw m raw m NIST 0 NIST Uncer	materials are used in Materials are used in ST (see above). ertainty of NIST 1994).	se stat re usec vve). NIST	n .							

Part # 58024 Lot # 060523

Part #											LEF	
58029	m/z->	1.0巨7	m/≥-> 2.0E7	2.567	m/z->- 5.0巨7	01 .0 .0 .0 .0 .0	1.0E6	Copper(II) nitrate trihydrate (Cu)	Volume sh	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number:	<u>CERTIFIED WEIGHT REPORT</u> Par Lo De	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
Lot # 071723	0 0		110		10		[1] Spectrum No.		Volume shown below was diluted to (mL): Part Lot Number Number	Expiration Date: Recommended Storage: I Concentration (µg/mL): NIST Test Number:	<u>Part Number:</u> Lot Number: Description:	om
			0				, J	58129	Part Number			
	NNO		120		20		-	022723	d to (mL): Lot Number	071726 Ambient (20 °C) 1000 6UTB	58029 071723 Copper (Cu)	100
	230		130		а О		53.422 B	0.1000	2000.02 Dilution Factor	°,	(T	
			0		-		ac]:58	200.0	0.058 Initial Vol. (mL)	5E-05		
	240 0		4 0		6		33.422 sec]:58029.D# [Count] [Linear]	0.084	Flask Uncertainty Uncertainty Pipette (mL) C	Balance Uncertainty		Certified R
1 of 2	N 5		1 0		n O		Count] [L	1000	Flask Uncertainty Uncertainty Nominal Pipette (mL) Conc. (µg/mL)	L.C. Z	Lot # 21110221	Reference M
	N 00		1.00		Ø		lnear]	10000.5	Initial Conc. (µg/mL)	(mL)	<u> </u>	laterial
	0						_	1000.0	Final) Conc. (µg/mL)			CRM M5751
			0		70			2.2	Expanded Uncertainty) +/- (µg/mL)	Reviewed By:		
Prin			0		g			10031-43-3	CAS		B	
Printed: 8/24/2023, 4:18:28 PM			190		0			3 1 mg/m3	SDS Information (Solvent Safety Info. On Attached pg.) # OSHA PEL (TWA) LDSO	Pedro L. Rentas		
023, 4:1			N		4			m3	SDS Information Safety Info. On Attac HA PEL (TWA)	Rentas		ANAI AR https://
8:28 PM			200		100			orf-rat 794 mg/kg	on ttached pg.) LDS0	071723	00743	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
								(g 3114	NIST	22	5	Accredited ate Number ndards.com

Printed: 8/24/2023, 4:18:28 PM	Printed: 8/24/20						2 of 2							1723	Lot # 071723	58029		Part #
			used in)). ST	rials are see above inty of NI 4).	nless oth w materia NIST (see Incertaint	t purity ra t purity ra ceable to sing the U gton, D.C	highesi highesi ndition: Expres Washin	and the and the with weigi ated. ated. g Office, g Office,	and ve assware vrated v wise st te labo r Evalua Printin	om gravimetric and volumetric measurements unless otherwise stated Class A glassware and the highest purity raw materials are use or to use. It are calibrated with weights traceable to NIST (see above). the, unless otherwise stated. Inder appropriate laboratory conditions. "Guidelines for Evaluating and Expressing the Uncertainty of NIST S. Government Printing Office, Washington, D.C. (1994).	l from g brated rrior to alue, u alue, u d under E., "Gu U.S. G	 * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards. * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated. * All Standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). 	onization culoush trically % of th 8.N. an hnical N	he concer sgohm dei standards, are meti s are meti d gravime (+/-) 0.5 (+/-) 0.5 (+/-) 0.5 Taylor, I NIST Tecl NIST Tecl	value is t 18.2 m 70 n f all m ontainen prepare certifed should b eference Result,"	The certified value is the concen Purified acids, 18.2 megohm deio the preparation of all standards. All standard containers are metic Standards are prepared gravimet Standards are certifed (+/-) 0.5 Standards should be stored w Uncertainty Reference: Taylor, E Measurement Result," NIST Tech	* * * * * * * * * * * * * * * * * * *	
d by:	Certified by:									is standard.	ion of th	Physical Characterization: Homogeneity: No heterogeneity was observed in the preparation of this standard.	served in	ion: eity was obs	acterizat heterogen	Physical Characterization: Homogeneity: No heterogeneity v	Phys i Homo	
						yte	get anal	(T) = Target analyte										
40.02 W <0.02 40.02 U <0.02	다. 같 답 답 답 답 답	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Ta S S Na A S S			40.02 40.02 40.02 40.02 40.02 40.02	K P P 2 S N N	40.02 40.02 40.02 40.02 40.02 40.02	Hg Nd	40.02 Li 40.02 Ni 40.02 Lu 40.02 Ni 40.02 Lu 40.02 Ni 40.02 Mg 40.02 No 40.02 Mg 40.01 Os 40.02 Mg 40.02 Pi 40.02 Hg 40.02 Pi 40.02 Hg 40.02 Pi 40.02 Nd 40.02 Pi 40.02 Nd 40.02 Pi 40.02 Nd 40.02 Pi	952F5	6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	A C C C F F P	40.02 - 40.	5 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	Al Al Ba Be Bi	
						5	· .	ry (ICP-)	tromet	Mass Spec	asma l	Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	lively (by Induct	nalysis	umental A	Instr	
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com					CRM	Certified Reference Material CRM	ence	ed Refer	Certifi					Inc.	Standards, Inc.	Absolute Standards, 800-368-1131 www.absolutestandards.com	Absolute : 800-368-1131 www.absolute	

Lot # 071723

Printed: 8/24/2023, 4:18:28 PM



1 of 2

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com



							Trace M	letals	Verification	ition	by ICP-MS		(ng/mL)							_
		and the second se	A CONTRACTOR OF A CONTRACTOR					All and the	TANK ALL STATE	The second s	ALL DESCRIPTION OF THE OWNER OF T	Nonese and			and the second second second				A COLUMN TO A C	10
A	<0.02	3	<0.02	ñ	<0.02	Hf	<0.02	ГI	<0.02	N	<0.02	Ł	<0.02	Se	<0.2	Trb	<0.02	M	<0.02	-
Sb	<0.02	J	40.2	固	<0.02	Ho	≤0.02	2	<0.02	£	<0.02	Re	<0.02	S	<0.02	Pe L	40.02	D	<0.02	_
As	<02	ථ	<0.02	Eu	40.02	ч	40.02	Mg	10.0>	ő	<0.02	Rh	<0.02	Ag	<0.02	F	≤0.02	>	<0.02	-
Ba	<0.02	ű	<0.02	3	40.02	Ц	40.02	Mn	<0.02	P	≤0.02	£	<0.02	Ra	40 12	đ	<0.02	\$	<0.02	-
Be	T	Ċ	0.02	G	<0.02	e.	<02	Hg	<02	۵.	<0.02	Ru	≤0.02	2	<0.02	μ	<0.02	7	<0.02	-
Ä	<0.02	රී	<0.0≥	පී	<0.02	r.	<0.02	Mo	<0.02	đ,	40.02	Sm	≤0.02	s	<0.02	Sn	<0.02	Za	<0.02	-
æ	<0.02	ð	<0.02	Au	<0.02	£	40.02	PN	<0.02	М	<0.2	ŝ	<0.02	Ta	<0.02	F	<0.02	2	40.02	_
									(T) = Tarr	get analy	yte									1

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
 - All standard containers are meticulously cleaned prior to use.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 - Standards are certifed ($\frac{1}{4}$) 0.5% of the stated value, unless otherwise stated.
- All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57050 Lot #	m/z->	N.01 M.4	m/2->-	1.0E5	177/2-> 2.0E5	N G M G	8. 0 11 15	1. Ammonium hexatluorostannate(IV) (Sn)	Compound	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number: Weight shown below w	<u>CERTIFIED WEIGHT REPORT</u> Part N Lot N Desc	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
Lot # 071123	210		110 120		0 No		[1] Spectrum No.1	(W) (Sn) INO10 SND042023A1	Lot RM# Number	Expiration Date: 071126 Pecommended Storage: Ambient (20 °C) Concentration (µg/mL): 1000 NIST Test Number: 6UTB Weight shown below was diluted to (mL):	<u>PORT:</u> Part Number: <u>57050</u> Lot Number: <u>071123</u> Description: <u>Tin (Sn)</u>	s.com
	230		130		e e		[15.034 sec]:	1000	Nominal Conc. (µg/mL)	0 °C) 499.93	2	V
	20		140		ð		15.034 sec]:58150.D# [Count] [Linear]	99.999 0.10 44.2	Purity Uncertainty Assay (%) Purity (%) (%)	5E-05 Balance Uncertainty 0.058 Flask Uncertainty	Solvents:	Certifi
	N30 260		150 160		8		unt) [Linear]	1.13107	r Target Actual Weight (g) Weight (g)	(mL)	Lot # 21110221 22D0562008	Certified Reference Material
			170		70			1001.6	Actual Conc. (µg/mL)	ric acid	ric acid	CRM
			180		80			16919-	Expanded Uncertainty (Solv +/- (µg/mL) CAS#	Formulated By:		PPGP M
			190 200		90 100			7 mg/m3	SDS Information (Solvent Safety Info. On Attached pg.))# OSHA PEL (TWA) LD50	Benson Chan		R
			0		ŏ			ω	on tached pg.) NIST LD50 SRM	071123 - 071123		ANAB ISC AR-1539 (https://Abso
												ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	•	Cei	Certified Reference Material CRM	ial CRM		ANAB ISO 17034 Accredited
www.absolutestandards.com	5				V	AR-1539 Certificate Number https://Absolutestandards.com
Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	ductively Coupled	Plasma Mass Spec	trometry (ICP-MS):			
		Trace Metals	Is Verification by ICP-MS	P-MS (µg/mL)		
AI <0.02 Cd <0.02	Dy <0.02	4003				
A)2 C C		2 2 2 2 2 2 2	40.02 Ni		Se <0.2 Tb Si <0.02 Te	40.02 W 40.02
2 2 2 2 2 2 2 2			<0.01 Os <0.02 Pd	Rb Rb		\$ < c
	Ge 40.02	Fe 40.2 Hg	40.2 P 40.02 Pt	Ru Sm		_
			(T) = Target	4	ZITAS	<0.02 Zr <0.02
Physical Characterization:						Certified by:
Homogeneity: No heterogeneity was observed in the preparation of this standard.	observed in the prepa	ration of this standard.				//
ŝ	9,					mr P All
		9 4			20	
					÷	
 * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards. * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are politoriated with using balances. 	centration calculat deionized water, ca ds. eticulously cleaned	d from gravimetric librated Class A gla prior to use.	and volumetric measurer ssware and the highest p	nents unless otherwise stated. writy raw materials are used in	ie stated. 'e used in	

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
 All standards should be stored with caps tight and under appropriate laboratory conditions.
 Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57050 Lot # 071123

2 of 2

Printed: 2/8/2024, 5:01:38 PM

redited Jumber ds.com	NIST SRM	3113		
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	Formulated By: Lawrence Barry 091923 Formulated By: Lawrence Barry 091923 Reviewed By: Pedro L. Rentas 091923 Expanded SDS Information Uncertainty (Solvent Safety Info. On Attached pg.) N +/- (ug/mL) CAS# 0SHA PEL (TWA) LD50 S	ng/kg	180 B0 190 200 200 200	Printed: 2/8/2024, 5:01:14 PM
AM I'U (fru (Nitric Acid	1000.0		
Certified Reference Material CRM 02109124	Solvent: Nttric Acid 40.0 (mL) httal bittal Conc. (ug/mL)	10000.0		
artified Réference l 0 2 0 9 1 2 4	Lot # C 24002546 2.0% 2.0% Nominat Nominat Conc. (rg/mL)	1000	34.243 eec]:58027.D# [Count] [Linear] 30 40 50 130 140 150 230 240 250	1 of 2
Certified F		0.084	240 240 240	
Å	5E-05 0.058 on Initial or Vol. (mL)	00 200.0	3 eec]:55 230 30 23 130	
	57027 091923 Cobait (Co) 091926 Ambient (20 °C) 1000 6UTB 6UTB 6UTB d to (mL): 2000.02 Lot Dilution Lot Dilution	23 0.1000		
	57027 091923 Cobalt (Cobalt (Ambient Ambient 1000 6UTB ss diluted to (mL Part Lot	58127 050923		
Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	CERTIFIED WEIGHT REPORT: Part Number: Lot Number: Description: Cobait (C Cobait (C Cobait (C 091926 Recommended Storage: Nominal Concentration (µg/mL): Nominal Concentration (µg/mL): Nominal Concentration (µg/mL): COTB NIST Test Number: COTB CODAIT (C) Part (C) CODAIT (C) C) CODAIT (C) C) C) C) C) C) C) C) C) C)	1. Cobatt(II) nitrate hexahydrate (Co) 58		<pre>Part # 57027 Lot # 091923</pre>

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS);

L	200	10	2 Contraction	4	2000		400			-		4							
	20.05	3	20.05	5	20.02	Ħ	40.02	3	<0.02	ż	40.02	£	40.02	8	40.2	f	₹0.02	M	40.02
_	40.02	లి	4 02	山	€0.02	Ho	40.02	5	<0.02	Ż	<u>40.02</u>	Re	<0.02	3	≤0.02	Te	€0.02	D	<0.02
_	402	ථ	€0.05	圕	40.02	Ч	40'02	Mg	10 ⁰ ⊳	ő	≤0.02	붭	<0.02	Ag	40.02	F	<0.02	Ż	<0.02
_	40.02	చి	≤0.02	ઝ	600	ы	<0.02	Mn	<0.02	P	40,02	ßb	<0.02	Na	40.2	đ	<0.02	Ŗ	<0.02
_	10.05	ບັ	≤0.02	g	20.0 2	ङ	402	Hg	40.2	۵.	€0.02	Ru	<0.02	<u>ې</u>	≪0.02	Ta	≤0.02	Y	€0.02
_	<0.02	ථ	£-	ö	40.02	Ľ	0 02	Mo	<u>60.02</u>	æ,	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	Z	6 .02
_	40.02	ට්	<0.02	Au	40.02	£	40.02	PN	40.02	м	4 02	8	40.02	£	40.02	Ë	40.02	72	2002

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Certified by:

Printed: 2/8/2024, 5:01:04 PM	1 of 2	Part # 57033 Lot # 111323
ő	230 240 250 26	m/z-> 210 220 2
		0 0 0
160 170 180 190 200	130 140 150 1	m/≥-> 110 120 1
		N m 4
80 70 80 100	90 40 50	5.0E4
		- 1 0 0 0 0
	34.433 seo]:57033.D# [Count] [Linear]	[1] Spectrum No.1 [34.433 2.0E5
1000.0 2.0 7440-38-2 0.5 mg/m3 orl-rat	400.0 0.084 1000	1. Arsenic (As) 58133 020522 0.1000
Expanded SDS Information Final Uncertainty (Solvent Safety Info. On Attached pg.) <u>nL) Conc. (ug/mL) +/- (ug/mL) CAS</u> # OSHA PEL (TWA) LD50	11	Part Lot Dilution Compound Number Number Factor
Reviewed By: Pedro L. Rentas 111323	0.06 Flask Uncertainty	Volume shown below was diluted to (mL): 4000.0
Hedre Fenter		
Id Acid Formulated By: Lawrence Barry 111992	24002546 Nitric Acid 2.0% 80.0	Description: <u>Arsenic (As)</u>
п (Lot # Solvent:	
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	Certified Reference Material CRM	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

< 00 **N**



Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited **AR-1539** Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Low P. S.

Certified by:

 * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
 * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.
 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST
 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57033 Lot # 111323

$\begin{array}{c c c c c c c c c c c c c c c c c c c $	m/z->	2500	m/z->	500	m/z->-	2.5 114	5.OE4	1. Ammonium dihydrogen phosphate (P)	Compound	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number: Weight shown below wa	CERTIFIED WEIGHT REPORT: Par Lo De	www.absolutestandards.com
R I D 2 M 4 C 1 M 52 15 Interview Lat* Solvent: 2111021 Nitric Acid Provide (P) 2% 40.0 Nitric Acid 2000/2 0.058 Failure inventienty Environmenty 2000/2 0.058 Failure inventienty Environmenty Environmenty Nominia Party Uncertainty Assay Target Actual Actual Commutated By: Perford L Ren 10000 ease 0.10 27.5 72.7287 72.7287 72.7284 10000.0 30.0 772.751 5mg/r 12.074 aeoc)15891 16. D/r Country [Linear) Status Stat	N O		110		10		[1] Spectrum		-	Expiration Date: Recommended Storage: I Concentration (µg/mL): NIST Test Number: Weight shown below was d	DRT: Part Number: Lot Number: Description:	om
RICZINGLA MITELS Bolvent: 21110221 Nitric Acid IDP 2% 40.0 Nitric Acid SEC5 Balance locentary (mL) Nitric Acid Formulated Br. Formulated Br. SEC5 Balance locentary (mL) Nitric Acid Formulated Br. Lawrence Balance (mL) Formulated Br. Lawrence Balance (mL) Formulated Br. Lawrence Balance (mL) Source It Mitels Acid Formulated Br. Lawrence Balance (ML) Source It Mitels Acid Formulated Br. Lawrence Balance (ML) Source It Mitels Acid Formulated Br. Formulated Br	2220		120		N. O				Lot Number	041726 Ambient (20 10000 6UTB 6UTB	57115 041723 Phosphore	5
Hric Acid Iric Acid Iric Acid Iric Acid Iric Acid Actual Actual Actual Expanded Expanded Expanded SDS Inf Expanded SDS Inf Solvent Safety Inf eight (g) Conc. (ug/mL) · (AS# OSHA PEL) 2.7289 10000.0 20.0 7722-76-1 5 mg/m 2.7289 10000.0 20.0 7722-76-1 5 mg/m 150 170 180 190 190 190	230		130		۵. 0		2.074 sec]:58			00.02	us (P)	R
Hric Acid Frite Acid Formulated By: Lawrence Ba Formulated By: Pedro L. Ren Expanded Actual Uncertainty (Solvent Safety Inf eight (g) Conc. (ug/mL) - 4/- (ug/mL) CAS# OSHA PEL 2.7289 10000.0 20.0 7722-76-1 5 mg/m 2.7289 10000.0 1722-76-1 5 mg/m 160 170 180 190 190	240		140		4		3115.D# [Cot		Uncertainty Assay Purity (%) (%)	2% Balance Uncertainty Flask Uncertainty	Solvent:	22/09/12
Formulated By: Lawrence Ba Formulated By: Lawrence Ba Reviewed By: Pedro L. Ren Conc. (ug/m), -/- (ug/m), CAS# OSHA PEL 10000.0 20.0 7722-76-1 5 mg/m 10000.0 20.0 7722-76-1 5 mg/m 10000.0 eio eio	250		150		S O		ınt] [Linear]					
Formulated By: Lawrence Ba Formulated By: Pedro L. Ren Expanded SDS Inf Uncertainty (Solvent Safety Inf +/- (ug/mL) CAS# OSHA PEL (20.0 7722-76-1 5 mg/m 20.0 7722-76-1 5 mg/m 20.0 190 90	260							2.7289 10000.	Actual Actual sight (g) Conc. (µg/1	rric Acid	tric Acid	15815
22-76-1 5 mg/m					1			20.0		Formulated B	Q	
o 200			4						SC (Solvent Saf CAS# OSH/	Ped	Gerence /	
.hed pg.) LbS0 LbS0									DS Information fety Info. On Attac A PEL (TWA)	L. Rentas	Jan	https://At
g 3186 SRM			9		J				0	041723 041723		tps://Absolutestandards.com

Abs	Absolute (800-368-1131 www.absolute	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	lards , ds.com	Inc.	-				ĉ	rtified Re	eren	Certified Reference Material CRM	ial CR	M					https AF	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	4 Accredited cate Number andards.com
-	nstrum	iental A	nalysi	s by Indi	uctive	ły Coupl	ed Pla	Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS);	s Spec	troscopy	(ICP	-MS):									
_								Trace Metals	etals	Verifica	Ition	Verification by ICP-MS	1.00	(µg/mL)							
-	A	40.02	8	40,02	Ą	40.02	H	40.02	E	A) ()2	Z	A)22	7	A).02	Se	A 2	ŧ	AB	W		
		A.22	5 2	A0.2	ម្មា	40.02	Но	40.02	Ŀ	40.02	NB	<0.02	Re	40.02	ŝ	40.02	Te	40.02	c :	40.02	
	Ba		<mark>ዮ</mark> የ	8 8 8 8	<u>ନ</u> ଜ	40.02 20	부 부	40.02 20	Mg	40.01 002	r S	A A 3 2	₽ ₽	A A 3 S	Å.	A) 02	1 11	A 600	\$ <	8 8	
		10.0>	ព្	<0.02	ណ្ឌ	<0.02	놂	<0.2	Hg	40.2	שי	T	R Q	40.02	K 2	8.8 2		<0.02	4 'B	60.02 20.02	
	B	8 8 22 22	5 S	8 8 22 22	ନ ବ	40.02 20	32	4 4 A	N W	4 4 8 8	* 7	A0.02	s s	A A 3 S	, s	88	1 S	A A A A	2 B	88	
										(T)= Ta	(T)= Target analyte	alyte			ĺ						
hand	hysical	Physical Characterization:	cteriza	ution:														Cer	Certified by:	y:	
-	Iomogen	eity: No I	heteroge	neity was	observ	ed in the pr	eparati	Homogeneity: No heterogeneity was observed in the preparation of this standard.	ındard.								(h	J.	Ŵ	
* *	The cel Purified	rtified va l acids,	alue is 18.2 m	The certified value is the concen Purified acids, 18.2 megohm dei the menantion of all standards	centrat deioniz	tion calcul red water,	lated f	The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all etandarde	metric s A gla	and volu	metric nd the	measure highest p	nents Jurity r	unless oth aw mater	nerwisc ials are	e stated. 9 used in					
* * * * *	All star Standa Standa All Star Uncerta Measur	ndard co rds are rds are ndards s ainty Re rement	ntaine prepare certife hould I ference Result,	rs are me ad gravin d (+/-) 0 es storec e: Taylor " NIST Te	eticulo netrica).5% o d with r, B.N. echnic	ally using the stat caps tigh and Kuya al Note 1;	hed pri balanc iced val it and it, C.E. 297, L	 * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. * All Standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). 	e calit other ropriat nes for nment	brated wit wise stat te laborat Evaluatir Printing (h weig ed. ory co Office,)hts trace onditions. Expressir Washingt	able to og the l on, D.(to NIST (see above). e Uncertainty of NIST D.C. (1994).	e abov ty of N	e). IIST					
														·							
										8											
Part #	57115		Lot # 041723	1723							2 of 2	of 2					Print	Printed: 2/8/2024, 5:01:22 PM	24, 5:0)1:22 PM	

Printed: 2/8/2024, 5:01:22 PM

	-	260	250	240	230		220	210	m/z->
									1.0巨5。
									2.0厘5
180 190 200	170	160	150	140	130	р. 9	120	110	m/z->
									2,5E
									5.0E5
80 80 100	70	eo	50	40	8	magan Raji Anana ya Anany	N	10	m/z->
									1000
		ear)	ount] [Lin	24.004 sec];58116,D# [Count] [Linear]	¢ sec];58	[24.00		[1] Spectrum No.1	2000
20.0 7763-20-2 NA orf-rat 4250mg/kg 3181	10000.1	82,4682	82.4675	0.10 24.3	99,9	10000	IN117 SLBR7225V	IN11	1. Ammonium sulfate (S)
Expanded SDS Information Uncertainty (Solvent Safety Info. On Attached pg.) NIST +/- (ug/mL) CAS# OSHA PEL (TWA) LDSO SRM	(g) Conc. (µg/mL)	Actual Weight (g)	Target Weight (g)	Uncertainty Assay Purity (%) (%)	Purity (%)	Nominal Conc. (µg/mL)	Lot. Number	RM#	Compound
i By: Ped	[F			Balance Uncertainty Flask Uncertainty	0.058	1999.48	led to (mL):	Weight shown below was diluted to (mL):	Weight show
Lawrence barry	1 1					20 °C)	071126 Ambient (20 °C) 10000 Sum	Expiration Date: nended Storage: htration (µg/mL): %T Test Number:	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Teet Number
around Bring	Type 1 Water	ASTM Ty	Lot# 071123	Solvent:		E)	57116 071123 Sulfur (S)	<u>PORT:</u> Part Number: Lot Number: Description:	CERTIFIED WEIGHT REPORT: Part N Lot N Desc
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	CRM		ference M	Certified Reference Material	R a			om	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
								And in case of the local division of the loc	

800-368-1131 www.absolutestandards.com		0	Certified Reference Material CRM	nce Material C	RM			•	ANAB ISO 1: AR-1539 Ce https://Absolut	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	ictively Coupled	Plasma Mass Sp	ectrometry (IC	P-MS):						
		Trace Metals		Verification by ICP-MS	IS (µg/mL)					
AI <0.02 Cd <0.02	Dv 40.02	A M	-12			a dista div.	ALL MERCY		A STREET STREET STREET	
40.02 Ca		40.02	40.02 40.02	Ni <0.02 Nb <0.02	Pr <0.02 Re <0.02	Si Se				A 6.3
50 C C	Gd <0.02	In <0.02 N	Mg <0.01 C						< 0	<0.02
40.02	Ga 40.02	Fe <0.2 Hg	A A 3 12	8 8			12 1		40.02 Y 40.02	40.02 20.02
B (UUZ CI 40,02	Au <0.02	<0.02	<0.02		Sc <0.02	Ta o	<0.02		40.02 21 21 40	40.02
Physical Characterization:			(T)= Target analyte	alyte				۲ ۲	Certified by:	
Homogeneity: No heterogeneity was observed in the preparation of this standard.	oserved in the prepa	ation of this standard								1
							(the second	P.S.	
 * The certified value is the concentration calculated from gravimetric and volumetric measurements * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity in the preparation of all standards. * All standard containers are meticulously cleaned prior to use the preparation of the preparation of all standards. 	ntration calculate ionized water, ca	d from gravimetri librated Class A g	c and volumetric lassware and the	c measurement highest purity	s unless otherwise stated. raw materials are used in	ise state are used i	5.6			
* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.	trically using bala % of the stated	value, unless othe	brated with weighwise stated.	phts traceable :	to NIST (see ab	ove).				
* Uncertainty Reference: Taylor, Measurement Result," NIST Tec	vith caps tight ar B.N. and Kuyat, (hnical Note 1297	id under appropria 2.E., "Guidelines fc , U.S. Governmen	ite laboratory co r Evaluating and t Printing Office,	I Expressing the Washington, D	⁹ Uncertainty of NIST).C. (1994).	F NIST				
	·									
		ð								
* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.	itrically using bails bails of the stated with caps tight ar B.N. and Kuyat, C hnical Note 1297	prior to use. ances that are cali value, unless othe d under appropria 2.E., "Guidelines fo , U.S. Governmen	brated with weig rwise stated. re laboratory co or Evaluating and t Printing Office, t Printing Office,	ghts traceable . onditions. I Expressing the Washington, C	to NiST (see ab 3 Uncertainty o).C. (1994).	ove). F NIST				

2 of 2

Printed: 2/8/2024, 5:01:31 PM



1 of 2

ww.a	0-36	bsc
bsol	-368-11	X ute
/w.absolutestandards.c	131	
and		Stan
ards		dal
ŝ		rds.
		Inc

\$8⊳



Certified Reference Material CRM



AR-1539 Certificate Number https://Absolutestandards.com ANAB ISO 17034 Accredited

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Al 40.02 Sb 40.02 As 40.02 Ba 40.02 Ba 40.02 Be 40.01 Bi 40.02 B 40.02	
402 402 402 402	
5 S S S S S S S	
8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
토 양 양 당 탑 백 것	
4 4 4 4 4 4 4 4 4 4 4 4 2 2 2 2 2 2 2 2	
法門站卢可知用	
40.22 40.22 40.22 40.22 40.22 40.22 40.22 40.22	
40.02 40.02 40.02 40.02 40.02 40.02 40.02	
Pd Pd R	
402 402 402 402 402 402	
S 문 문 문 문 동 S 문 문 문 문 문 문 문 문 문 문 문 문 문 문 문 문 문 문 문	
(µg/mL 402 402 402 402 402 402	
) Ag Sr Ag	
8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
김징별러덕역	
4 4 4 2 2 2 4 4 4 4 4 4 4 4 4 4 4 4 4 4	
这说 ~ 있 ~ c 《	
6 - 6 6 6 6 6 7 7 8 8 8 8 8 8 8 8 8 8 8 8 8	

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58030 Lot # 111623

Sodium Chloride, Crystal BAKER ANALYZED® A.C.S. Reagent








Material No.: 3624-01 Batch No.: 0000281938 Manufactured Date: 2021-06-07 Retest Date: 2026-06-07 Revision No.: 1

Certificate of Analysis


Test	Specification	Result
Assay (NaCl) (by Ag titrn)	≥ 99.0 %	100.0 %
pH of 5% Solution at 25°C	5.0 - 9.0	6.3
Insoluble Matter	≤ 0.005 %	0.003 %
lodide (I)	≤ 0.002 %	< 0.002 %
Bromide (Br)	≤ 0.01 %	< 0.01 %
Chlorate and Nitrate (as NO ₃)	≤ 0.003 %	< 0.001 %
ACS - Phosphate (PO ₄)	≤ 5 ppm	< 5 ppm
Sulfate (SO ₄)	≤ 0.004 %	< 0.004 %
Barium (Ba)	Passes Test	Passes Test
ACS - Heavy Metals (as Pb)	≤ 5 ppm	< 5 ppm
Iron (Fe)	≤ 2 ppm	< 1 ppm
Calcium (Ca)	≤ 0.002 %	< 0.001 %
Magnesium (Mg)	≤ 0.001 %	< 0.001 %
Potassium (K)	≤ 0.005 %	0.001 %

For Laboratory,Research,or Manufacturing Use Meets Reagent Specifications for testing USP/NF monographs Country of Origin: USA Packaging Site: Paris Mfg Ctr & DC



Jamie Ethier Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Mansford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone 610.386.1700

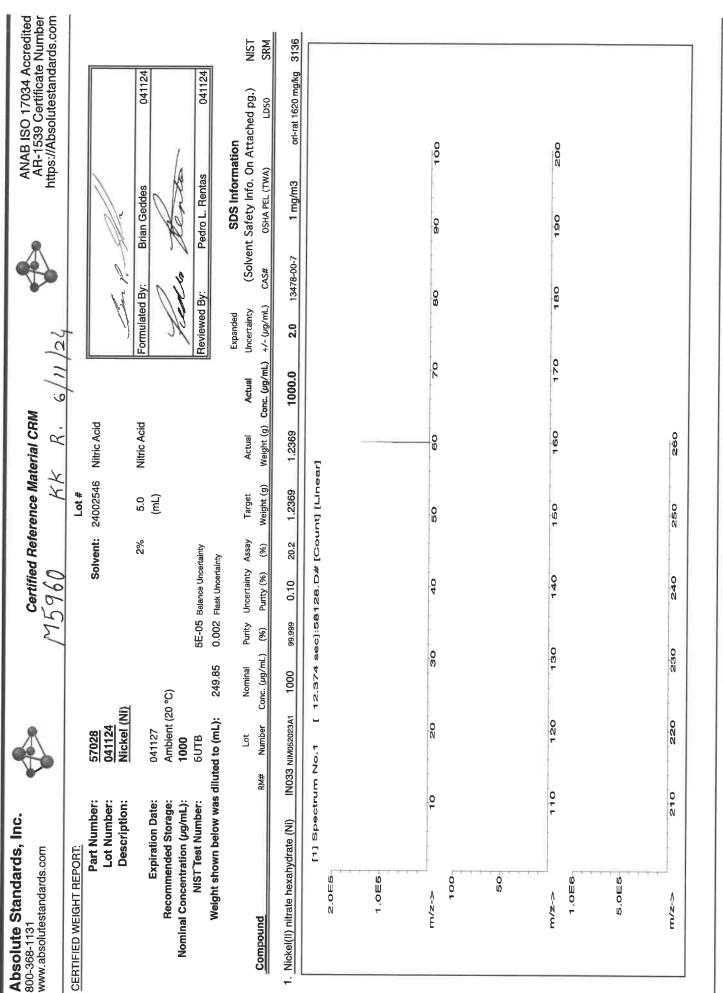

Part # 57028 Lot # 041124

1 of 2

Printed: 5/21/2024, 11:20:13 PM

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131





AR-1539 Certificate Number https://Absolutestandards.com ANAB ISO 17034 Accredited

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS);

							I race Me	Metals	Verification	ation	by ICP-MS	MS ((JmL)						
A		B	<0.02	Dy	<0.02	Ηf	<0.02	Li.	<0.02	Ni	T	Pr	<0.02	Se	<0.2	Th	<0.02		000
Sb	<0.02	G	<0.2	ם	<0.02	Но	<0.02	Lu	<0.02	Νb	<0.02	Re	<0.02	5	<0.05	e E	20.02	= =	20.02
As		C	<0.02	Eu	<0.02	In	<0.02	Mg	<0.01	ő	<0.02	Rh	<0.02	Αø	000	2 F	20.07		20.02
Ba		C	<0.02	Gd	<0.02	Ir	<0.02	Mn	<0.02	Рd	<0.02	Rh	2002	en.	20:07	Ĩ		- 5	20.02
Be	•	ų	<0.02	Ga	<0.02	ы Ц	C 0>	μœ	C07	4	000		2010	10	7.07	1	<0.02		<0.02
Bi		c	<0.02	Ge	<0.02	e I	~0.0>	o Mo	CU U2	- Å	20.02	n ^w S	20.02	50	20.02		<0.02	7 1	<0.02
8	_	Cn	<0.02	Au	<0.02	P	<0.02	PN	<0.02	×	<0.02	5	20.02	٩¢	20.02	i i	20.02	5	<0.02
											HID		70.02	1 4	70.02	=	20.02	77	<0.02
									l										

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

an P S

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards,
 - All standard containers are meticulously cleaned prior to use.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 - Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



	Ho	Ph		Bi Bi	As Ba	2	1 5	Absc 800-36 www.at
The cer Purified the pre All stan Standar Standar Standar Jncerta	mogene	ıysical					strum	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
acids, paratic dard co dard co dard sare dards are dards s dards s	ity: No]	Physical Characterization:		<0.01 <0.02	<0.02 <0.2 <0.02	40.02	ental A	Absolute Standards 800-368-1131 www.absolutestandards.com
alue is 18.2 n n of al prepar certife certife ferenc ferenc	heteroge	octeriz		5 S S	ଦୁ ଦୁ ଦୁ	Ca	nalysi	ds.com
The certified value is the concen Purified acids, 18.2 megohm deio the preparation of all standards. All standard containers are metic Standards are prepared gravimet Standards are certifed (+/-) 0.59 Standards should be stored w All standards should be stored w Uncertainty Reference: Taylor, E Measurement Result," NIST Tech	neity was	ation:		40.02 40.02	<0.2 <0.02	A.2	s by Indi	, Inc.
entrati deionize ds. ds. sticulou netrical netrical i with c f with c f with c	observed			A Ga	운 딸 탁 J	Dv	uctivel	
The certified value is the concentration calculated from gravi Purified acids, 18.2 megohm deionized water, calibrated Clas the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that ar Standards are certifed (+/-) 0.5% of the stated value, unless All standards should be stored with caps tight and under app Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelin Measurement Result," NIST Technical Note 1297, U.S. Gover	l in the prep			<0.02 <0.02 <0.02	<0.02	A) 02	y Couple	
calibra calibra ed prio palance and ur and ur c, C.E., c, C.E.,	paration			Fe La	F F H		d Plas	
The certified value is the concentration calculated from gravimetric and volumetric measury Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights trac Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Express Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washing	Homogeneity: No heterogeneity was observed in the preparation of this standard			<0.2 <0.02	40.02 20.02		Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):	
A glass A glass calibra calibra s for E s for E s for E	lard.			Hg Mo Nd	Mn Mn	Metals	Spectr	Certif
nd volume ware and ted with se stated laborator valuating Valuating Of			(T) = Ta	<0.2 <0.02	40.02 40.02	Verific	ometry ()	ied Refe
etric m I the hi weight I. y cond and Ex and Ex			(T) = Target analyte	х P P	Pd Os Nb	ation	ICP-M	rence
 * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards. * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated. * All standards should be stored with caps tight and under appropriate laboratory conditions. * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). 			ılyte	<0.02 <0.02 <0.2	<0.02	Ann I Ni T I P. I	IS):	Certified Reference Material CRM
to NIS b.C. (Ru Sm Sc	Rb Rb	MS (CRM
ertainty of NIST 1994).				40.02 40.02		Jg/mL)		
are use ove). f NIST				Sr Ta	Ag Si	2		
3d in				40.02 40.02	40.02 10 10	Ĵ.		•
				T Sn Tm	1 1 7 8 1 1 7 8	7		× ×
	ar 1	Certified by:		<0.02 <0.02	<pre><0.02</pre>	6		http://
	M	by:		Zn Zr	५ २दः	w		NAB IS R-1530 s://Abs
	-lls					3		ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
								Accredit te Numb dards.co
								1 3 6 8

	m/z-> 210	1.0E8	N. O E B	m/z-≻ 110	-1 -0 	m/z-> 10 2.0E8	1.0 [[]4	[1] Spectrum No.1 2.0E4	1. Selenium (Se)	Compound	Volume shown below was diluted to (mL):	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL):	Lot Number: Description:	CERTIFIED WEIGHT REPORT:	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
	0			0		J.		um No	58134	Part Number	6 as diluted			л	
220				120		12 0		-	071223	Lot Number	ed to (mL):	060627 Ambient (20 °C) 1000	<u>060624</u> Selenium (Se)	7024	V
	N			4		ω		33.702	0.1000	Dilution Factor	2000.07	ĉ	(Se)		
	230			130		80		90c]:58	200.0	Initial Vol. (mL)	5E-05 0.100				
	240			140		4 0		034.D#	0.084	Initial Uncertainty Vol. (mL) Pipette (mL)	Balance Uncertainty Flask Uncertainty				Sertified Referen
	250			150		. (л О		33.702 sec]:58034.D# [Count] [Linear]	1000	Nominal Conc. (µg/mL)	rtainty nty		2.0%	Lot #	Reference 162.
	260			160		60		inear]	10002.5	Initial Conc. (µg/mL)		(mL)	40.0	Solvent:	Certified Reference Material CRM からすチェート・アンの
				170		70			1000.0	Final Conc. (ug/mL)	11		Nitric Acid		114
				ŏ		0			2.2	Expanded Uncertainty +/- (µg/mL)	Reviewed By:	<i>M</i>	Formulated By:		24
				180		80			7782-49-2	0	×	20	BY		
				190		90			0.2 mg/m3	SDS Information nt Safety Info. On Att: OSHA PEL (TWA)	Pedro L. Rentas		Benson Chan		ਤ
				200		100			3 orl-rat 6700 mg/kg	SDS Information (Solvent Safety Info. On Attached pg.) AS# OSHA PEL (TWA) LDS0	1tas 060624	,	n 060624		ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
									3149	NIST	24	I	24		Accreditec ate Number Idards.com

															1
	The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).	The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise st. Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are us the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).	rements t purity r ceable to s. s. sing the l ngton, D.0	highes highes tra ndition: Expres Washir	volumetric re and the i with weij stated. stated. voratory cc uating and ing Office.	ric and glasswa glasswa alibratec nerwise riate lab for Evalu nt Print	 * The certified value is the concentration calculated from gravimetric and volumetric measurements unlee * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw n the preparation of all standards. * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIS * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Unce Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1 	ed fron alibrate alibrates lances l value, l value, C.E., "Q C.E., "Q C.E., "Q	The certified value is the concentration calculated from gravi Purified acids, 18.2 megohm deionized water, calibrated Class the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that ar Standards are certifed (+/-) 0.5% of the stated value, unless All standards should be stored with caps tight and under app Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelin Measurement Result," NIST Technical Note 1297, U.S. Gover	ntratio sionized s. etrically etrically 5% of t 5% of t B.N. a B.N. a	he conce egohm de standardd s are met d gravim (+/-) 0. e stored : Taylor, NIST Tev	alue is t 1 8.2 me n of all : ntainer: orepare certifed bould bu ference ference Result,"	The certified value is the concen Purified acids, 18.2 megohm dei the preparation of all standards. All standard containers are meti Standards are prepared gravime Standards are certifed (+/-) 0.5 All standards should be stored w Uncertainty Reference: Taylor, E Measurement Result," NIST Tech	* The c * Purifie the purifie * All stand * Stand * All stand Measu	
In P. Ar						ġ.	Homogeneity: No heterogeneity was observed in the preparation of this standard.	ration of	n the prepa	bserved	eity was ol	eterogen	neity: No h	Homoge	
Certified by:			lyte	(T) = Target analyte	(T) = T						lion:	cterizat	Physical Characterization:	Physic	
$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	Se T Si <0.02	Pr 40.02 Re 40.02 Rh 40.02 Rh 40.02 Rb 40.02 Sc 40.02 Sc 40.02	 40.02 <	PP PP	40.02 40.02 40.02 40.02 40.02 40.02	Li Lu Mg Mn Hg Nd	40.02 40.02 40.02 40.02 40.02	HH Fr Fr Fr Fr Fr	40.02 40.02 40.02 40.02 40.02	Dy Er Eu Ga Ga	40.2 40.2 40.2 40.2 2 40.2 2	5 6 6 8 6 6 5	40.02 40.02 40.02 40.02 40.02 40.02	Al As Ba Bi Bi	
		(µg/mL)	ICP-MS	-MS): on by	metry (ICP-MS): Verification by ICP-MS	s Spectrom Metals V	Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS): Trace Metals Verification by	Plasma	Coupled	ctively	by Indu	nalysis	nental A	Instru	
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com		₽M	terial Cl	nce Ma	Certified Reference Material CRM	Certifie					Inc.		Absolute Standards, 800-368-1131 www.absolutestandards.com	Absolute 800-368-1131 www.absolute	800-



300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

Certificate of Analysis M5936, M5933 R: 02/22/24 P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 **ACCREDITATION / REGISTRATION**

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 **PRODUCT DESCRIPTION**

Product Code:	Single Analyte Custom Grade Solution
Catalog Number:	CGMO1
Lot Number:	T2-M0720876
Matrix:	H2O
	tr. NH4OH
Value / Analyte(s):	1 000 μg/mL ea:
	Molybdenum
Starting Material:	Ammonium Molybdate
Starting Material Lot#:	2361
Starting Material Purity:	99.9893%
CEPTIEIED VALUES	

3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value:	998 ± 7 μg/mL
Density:	1.000 g/mL (measured at 20 ± 4 °C)

Assav Information:

Assay Method #1	998 ± 4 µg/mL
	ICP Assay NIST SRM 3134 Lot Number: 130418

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods	Characterization of CRM/RM by One Method
Certified Value, X _{CRWRM} , where two or more methods of characterization are used is the weighted mean of the results:	Certified Value, X _{CRWRM} , where one method of characterization is used is the mean of individual results:
$\begin{split} & \textbf{X}_{CRM/RM} \equiv \boldsymbol{\Sigma}(\textbf{w}_i) \left(\textbf{X}_i \right) \\ & \textbf{X}_i = \text{mean of Assay Method : with standard uncertainty u_{char i} \\ & \textbf{w}_i = \text{the weightling factors for each method calculated using the inverse square of the variance.} \\ & \textbf{w}_i = (1/k_{ohar})^2 / (\boldsymbol{\Sigma}(1/(u_{char}))^2) \end{split}$	$X_{CRM/RM} = (X_a) (u_{cher, a})$ $X_a = mean of Assay Method A withu_{cher, a} = the standard uncertainty of characterization Method A$
CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k ($u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{cs}$) ^{1/5} k = coverage factor = 2 $u_{char} = [\Sigma(w_p)^2 (u_{char}; p^2)]^{1/2}$ where u_{char} are the errors from each characterization method $u_{bb} = $ bottle to bottle homogeneity standard uncertainty $u_{lts} = long term stability standard uncertainty (storage) u_{ts} = transport stability standard uncertainty$	CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k (u ² _{char a} + u ² _{bb} + u ² _{lts} + u ² _{ts}) ^{y₅} k = coverage factor = 2 u _{char a} = the errors from characterization u _{bb} = bottle to bottle homogeneity standard uncertainty u _{lts} = long term stability standard uncertainty (storage) u _{lts} = transport stability standard uncertainty
Page 1 of 4	

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

Μ	Ag	<	0.000590	Μ	Eu	<	0.000300	М	Na		0.000879	М	Se	<	0.008000	М	Zn		0.000598
М	A		0.000563	Μ	Fe	<	0.006500	М	Nb	<	0.029000	i	Si	<		М	Zr	<	0.001800
Μ	As	<	0.002100	Μ	Ga	<	0.000300	i	Nd	<		Μ	Sm	<	0.000300				
Μ	Au	<	0.000300	Μ	Gd	<	0.000300	Μ	Ni	<	0.008000	M	Sn	<	0.008900				
Μ	В	<	0.003300	М	Ge	<	0.000300	Μ	Os	<	0.000590	Μ	Sr		0.000175				
Μ	Ba		0.001689	Μ	Hf	<	0.001800	i –	P	<		Μ	Та	<	0.004200				
М	Be	<	0.000890	Μ	Hg	<	0.003300	Μ	Pb	<	0.000300	Μ	Tb	<	0.000300				
Μ	Bi	<	0.000890	Μ	Но	<	0.000300	Μ	Pd	<	0.001800	М	Те	<	0.021000				
0	Ca		0.006334	M	In	<	0.032000	Μ	Pr	<	0.013000	М	Th	<	0.000300				
0	Cd	<	0.026000	Μ	-Ir	<	0.000300	Μ	Pt	<	0.000300	0	TI	<	0.032000				
Μ	Се	<	0.008300	Μ	ĸ		0.130213	М	Rb		0.004575	Μ	TI		0.001266				
М	Co		0.000598	М	La	<	0.000300	М	Re	<	0.000300	М	Tm	<	0.000300				
Μ	Cr		0.000527	0	Li		0.000059	Μ	Rh	<	0.000300	M	U	<	0.005300				
М	Cs		0.000527	М	Lu	<	0.000300	М	Ru	<	0.079000	M	V	<	0.000890				
Μ	Cu		0.002252	M	Mg		0.000563	i	S	<		M	W		0.087982				
М	Dy	<	0.000300	Μ	Mn	<	0.005900	М	Sb		0.001513	М	Y	<	0.000300				
Μ	Er	<	0.000300	s	Мо	<		Μ	Sc	<	0.001200	М	Yb	<	0.000300				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at $20^\circ \pm 4^\circ$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliguots to container.

- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 95.94 +6 6,7,8,9 [MoO4]-2(chemical form as received)

Chemical Compatibility -Mo is received in a NH4OH matrix giving the operator the option of using HCI or HF to stabilize acidic solutions. The [MoO4]-2 is soluble in concentrated HCI [MoOCI5]-2, dilute HF / HNO3 [MoOF5]-2 and basic media [MoO4]-2. Stable at ppm levels with some metals provided it is fluorinated. Do not mix with Alkaline or Rare Earths when HF is present. Stable with most inorganic anions provided it is in the [MoO4]-2 chemical form.

Stability - 2-100 ppb levels stable (alone or mixed with all other metals that are at comparable levels) as the [MoOF5]-2 for months in 1% HNO3 / LDPE container. 1-10,000 ppm single element solutions as the [MoO4]-2 chemically stable for years in 1% NH4OH in a LDPE container.

Mo Containing Samples (Preparation and Solution) -Metal (Soluble in HF / HNO3 or hot dilute HCI); Oxide (soluble in HF or NH4OH); Organic Matrices (Dry ash at 450EC in Pt0 and dissolve oxide with HF or HCI). Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 95 amu	3 ppt	n/a	40Ar39K16O,79Br1
			60,1900s2+,190Pt
			2+
ICP-OES 202.030 nm	0.008 / 0.0002 µg/mL	1	Os, Hf
ICP-OES 203.844 nm	0.012 / 0.002 μg/mL	1	
ICP-OES 204.598 nm	0.012 / 0.001 µg/mL	1	Ir, Ta

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRWRM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

July 17, 2022

- The certification is valid within the measurement uncertainty specified provided the CRW/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- July 17, 2027

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS **Certificate Prepared By:**

Uyen Truong Supervisor, Product Documentation

Michael 2 Booth

Certificate Approved By:

Michael Booth **Director**, Technical

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Paul R Laine



300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

Certificate of Analysis M5936, M5933 R: 02/22/24 P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 **ACCREDITATION / REGISTRATION**

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 **PRODUCT DESCRIPTION**

Product Code:	Single Analyte Custom Grade Solution
Catalog Number:	CGMO1
Lot Number:	T2-M0720876
Matrix:	H2O
	tr. NH4OH
Value / Analyte(s):	1 000 μg/mL ea:
	Molybdenum
Starting Material:	Ammonium Molybdate
Starting Material Lot#:	2361
Starting Material Purity:	99.9893%
CEPTIEIED VALUES	

3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value:	998 ± 7 μg/mL
Density:	1.000 g/mL (measured at 20 ± 4 °C)

Assav Information:

Assay Method #1	998 ± 4 µg/mL
	ICP Assay NIST SRM 3134 Lot Number: 130418

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods	Characterization of CRM/RM by One Method
Certified Value, X _{CRWRM} , where two or more methods of characterization are used is the weighted mean of the results:	Certified Value, X _{CRWRM} , where one method of characterization is used is the mean of individual results:
$\begin{split} & \textbf{X}_{CRM/RM} \equiv \boldsymbol{\Sigma}(\textbf{w}_i) \left(\textbf{X}_i \right) \\ & \textbf{X}_i = \text{mean of Assay Method : with standard uncertainty u_{char i} \\ & \textbf{w}_i = \text{the weightling factors for each method calculated using the inverse square of the variance.} \\ & \textbf{w}_i = (1/k_{ohar})^2 / (\boldsymbol{\Sigma}(1/(u_{char}))^2) \end{split}$	$X_{CRM/RM} = (X_a) (u_{cher, a})$ $X_a = mean of Assay Method A withu_{cher, a} = the standard uncertainty of characterization Method A$
CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k ($u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{cs}$) ^{1/5} k = coverage factor = 2 $u_{char} = [\Sigma(w_p)^2 (u_{char}; p^2)]^{1/2}$ where u_{char} are the errors from each characterization method $u_{bb} = $ bottle to bottle homogeneity standard uncertainty $u_{lts} = long term stability standard uncertainty (storage) u_{ts} = transport stability standard uncertainty$	CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k (u ² _{char a} + u ² _{bb} + u ² _{lts} + u ² _{ts}) ^{y₅} k = coverage factor = 2 u _{char a} = the errors from characterization u _{bb} = bottle to bottle homogeneity standard uncertainty u _{lts} = long term stability standard uncertainty (storage) u _{lts} = transport stability standard uncertainty
Page 1 of 4	

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

Μ	Ag	<	0.000590	Μ	Eu	<	0.000300	М	Na		0.000879	М	Se	<	0.008000	М	Zn		0.000598
М	A		0.000563	Μ	Fe	<	0.006500	М	Nb	<	0.029000	i	Si	<		М	Zr	<	0.001800
Μ	As	<	0.002100	Μ	Ga	<	0.000300	i	Nd	<		Μ	Sm	<	0.000300				
Μ	Au	<	0.000300	Μ	Gd	<	0.000300	Μ	Ni	<	0.008000	M	Sn	<	0.008900				
Μ	В	<	0.003300	М	Ge	<	0.000300	Μ	Os	<	0.000590	Μ	Sr		0.000175				
Μ	Ba		0.001689	Μ	Hf	<	0.001800	i	P	<		Μ	Та	<	0.004200				
М	Be	<	0.000890	Μ	Hg	<	0.003300	Μ	Pb	<	0.000300	Μ	Tb	<	0.000300				
Μ	Bi	<	0.000890	Μ	Но	<	0.000300	Μ	Pd	<	0.001800	М	Те	<	0.021000				
0	Ca		0.006334	M	In	<	0.032000	Μ	Pr	<	0.013000	М	Th	<	0.000300				
0	Cd	<	0.026000	Μ	-Ir	<	0.000300	Μ	Pt	<	0.000300	0	TI	<	0.032000				
Μ	Се	<	0.008300	Μ	ĸ		0.130213	М	Rb		0.004575	Μ	TI		0.001266				
М	Co		0.000598	М	La	<	0.000300	М	Re	<	0.000300	М	Tm	<	0.000300				
Μ	Cr		0.000527	0	Li		0.000059	Μ	Rh	<	0.000300	M	U	<	0.005300				
М	Cs		0.000527	М	Lu	<	0.000300	М	Ru	<	0.079000	M	V	<	0.000890				
Μ	Cu		0.002252	M	Mg		0.000563	i	S	<		M	W		0.087982				
М	Dy	<	0.000300	Μ	Mn	<	0.005900	М	Sb		0.001513	М	Y	<	0.000300				
Μ	Er	<	0.000300	s	Мо	<		Μ	Sc	<	0.001200	М	Yb	<	0.000300				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at $20^\circ \pm 4^\circ$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliguots to container.

- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 95.94 +6 6,7,8,9 [MoO4]-2(chemical form as received)

Chemical Compatibility -Mo is received in a NH4OH matrix giving the operator the option of using HCI or HF to stabilize acidic solutions. The [MoO4]-2 is soluble in concentrated HCI [MoOCI5]-2, dilute HF / HNO3 [MoOF5]-2 and basic media [MoO4]-2. Stable at ppm levels with some metals provided it is fluorinated. Do not mix with Alkaline or Rare Earths when HF is present. Stable with most inorganic anions provided it is in the [MoO4]-2 chemical form.

Stability - 2-100 ppb levels stable (alone or mixed with all other metals that are at comparable levels) as the [MoOF5]-2 for months in 1% HNO3 / LDPE container. 1-10,000 ppm single element solutions as the [MoO4]-2 chemically stable for years in 1% NH4OH in a LDPE container.

Mo Containing Samples (Preparation and Solution) -Metal (Soluble in HF / HNO3 or hot dilute HCI); Oxide (soluble in HF or NH4OH); Organic Matrices (Dry ash at 450EC in Pt0 and dissolve oxide with HF or HCI). Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 95 amu	3 ppt	n/a	40Ar39K16O,79Br1
			60,1900s2+,190Pt
			2+
ICP-OES 202.030 nm	0.008 / 0.0002 µg/mL	1	Os, Hf
ICP-OES 203.844 nm	0.012 / 0.002 μg/mL	1	
ICP-OES 204.598 nm	0.012 / 0.001 µg/mL	1	Ir, Ta

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRWRM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

July 17, 2022

- The certification is valid within the measurement uncertainty specified provided the CRW/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- July 17, 2027

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS **Certificate Prepared By:**

Uyen Truong Supervisor, Product Documentation

Michael 2 Booth

Certificate Approved By:

Michael Booth **Director**, Technical

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Paul R Laine

Page 1 of 4

ក⁰⁸ = ក្រុងអាស់ ដែល ភ្លេង ភ្ល

Z = 1000BL = $\sup_{x \in \mathcal{A}} (\pi_x) = O_{CRM/RM} = k \left(u^2_{Char} + u^2_{T}_{bb} + u^2_{T}_{bb} + u^2_{T}_{bb} + u^2_{C}_{bb} \right)^{1/2}$ $\mathsf{M}^{i} = (1/\mathsf{n}^{\mathsf{clust}\,i})^{\Sigma} \setminus (\Sigma(1/(\mathsf{n}^{\mathsf{clust}\,i})_{\Sigma})$

nieneity standard uncertain ucherts mort arone enti = a fanta lisnegomort ettod, of ettod = dd^u adnere vitidats mot gnot = _{ad}t $\label{eq:spinor} \min \left\{ x \right\} = U_{CRM/RM} = k \left\{ u^2_{char} * u^2_{bb} + u^2_{bb} + u^2_{bb} + u^2_{bb} \right\}^{4}$

$$\begin{split} \chi_{CRM,FRM} = & (\chi_{o}) \; (u_{char, o}) \\ \chi_{a} = mean of Assay Method A with ut and a charter of the standard uncertainty of uncertainty of the standard uncertainty$$

Certified Value, X_{CRM/RM}, where one method of characterization is used is the mean of individual results:

Certified Value, X_{CRMMM}, where two or more methods of characterization are used is the weighted mean of the results: Characterization of CRM/RM by One Method Characterization of CRM/RM by Two or More Methods

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent to following equations are used in the calculate/K=2.

traceability. - The Calculated Value is a value calculated from the weight of a starting material that has been cartified idrectly vs. A National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance starting.

ICP Assay NIST SRM 3162a Lot Number: 130925 1002 ± 4 hg/mL

Pssay Method #1

g = Jojoej

un pepuedra w

(1x) (1w) = X(wi) (xi)

:noiternotnl ysseA

1.012 g/mL (measured at 20 ± 4 °C) Density: 1002 ± 5 µg/mL sulsV beitified

 $\chi_q = mean of Assay Method I with standard uncertainty updat 1$ w₁ = the weighting factors for each method calculated using the tothe weighting and the standard uncertainty updat 1

CERTIFIED VALUES AND UNCERTAINTIES 3.0

Starting Material Purity: 99.9975% Starting Material Lot#: 2094 Starting Material: In Metal unineti T 1 000 hg/mL ea: :(s)ətylanA \ əulsV :xinteM

tr. HF 2% (v/v) HNO3 27991717-2T Lot Number: **LITED** Catalog Number: Product Code:

Single Analyte Custom Grade Solution

PRODUCT DESCRIPTION 0.S

Number QSR-1034).

the Competence of Reference Material Producers" and ISO/IEC 17025, "Ceneral Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Vantures is also an ISO 9001 registered manufacturer (QSR Certificate Inorganic Manuel 2014) INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for



ACCREDITATION / REGISTRATION 0.r

300 Technology Drive Christiansburg, VA 24073 USA Christiansburg, VA 24073

R:2/22/24

info@inorganicventures.com E: 240-282-3015 E: 240-282-3030

Refine your results. Redefine your industry. Certificate of Analysis 6LESH' 8LESH

4.0 TRACEABILITY TO NIST

sbecueq. - This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRMRM uncertainty error and the measurement, weighing and volume dilutiton errors. In rare cases where no NIST SRMRM are available, the term "in-house std." is approximately and the term and term and term and term and term are cases where no NIST SRMRM are available, the term "in-house std." is a provided.

4.1 Thermometer Calibration

laboratory. - All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration

4.2 Balance Calibration

used for testing are annually compared to master weights and are traceable to NIST. - All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights

4.3 Glassware Calibration

An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

.my €.0 a2 M 0732£0.0 > ⊨N O 832000.0 > ⊔∃ M 8€2000.0 > ⊵A M ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to CRMRMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS, were analyzed in an up of the method for each element of the property effection of the method for the met

											-				•				
			9	0:000536	>	٩٨	Μ	0.004900	>	эS	0	¢77000.0		oM	Μ	892000.0	>	ΞL	Μ
			9	941200.0	>	×	Μ	926900.0	>	qs	Μ	0.003267	>	υM	0	892000.0	>	DÀ	M
			1	0.000473		M	Μ		>	S	- į	0.005445	>	БM	0	068010.0	>	ng	0
			9	98610.0	>	Λ	Μ	0.000269	>	nЯ	Μ	0.000268	>	nŋ	Μ	0.000268	>	sÖ	M
			8	0.000268	>	Π	Μ	0.000268	>	ЧЫ	Μ	0.027225	>	П	0	297000.0		CL	M
			8	0.000268	>	шŢ	M	89Z000.0	>	əЯ	W	0.000268	>	F۵	W	0.004293	>	00	W
			5	0.000268	>	Ш	Μ	0.000268	>	ЧЯ	Μ	271100.0		К	W	0.000268	>	9 <u>0</u>	W
					>	Ш	S	0.000536	>	Ъł	Μ	692000.0	>	4	Μ	892000.0	>	PO	M
			8	0.053663	>	41	Μ	0.000268	>	Ч	Μ	0.002683	>	uj	Μ	929000.0		сa	0
				\$£100.0	>	θT	Μ	0.000268	>	Pd	Μ	0.000268	>	ен	Μ	609100.0	>	B	M
				92000.0	>	ЧT	Μ	£70100.0	>	ЬΡ	Μ	0.003231	>	бн	Μ	0.005366	>	вe	M
				0.01056(БT	Μ	0.054450.0	>	d	0	191200.0		łΗ	Μ	0.002683	>	Вa	M
			ę	60000.0		٦S	0	0.000269	>	sO	Μ	0.002146	>	99	Μ	0.008929	>	В	0
			-	60000.0		us	Μ	068010.0	>	!N	0	0.000268	>	ΡÐ	M	778400.0	>	nΨ	W
			8	0.00026	>	шS	Μ	0.000268	>	PN	Μ	0.000268	>	БÐ	M	986800.0	>	sA	M
0.043560	>	۶Z		67400.0		!S	0	0.043560	>	٩N	0	0.003225		θ٦	0	278000.0		IA	0
792600.0	>	uΖ	0 \$	0.00120		92	Μ	0.032670	>	вN	0	0.000268	>	nΞ	Μ	0.000536	>	₿¥	M

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

- For the calibration of analytical instruments and validation of analytical methods as appropriate. 9.0 INTENDED USE

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

Page 2 of 4

Page 3 of 4

- Chemical Testing - Accredited / A2LA Certificate Number 883.01 "serveter of the second second and the Competence of the Competence of Testing and Calibration Laboratories."

- QSR Certificate Number QSR-1034

nottertizigeA metevs inemegeneM villsuD 100e OSI 1.01

WOITATNEMUDOD GRADNATS YTILAUD

0.01

Homogeneity data indicate that the end user should take a minimum server of 0.2 m L or 2.0 m L or 2 - This solution was more according to the superior superior of the form as the solution of the homogeneous. المستحدم المرابعة الم .viienegeneity.

Please refer to the Safety Data Sheet for information regarding this CRMRM. HOMOGENEITY 0'6

NOITAMAORNI SUOGAASAH 0.8

1401150180, 14011702, 36Ar12C, 48Cs, 196X≃2 (Where X = Zr, Mo, Fu) Ωb, Ta, Cr, U	.sselo n r r r	0.0054 / 0.00052 µg/mL 0.0054 / 0.00038 µg/mL 0.0053 / 0.00034 µg/mL 10 not be prepared or stored ir 10N	CP-OES 323.452 nm (CP-OES 334.941 nm (CP-OES 334.941 nm (CP-OES 336.121 nm (CP-OES 336.121 nm (CP-OES 336.121 nm (CP-OES 336.121 nm (CP-OES 336.121 nm (CP-OES 336.121 nm) (CP-OES 34.121 nm) (CP-OES 34.121 nm) (CP-OES 34.121 nm) (CP-OES 34.121 nm)
SET Interferences (underlined indicates severe) 32S160, 32S14N,	Orde A/N	14 pt	ICP-MS 48 amu

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view): **Technique/Line**

1:1:1 H2O / HF / H2SO4 or fuse ash with pyrosultate it oxide is as plastic pigment and likely in prookite Notentity: Oxde - low temperature history and sortanty - ineer (sortant in 122) in source heads Notentity: Oxde - low temperature history (-800EC) brookite (fuse in Pto with KS2207); Ores (f TI Containing Samples (Preparation and Solution) - Metal (Soluble in H2O / HF caution -powder reacts violentino: Ovide , Iour Inergene , or entile (Discoluted by Inergene) and Ferdinal Market (Soluble in the Lasc

HINGS / LDPE compared from and solutions as the TI(F)6-2 chemically stable for years in the solution and the solutions as the TI(F)6-2 chemically stable for years in the solution from and solutions. 1-10,000 ppm aingle element solutions as the TI(F)6-2 chemically stable for years in the solution from and solutions are the transmission from and solutions are the transmission from and solutions are the solutions are the transmission from and solutions are the solutions are the transmission from and solutions are the transmission from and solutions are the solution from and solutions are the transmission from and solutions are the solution from an and solutions are the solution from an and solutions are the solution from an and solutions are the solutions are the solution from an and solutions are the solutions are the solutions are the solution from an an and solutions are the solutions are the solutions are the solutions are the solution from an and solutions are the solutions are the solution from an and solutions are the solutions are the solutions are the solution from an and solutions are the solutions are the solutions are the solution from an and solutions are the solutions are the solutions are the solution from an an an an an an and solutions are the solutions are the solution are the so with a fendency to hydrolyze forming the hydrafied oxide in all dilute acids except HF. **Stability -** 2-100 ppb levels stable (Alone or mixed with all other metals) as the Ti(F)6-2 for months in 1% HNO3 / LDPE container. 1-10.000 point and element solutions as the Ti(F)6-2 chemically stable for year media. Unstable at ppm levels with metals that would pull F- away (i.e. Do not mix with Alkaline or Rare Earths or high levels of thansition elements unless they are fluorinated). Stable with Mixaline or Rare with a tendency to hydrolyze forming the hydrafed oxide in all dilute acids except HF. Chemical Compatibility - Soluble in concentrated HCI, HF, H3PO4 H2SO4 and HVO3. Avoid neutral to basic S-8(T)T 6 4+ 78.74 - noiluite in Solution (Chemical Form in Solution - 47.74 6 T(F)6-5-- For more information, visit www.inorganicventures.com/TCT Afomic Weinher Valence: Coordination Winnher: Chemical Equa

reported density. Do not pipette from the container. Do not return removed aliquots to container. - After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the renorted density. To not other from the container. To not return removed alternots to container.

Page some more served to the served to the served to the ordent of the ordent increase in the analyte concentration (s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being the rescaled to the test to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss. - While stored in the sealed TCT bag, transpiration of this CRAWRM is negligible. After opening the sealed TCT had transmission of the CDMMAN will occur recutification increase in the source concentration of the is

- Store between approximately 4° - 30° C while in sealed TCT bag.

Page 4 of 4

Certifying Officer:

Chairman / Senior Technical Director

NOS Paulo 182

Paul Gaines

-

Thomas Kozikowski Manager, Quality Control

Certificate Approved By:

0.2r

NAMES AND SIGNATURES OF CERTIFYING OFFICERS

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7,1.

- Sealed TCT Bag Open Date:

11.3 Period of Validity stability studies conducted on property stored and handled CR/WRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

- The lot expiration date reflects the period of time that the stability of a CRMMM can be supported by long term

- The date after which this CRM/RM should not be used.

- June 17, 2027

11.2 Lot Expiration Date

The cartification is valid within the measurement uncertainty specified provided the CRWRM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

June 17, 2022

11.1 Certification Issue Date

CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY 0.11

norganic Ventures, 300 Technicky Drive, Christianeburg, Ve. 24073, USA; Telephone: 800,669,678; 540,585,3030, Fax: 540,562,5015; Innegan

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

ADSOIUTE STANDARDS, INC. 800-368-1131 www absolutestandards com	P			0	ertified R	eference	Material CF				AR	ANAB ISO 17034 Accredited AR-1539 Certificate Number	ocredited Number
			X	6	-	ž	K5981 R:61	1	124	6	https	https://Absolutestandards.com	ards.com
CERTIFIED WEIGHT REPORT:						Lot #	Solvent:						
Part Number: Lot Number:		57092 060724				24002546	Nitric Acid		Phine R	1° man Mr. 9	ARector		
Description:		Uranium (U)	ົ						252				
						2.0%	40.0	Nitric Acid	Formulated By:	2	Giovanni Esposito	060724	
Expiration Date: Recommended Storage: Nominal Concentration (µg/mL):		060727 Ambient (20 °C) 1000	0 °C)				(mL)		Jus	42 . A	enter		
NIST Test Number:		GUTB		5E-05	Balance Uncertainty	inty			Reviewed By:		Pedro L. Rentas	060724	
Volume shown below was diluted to (mL):	was dilute	d to (mL):	2000.07	0.100	Flask Uncertainty								-
	Part	Lot	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Expanded Uncertainty	(Solven	SDS Information (Solvent Safety Info. On Attached pg.)	tion Attached po.)	NIST
Compound	Number	Number	Factor	Vol. (mL)	Vol. (mL) Pipette (mL) (Conc. (µg/mL)	Conc. (ug/mL)	Conc. (µg/mL)	+/- (ug/ml.)	CAS#	OSHA PEL (TWA)	LD50	SRM
1. Uranyl nitrate hexahydrate (U)	58192	041524	0.1000	200.0	0.084	1000	10001.5	1000.0	2.2	13520-83-7	0.05 mg/m3	orl-rat 1040 mg/kg	3164
[1] Spectrum No.1	trum No	а <u>н</u>	23.254 sec]:57092.D# [Count] [Linear]	9c]:570	092.D#[0	ini) [mino	near]						F
1.0E6) 1							
5.0E8													
	10	0	30		40	50	00	20		80	08	100	_
5.0E4													
0.0 7 4													
m/z->	0	120	130	0	440	150	160	021		081	Cer	000	
										0			-
9 1 0					46468								
6.0E5													
m/z->	810	520	530	0	240	250	260						
]
Part # 57092 Lot # 060724						1 of 2				Printe	Printed: 6/7/2024, 3:58:45 PM	8:45 PM	

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com



<0.02 Cd <0.02 Dy <0.02 Hf <0.02 Li <0.02		The factor of the second se					
Cd <0.02 Dy <0.02 Hf <0.02 Li		and the second se	A number of state of	Statistical and a statistical design	の日本の日本の		
	_	Ľ		507	ŧ		11
Ca <0.2 Er <0.02 Ha <0.02 Ha <0.02 I.a	Nh				2 6	70.02	*
بال ال ا					e.	<0.02	D
		•		<u>60.0</u> 5	Ę	20.02	>
Cs <0.02 Gd <0.02 If <0.02 Mn		_		ŝ	4		
Cr <0.02 Ga <0.07 Fe <0.7 He				707	111	70'05	QI
				<0.02	цп	<u>60.02</u>	¥
CU 2012 UE 2012 La 2012 Mo				<0.02	Sn	000	7
Cii <0.02 Au <0.02 Pb <0.02 Nd	K 402					2000	1

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
 - All standard containers are meticulously cleaned prior to use.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

1 هي الالي الالي 5 1 ×., -

Printed: 6/7/2024, 3:58:45 PM

Luts Solvent: 2110021 Ninic Acid 2.0% 40.0 Ninic Acid 2.0% 40.0 Ninic Acid 2.0% 40.0 Ninic Acid mininy Final Emmoded By: Beneon Chen mininy minish Expanded SDS Information v Nominal Intel Expanded SDS Information v 1000 1000.0 22 1050-034 Pictor 1000 1000.0 22 1500-03-0 IOO 1000 1000 22 1500-03-0 IOO 1000 100 100 100 100 100 1000 23 1500-05-3 M MA	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com			X	MS982	rtified Re	ference A	Certified Reference Material CRM	11/2	5		AL	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	Accredited ate Number ndards.com
Epinitum Dist. Epinitation Dist. Other Abold and concentration Dist. Other Abold and concentration Dist. Other Abold and concentration Dist. Other Abold and concentration Dist. Epine List of the Abold and concentration Dist. Epine Dist.	CERTIFIED WEIGHT REPORT: Part Numbe Lot Numbe Description		23 23 nium (Zr)				Lot # 21110221	Solvent: Nitric Acid						
NIST Test Number: Othome of the wave situation E::05 Balance of minute situation E::00: Dots in the mean situation E::00: Distribution E::00: Distribution E::00: Distribution E::00: Distribution E::00: Distribution Distri	Expiration Dat Recommended Storag Nominal Concentration (µg/ml		16 Int (20 °C)	J			2.0%	40.0 (mL)		ormulated By		Benson Chan	071423	8
Image: marker Test of	NIST Test Numbe Volume shown below	er: 6UTB v was diluted to (i				alarce Uncertair ask Uncertainty	ytr			leviewed By:		Pedro L, Rentas	071423	23
Indecenting (n) Statut Order Otder	Compound				hritial (/ol. (mL) Pi		Nomina! onc. (µg/mL)	Initial Conc. (µg/mL) (Final Conc. (µg/mL)	Expanded Uncertainty +/- (µg/mL)	(Solv∉ CAS#	SDS Inform int Safety Info. Or OSHA PEL (TWA)	ation Attached pg.) LD50	NIST SRM
1.1 Spectrum No.1 [1.1.163 esc)[s7040.DM [Count] [Linear] 1.0E6 10 20 30 40 60 70 80 3c=b 10 20 30 40 60 70 80 4.0E8 1.0E 10 120 130 140 160 170 160 4.0E8 210 130 140 160 160 170 160 4.0E8 210 230 230 240 260 260 100 160	1. Zirconyl chloride octahydrate (Zr)				200.0	0.084	1000	10000.3	1000.0			NA		NA
6:0EC 1:0 20 30 40 60 70 80 1:0E3	-	atru No.	4	000	c]:670		T) [tunes	inearj						
10 20 30 40 60 70 60 1-0E8 1 1 1 1 1 1 1 6-0E7 1 1 1 1 1 1 1 0-0 1 1 1 1 1 1 1 0-0 1 1 1 1 1 1 1 0-0 1 1 1 1 1 1 1 0-0 20 20 20 20 20 20 10	ອ ພ ຍ													
5.0E7 110 120 130 140 160 160 170 180 1.0E8 1.0E8 120 120 130 140 160 170 160 1.0E8 1.0E8 210 230 230 240 250 260 100 1.0E4/071423 10f4/071423 10f2 10f2 10f2 10f2 10f2 10f2 10f2	۵ 11		0	0		6 0	0	D Ø	02		Q	O	000	
10 120 130 140 160 170 180 1.0E8 1.0E8 1.00 1.00 1.00 1.00 1.00 5.0E7 210 220 230 240 260 260 Iot# 071423 Iot# 07142	£.0E ₹													
5.0€7 1/2-3 210 230 240 250 260 Lot # 071423 1012	Ø		Q	130		040	160	160	5		Ca	190	200	
1/2 210 220 230 250 260 Lot # 071423 1 of 2	6.0E7													
Lot # 071423 1 of 2			0	530		240	580	260						
							1 of 2				Printe	d: 6/7/2024, 3:	58:47 PM	

Absolute Standards, Inc. www.absolutestandards.com 800-368-1131

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							I race N	letals	Verificat	tion b	y ICP-M	or) SN	/mL)						
	000			11 - 21 28 12	A COLUMN TO A	Station of the		1011		1000	No. N. M. Markey	Contraction of							
₹	20.02	3	<0.02	à	€0.02	Hf	<0.02	E	<0.02	ž	000	4			e				
Sb	<0.02	Ő	602	ģ	5007	11	200	,			1000	TT I		8	202	19	<0.02	M	5
		}	+ ~	3	7000	24	70'05	5	20:02	q	40.02	Re		57	<0.02	f	5007	11	
As	Q 12	లి	40.02	đ	<0.02	ų	<0.00 20.00	Mo	100	ð	ŝ	ć	_	5.	70.04	2 T	70'05	>	_
R.	0007	ć	200	č	00 0	,		Ser	10-05	5	70.02	2		Ag	<u>60.02</u>	F	<0.02	>	
5		3	70.02	5		5	60.09 60.09	Mn	60.02	Pd	<0.02	Rh	_	ŝ	5	ŧ	000		_
ഷ്	<u>60.01</u>	ප්	<0.02	ő	<0.02	ų	۶	-0		¢					707	UT		χp	_
ä	2007	ć	ŝ			2		20	7.02	4	20.02	ž	<0.02	ъ	0.02	Ē	<0.02	>	2002
គឺ ៖	70.02	3	70.02	3	20:02	5	<u>60.02</u>	Wo	<u>60.02</u>	đ.	<u>40.02</u>	Ę		v	W Vr	z		' 1	_
8	<u>6.02</u>	ð	<0.02	An	<002	á	2007	M	5	: >			_	n	20,02	EN	<0.02	5	_
					and the		70.0	DN	20.02	4	202	Sc	·	Ta	60.02	F	<0.02	77	_
													all a second sec					1	

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards
 - * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- - * All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

-¥. . . . 1 . .

Lot # 071423 Part # 57040

Sulfuric Acid BAKER INSTRA-ANALYZED® Reagent

For Trace Metal Analysis

Low Selenium

W for HI-NP





Material No.: 9673-33 Batch No.: 23D2462010 Manufactured Date: 2023-03-22 Retest Date: 2028-03-20 **Revision No.: 0**

Certificate of Analysis

Test	Specification	Result
ACS – Assay (H2SO4)	95.0 - 98.0 %	96.1 %
Appearance	Passes Test	Passes Test
ACS – Color (APHA)	≤ 10	5
ACS – Residue after Ignition	≤ 3 ppm	< 1 ppm
ACS – Substances Reducing Permanganate (as SO2)	≤ 2 ppm	< 2 ppm
Ammonium (NH4)	≤ 1 ppm	1 ppm
Chloride (Cl)	≤ 0.1 ppm	< 0.1 ppm
Nitrate (NO3)	≤ 0.2 ppm	< 0.1 ppm
Phosphate (PO4)	≤ 0.5 ppm	< 0.1 ppm
Trace Impurities – Aluminum (Al)	≤ 30.0 ppb	< 5.0 ppb
Arsenic and Antimony (as As)	≤ 4.0 ppb	< 2.0 ppb
Trace Impurities – Boron (B)	≤ 10.0 ppb	8.5 ppb
Trace Impurities – Cadmium (Cd)	≤ 2.0 ppb	< 0.3 ppb
Trace Impurities – Chromium (Cr)	≤ 6.0 ppb	< 0.4 ppb
Trace Impurities – Cobalt (Co)	≤ 0.5 ppb	< 0.3 ppb
Trace Impurities – Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities - Gold (Au)	≤ 10.0 ppb	0.5 ppb
Heavy Metals (as Pb)	≤ 500.0 ppb	< 100.0 ppb
Trace Impurities – Iron (Fe)	≤ 50.0 ppb	1.3 ppb
Trace Impurities - Lead (Pb)	≤ 0.5 ppb	< 0.5 ppb
Trace Impurities – Magnesium (Mg)	≤ 7.0 ppb	0.8 ppb
Trace Impurities – Manganese (Mn)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities – Mercury (Hg)	≤ 0.5 ppb	< 0.1 ppb
Trace Impurities – Nickel (Ni)	≤ 2.0 ppb	0.3 ppb
Trace Impurities – Potassium (K)	≤ 500.0 ppb	< 2.0 ppb
Trace Impurities – Selenium (Se)	≤ 50.0 ppb	< 0.1 ppb
Trace Impurities – Silicon (Si)	≤ 100.0 ppb	31.5 ppb
Trace Impurities – Silver (Ag)	≤ 1.0 ppb	< 0.3 ppb

>>> Continued on page 2 >>>

Sulfuric Acid BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis Low Selenium






Material No.: 9673-33 Batch No.: 23D2462010

Test	Specification	Result
Trace Impurities - Sodium (Na)	≤ 500.0 ppb	5.4 ppb
Trace Impurities – Strontium (Sr)	≤ 5.0 ppb	< 0.2 ppb
Trace Impurities – Tin (Sn)	≤ 5.0 ppb	< 0.8 ppb
Trace Impurities – Zinc (Zn)	≤ 5.0 ppb	0.4 ppb

For Laboratory, Research, or Manufacturing Use

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC



C10 30C 1300

Jamie Ethier Vice President Global Quality

1.0



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:	Multi Analyte Custom Grade Solution	
Catalog Number:	IV-STOCK-12	
Lot Number:	U2-MEB734294	
Matrix:	5% (v/v) HNO3	
Value / Analyte(s):	10 μg/mL ea:	
	Barium,	Beryllium,
	Bismuth,	Cerium,
	Cobalt,	Indium,
	Lithium,	Nickel,
	Lead,	Uranium

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE Barium, Ba	CERTIFIED VALUE 10.01 ± 0.04 µg/mL	ANALYTE Beryllium, Be	CERTIFIED VALUE 10.01 ± 0.05 µg/mL
Bismuth, Bi	10.01 ± 0.06 µg/mL	Cerium, Ce	10.01 ± 0.04 µg/mL
Cobalt, Co	10.01 ± 0.05 µg/mL	Indium, in	10.01 ± 0.04 μg/mL
Lead, Pb	10.00 ± 0.04 µg/mL	Lithium, Li	10.01 ± 0.04 µg/mL
Nickel, Ni	10.01 ± 0.04 µg/mL	Uranium, U	10.01 ± 0.05 µg/mL

Density:

1.025 g/mL (measured at 20 \pm 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Ва	ICP Assay	3104a	140909
Ва	Calculated		See Sec. 4.2
Ва	Gravimetric		See Sec. 4.2
Be	ICP Assay	3105a	090514
Be	Calculated		See Sec. 4.2
Bi	ICP Assay	3106	180815
Се	ICP Assay	3110	160830
Ce	EDTA	928	928
Ce	Calculated		See Sec. 4.2
Co	ICP Assay	3113	190630
Co	EDTA	928	928
Co	Calculated		See Sec. 4.2
In	ICP Assay	3124a	110516
In	EDTA	928	928
In	Calculated		See Sec. 4.2
Li	ICP Assay	3129a	100714
Lí	Calculated		See Sec. 4.2
Li	Gravimetric		See Sec. 4.2
Ni	ICP Assay	3136	120619
Ni	EDTA	928	928
Ni	Calculated		See Sec. 4.2
Pb	ICP Assay	3128	101026
Pb	EDTA	928	928
Pb	Calculated		See Sec. 4.2
U	ICP Assay	traceable to 3164	R2-U689597
U	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods	Characterization of CRM/RM by One Method
Certified Value, X _{CRWRM} , where two or more methods of characterization are used is the weighted mean of the results:	Certified Value, X _{CRWRM} , where one method of characterization is used is the mean of individual results:
$\mathbf{x}_{\mathbf{CRM/RM}} = \Sigma(\mathbf{w}_i) (\mathbf{x}_i)$	$X_{CRM/RM} = (X_{a}) (u_{char a})$
X _i = mean of Assay Method I with standard uncertainty u _{char i}	X _a = mean of Assay Method A with
w_j = the weighting factors for each method calculated using the inverse square of the variance: $w_i = (1/u_{char})^2 / (\Sigma(1/(u_{char})^2))$	$\boldsymbol{u}_{char,a}$ = the standard uncertainty of characterization Method A
CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{\frac{1}{2}}$	CRM/RM Expanded Uncertainty (1) = U _{CRM/RM} = k (u ² _{char a} + u ² _{bb} + u ² _{fts} + u ² _{ts}) [%]
k = coverage factor = 2	k = coverage factor = 2
$u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} are the errors from each characterization method	uchar a = the errors from characterization
ubb = bottle to bottle homogeneity standard uncertainty	ubb = bottle to bottle homogeneity standard uncertainty
u _{lts} = long term stability standard uncertainty (storage)	ults = long term stability standard uncertainty (storage)
uts = transport stability standard uncertainty	uts = transport stability standard uncertainty
Certified Abundance:	
IV's Certified Abundance	

Isotope	Atom %
Uranium 238U	99.8 ± 0.1
Uranium 235U	0.19 ± 0.05

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale. <u>https://www.inorganicventures.com/terms-and-conditions-sale</u>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit www.inorganicventures.com/TCT

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 **CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY**

11.1 Certification Issue Date

June 21, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- June 21, 2028
- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

NAMES AND SIGNATURES OF CERTIFYING OFFICERS 12.0

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

SD9781. Paul R Saine

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent

For Trace Metal Analysis





R->10/13/24

Met dig

Material No.: 9530-33 Batch No.: 0000275677 Manufactured Date: 2020/12/16 Retest Date: 2025/12/15

Μ	6	۱	2	1
_	_	-		

Certificate of Analysis

Test	Specification	Result
ACS - Assay (as HCI) (by acid-base titrn)	36.5 - 38.0 %	37.6
ACS – Color (APHA)	<= 10	5
ACS – Residue after Ignition	<= 3 ppm	1
ACS - Specific Gravity at 60°/60°F	1.185 - 1.192	1.190
ACS – Bromide (Br)	<= 0.005 %	< 0.005
ACS – Extractable Organic Substances	<= 5 ppm	1
ACS - Free Chlorine (as Cl2)	<= 0.5 ppm	< 0.5
Phosphate (PO4)	<= 0.05 ppm	< 0.03
Sulfate (SO4)	<= 0.5 ppm	< 0.3
Sulfite (SO3)	<= 0.8 ppm	0.3
Ammonium (NH4)	<= 3 ppm	< 1
Trace Impurities - Arsenic (As)	<= 0.010 ppm	< 0.003
Trace Impurities - Aluminum (Al)	<= 10.0 ppb	< 0.2
Arsenic and Antimony (as As)	<= 5 ppb	< 3
Trace Impurities – Barium (Ba)	<= 1.0 ppb	< 0.2
Trace Impurities – Beryllium (Be)	<= 1.0 ppb	< 0.2
Trace Impurities – Bismuth (Bi)	<= 10.0 ppb	< 1.0
Trace Impurities – Boron (B)	<= 20.0 ppb	< 5.0
Trace Impurities - Cadmium (Cd)	<= 1.0 ppb	< 0.3
Trace Impurities – Calcium (Ca)	<= 50.0 ppb	29.7
Trace Impurities – Chromium (Cr)	<= 1.0 ppb	< 0.4
Trace Impurities – Cobalt (Co)	<= 1.0 ppb	< 0.3
Trace Impurities – Copper (Cu)	<= 1.0 ppb	< 0.1
Trace Impurities – Gallium (Ga)	<= 1.0 ppb	< 0.2

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone: 610.386.1700

Material No.: 9530-33 Batch No.: 0000275677

Test	Specification	Result
Trace Impurities – Germanium (Ge)	<= 3.0 ppb	< 2.0
Trace Impurities - Gold (Au)	<= 4.0 ppb	< 0.2
Heavy Metals (as Pb)	<= 100 ppb	< 50
Trace Impurities – Iron (Fe)	<= 15.0 ppb	<]
Trace Impurities – Lead (Pb)	<pre>>> dqq 0.1 =></pre>	< 0.5
Trace Impurities – Lithium (Li)	<= 1.0 ppb	0.2
Frace Impurities – Magnesium (Mg)	<= 10.0 ppb	0.2
Frace Impurities – Manganese (Mn)	<= 1.0 ppb	< 0.4
race Impurities – Mercury (Hg)	<= 0.5 ppb	0.1
race Impurities – Molybdenum (Mo)	<= 10.0 ppb	< 5.0
race Impurities – Nickel (Ni)	<= 4.0 ppb	< 0.3
race Impurities – Niobium (Nb)	<= 1.0 ppb	< 0.2
race Impurities – Potassium (K)	<= 9.0 ppb	< 2.0
race Impurities - Selenium (Se), For Information Only	ppb	1.0
race Impurities - Silicon (Si)	<= 100.0 ppb	< 10.0
race Impurities – Silver (Ag)	<= 1.0 ppb	< 0.3
race Impurities – Sodium (Na)	<= 100.0 ppb	< 5.0
race Impurities – Strontium (Sr)	<= 1.0 ppb	< 0.2
race Impurities – Tantalum (Ta)	<= 1.0 ppb	< 0.2
ace Impurities - Thallium (TI)	<= 5.0 ppb	
ace Impurities – Tin (Sn)	<= 5.0 ppb	< 2.0
ace Impurities - Titanium (Ti)	<= 1.0 ppb	< 0.8
ace Impurities – Vanadium (V)	<= 1.0 ppb	0.2
ace Impurities – Zinc (Zn)	<= 5.0 ppb	< 0.2
ace Impurities – Zirconium (Zr)	<= 1.0 ppb	0.3 < 0.1

For Laboratory, Research or Manufacturing Use Product Information (not specifications): Appearance (clear, fuming liquid) Meets ACS Specifications

Country of Origin: US Packaging Site: Phillipsburg Mfg Ctr & DC

James Techie Jamie Ethier Vice President Global Quality

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700 Avantor Performance Materials, LLC 100 Matsonford Rd, Suite 200, Radnor, PA 19087. U.S.A. Phone: 610.386.1700





R-> 11/12/24 TH6126

Material No.: 9606-03 Batch No.: 24D1062002 Manufactured Date: 2024-03-26 Retest Date: 2029-03-25 **Revision No.: 0**

Certificate of Analysis

Test	Specification	Result
Assay (HNO₃)	69.0 – 70.0 %	69.7 %
Appearance	Passes Test	Passes Test
Color (APHA)	≤ 10	5
Residue after Ignition	≤ 2 ppm	1 ppm
Chloride (CI)	≤ 0.08 ppm	< 0.03 ppm
Phosphate (PO4)	≤ 0.10 ppm	< 0.03 ppm
Sulfate (SO4)	≤ 0.2 ppm	< 0.2 ppm
Trace Impurities – Aluminum (Al)	≤ 40.0 ppb	< 1.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Barium (Ba)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Boron (B)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Cadmium (Cd)	≤ 50 ppb	< 1 ppb
Trace Impurities – Calcium (Ca)	≤ 50.0 ppb	2.3 ppb
Trace Impurities - Chromium (Cr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities – Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Germanium (Ge)	≤ 20 ppb	< 10 ppb
Trace Impurities – Gold (Au)	≤ 20 ppb	< 5 ppb
Heavy Metals (as Pb)	≤ 100 ppb	100 ppb
Trace Impurities – Iron (Fe)	≤ 40.0 ppb	< 1.0 ppb
Trace Impurities - Lead (Pb)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Magnesium (Mg)	≤ 20 ppb	< 1 ppb
Trace Impurities – Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Nickel (Ni)	≤ 20.0 ppb	< 5.0 ppb

>>> Continued on page 2 >>>

Nitric Acid 69% CMOS





Material No.: 9606-03 Batch No.: 24D1062002

Test	Specification	Result	

For Microelectronic Use

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC



Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com CERTIFIED WEIGHT REPORT: Part Number: Lot Number: Description: Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number:	Setting Certified Reference Material CRM Setting National 112124 N.S. I/I/3/250/vent: 24012496 Nitric Acid Magnesium (Mg) N.S. I/I/3/250/vent: 24012496 Nitric Acid 112127 N.J. V.Y. 2% 40.0 Nitric Acid 112127 M. V.Y. 2% 40.0 Nitric Acid 112127 M. V.Y. 2% 40.0 Nitric Acid 110000 SE-05 Balance Uncertainty SE-05 Balance Uncertainty	Formulated By:
Weight shown below was diluted to (mL):	2000.07 0.100 Fask Uncertainty 2000.07 0.100 Fask Uncertainty Nominal Purthy Uncertainty Assay Target Actual Conc. (ug/mL) (%) Purthy (%) (%) Weight (g)	Expanded SDS Information Actual Uncertainty Uncertainty (Solvent Safety Info. On Attached pg.) Conc. (ug/mL) +/- (ug/mL) CAS# OSHA PEL (TWA)
1. Magnesium nitrate hexahydrate (Mg) IN030 Mgposzoza41	10000 98.999 0.10 8.51 234.9183 234.9459	20.0 13446-18-9 NA orf-rat
[1] Spectrum No.1 1.0E6	[19.923 sec];58112.D# [Count] [Linear]	
6.0 E		
m/≈-> 10 2000	20 30 40 50 6 0	70 80 90 100
1000		
m/z-> 110 2.0厘4	120 130 140 150 160	170 180 190 200
m/z-≫ 210	220 230 240 250 260	

www.absolutestandards.com Absolute Standards, Inc. 800-368-1131



Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

$ \begin{array}{c c c c c c c c c c c c c c c c c c c $	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$		-	20.02		20.05	18	<0.0Z	×	40.2	ĸ	<0.02	Nd	<0.02	Рb	<0.02	Au	<0.02	ç	<0.02	8
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{cccccccccccccccccccccccccccccccccccc$	λ.	2	2002	9 8	0.02	3 6	10.02	311	20.02	2	<0.02	MO	20.05	5	Z0102	ନ୍ନ	<0.02	S	<0.02	æ.
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	4	Zn	-0.02	2	2002	0	5	2	3	2	3		200	1 (10.02	1	10.01	Ş
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	40.02 Cd 40.02 Dy 40.02 Hf 40.02 Li 40.02 Ni 40.02 Pr 40.02 Se 40.2 Tb 40.02 W 40.02 Ca 40.2 Er 40.02 Hf 40.02 Li 40.02 Ni 40.02 Se 40.2 Tb 40.02 U 40.02 Ca 40.02 Er 40.02 Hf 40.02 Li 40.02 Re 40.02 Se 40.2 Tb 40.02 U 40.02 Ca 40.02 In 40.02 Mg T 0.8 40.02 Re 40.02 Ag 40.02 U 40.02 Ca 40.02 Ir 40.02 Mg T 0.8 40.02 Ag 40.02 Th 40.02 V 40.02 Ca 40.02 Ir 40.02 Ma 40.02 Na 40.2 Th 40.02 V 40.02 Tr 40.02 Pd 40.02 Rb 40.02 Na 40.2 <td>6</td> <td>Y</td> <td><0.02</td> <td>Tm</td> <td><0.02</td> <td>S</td> <td><0.02</td> <td>Ru</td> <td><0.02</td> <td>ŋ</td> <td>40,2</td> <td>Hø</td> <td>40.2</td> <td>21</td> <td>40.02</td> <td><u>.</u></td> <td>AD 03</td> <td>2</td> <td>100</td> <td>5</td>	6	Y	<0.02	Tm	<0.02	S	<0.02	Ru	<0.02	ŋ	40,2	Hø	40.2	21	40.02	<u>.</u>	AD 03	2	100	5
40.02 Cd 40.02 Dy 40.02 Hf 40.02 Li 40.02 Ni 40.02 Pr 40.02 Se 40.2 Th 40.02 W 40.02 Ca 40.2 Er 40.02 Hf 40.02 Li 40.02 Pr 40.02 Se 40.2 Th 40.02 W 40.02 Ca 40.2 Er 40.02 Ha 40.02 Nb 40.02 Re 40.02 Si 40.02 T 40.02 V 40.02 V	40.02 Cd 40.02 Dy 40.02 Hf 40.02 Li 40.02 Ni 40.02 Pr 40.02 Se 40.2 Tb 40.02 W 40.02 Ca 40.2 Er 40.02 Hf 40.02 Li 40.02 N 40.02 Se 40.2 Tb 40.02 U 40.02 Ca 40.02 Hr 40.02 Li 40.02 Nb 40.02 Se 40.2 Tb 40.02 U 40.02 Ca 40.02 Hr 40.02 Mg T 0s 40.02 Rb 40.02 Tb 40.02 U 40.02 Ca 40.02 In 40.02 Mg T 0s 40.02 Rb 40.02 Tb 40.02 V 40.02 Ca 40.02 In 40.02 Mg T 0s 40.02 Rb 40.02 Tb 40.02 V 40.02 Fin 40.02 Mg T 0s 40.02 Rb 40.02	. 6	IO	20.02	10	40.2	Næ	<0.02	Rb	<0.02	Pd	<0.02	Mn	<0.02	ŀ	<0.02	R	<0.02	S	<0.02	Ba
Cd CD Li <	40.02 Cd 40.02 Dy 40.02 Hf 40.02 Li 40.02 Ni 40.02 Pr 40.02 Se 40.2 Tb 40.02 W 40.02 Ca 40.2 Er 40.02 Hf 40.02 Li 40.02 Nb 40.02 Se 40.2 Tb 40.02 U 40.02 Ca 40.02 Ho 40.02 Lu 40.02 Nb 40.02 Si 40.02 Tc 40.02 U	56	ģ <	20.02		20.02	Ag	<0.02	Rb	<0.02	0s	Ţ	Mg	<0.02	In	<0.02	臣	<0.02	ŝ	<0.2	As
	<th< td=""><td>3 6</td><td>4 0</td><td>20.02</td><td>1</td><td>20.02</td><td>2</td><td>20.02</td><td>KC</td><td><0.02</td><td>NP</td><td><0.02</td><td>Lu</td><td><0.02</td><td>Но</td><td><0.02</td><td>막</td><td>40.2</td><td>C₂</td><td><0.02</td><td>SP</td></th<>	3 6	4 0	20.02	1	20.02	2	20.02	KC	<0.02	NP	<0.02	Lu	<0.02	Но	<0.02	막	40.2	C ₂	<0.02	SP
		3	; :	3	3 3	5	a g	10.02	1	0.02	1	<0.02	F	20.02	HI	20.02	Ŋ	<0.02	2	<0.02	A
		4	W	40.02	7	c (b)	S	300	Dr	3		2003	1	200							

(I) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Son P. A.

Certified by:

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* All standard containers are meticulously cleaned prior to use. the preparation of all standards.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58112 Lot # 112124

Dat # 60036 101 #	m/z->-	5.067	m/z-> 1.0⋿8	5.067	m/≥-> 1.0E8	N.5 8	5.006	1. Manganese(II) nitrate hydrate (Mn)	Weight sh Compound	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number:	CERTIFIED WEIGHT REPORT: Part I Lot Des	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
Lot # 101124	Ņ		110		10		[1] Spectrum No.1		Weight shown below was diluted to (mL): Lot RM# Number	Expiration Date: Recommended Storage: Il Concentration (µg/mL): NIST Test Number:	<u>Part Number:</u> Lot Number: Description:	s, Inc.
	N N O		120		0 0			A1		õ	58025 101124 Manganese (Mn)	
	N. 0		100		۵ Ö		[34.243 sec]:57025.D# [Count] [Linear]	1000 99.999	4000.2 0.10 Fit Nominal Purity U Cone. (ug/mL) (%) F	Ś	R-71/13/2& Solvent:	Се
_	N 4 0		140		4 0		25.D# [Count]	0.10 20.8	0.10 Flask Uncertainty Purity Uncertainty Assay (%) Purity (%) (%)	SE-05 Balance Uncertainty		rtified Referen
1 of 2	260 260		150 160		0. 0.		[Linear]		Target Actual Weight (g) Weight (g)	(mL) Nitric Acid	46	Certified Reference Material CRM
			170		70				Actual Conc. (ug/mL)	(M
Prin			180		8			2.0 15710-66-4	Expanded Uncertainty (SolVe +/- (µg/mL) CAS#	Pormulated by:	Giovannie	
Printed: 1/10/2025, 4:51:16 PM			190		80			5 mg/m3	SDS Information (Solvent Safety Info. On Attached pg.) S# OSHA PEL (TWA) LD50	Pedro L. Rentas	Especite	ANA AR- https:
:51:16 PM			N 0 0		100			orl-rat >300mg/kg	ttion Attached pg.) LD50	101124		ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
								g 3132	NIST	<u>1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 </u>		Accredited e Number Jards.com

www.absolutestandards.com	800-368-1131	Absolute Standards,
		Inc.





Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Г							Trace Mo	etals	Verifica	ition	by ICP-	Ś	(µg/mL)						
	3	2	2000		200		200												
Al	<0.02	8	<0.02	Ðy	<0.02	Hf	<0.02	5	<0.02	N	<0.02	Ŗ	<0.02	Se	40.2	ТЪ	<0.02	W	<0.02
Sb	<0.02	Q	<0.2	Ę	<0.02	Ho	<0.02	Ę	<0.02	N	<0.02	Re	<0.02	S	<0.02	Te	<0.02	C	<0.02
As	<0.2	ଚ	<0.02	Eu	<0.02	In	<0.02	Mg	<0.01	°s	<0.02	RJ.	<0.02	Ag	<0.02	Ξ	<0.02	<	<0.02
Ba	<0.02	Ç	<0.02	ଜୁ	<0.02	F,	<0.02	Mn	Н	Pd	<0.02	Rb	<0.02	Na	<0.2	П	<0.02	Υ _b	<0.02
Be	<0.01	ភ្	<0.02	ဌ	<0.02	Fe	<0.2	Hg	<0.2	Ψ	<0.02	Ru	<0.02	Sr	<0.02	Tm	<0.02	×	<0.02
Bi	<0.02	S	<0.02	ନ୍ଚ	<0.02	La	<0.02	Mo	<0.02	P	<0.02	Sm	<0.02	s	<0.02	Sn	<0.02	Zn	<0.02
в	<0.02	Q	<0.02	Au	<0.02	РЬ	<0.02	Nd	<0.02	ĸ	<0.2	Sc	<0.02	Ta	<0.02	E	<0.02	Zr	<0.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

for P. S.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58025 Lot # 101124

_				/			1. Sodium nitrate (Na)	Compound	Description: Expiration Date: Recommended Storage: Nominal Concentration (µg/mL): NIST Test Number: Weight shown below wa	CERTIFIED WEIGHT REPORT: Part Numbei Lot Numbei	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com
m/z->	N 0 11 0	m/z-≻ 5.0E6	N.5 6	m/z-> 5.0∈6	2.5E5	5.0E5	trate (Na)	đ	Description: Sodium (Expiration Date: 12226 Recommended Storage: Ambient (2 I Concentration (µg/mL): 10000 NIST Test Number: 6UTB Weight shown below was dliuted to (mL):	<u>VEIGHT RE</u> Part I Lot I	standards.c
						[1] Spec	=		Description: Expiration Date: nended Storage: ntration (µg/mL): htration (µg/mL): T Test Number: ST Test Number:	HT REPORT: Part Number: Lot Number:	om
0		110		10		[1] Spectrum No.1	IN036 NAV01201511	Lot RM# Number	Sodiur 12226 Ambien 10000 6UTB 6UTB	<u>58111</u> 122223	
N N O		120		N. O		-				23	V
230		130		а О			10000 99.999	Nominal Purity Conc. (µg/mL) (%)	5) 3000.4 0.06		RIO
		and here and				8.935 sec]:58111.D# [Count] [Linear]	999 0.10	ity Uncertainty) Purity (%)	2% 5E-05 Balance Uncertainty 0.06 Flask Uncertainty		Certi
240		140		6		.D# [Cot	26.9	Assay (%)	2% ncertainty ertainty	Solvent:	ified Refu
N U O		150		Ö		unt) [Line	111.5406	Target Weight (g)	60.0 (mL)	Lot # 24002546	erence Mi MSR 0
280		160		0 O		ar]	111.5479	Actual Weight (g)	Nitric Acid	Nitric Acid	Certified Reference Material CRM 5 124 MSR06 MS
				N			10000.7	Actual Conc. (µg/mL)		3	RM 5807
		170		70			20.0	Expanded Uncertainty +/- (µg/mL)	Formulated By:	Allea	
		180		80			7631-99-4	0	By:	aha	
		190		80			5 mg/m3	SUS information (Solvent Safety Info. On Attached pg.) AS# OSHA PEL (TWA) LD50	Aleah O'Brady	Brad	×
		200		100				SUS Information afety Info. On Atta OSHA PEL (TWA)	ady C	All I	ANAB AR-1 https:///
		ŏ		ŏ			orl-rat 3430 mg/kg	ached pg.) سەءە	122223		ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com
							9/kg 3152a	NIST	223		4 Accred cate Num andards.c

-

Printed: 12/29/2023 2:56:20 PM	Printed: 12/2					2 of 2							2223	Lot # 122223		# 58111	Part #
	r sed in	The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).	nts unless oth ity raw materi e to NIST (see the Uncertaint , D.C. (1994).	ements purity ; eable to ing the gton, D.	The certified value is the concentration calculated from gravimetric and volumetric measureme Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest puri the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing t Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington,	and the and the ith weig ated. atory co atory co flice,	The certified value is the concentration calculated from gravimetric and volume Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with w Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. All Standards should be stored with caps tight and under appropriate laboratory Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating a Measurement Result," NIST Technical Note 1297, U.S. Government Printing Offi	avimetri ass A g are cali are cali ppropria ernmen	from gra rated Cl ior to us ces that lue, unle under a J.S. Gov	ulated er, calib er, calib er, calib er, calib g baland g baland g baland ght and ght and 1297, L	tion calc zed wat ally usin ally usin of the st and Ku al Note	ncentra ards. meticule 0.5% c 0.5% c lor, B.N Technic	The certified value is the concentration calculated from gravi Purified acids, 18.2 megohm deionized water, calibrated Clas the preparation of all standards. All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that ar Standards are certifed (+/-) 0.5% of the stated value, unless All Standards should be stored with caps tight and under app Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelin Measurement Result," NIST Technical Note 1297, U.S. Gover	value i s, 18.2 ion of e prepa e certifi e certifi Referen it Result	certified preparat preparat dards ar dards ar dards ar tandards suremen	* The * Purif * All s * Stan Mea:	
Certified by:	e e							standard.	on of this	reparati	ed in the j	ts observ	Physical Characterization: Homogeneity: No heterogeneity was observed in the preparation of this standard.	o heterog	Physical Characterization: Homogeneity: No heterogeneity v	Physi Homog	
	-				alyte	(T) = Target analyte	= (T)										
2 2 × 3 < c *	40.02 40.02 17 40.02 17 17 17 17 17 17 17 17 17 17	Ta Sr			402 402 402 402 402 402 402 402 402 402	P P OS NN		Man Lu Mag	4 4 4 4 4 4 4 4 4 5 5 5 5 5 5 5 5 5 5 5	で で で で で ま ま ま ま ま ま ま ま ま ま ま ま ま	4 4 4 4 4 4 5 8 8 8 8 8 8	e e e e e e e	40.02 40.02 40.02 40.02	5 S C C S S S	40.02 40.02 40.02 40.02	Bi Bi	
			(ua/ml)	ומ	rometry (ICP-MS): Verification by ICP-M	ry (ICP		ass Spect Metals	asma Ma Trace	pled Pla	aly Cou	ductiv	sis by In	Analys	umenta	Instra	
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	*			al CRM	Certified Reference Material C	ference	tified Re	Cen					s, Inc.	ards.con	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	Absolute (800-368-1131 www.absolute	800 WWW

Certificate of Analysis M5738 M&739 M5740 MS741 M5742 Refine your results. Redefine your industry.

VENTURES

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

M5743

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 **ACCREDITATION / REGISTRATION**

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).

A: 4/11/22



2.0 **PRODUCT DESCRIPTION**

Product Code:	Multi Analyte Custom Grade Soluti	on
Catalog Number:	6020ISS	
Lot Number:	\$2-MEB709511	
Matrix:	7% (v/v) HNO3	
Value / Analyte(s):	10 μg/mL ea:	
	Bismuth,	Holmium,
	Indium,	6-Lithium,
	Rhodium,	Scandium,
	Terbium,	Yttrium

3.0 **CERTIFIED VALUES AND UNCERTAINTIES**

ANALYTE 6-Lithium, Li6	CERTIFIED VALUE 10.00 ± 0.03 µg/mL	ANALYTE Bismuth, Bi	CERTIFIED VALUE 10.00 ± 0.05 µg/mL
Holmium, Ho	10.00 ± 0.05 µg/mL	Indium, In	10.00 ± 0.04 µg/mL
Rhodium, Rh	10.00 ± 0.07 µg/mL	Scandlum, Sc	10.00 ± 0.04 µg/mL
Terbium, Tb	10.00 ± 0.04 µg/mL	Yttrium, Y	10.00 ± 0.04 µg/mL

Density:

1.035 g/mL (measured at 20 ± 4 °C)

Assay Information:

ANALYTE Bi	METHOD ICP Assay	NIST SRM# 3106	SRM LOT# 180815
Bi	Calculated		See Sec. 4.2
Но	ICP Assay	3123a	090408
Но	EDTA	928	928
In	ICP Assay	3124a	110516
In	EDTA	928	928
In	Calculated		See Sec. 4.2
Li6	Gravimetric		See Sec. 4.2
Rh	ICP Assay	3144	070619
Sc	ICP Assay	3148a	100701
Sc	EDTA	928	928
Тb	ICP Assay	3157a	100518
Tb	EDTA	928	928
Тb	Calculated		See Sec. 4,2
Y	ICP Assay	3167a	120314
Y	EDTA	928	928
Y	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods	Characterization of CRM/RM by One Method
Certified Value, X _{CRWRM} , where two or more methods of characterization are used is the weighted mean of the results:	Certified Value, X _{CRMRM} , where one method of characterization is used is the mean of individual results:
X _{CRM/RM} = Σ(w _i) (X _i) X _i = mean of Assay Method I with standard uncertainty u _{char} i w _i ≃ the weighting factors for each method calculated using the inverse square of the variance: w _i = (1/u _{char}) ² / (Σ(1/u _{char}) ²)	$X_{CRM/RM} = \{X_a\} (u_{cher} a)$ $X_a = mean of Assay Method A withu_{cher} a = the standard uncertainty of characterization Method A$
$w_{1} = (1)^{1/2} char i^{1/2} (2(1)^{1/2} char i^{1/2})$ CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k (u ² _{char} + u ² _{bb} + u ² _{lts} + u ² _{ts}) ^{1/2} k = coverage factor = 2 u _{char} = (E((w)) ² (u _{char}) ²)] ^{1/2} where u _{char} i are the errors from each characterization method u _{bb} = bolte to bottle homogeneity standard uncertainty u _{lts} = long term stability standard uncertainty u _{bb} = transport stability standard uncertainty	CRM/RM Expanded Uncertainty (±) = U _{CRM/RM} = k ($u^2_{char a} + u^2_{bb} + u^2_{fts} + u^2_{ts}$) ^{1/2} k = coverage factor = 2 u _{char a} = the encus from characterization u _{bb} = bottle to bottle homogeneity standard uncertainty u _{fts} = long term stability standard uncertainty (storage) u _{tts} = transport stability standard uncertainty
ertified Abundance:	
We Certified Abundance	

	1.4	э	CEI	unea	Moundance	
te	m					Δt.

Isotope	Atom %
Lithium Li6	95.6 ± 0.3
Lithium Li7	4.4 ± 0.1

4.0 **TRACEABILITY TO NIST**

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit www.inorganicventures.com/TCT

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

September 03, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- September 03, 2026

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRWRM can be supported by long term stability studies conducted on properly stored and handled CRWRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Michael Booth Director, Quality Control

Michael 2 Bath

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Paul R Laine

RD: 07/14/2022



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-MS ICS

QATS LABORATORY INORGANIC REFERENCE MATERIAL INTERFERENCE CHECK SAMPLE SET FOR ICP-MS (ICSA WITH ICSB)

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION: For use with the CLP SFAM01.0 SOW and revisions.

CAUTION: Read instructions carefully before opening bottle(s) and proceeding with the analyses.

Contains Heavy Metals HAZARDOUS MATERIAL

Safety Data Sheets Available Upon Request

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more bottles of an Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-0803" and for the ICSAB mixture use "ICSA-0803+ICSB-0803".

<u>CAUTION</u>: The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.**

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to the Contracting Officer, Ross Miller at <u>miller.ross@epa.gov</u>. If directed by Ross Miller, return the chain of custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY APTIM Federal Services, LLC 2700 Chandler Avenue - Building C Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

This interference check sample set is to be used to verify elemental isobaric correction factors of inductively coupled plasma-mass spectrometers (ICP-MS). This reference material set consists of two (2) concentrated solutions. The ICSA solution contains several interferent elements and species; for a complete listing refer to the CLP SOW. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, TI, Se, V, and Zn. This instruction sheet provides the nominal values for the ICP-MS ICS Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:



Page 1 of 2



ICSB: M5874

ICSA-0803, Inferferents: Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO₃. Analyze this solution by ICP-MS.

ICSB-0803, Analytes, mixed with ICSA-0803, Interferents: Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO₃. Analyze this ICSAB solution by ICP-MS.

(D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-MS ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

	Table 1.		VALUES" FOF 303, AND ICSA				MS
Element	CRQL	Part A (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)	Part A +Part B (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)
AI	20.0	[100000]			[100000]		
Sb	2.0	(1.5)	-2.5	5.5	(22.0)	18.0	26.0
As	1.0	(0.1)	-1.9	2.1	19.0	16.2	21.9
Ba	10.0	(1.2)	-18.8	21.2	(22.0)	2.0	42.0
Be	1.0	(0)	-2.0	2.0	19.0	16.2	21.9
Cd	1.0	(0.7)	-1.3	2.7	20.0	17.0	23.0
Ca	500	[100000]			[100000]		
С		[200000]			[200000]		
CI		[1000000]			[1000000]		
Cr	2.0	(21.0)	17.0	25.0	40.0	34.0	46.0
Co	1.0	(1.0)	-1.0	3.0	20.0	17.0	23.0
Cu	2.0	(8.0)	4.0	12.0	(25.0)	21.0	29.0
Fe	200	[100000]			[100000]		
Pb	1.0	(4.0)	2.0	6.0	25.0	21.3	28.8
Mg	500	[100000]			[100000]		
Mn	1.0	(7.0)	5.0	9.0	27.0	23.0	31.1
Мо		[2000]			[2000]		
Ni	1.0	(6.0)	4.0	8.0	24.0	20.4	27.6
Р		[100000]			[100000]		
K	500	[100000]			[100000]		
Se	5.0	(0.3)	-9.7	10.3	(19.0)	9.0	29.0
Ag	1.0	(0)	-2.0	2.0	18.0	15.3	20.7
Na	500	[100000]			[100000]		
S		[100000]			[100000]		
TI	1.0	(0)	-2.0	2.0	21.0	17.9	24.2
Ti		[2000]			[2000]		
V	5.0	(0.5)	-9.5	10.5	(19.0)	9.0	29.0
Zn	5.0	(11.0)	1.0	21.0	(29.0)	19.0	39.0

[] Indicates analytes that do not require ICP-MS determination in the ICS.

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value \pm 2 times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value \pm 15 percent of the listed certified value.

ICSA: M5873

RD: 07/14/2022



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-MS ICS

QATS LABORATORY INORGANIC REFERENCE MATERIAL INTERFERENCE CHECK SAMPLE SET FOR ICP-MS (ICSA WITH ICSB)

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION: For use with the CLP SFAM01.0 SOW and revisions.

CAUTION: Read instructions carefully before opening bottle(s) and proceeding with the analyses.

Contains Heavy Metals HAZARDOUS MATERIAL

Safety Data Sheets Available Upon Request

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more bottles of an Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-0803" and for the ICSAB mixture use "ICSA-0803+ICSB-0803".

<u>CAUTION</u>: The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.**

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to the Contracting Officer, Ross Miller at <u>miller.ross@epa.gov</u>. If directed by Ross Miller, return the chain of custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY APTIM Federal Services, LLC 2700 Chandler Avenue - Building C Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

This interference check sample set is to be used to verify elemental isobaric correction factors of inductively coupled plasma-mass spectrometers (ICP-MS). This reference material set consists of two (2) concentrated solutions. The ICSA solution contains several interferent elements and species; for a complete listing refer to the CLP SOW. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be, Cd, Co, Cr, Cu, Mn, Ni, Pb, TI, Se, V, and Zn. This instruction sheet provides the nominal values for the ICP-MS ICS Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:



Page 1 of 2



ICSB: M5874

ICSA-0803, Inferferents: Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO₃. Analyze this solution by ICP-MS.

ICSB-0803, Analytes, mixed with ICSA-0803, Interferents: Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 1% v/v HNO₃. Analyze this ICSAB solution by ICP-MS.

(D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-MS ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

	Table 1.		VALUES" FOF 303, AND ICSA				MS
Element	CRQL	Part A (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)	Part A +Part B (µg/L)	Lower Limit (µg/L)	Upper Limit (µg/L)
AI	20.0	[100000]			[100000]		
Sb	2.0	(1.5)	-2.5	5.5	(22.0)	18.0	26.0
As	1.0	(0.1)	-1.9	2.1	19.0	16.2	21.9
Ba	10.0	(1.2)	-18.8	21.2	(22.0)	2.0	42.0
Be	1.0	(0)	-2.0	2.0	19.0	16.2	21.9
Cd	1.0	(0.7)	-1.3	2.7	20.0	17.0	23.0
Ca	500	[100000]			[100000]		
С		[200000]			[200000]		
CI		[1000000]			[1000000]		
Cr	2.0	(21.0)	17.0	25.0	40.0	34.0	46.0
Co	1.0	(1.0)	-1.0	3.0	20.0	17.0	23.0
Cu	2.0	(8.0)	4.0	12.0	(25.0)	21.0	29.0
Fe	200	[100000]			[100000]		
Pb	1.0	(4.0)	2.0	6.0	25.0	21.3	28.8
Mg	500	[100000]			[100000]		
Mn	1.0	(7.0)	5.0	9.0	27.0	23.0	31.1
Мо		[2000]			[2000]		
Ni	1.0	(6.0)	4.0	8.0	24.0	20.4	27.6
Р		[100000]			[100000]		
K	500	[100000]			[100000]		
Se	5.0	(0.3)	-9.7	10.3	(19.0)	9.0	29.0
Ag	1.0	(0)	-2.0	2.0	18.0	15.3	20.7
Na	500	[100000]			[100000]		
S		[100000]			[100000]		
TI	1.0	(0)	-2.0	2.0	21.0	17.9	24.2
Ti		[2000]			[2000]		
V	5.0	(0.5)	-9.5	10.5	(19.0)	9.0	29.0
Zn	5.0	(11.0)	1.0	21.0	(29.0)	19.0	39.0

[] Indicates analytes that do not require ICP-MS determination in the ICS.

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value \pm 2 times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value \pm 15 percent of the listed certified value.

ICSA: M5873

	1.057	2.0年7	m/z->	р. С. С. С.	5.0 E	7/2->	N 0 0	5.0E5	1. Antimony (Sb)	Compound	Volume shown below was diluted to (mL):	NIST Test Number:	Recommended Storage: Nominal Concentration (µg/mL):	Expiration Date:	Part Number: Lot Number: Description:	CERTIFIED WEIGHT REPORT:	800-368-1131 www.absolutestandards.com
)			110			10		[1] Spectrum No.1	58151	Part Number	lip sam mo	ber	nL):	ate:	on:		
			12.			NO		40.1	1 100923	Lot r Number	uted to (mL)	6UTB	Ambient (20 °C) 1000	120526	57051 120523 Antimony (Sb)		
									0.1000	Dilution Factor	: 3000.41		20 °C)		w (Sb)		Ri
			130			30		39C]:58	300.0	Initial Vol. (mL)		5E-05					Certifi (0 1) 03 (2 4
:			140			\$ 0		051.D#	0.084	Uncertainty) Pipette (mL)		Balance Uncertainty				ł	Certified
			1 80			50		17.964 sec]:58051.D# [Count] [Línear]	1000	Nominal	unty	rteintv		2.0%	24002546	Lot #	Certified Reference Material CRM (芝り MS802 Mら
						Ö		_(near]	10001.4	Initial) Conc. (µg/ml				(mL)	Nitric Acid	Solvent:	nce Material
			180			80			1000.0	Final nL) Conc. (µg/mL)				Nitric Acid			CRM
			170			70			0 2.1	Expanded Uncertainty mL) +/- (µg/mL)		Reviews	K	id Formulated By:			UU UU
			180			80			7440-36-0	Ĕ	an of		20	ited By:	Ferre		
			190			0				Solvent Sa CAS# OSH/		Pertr	the second	Lawr	and b		V
						A. and A. and A. and A.			0.5 mg/m3	SDS Information nt Safety Info. On Attac OSHA PEL (TWA)		o I Rentas	SA)	Lawrence Barry	De		Alv AR https
			200			100			orl-rat 7000 mg/kg	SDS Information (Solvent Safety Info. On Attached pg.) # OSHA PEL (TWA) LD50							ANAB ISO 1:/034 Accreated AR-1539 Certificate Number https://Absolutestandards.com
) mg/kg 3102a) NIST	120020	120523		120523			tificate l standar

www.absolutestandards.com 800-368-1131 Absolute Standards, Inc.



Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							I race M	etals	Verifica	tion	by ICP-N	IS (II)	g/mL)						
A	B	2	202	2	-	1	MILLION CONTRACTOR	Manual	AND IN THE OWNER.						Contraction of the local division of the loc	CONTRACTO	AL INCOME IN		
2	20.02	5	20.02	Dy	40.02	Hf	40.02	E	<0.02	Ni	40.02	7	20.02	Se	<0.2	7	400	W	200
SB		ۍ	4	ដ	2003	Ľ,	ŝ	4	2	1		1			1012		10.02	**	20.02
	5,			1	20.00	CR1	70.02	L	20.02	NP	40.02	Re	40.02	2	40.02	P	20102	9	4000
202	202	ß	20.02	ñ	40.02	5	A ,92	M	40,01	õ	4002	R.	23	A.	2003	3	3	4	
B	2020	ç	33	5	5	ľ	3	5,		!		-	mot on	94.	TNN		20.02	~	20.02
1		u g	10.01	ę	70.02	-	20.05	MD	20.02	Pd	40.02	8	40.02	Za	A	þ	40.02	Ş	3
De	1000	ç	40,02	ନ୍ଥ	40,02	4	402	He	A 12	Ð	300	2	33	n'	3	1	3	: :	
<u>H</u>	43	3	3	P	3	4						111	700.00	ġ	20.02	101	<u.u2< td=""><td>1</td><td>20.02</td></u.u2<>	1	20.02
		1	20.02	G	20.05	5	20.02	Mo	40.02	7	0 02	S	40.02	6	AN 03	3	33	7	3
G	SUUS	ç	A .02	Au		y	A B	K	200	4	5	2	5	3,			10.00	1	70.02
				I					NAL ON	ļ	44	Ŕ	20.02	12	20.02	11	40.02	2	20.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

for P. A.

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57051 Lot # 120523

N 55 10 0	m/z-> 110 5.0E6	រា .0 ៣ ភា	m/≥-> 10	ហ .0 ៣ ៥	[1] Spectrum No.1 1.0E7	1. Silver nitrate (Ag)	Compound	Part Number: 57047 Lot Number: 122823 Description: Silver (A Description: Silver (A Expiration Date: 122826 Recommended Storage: Ambient (; Nominal Concentration (µg/mL): 1000 NIST Test Number: 6UTB Weight shown below was diluted to (mL):	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com CERTIFIED WEIGHT REPORT:
	120		N.		-	5 J0612AGA1	Lot Nor RM# Number Conc. (57047 122823 Silver (Ag) 122826 Ambient (20 Ambient (20 1000 6UTB 6UTB	-
	130 140		90 40		14.044 sec]:58147.D# [Count] [Linear]	88.8988 0.10	Nominal Purity Uncertainty Assay Conc. (Jug/mL) (96) Purity (96) (96)	*C) 5E-05 Balance Uncertainty	Certified I R 1 8 5 2 4
	1 ភូ- O		50		[Count] [Linear]	6.27992	Target Weight (g)	n t: 24002546 2% 80.0 (mL)	Certified Reference Material
	160 170		60 70			1000.0	Actual Actual U Weight (g) Conc. (µg/mL) +	Nitric Acid	rial CRM M6030
	180		80			2.0 7761-88-8	Expanded Uncertainty (Solv +/- (µg/mL) CAS#	ad By:)30
	190 200		90 100			10 ug/m3	SDS Information (Solvent Safety Info. On Attached pg.) # OSHA PEL (TWA) LD51	Benson Chan Pedro L. Rentas	http
	ŏ		ŏ				n ached pg.) NIST LD50 SRM	122823	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Part # 57047 Lot # 122823

1 of 2

Printed: 8/1/2024, 2:13:15 PM

≤ ∞





Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

								-lecais	VCITICA		by ICFT	SIC 1	hailer						
			The shares	A COLUMN	Contraction of the	State of	UNIX 2 COL	18 - ¹ 19		100	The state of the state		1.40 . 10 . 10 . 10 E	No.		No.			
A	<0.02	8	<0.02	Dy	<0.02	Hf	<0.02	5	<0.02	N	<0.02	7	<0.02	Se	<0.2	ТЪ	<0.02	W	<0.02
Sb	<0.02	ß	<0.2	막	40.02	Но	<0.02	Lu	<0.02	ĥ	<0.02	Re	<0.02	<u>8</u>	<0.02	Te	<0.02	q	<0.02
As	4 0.2	ĉ	<0.02	땹	<0.02	h	<0.02	Mg	<0.01	õ	<0.02	Rh	<0.02	Ag	T	1	<0.02	<	<0.02
Ba	<0.02	S	<0.02	ନ୍ଥ	<0.02	Ħ	<0.02	Mn	<0.02	Pd	<0.02	Rb	<0.02	Na	<0.2	Ţ	<0.02	YЪ	<0.02
Be	<0.01	Ω	<0.02	ଦ୍ଧ	<0.02	Fe	<0.2	Hg	40.2	p	<0.02	Ru	<0.02	ş	<0.02	Tm	<0.02	×	<0.02
B	<0.02	S	<0.02	ନ୍ନ	<0.02	L	<0.02	Mo	<0.02	Ŗ	<0.02	Sm	<0.02	Ś	<0.02	Sh	<0.02	2	<0.02
μ.	<0.02	ß	<0.02	Au	<0.02	Pb	<0.02	Nd	<0.02	K	40 2	Ş	<0.02	Ta	<0.02	Ð	<0.02	2	<0.02

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Physical Characterization:

(T)= Target analyte

Certified by:

In & She

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above)

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Certificate of Analysis

R: 8/5/24 M6019

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:	Single Analyte Custom Grade Solution
Catalog Number:	CGSR1
Lot Number:	U2-SR730227
Matrix:	0.1% (v/v) HNO3
Value / Analyte(s):	1 000 μg/mL ea: Strontium
Starting Material:	SrCO3
Starting Material Lot#:	M2-2192
Starting Material Purity:	99.9993%
CERTIFIED VALUES AN	ID UNCERTAINTIES

Certified Value:	1001 ± 3 µg/mL
Density:	1.000 g/mL (measured at 20 \pm 4 °C)

Assay Information:

3.0

Assay Method #1	998 ± 4 μg/mL ICP Assay NIST SRM Traceable to 3153a Lot Number: K2-SR650985
Assay Method #2	1001 ± 3 μg/mL EDTA NIST SRM 928 Lot Number: 928
Assay Method #3	1001 ± 2 µg/mL Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

$X_{CRM/RM} = \Sigma(w_i) (X_i)$

- X_i ≃ mean of Assay Method i with standard uncertainty u_{char} i w_i = the weighting factors for each method calculated using the inverse square of the variance:
 - $w_{i} = (1/u_{char\,i})^{2} / (\Sigma(1/(u_{char\,i})^{2})$

CRM/RM Expanded Uncertainty (±) = U_{CRM/RM} = k ($u^2_{cher} + u^2_{bb} + u^2_{lts} + u^2_{ts}$)^{1/2} k = coverage factor = 2 $u_{cher} = [Z(w_i)^2 (u_{char} i)^2]$ ^{1/2} where u_{char} i are the errors from each characterization method u_{bb} = bottle to bottle homogeneity standard uncertainty

bb - boute to outer homogeneity sandard uncertainty utrs = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

Characterization of CRM/RM by One Method

Certified Value, $X_{CRMRM},$ where one method of characterization is used is the mean of individual results:

 $X_{CRM/RM} = (X_n) (u_{char e})$ $X_n = mean of Assay Method A with$ $<math>u_{char a} =$ the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = U_{CRM/RM} = k ($u^2_{char a} + u^2_{bb} + u^2_{tts} + u^2_{ts}$)^{1/2} k = coverage factor = 2 uchar a = the errors from characterization u_{bb} = bottle to bottle homogeneity standard uncertainty u_{its} = long term stability standard uncertainty (storage) u_{its} = transport stability standard uncertainty

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

м	Ag	<	0.001980	М	Eu	<	0.000495	0	Na		0.000200	М	Se	<	0.013862	0	Zn		0.000143
0	A		0.000370	0	Fe		0.000410	М	Nb	<	0.000495	i	Si	<		М	Zr	<	0.000495
М	As	<	0.000495	М	Ga	<	0.000495	М	Nd	<	0.000495	М	Sm	<	0.000495				
М	Au	<	0.000989	М	Gd	<	0.000495	0	Ni	<	0.007631	М	Sn	<	0.000990				
М	в	<	0.039606	М	Ge	<	0.000495	М	Os	<	0.000494	s	Sr	<					
М	Ba		0.006486	М	Hf	<	0.000495	i –	Р	<		М	Та	<	0.000495				
М	Be	<	0.000990	M	Hg	<	0.000989	М	Pb	<	0.002970	М	Tb	<	0.000495				
М	Bi	<	0.000495	М	Но	<	0.000495	М	Pd	<	0.003957	М	Те	<	0.027724				
0	Ca		0.004255	М	In	<	0.000495	М	Pr	<	0.000495	M	Th	<	0.000990				
М	Cd		0.001339	Μ	lr	<	0.000494	М	Pt	<	0.002970	М	Ti	<	0.005940				
М	Ce	<	0.004950	0	к	<	0.008184	М	Rb	<	0.002970	М	TI	<	0.000495				
М	Со	<	0.000495	М	La	<	0.000495	М	Re	<	0.000495	М	Tm	<	0.000495				
0	Cr	<	0.003207	0	Li	<	0.000884	0	Rh	<	0.012829	М	U	<	0.001485				
М	Cs	<	0.000990	М	Lu	<	0.002970	М	Ru	<	0.000989	М	V	<	0.001980				
М	Cu		0.000099	0	Mg		0.000064	i	s	<		М	W	<	0.003960				
М	Dy	<	0.000495	0	Mn		0.000066	М	Sb	<	0.014852	0	Y	<	0.000995				
М	Er	<	0.000495	М	Мо	<	0.001980	М	Sc	<	0.001980	М	Yb	<	0.000495				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM[™]) see the Limited License to Use PCRM[™] in the Inorganic Ventures Terms and Conditions of Sale. <u>https://www.inorganicventures.com/terms-and-conditions-sale</u>. The Terms and Conditions contain information on the use of materials traceable to PCRM[™] certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between $4^{\circ} - 24^{\circ}$ C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 87.62 +2 6 Sr(H2O)6+2 Chemical Compatibility - Soluble in HCI, and HNO3. Avoid H2SO4, HF and neutral to basic media. Stable with most metals and inorganic anions forming insoluble silicate, carbonate, hydroxide, oxide, fluoride, sulfate, oxalate, chromate, arsenate and tungstate in neutral aqueous media.

Stability - 2-100 ppb levels stable for months in 1% HNO3 / LDPE container. 1-10,000 ppm solutions chemically stable for years in 1 - 3.5% HNO3 / LDPE container.

Sr Containing Samples (Preparation and Solution) -Metal (Best dissolved in diluted HNO3); Ores (Carbonate fusion in Pt0 followed by HCl dissolution); Organic Matrices (Dry ash and dissolution in dilute HCl).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

		1. Y	
Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 88 amu	1200 ppt	N/A	72Ge16O, 176Yb+2,
			176Lu+2 , 176Hf+2
ICP-OES 407.771 nm	0.0004 / 0.00006 µg/mL	1	U, Ce
ICP-OES 421.552 nm	0.0008 / 0.00004 µg/mL	1	Rb
ICP-OES 460.733 nm	0.07 / 0.003 µg/mL	1	Се

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; Inorganicventures.com; info@inorganicventures.com

CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY 11.0

11.1 Certification Issue Date

March 03, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- March 03, 2028

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

NAMES AND SIGNATURES OF CERTIFYING OFFICERS 12.0

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

BD9784.

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Printed: 9/21/2022, 11:20:01 PM	1 of 2			Part # 56138 Lot # 082922
20 0	250	240	220 230	m/z-> 210
				N 07 5 О П П О О
160 170 180 190 200	150 10	0 140	120 130	m/z-> 110
				5. 0 E 5
60 70 80 90 100	50	40	20 30	m/z-> 10
				₽.5E6
	unt] [Linear]	14.495 sec]:58138.D# [Count] [Linear]	_	[1] Speatrum No.1 5.0E6
10000.1 20.0 10042-76-9 NA orf-rat >2000mg/kg 3		99.997 0.10	7 SRZ022018A1	trate (Sr)
Expanded SDS Information Actual Actual Uncertainty (Solvent Safety Info. On Attached pg.) NIST Weight (g) Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA) LD50 SRM	Target Weight (g)		Lot Nominal RM# Number Conc. (µg/mL)	Compound
Reviewed By: Pedro L. Rentas 082922		5E-05 Balance Uncertainty 0.058 Flask Uncertainty	6018 diluted to (mL): 1000.12	Weight shown below was diluted to (mL):
Nuic Acid Formulated by: Lawrence barry 082922	(mL)	6 1	082925 Ambient (20 °C) 10000	Expiration Date: Recommended Storage: Nominal Concentration (µg/mL):
Advance Bary	20510011	Solvent:	<u>56138</u> <u>082922</u> <u>Strontium (Sr)</u>	Part Number: Lot Number: Description:
I CRM ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	Certified Reference Material CRM いまま いまま	Certified Ref এ৯।।১।২३ শ	R:	Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com CERTIFIED WEIGHT REPORT:

vww.absolutestandards.com	300-368-1131	\bsolute Standards,
		nc



Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							race Me	tais	Verifica	TION	by ICP-	MC (/Jm/b/						
					10-31										10 T		ALC: NO		No. of Concession, No. of Conces
AI	<0.02	Cd	<0.02	Dy	<0.02	Hf	<0.02	Ε.	40.02	<u>N</u>	<0.02	Pr	<0.02	Se	<0.2	ТЪ	<0.02	W	<0.02
SР	<0.02	Ca	<0.2	막	<0.02	Но	<0.02	Lu	<0.02	ß	<0.02	Re	<0.02	ŝ	<0.02	Te	△ .02	q	<0.02
As	<0.2	ĉ	<0.02	E	<0.02	ľ	<0.02	Mg	<0.01	õ	<0.02	Rh	<0.02	Ag	<0.02	H	<0.02	<	<0.02
Ba	<0.02	ß	<0.02	ନ୍ଦ	<0.02	F	<0.02	M'n	<0.02	Pd	<0.02	RЬ	<0.02	Na	<0.2	Ţ	<0.02	YЪ	<0.02
Be	<0.01	Ω	<0.02	Ga	<0.02	F	<0.2	Hg	<0.2	P	<0.02	Ru	<0.02	Sr	Ţ	Tm	<0.02	¥	<0.02
Bi	<0.02	ĉ	<0.02	Ge	<0.02	La	<0.02	Mo	<0.02	Ŗ	<0.02	Sm	<0.02	s	<0.02	Sn	<0.02	Zn	<0.02
в	<0.02	Cu	<0.02	Au	<0.02	РЪ	<0.02	Nd	<0.02	ĸ	<0.2	Sc	<0.02	Ta	<0.02	E	<0.02	Zr	<0.02

Homogeneity: No heterogeneity was observed in the preparation of this standard.

(T)= Target analyte

Physical Characterization:

Certified by:

Sur & Sur

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.
 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST
 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 56138 Lot # 082922

Absolute standards, Inc. 800-368-1131 www.absolutestandards.com	CERTIFIED WEIGHT REPORT: Part N Lot N Desc	Expiration Date: Recommended Storage:	NIST Te	Weight showr	Compound		2.0 円の	1.0巨6	TTVZ->>	1.0巨4	0 0 0	m/z->-	1.0匹色	5.0 E5	mvz->
	<u>PORT:</u> Part Number: Lot Number: Description:	Expiration Date: nended Storage:	NIST Test Number:	Weight shown below was diluted to (mL):	RM#				Ó			110			210
	<u>57081</u> 062724 Thalllum (TI)	062727 Ambient (20 °C)	6UTB	ed to (mL): Lot	Number C	110007 BCCF4088			N			120			220
	3	°C)		2000.1 0 Nominal Pi	Conc. (µg/mL) (88			ක 0			130			230
Certified Refi R ! 8]5]24	ğ			0.10 Flask Uncertainty Purity Uncertainty Assay	(%) Purity (%)	89,889 U.1U			4			140			240
Certified Reference Material CRM とという		2% 40 (m	sertainty	ainty v Assay Target	(%) Weight (g)	0.11			80			150			250
e Material	Lot # 24002546 Nitric Acid	40.0 Nitric Acid (mL)		get Actual		116C'7 CJR									
СRМ М6023	Acid	Acid		Actual	Weight (g) Conc. (µg/mL)	1000.1			8			160			260
23	Ala	Formulated By:	Reviewed By:	Expanded Uncertainty		2.0			70			170			
	20	\$		(Solvent	CAS#	10102-45-1			80			180			
http	Gion El o	Aleah O'Brady	Pedro L. Rentas	SDS Information Safety Info. On Atta	OSHA PEL (TWA)	u.i mg/ma			90			190			
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com		062724	062724	SDS Information (Solvent Safety Info. On Attached pg.)	s) LD50	gy/gmct snut-no			100			200			
Accredite te Numbe dards.con		4		NIST	SRM	9 3158									

Part # 57081 Lot # 062724

1 of 2

Printed: 8/1/2024, 2:13:42 PM

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com





https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	E	χđ	10	i ș	Re	Ba	2	>	Sb	2		ſ	
		<002	20.02	0.01	100-	A0.02	20.2	2	2002	20.02			
		2	S	2	ç	ĉ	Ę	? (ç	5			
	10.01	50	<0.02	70.02	200	<0.02	20.05		502	<0.02			
	20	<u>۸.</u>	ନ୍ଚ	Ga	?	ଜୁ	E	1 [ų	Dy			
	70.07	23	<0.02	20.02	3	<0.02	20.02	20.02	500	<0.02	The second se		
	10	P	Ľ	не	1	7	In	DIT.	5	Hf			
	20.02	3	A0.02	<0.2	10101	2003	<0.02	20.05	3	<0.02		1 :	TYPE Me
	NO		Mo	ВH		Š	Mg	Ľ	1	5.	Superior of	, caro	Aptolo 1
9	20.02		A0.03	<0.2	10.02	505	<0.01	<0.02	3	<0.02	WINDER HURST	V CI IIICO	Varifics
	Ĕ	1;	Ş	ď	2	2	õ	No	í	N			
	40.2	10.01	30	<0.02	20.02	2	<0.02	20.02		40.02	100 m 100 m	by icr-	
	Sc	011	2	Ru	20	ļ	R	Re	1	Ŗ		D CIM	No 1
	<0.02	20.02	3	<0.02	20.05	2	<0.02	<0.02	a cion	50.02		nav uur)	
	Ta	G	0	Sr	Na	5	Ag	S	Ş	2	And a state of the		
	<0.02	20.02	2	<0.02	202		<0.02	A0.02	101	c (h			
	3	20	2	ī	ЦI,		-	Te					
	40.02	20.02	2	40.02	<0.02	Þ	-1	<0.02	70.02	co c	COLUMN TWO AND ADDRESS OF THE OWNER.		
10 10 10 10 10 10 10 10 10 10 10 10 10 1	Zr	20	9	×	Υ _β	-	<	c					
	<0.02	40.02		40.02	40,02	20.02	3	40.02	<0.02	5			

(I) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Ser P. S.

Certified by:

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* All Standards should be stored with caps tight and under appropriate laboratory conditions.
 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST
 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

*^

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com	CERTIFIED WEIGHT REPORT:	Part Number: 57023 Lot Number: 062424 Description: Vanadium (V)	Expiration Date: 062427			Volume shown below was diluted to (mL): 2000.3	Part Lot Dilution	Compound Number Number Factor	1. Ammonium metavanadate (V) 58123 021224 0.1000	[1] Spectrum No.1 [34.243 2.0E6		m/z->- 10 20	2.067	1.067	m/z 110 120 1	2.588	
8:81 Ce					5E-05	0.06	Initial		200.0	sec]:58		30			190		200
Certified Reference Material CRM 冬」 シート					Balance Uncertainty	Flask Uncertainty	Uncertainty		0.084	34.243 sec]:58023.D# [Count] [Linear]		4			140		240
eference l	Lot #	24002546	2,0%		inty		Nominal	Conc. (µg/mL)	1000	žount) [Lin		5 0			- 50		2000
Naterial Cl	Solvent:	Nitric Acid	40.0 (mL)				Initial	Conc. (µg/mL)	10000.3	1⊖ar]		60			160		260
MF M6021			Nitric Acid				Final	Con	1000.0						j.		•
21		Alla	Formulated By:	M	Reviewed By:		Expanded		2.2			70			170		
		Alleah & Brack	J By:	2 l	y:		(Solve)		7803-55-6			80			180 0		
ht		Garan	Aleah O'Brady	ento	Pedro L. Rentas		SDS Information It Safety Info. On Atta	OSHA PEL (TWA)	0.05 mg/m3			90			190		
ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com			062424	/	s 062424		SDS Information (Solvent Safety Info. On Attached pg.)	(A) LD50	3 ort-rat 58.1mg/kg			100			200		
Accreditec te Numbe dards.con	1		<u> </u>			ļ	NIST	SRM	3165								

1 of 2

Printed: 8/1/2024, 2:13:49 PM

Part # 57023 Lot # 062424





https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			IG	<u>.</u>	Be	U4	5	202	A =	S		≥				
		93	20.05	3	<u>0</u> 0	20.02	3	202	5	A0.02		40.02				
		2	S) 	ፍ	ç	?	5	>	ي ۵	1	5				
	areas	3	20.02		<0.02	20.05	2	20.02	2	4012	10100	ann	and the second se			
	200	Ån	ç		<u></u>	ç	2	13	' 1	막	5	٦ . .				
	70.02	3	<0.02		303	20.02	2	A0.02		2002	10.04	con				
	1 50	ģ	5		ţ,	q	•	þ		H	m	5	Cardinal and			
	20.02	3	A0.02	1.01	5	40.02	2	A.02	-01-01-	33	20.02	200	Contraction of the local division of the loc		Trace M	
	Na		Mo	28	Ş	Mn	6	Ma	Ę		L	T	Constant in the second		etals	•
(T) = Targ	20.02	2	40.02	202	Ś	40.02		2001	70.02	53	20.02	222	SCHOOL STORE		Verifica	
Target analyte	ŗ	:	7	٦	3	Pd	;	ò	UNI	ł	N		1 10 1 10 10 10 10 10 10 10 10 10 10 10		tion	
e	40.2		40.02	20.02	2	A 22	10100	403	20.05	5	A0.02		のないのであるので	101		
	Sc	i	Sm	Ku	,	Rb	1111	Ŗ	Xe	3	1					
	40.02		33	<0.02		40.02	10.06	33	20.02	3	<0.02	and the second se		/ min_/		
	Ta	<	<i>^</i>	St		z	26	A.	Ľ	;	Ş					
	<0.02	10.01	3	40.02		<n.2< td=""><td>70.02</td><td>3</td><td><0.02</td><td></td><td>40.2</td><td>and the second se</td><td></td><td></td><td></td><td></td></n.2<>	70.02	3	<0.02		40.2	and the second se				
	П	QH	ç	Tm		ł	11	ł	Te	3	Ţ					
	<0.02	20.02	3	<0.02	10.04	3	20:05	2	40.02	10101	2003					
	Zr	211	1	¥	, L	ş	<		q	:	W	A DESCRIPTION OF				
	<0.02	20.02	3	40.02	70.07	3	-	3	40.02	20.02	Solution	A DESCRIPTION OF THE PARTY OF T				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

In P. Sur

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

- * All standard containers are meticulously cleaned prior to use. * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions. * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

.