

8900, Fax: 908 789 8922

Prep Standard - Chemical Standard Summary

Order ID: Q1488

Test: Mercury, Metals ICP-TAL

Prepbatch ID: PB166977,PB166987,PB167002,PB167021,

Sequence ID/Qc Batch ID: LB134901,LB134917,LB134928,LB134987,LB135011,LB135035,

Standard ID:

 $\label{eq:mps4443} MP84563, MP84564, MP84565, MP84566, MP84636, MP84637, MP84638, MP84639, MP84640, MP84641, MP84642, MP84643, MP84644, MP846464, MP84649, MP84650, MP84720, MP84721, MP84759, MP84760, MP84761, MP84762, MP84763, MP84764, MP84765, MP84765, MP84767, MP84768, MP84769, MP84770, MP84771, MP84772, MP84773, MP84776, MP84777, MP84778, MP84779, MP84780, MP84781, MP84782, MP84783, MP84784, MP84785, MP84786, MP84787, MP84780, MP84780, MP84780, MP84784, MP84784, MP84785, MP84786, MP84787, MP84780, MP84780,$

Chemical ID:

M4371,M4465,M4583,M4883,M4884,M4891,M4916,M5062,M5192,M5218,M5288,M5296,M5395,M5429,M5467,M5472,M5496,M5497,M5532,M5585,M5658,M5697,M5698,M5747,M5748,M5751,M5769,M5789,M5792,M5798,M5799,M58000,M5801,M5806,M5808,M5811,M5814,M5815,M5816,M5817,M5820,M5875,M5882,M5884,M5959,M5962,M5970,M5978,M5985,M6003,M6001,M6021,M6023,M6028,M6030,M6032,M6041,M6077,M6125,M6126,M6127,M6128,M6137,M61444,M6145,M6146,M6150,M6151,M6152,M6155,M6156,W3112,





Metals STANDARD PREPARATION LOG

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
169	1:1HNO3	MP84041	01/14/2025	07/14/2025	Eman Mughal	None	None	,
								01/16/2025

FROM	1250.00000ml of M6126 +	1250.00000ml of W3112	= Final Quantity: 2500.000 ml
------	-------------------------	-----------------------	-------------------------------

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Janvi Patel
3965	2:1 H2SO4 : HNO3	MP84563	02/18/2025	06/03/2025	Mohan Bera	None	None	
								02/19/2025

FROM 1600.00000ml of M6041 + 800.00000ml of M6126 = Final Quantity: 3200.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Janvi Patel
65	POTASSIUM PERMANGANATE SOLUTION 5 %	MP84564	02/18/2025	08/18/2025	Mohan Bera	None	None	02/19/2025

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Janvi Patel
66	POTASSIUM PERSULFATE SOLUTION 5 %	MP84565	02/18/2025	08/06/2025		METALS_SCA LE_3 (M SC-3)		02/19/2025

FROM 100.00000ml of M4465 + 2000.00000ml of W3112 = Final Quantity: 2000.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone: \; 908 \; 789 \; 8900, \\$

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Janvi Patel
67	SODIUM CHLORIDE - HYDROXYL- CHLORIDE	MP84566	02/18/2025	06/25/2025		METALS_SCA LE_3 (M SC-3)		02/19/2025
FROM	2000.00000ml of W3112 + 240.0000	Ogram of M4	1371 + 240.00	0000gram of M	5884 = Final Q	uantity: 2000.000	0 ml	

<u>FRUIVI</u>	2000.000001111 01 773 112	240.00000graffi 01 W437 1	+ 240.0000grain or 103004	- I mai Quantity. 2000.000 mil

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
902	ICP AES CAL BLK (SO/ICB/CCB)	MP84636	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM 125.00000ml of M5792 + 2350.00000ml of W3112 + 25.00000ml of M5789 = Final Quantity: 2500.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
907	ICP AES STD S (S5)	MP84637	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM

5.00000ml of M5395 + 5.00000ml of M5467 + 5.00000ml of M5472 + 5.00000ml of M5816 + 5.00000ml of M5875 + 5.00000ml of M5970 + 5.00000ml of M6077 + 5.00000ml of M6146 + 455.00000ml of MP84636 = Final Quantity: 500.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
910	ICP AES STD S4	MP84638	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM 50.00000ml of MP84636 + 50.00000ml of MP84637 = Final Quantity: 100.000 ml





Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

909 ICP AES STD S3 MP84639 02/25/2025 03/25/2025 Kareem None None 02/28/2025	Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
	909	ICP AES STD S3	MP84639	02/25/2025	03/25/2025		None	None	02/28/2025

FROM 25.00000ml of MP84637 + 75.00000ml of MP84636 = Final Quantity: 100.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
3913	ICP AES STD S2	MP84640	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM 16.00000ml of MP84637 + 184.00000ml of MP84636 = Final Quantity: 200.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe				<u>Expiration</u>	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
2950	ICP AES S1/CRI STOCK STD	MP84641	02/25/2025	03/09/2025	Kareem Khairalla	None	None	02/28/2025

FROM

 $0.00200ml\ of\ M5816+0.00400ml\ of\ M5978+0.03000ml\ of\ M6028+0.04000ml\ of\ M4884+0.05000ml\ of\ M5496+0.05000ml\ of\ M5658+0.05000ml\ of\ M5811+0.05000ml\ of\ M6030+0.06000ml\ of\ M5747+0.10000ml\ of\ M5472+0.10000ml\ of\ M5472+0.10000ml\ of\ M5751+0.10000ml\ of\ M5801+0.10000ml\ of\ M5801+0.10000ml\ of\ M5800+0.20000ml\ of\ M5748+0.20000ml\ of\ M5799+0.20000ml\ of\ M6021+0.20000ml\ of\ M6023+0.20000ml\ of\ M6145+0.25000ml\ of\ M5467+0.25000ml\ of\ M6146+0.50000ml\ of\ M5798+0.50000ml\ of\ M5814+0.50000ml\ of\ M6032+1.00000ml\ of\ M5192+1.00000ml\ of\ M5288+1.00000ml\ of\ M5497+1.00000ml\ of\ M6127+1.00000ml\ of\ M6144+77.68000ml\ of\ MP84636=Final\ Quantity:\ 100.000\ ml$

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
2951	ICP AES S1/CRI WORK STD	MP84642	02/25/2025	03/09/2025	Kareem Khairalla	None	None	02/28/2025

FROM 2.00000ml of MP84641 + 98.00000ml of MP84636 = Final Quantity: 100.000 ml



FROM

284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME.	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
912	ICP AES ICV SOLN	MP84643	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

0.02500 ml of M5429 + 0.02500 ml of M5815 + 0.02500 ml of M5817 + 0.10000 ml of M5467 + 0.25000 ml of M5472 + 10.00000 ml of M6150 + 89.77500 ml of MP84636 = Final Quantity: 100.000 ml

ID NAME NO. Prep Date Date By ScaleID PipetteID	Recipe				Expiration	<u>Prepared</u>			Supervised By
904 ICP AES ICSA SOLN MP84644 02/24/2025 03/25/2025 Kareem None None	<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
Khairalla	904	ICP AES ICSA SOLN	MP84644	02/24/2025	03/25/2025		None	None	02/28/2025

FROM 25.00000ml of M6152 + 225.00000ml of MP84636 = Final Quantity: 250.000 ml





Metals STANDARD PREPARATION LOG

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
911	ICP AES CCV SOLN	MP84646	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM 50.00000ml of MP84636 + 50.00000ml of MP84637 = Final Quantity: 100.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
919	ICP AES INTERNAL STD	MP84649	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM 1.00000ml of M5959 + 10.00000ml of M5985 + 1969.00000ml of W3112 + 20.00000ml of M5789 = Final Quantity: 2000.000 ml





Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Sarabiit Jaswal
513	RINSE SOLN	MP84650	02/25/2025	03/25/2025	Kareem Khairalla	None	None	02/28/2025

FROM 200.00000ml of M5789 + 9800.00000ml of W3112 = Final Quantity: 10000.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
170	1:1HCL	MP84720	03/03/2025	04/04/2025	Sagar Kanani		METALS_PIP ETTE 1 (ICP	
							A)	03/03/2023

FROM 1000.0000ml of M6151 + 1000.0000ml of W3112 = Final Quantity: 2000.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe <u>ID</u> 3494	NAME ICP AES ICSAB SOLN-1	NO. MP84721	Prep Date 02/25/2025	Expiration Date 03/25/2025	Prepared By Kareem Khairalla	<u>ScaleID</u> None	PipetteID None	Supervised By Sarabjit Jaswal 02/28/2025	
FROM 0.01000ml of M5815 + 0.01000ml of M5817 + 0.10000ml of M5296 + 0.10000ml of M5472 + 0.10000ml of M5970 + 10.00000ml									

 $0.01000 ml \ of \ M5815 + 0.01000 ml \ of \ M5817 + 0.10000 ml \ of \ M5296 + 0.10000 ml \ of \ M5472 + 0.10000 ml \ of \ M5970 + 10.0000 ml$ of M6152 + 10.00000ml of M6155 + 79.50000ml of MP84636 = Final Quantity: 100.000 ml

Recipe ID	NAME.	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
871	MERCURY INTERMEDIATE B 250PPB WORKING STD.	MP84759	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	

1.00000ml of M6126 + 2.50000ml of M5062 + 96.50000ml of W3112 = Final Quantity: 100.000 ml **FROM**



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1340	Hg 0.00 PPB STD	MP84760	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
							A)	

FROM 2.50000ml of M6126 + 247.50000ml of W3112 = Final Quantity: 250.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1341	Hg 0.2 PPB STD	MP84761	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	•

FROM 2.50000ml of M6126 + 247.50000ml of W3112 + 0.20000ml of MP84759 = Final Quantity: 250.000 ml





Metals STANDARD PREPARATION LOG

Recipe				Expiration	Prepared			Supervised By		
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal		
1342	Hg 2.5 PPB STD MP84762 03/05/2025 03/06/2025 Mohan Bera None METALS_PIP ETTE 5 (HG									
	A) ETTE_5 (HG									
FROM	2.50000ml of M6126 + 245.0000ml of W3112 + 2.50000ml of MP84759 = Final Quantity: 250.000 ml									

FROM	2.500000mi of Mo 126 + 245.00000mi of W3 112	+ 2.50000mi of MP84759	= Final Quantity: 250.000 mi

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1343	Hg 5.0 PPB STD	MP84763	03/05/2025	03/06/2025	Mohan Bera	None	METALS_PIP ETTE_5 (HG	•

FROM 2.50000ml of M6126 + 242.50000ml of W3112 + 5.00000ml of MP84759 = Final Quantity: 250.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1344	Hg 7.5 PPB STD	MP84764	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
							A)	

FROM 2.50000ml of M6126 + 240.00000ml of W3112 + 7.50000ml of MP84759 = Final Quantity: 250.000 ml

Recipe				<u>Expiration</u>	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1345	Hg 10.0 PPB STD	MP84765	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP	
							ETTE_5 (HG	03/05/2025

FROM 2.50000ml of M6126 + 237.50000ml of W3112 + 10.00000ml of MP84759 = Final Quantity: 250.000 ml





Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1346	Hg ICV SOLUTION	MP84766	03/05/2025	03/06/2025	Mohan Bera	None	METALS_PIP ETTE_5 (HG	03/05/2025
FDOM	2 50000ml of M5522 + 2 50000ml of	M6126 ± 24	5 00000ml of	\\\\2112 = Einc	L Quantity: 250	000 ml	A)	

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	NO.	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1351	ICB (Hg 0.00 PPB SOLUTION)	MP84767	03/05/2025	03/06/2025	Mohan Bera	None	METALS_PIP	
							ETTE_5 (HG	03/05/2025

FROM 2.50000ml of M6126 + 247.50000ml of W3112 = Final Quantity: 250.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1358	CCV (Hg 5.0 PPB SOLUTION)	MP84768	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
	407.0000.1.5340.4407.0000.1	5140400			-:		A)	

 $\hline \textbf{FROM} \qquad 485.00000 \text{ml of W3112} + 5.00000 \text{ml of M6126} + 10.00000 \text{ml of MP84759} \ = \text{Final Quantity: } 500.000 \ \text{ml}$

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	<u>PipetteID</u>	Supervised By
1352	CCB (Hg 0.00 PPB SOLUTION)		03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	

FROM 495.00000ml of W3112 + 5.00000ml of M6126 = Final Quantity: 500.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone: \; 908 \; 789 \; 8900, \\$

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

1349 CRA/CRI (Hg 0.2 PPB SOLUTION) MP84770 03/05/2025 03/06/2025 Mohan Bera None METALS_PIP ETTE_5 (HG 03/05/2025	<u>R</u>	ecipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
		1349	` •	MP84770	03/05/2025	03/06/2025	Mohan Bera			

FROM 2.50000ml of M6126 + 247.30000ml of W3112 + 0.20000ml of MP84759 = Final Quantity: 250.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1350	CHK STD (Hg 7.0 PPB SOLUTION)	MP84771	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	•

FROM 2.50000ml of M6126 + 240.50000ml of W3112 + 7.00000ml of MP84759 = Final Quantity: 250.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone \; : \; 908 \; 789 \; 8900, \\$

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
887	AQUA REGIA FOR HG ON 7471A	MP84772	03/05/2025	03/06/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
					_		A)	

FROM 150.00000ml of M6151 + 50.00000ml of M6126 = Final Quantity: 200.000 ml

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
68	STANNOUS CHLORIDE SOLUTION	MP84773	03/05/2025	03/06/2025		METALS_SCA LE_3 (M SC-3)		03/05/2025

FROM 450.00000ml of W3112 + 50.00000gram of M5882 + 50.00000ml of M6151 = Final Quantity: 500.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone \; : \; 908 \; 789 \; 8900, \\$

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

871 MERCURY INTERMEDIATE B 250PPB WORKING STD. MP84776 03/06/2025 03/07/2025 Mohan Bera None METALS_PIP ETTE_5 (HG 03/10/2025	Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Kareem Khairalla
	871		MP84776	03/06/2025	03/07/2025	Mohan Bera	None	_	

FROM 1.00000ml of M6126 + 2.50000ml of M5062 + 96.50000ml of W3112 = Final Quantity: 100.000 ml

Recipe ID	NAME.	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Kareem Khairalla
1340	Hg 0.00 PPB STD	MP84777	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	

FROM 2.50000ml of M6126 + 247.50000ml of W3112 = Final Quantity: 250.000 ml





Metals STANDARD PREPARATION LOG

Recipe				Expiration	Prepared			Supervised By		
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Kareem Khairalla		
1341	1341 Hg 0.2 PPB STD MP84778 03/06/2025 03/07/2025 Mohan Bera None METALS_PIP ETTE_5 (HG 03/10/20									
FROM	2.50000ml of M6126 + 247.30000ml of W3112 + 0.20000ml of MP84776 = Final Quantity: 250.000 ml									

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Kareem Khairalla
1342	Hg 2.5 PPB STD	MP84779	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	

FROM 2.50000ml of M6126 + 245.0000ml of W3112 + 2.50000ml of MP84776 = Final Quantity: 250.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

1343 Hg 5.0 PPB STD MP84780 03/06/2025 03/07/2025 Mohan Bera None METALS_PIP ETTE_5 (HG 03/10/2025	Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Kareem Khairalla
	1343	Hg 5.0 PPB STD	MP84780	03/06/2025	03/07/2025	Mohan Bera	None	_	

FROM 2.50000ml of M6126 + 242.50000ml of W3112 + 5.00000ml of MP84776 = Final Quantity: 250.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Kareem Khairalla
1344	Hg 7.5 PPB STD	MP84781	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP	
							ETTE_5 (HG	03/10/2025

FROM 2.50000ml of M6126 + 240.00000ml of W3112 + 7.50000ml of MP84776 = Final Quantity: 250.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone \; : \; 908 \; 789 \; 8900, \\$

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME.	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Kareem Khairalla
1345	Hg 10.0 PPB STD	MP84782	03/06/2025	03/07/2025	Mohan Bera	None	METALS_PIP ETTE_5 (HG	
							A)	

FROM 2.50000ml of M6126 + 237.50000ml of W3112 + 10.00000ml of MP84776 = Final Quantity: 250.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Kareem Khairalla
1346	Hg ICV SOLUTION	MP84783	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP	
							ETTE_5 (HG	03/10/2025

FROM 2.50000ml of M5532 + 2.50000ml of M6126 + 245.00000ml of W3112 = Final Quantity: 250.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Kareem Khairalla
1351	ICB (Hg 0.00 PPB SOLUTION)	MP84784	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
							A)	

FROM 2.50000ml of M6126 + 247.50000ml of W3112 = Final Quantity: 250.000 ml

Recipe				Expiration	Prepared			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Kareem Khairalla
1358	CCV (Hg 5.0 PPB SOLUTION)	MP84785	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP	
							ETTE_5 (HG	03/10/2025

FROM 485.00000ml of W3112 + 5.00000ml of M6126 + 10.00000ml of MP84776 = Final Quantity: 500.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone \; : \; 908 \; 789 \; 8900, \\$

Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Kareem Khairalla
1352	CCB (Hg 0.00 PPB SOLUTION)	MP84786	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
							A)	

FROM 495.00000ml of W3112 + 5.00000ml of M6126 = Final Quantity: 500.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Kareem Khairalla
1349	CRA/CRI (Hg 0.2 PPB SOLUTION)	MP84787	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	

FROM 2.50000ml of M6126 + 247.30000ml of W3112 + 0.20000ml of MP84776 = Final Quantity: 250.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Kareem Khairalla
1350	CHK STD (Hg 7.0 PPB SOLUTION)	MP84788	03/06/2025	03/07/2025	Mohan Bera		METALS_PIP ETTE_5 (HG	
							A)	

FROM 2.50000ml of M6126 + 240.50000ml of W3112 + 7.00000ml of MP84776 = Final Quantity: 250.000 ml

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Kareem Khairalla
68	STANNOUS CHLORIDE SOLUTION	MP84790	03/06/2025	03/07/2025		METALS_SCA LE_3 (M SC-3)		03/10/2025

FROM 450.00000ml of W3112 + 50.00000gram of M5882 + 50.00000ml of M6151 = Final Quantity: 500.000 ml



Fax: 908 789 8922

Metals STANDARD PREPARATION LOG

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
2950	ICP AES S1/CRI STOCK STD	MP84845	03/09/2025	03/25/2025	Kareem Khairalla	None	None	03/11/2025

FROM

0.03000 ml of M5798 + 0.03000 ml of M6028 + 0.04000 ml of M6137 + 0.05000 ml of M5658 + 0.05000 ml of M5808 + 0.05000 ml of M5808 + 0.05000 ml of M5808 + 0.05000 ml of M5811 + 0.05000 ml of M6030 + 0.06000 ml of M5747 + 0.10000 ml of M4883 + 0.10000 ml of M5472 + 0.10000 ml of M5697 + 0.10000 ml of M5698 + 0.10000 ml of M5801 + 0.10000 ml of M5820 + 0.10000 ml of M5970 + 0.15000 ml of M5800 + 0.20000 ml of M5748 + 0.20000 ml of M5799 + 0.20000 ml of M6021 + 0.20000 ml of M6023 + 0.25000 ml of M5846 + 1.00000 ml of M5748 + 0.50000 ml of M5799 + 0.20000 ml of M6032 + 1.00000 ml of M5288 + 1.00000 ml of M5840 + 1.00000 ml of M5866 + 1.00000 ml of M5978 + 1.00000 ml of M6156 + 2.00000 ml of M5816 + 77.68000 ml of MP84636 = Final Quantity: 100.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
2951	ICP AES S1/CRI WORK STD	MP84846	03/09/2025	03/25/2025	Kareem Khairalla	None	None	03/11/2025

FROM 2.00000ml of MP84845 + 98.00000ml of MP84636 = Final Quantity: 100.000 ml



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-2196-01 / Hydroxylamine Hydrochloride, Crystal (cs/4x500g)	0000215387	06/25/2025	07/01/2019 / RICHARD	06/07/2019 / RICHARD	M4371
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3238-05 / Potassium Persulfate (2.5kg)	0000234156	08/06/2025	07/23/2019 /	07/25/2019 / manojkumar	M4465
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Labpure	0919120 / Boiling Stones	26275770	07/07/2025	07/03/2020 / mohan	05/07/2020 / mohan	M4583
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57034 / Se, 1000 PPM, 125 ml	070221	09/07/2025	08/06/2021 / jaswal	08/05/2021 / jaswal	M4883
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57014 / Si, 1000 PPM, 125 ml	030921	03/09/2025	08/06/2021 / jaswal	08/05/2021 / jaswal	M4884
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58030 / Zinc, Zn, 500 ml, 1000 PPM	031921	05/19/2025	08/25/2021 / bin	08/05/2021 / jaswal	M4891



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3227-05 / Potassium Permanganate (2.5kg)	210800	03/31/2026	11/30/2022 / mohan	07/28/2021 / mohan	M4916
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	MSHG-10PPM / MERCURY HCI 125mL 10ug/mL	S2-HG709270	09/22/2026	05/28/2022 / mohan	01/27/2022 / mohan	M5062
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57042 / Mo, 1000 PPM, 125 ml	051722	05/17/2025	07/01/2022 / bin	06/17/2022 / jaswal	M5192
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CHEM-QC-4 / CHEM-QC-4, Second Source, 1000 ug/ml, B, Mo, Si, Sn, Ti	S2-MEB711674	11/02/2026	07/01/2022 / bin	09/10/2021 / bin	M5218
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58119 / K, 10000 PPM, 500 ml	071122	07/11/2025	09/01/2022 / jaswal	07/21/2022 / jaswal	M5288
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
		S2-MEB711673	11/02/2026	09/19/2022 /	08/20/2022 /	



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CLPP-CAL-3 / CLP CAL SOLUTION #3, 125mL	T2-MEB714159	01/13/2027	01/30/2024 / bin	09/19/2022 / bin	M5395
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57103 / Li, 10000 PPM, 125 ml	070622	07/06/2025	01/30/2023 / bin	01/26/2023 / bin	M5429
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57058 / Cerium, 1000PPM, 100ML	020623	02/06/2026	03/06/2023 / bin	03/01/2023 / bin	M5467
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57038 / Sr, 1000 PPM, 125 ml	082922	08/29/2025	01/14/2025 / Jaswal	03/16/2023 / jaswal	M5472
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Supplier Absolute Standards, Inc.	ItemCode / ItemName 58113 / AI, 10000 PPM, 500 ml	Lot # 011623	I -	-		
Absolute	58113 / AI, 10000 PPM,		Date	Opened By 08/15/2023 /	Received By 03/17/2023 /	Lot #



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-5 / ICV (HG)STOCK SOLN	ICV5-0415	03/15/2025	01/02/2025 /	03/30/2023 / mohan	M5532
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	26397-103 / PTFE BOILING STONES	W126678	03/31/2025	01/20/2024 /	06/12/2023 / jaswal	M5585
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58024 / Chromium, Cr, 500 ml, 1000 PPM	060523	06/05/2026	08/28/2023 / jaswal	08/25/2023 / jaswal	M5658
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58029 / Cu, 1000 PPM, 500 ml	102523	10/25/2026	04/03/2024 / jaswal	10/27/2023 / jaswal	M5697
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58025 / Mn, 1000 PPM, 500 ml	102623	10/26/2026	04/18/2024 / jaswal	10/27/2023 / jaswal	M5698
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	/ Lead (Pb) 1000PPM	100923	10/09/2026	05/20/2024 / Jaswal	12/20/2023 / jaswal	M5747



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	/ Nickel (Ni) 1000PPM	091223	09/12/2026	01/02/2024 / bin	12/20/2023 / jaswal	M5748
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58029 / Cu, 1000 PPM, 500 ml	071723	07/17/2026	10/01/2024 / Jaswal	08/25/2023 / jaswal	M5751
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58112 / Mg, 10000 PPM, 500 ml	091823	09/18/2026	05/24/2024 / Jaswal	01/03/2024 / bin	M5769
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	23G1262003	07/30/2025	02/08/2024 / Al-Terek	06/26/2023 / Al-Terek	M5789
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Supplier Seidler Chemical	ItemCode / ItemName BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L)	Lot # 22D1462006	-	-		
	BA-9530-33 / Hydrochloric Acid, Instra-Analyzed		Date	Opened By 02/05/2024 /	Received By 02/24/2022 /	Lot #



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57050 / Sn, 1000 PPM, 125 ml	071123	07/11/2026	02/09/2024 / bin	02/09/2024 / bin	M5799
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57027 / CO, 1000 PPM, 125 ml	091923	09/19/2026	05/31/2024 / bin	02/09/2024 / bin	M5800
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57033 / As, 1000 PPM, 125 ml	111323	11/13/2026	02/09/2024 / bin	02/09/2024 / bin	M5801
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58111 / Na, 10000 PPM, 500 ml	122223	12/22/2026	08/01/2024 / Jaswal	01/03/2024 / jaswal	M5806
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58113 / AI, 10000 PPM, 500 ml	122926	12/29/2026	12/18/2024 / janvi	01/03/2024 / jaswal	M5808
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
		051523	05/15/2026	02/06/2025 /	01/03/2024 /	



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57005 / B, 1000 PPM, 125 ml	071123	07/11/2026	03/26/2024 / Sohil	01/03/2024 / jaswal	M5814
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57115 / P, 10000 PPM, 125 ml	041723	04/17/2026	05/21/2024 / Jaswal	02/09/2024 / jaswal	M5815
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57016 / S, 1000 PPM, 125 ml	122923	12/29/2026	05/20/2024 / Jaswal	02/09/2024 / jaswal	M5816
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57116 / S, 10000 PPM, 125 ml	071123	07/11/2026	03/01/2024 / jaswal	02/09/2024 / jaswal	M5817
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57015 / P, 1000 PPM, 125 ml	091123	09/11/2026	05/01/2024 / jaswal	02/09/2024 / jaswal	M5820
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
			1	1	1	



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3980-01 / Stannous Chloride (cs/4x500g)	232820	08/31/2028	04/30/2024 / mohan	04/25/2024 / mohan	M5882
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3624-05 / Sodium Chloride, Crystal (cs/4x2.5kg)	0000281938	07/06/2026	04/30/2024 / mohan	04/25/2024 / mohan	M5884
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGY10-1 / YTTRIUM 125mL 10,000ug/mL	V2-Y740548	02/20/2029	07/01/2024 / Jaswal	06/14/2024 / Jaswal	M5959
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57034 / Se, 1000 PPM, 125 ml	060624	06/06/2027	07/02/2024 / Jaswal	06/14/2024 / Jaswal	M5962
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57003 / Li, 1000 PPM, 125 ml	061224	06/21/2027	07/01/2024 / Jaswal	07/01/2024 / Jaswal	M5970
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
	CGTI1-1 / TITANIUM	T2-TI719972	06/17/2027	08/07/2024 /	02/22/2024 /	M5978



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGIN10-5 / INDIUM 1 x 500 ml	U2-IN729349	02/21/2028	10/08/2024 / Jaswal	06/14/2024 / Jaswal	M5985
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	WW-LFS-1 / Laboratory Fortified Stock Solution 1, 125 ml	T2-MEB723367	08/26/2025	02/26/2025 / Eman	05/14/2024 / Jaswal	M6003
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	WW-LFS-2 / Laboratory Fortified Stock Solution 2, 125 ml	U2-MEB731108	07/14/2025	01/14/2025 / Eman	05/14/2024 / Jaswal	M6011
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57023 / V, 1000 PPM, 125 ml	062424	06/24/2027	09/28/2024 / jaswal	08/05/2024 / Jaswal	M6021
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute	57081 / TI, 1000 PPM, 125	0624724	06/27/2027	08/05/2024 / kareem	08/05/2024 / Jaswal	M6023
Standards, Inc.	1111					
Standards, Inc. Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57047 / Ag, 1000 PPM, 125 ml	122823	12/28/2026	08/05/2024 / kareem	08/05/2024 / Jaswal	M6030
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57056 / Ba, 1000 PPM, 125 ml	010924	01/09/2027	01/14/2025 / Jaswal	08/05/2024 / Jaswal	M6032
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9673-33 / Sulfuric Acid, Instra-Analyzed (cs/6c2.5L)	23D2462010	03/20/2028	08/16/2024 / mohan	08/16/2024 / mohan	M6041
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	Z9651Q / CHEM-CLP-4/.25L	V2-MEB746762	09/06/2029	01/23/2025 / kareem	09/19/2024 / kareem	M6077
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Supplier PCI Scientific Supply, Inc.	ItemCode / ItemName 1403 / Hydrogen Peroxide, 30% 1 gal	Lot # 820803				
PCI Scientific	1403 / Hydrogen Peroxide,		Date	Opened By 11/26/2024 /	Received By 11/22/2024 /	Lot #



CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58112 / Mg, 10000 PPM, 500 ml	112124	11/21/2027	01/13/2025 / kareem	01/13/2025 / kareem	M6127
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute 58025 / Mn, 1000 PPM, 500 ml		101124	10/11/2027	01/13/2025 / kareem	01/13/2025 / kareem	M6128
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGSI1-1 / SILICON 125mL 1000ug/mL	V2-SI744713	07/10/2029	01/14/2025 / Jaswal	10/03/2024 / Jaswal	M6137
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58111 / Na, 10000 PPM, 500 ml	072424	07/24/2027	01/23/2025 / kareem	01/13/2025 / Jaswal	M6144
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58030 / Zinc, Zn, 500 ml, 1000 PPM	121724	12/17/2027	02/04/2025 /	01/13/2025 / Jaswal	M6145
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	57051 / Sb, 1000 PPM, 125 ml	071724	07/17/2027	01/31/2025 / kareem	10/18/2024 / kareem	M6146



CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-1 / ICV (ICP/ICPMS) STOCK SOLN	ICV1-1014	07/07/2025	02/07/2025 / JANVI	04/20/2021 / JANVI	M6150
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L)		22G2862015	08/18/2025	02/18/2025 / Sagar	01/15/2025 / Sagar	M6151
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	PART A / ICSA (ICP) STOCK SOLN	ICSA-1211	08/24/2025	02/24/2025 / kareem	04/20/2021 / kareem	M6152
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	PART B / ICSAB (ICP) STOCK SOLN	ICSB-0710	06/20/2025	02/10/2025 / kareem	02/09/2024 / kareem	M6155
	1			Date Opened /	Received Date /	Chemtech
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Opened By	Received By	Lot #
Supplier Absolute Standards, Inc.	ItemCode / ItemName 57042 / Mo, 1000 PPM, 125 ml	Lot # 032123	-	-		
Absolute	57042 / Mo, 1000 PPM,		Date	Opened By 11/06/2024 /	Received By 06/12/2024 /	Lot #





1 Reagent Lane Fair Lawn, NJ 07410 201,796,7100 tel

Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System

Standard ISO9001:2015 by SAI Global Certificate Number CERT - 0120633 201,796,1329 fax

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	T142	Quality Test / Release Date	08/17/2023
Lot Number	232820		
Description	STANNOUS CHLORIDE, DIHYDRATE CERTIFIED ACS (Suitable for Mercury Determination)		
Country of Origin	United States	Suggested Retest Date	Aug/2028
Chemical Origin	Inorganic-non animal		
BSE/TSE Comment	No animal products are used as sta processing aids, or any other mater	arting raw material ingredients, or used rial that might migrate to the finished pr	in processing, including lubricants, oduct.

N/A					
Result Name	Units	Specifications	Test Value		
APPEARANCE		REPORT	Clear crystals		
ASSAY	%	Inclusive Between 98 - 103	100.65		
CALCIUM	%	<= 0.005	0.0017		
IDENTIFICATION	PASS/FAIL	= PASS TEST	PASS TEST		
IRON (Fe)	%	<= 0.003	0.0011		
LEAD (Pb)	%	<= 0.01	0.0006		
MERCURY (Hg)	ppm	<= 0.05	<0.05		
POTASSIUM (K)	%	<= 0.005	0.0001		
SODIUM (Na)	%	<= 0.01	<0.01		
SOLUBILITY IN HCL	PASS/FAIL	= PASS TEST	PASS TEST		
SULFATE (SO4)	PASS/FAIL	= P.T. (ABOUT 0.003%)	P.T. (ABOUT 0.003%)		

Harout Sahagian - Quality Control Supervisor - Fair Lawn

800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



Certified Reference Material CRM M5809

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT

Part Number: Lot Number: Description:

58113 122923

Aluminum (AI)

2%

Nitric Acid

40,0

Lot # M5808

Solvent: 24002546 Nitric Acid

Formulated By: Disvance Giovanni Esposito JARAGE T

122923

Reviewed By: Pedro L. Rentas Cras 22923

Weight (g) Conc. (µg/mL) Actual +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) **SDS Information** LD50 NIST SRM

Compound

RM#

Number 5

Conc. (µg/mL)

8

Purity (%)

3

Weight (g)

Target

Actual

Nominal

Purity Uncertainty Assay

Nominal Concentration (µg/mL):

NIST Test Number:

ELUB 10000 Ambient (20 °C) 122926

Recommended Storage:

Expiration Date:

Weight shown below was diluted to (mL):

2000.02

0.058 Flask Uncertainty

5E-05 Balance Uncertainty

 Aluminum nitrate nonahydrate (Al) m/2-> m/z-> 2.0 €6 1.0E6 2.5E6 5.0E6 2.5E5 5.0E5 [1] Spectrum No.1 110 0 IN022 ALM092022A1 120 0 [15.014 sec]:58113.D# [Count] [Linear] 10000 130 30 99.999 0.10 140 40 7.30 273.9779 150 50 273.9813 160 0 10000.1 170 70 20.0 180 80 7784-27-2 190 0 2 mg/m3 200 100 ori-rat 3671 mg/kg 3101a

m/z->

200

220

230

240

250

200

Part # 58113

1 of 2

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Al Sb As Ba Be	I
	0.02 0.02 0.02 0.03 0.03	
	5	
	40,02 40,02 40,02 40,02 40,02	
	Dy Er Gd Ga	
	8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
	# # # # # # # # # # # # # # # # # # #	_
	4000 4000 4000 4000 4000 4000 4000 400	race M
	Li. Mg Mg Mo	/letals
(T) = Ta	40.02 40.02 40.02 40.02	Verificati
(T) = Target analyte	× 7 7 2 8 8 2	ition k
yte	402 402 402 402	y ICP-N
	S R R R R P	ori) SV
	4000 4000 4000 4000 4000 4000 4000 400	I/mL)
	Se S	
	45 40.02 40.02 40.02 40.02	
	T I I I I	
	4 4 4 4 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5	
	Z Z × Z < C €	
	0.03 0.03 0.03 0.03	

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

* Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Certified Reference Material CRM

M6032

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: Part Number: Lot Number: 010924 57056 Solvent: 24002546 Lot # Nitric Acid Giovannie Lasas EL

Recommended Storage: **Expiration Date:** Description: Ambient (20 °C) 010927 Barium (Ba) 2% 40.0

Nitric Acid

Formulated By:

Giovanni Esposito

010924

Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): **NIST Test Number: 6UTB** 1000 2000.02 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Reviewed By: Expanded Pedro L. Rentas

Lot Nominal SDS Information

Barium nitrate (Ba) IN023 BAD022019A1 RV# Number Conc. (µg/mL) 1000 99.999 38 Purity (%) 0,10 52.3 8 Weight (g) 3.82417 Weight (g) Conc. (µg/mL) 3.82441 1000.1 +/- (µg/mL) 2.0 10022-31-B CAS# 0.5 mg/m3 SRM

Purity Uncertainty Assay Target Actual Actual Uncertainty

(Solvent Safety Info. On Attached pg.)
OSHA PEL (TWA) LD50 NIST

010924

orl-rat 355 mg/kg 3104a

[1] Spectrum No.1

m/z-> m/z-> m/z-> 2.5E6 5.0E6 2.0E5 1.0ES 2.0≡6 1.0E6 200 110 0 NNO 120 20 [12.514 sec]:58156.D# [Count] [Linear] 230 130 30 140 1040 4 150 NSO 50 160 1200 00 170 70 180 80 190 90 200 100

Part # 57056



Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	ſ	B	В		전	Ва	2	D _C	0	2	≥		ĺ		
e.		۵ 69	0.02	10.01	3	-	10.1	3	40.02		A).02	STREET, STREET			
		ဥ	င	2	5	င္ပ	ξ	3	Ç)	8	Contract Agency			
		A 02	6 .02	20.02	3	& 0.02	20.02	3	40,2		200				
		AII	ටු	Va.	?	2	E	7	ĮĮ1	7	T V		ı		
	20.00	3	40.02	20.02	3	<u>0.02</u>	<0.02	3	∆ .02	10.04	2003	THE STREET	The Real Property lies, the Persons in column 2 is not the Per		
		Ş	2	FG.	1 ;	=	Þ	1	픙	111	311	STATE OF	I.		
	70.02	3	∆ 0.02	8	, ;	A .02	<0.02		<u>&</u>	20.02	2000			race M	
	Z	2	Mo	냺		<u> </u>	Me		Ē,	1				S R T T	
	20.02	3 6	A)(2)	802	20.00	3	40.01		A0.02	20.03	200	THE PROPERTY AND PERSONS ASSESSED.	40111100	Serifica	
Target analyte	2	4 ;	¥	Þ	ć	2	ဝွ		ş	2	1	OF SHAPPS		5.	
STO	.ĕ.	20.02	3	40.02	10.04	3	∆ .02	10.04	3	40.02			by ICI	797	
	S	1 2 1	3	잗	20	9	2	18	ب	7	1		NO C	ころ	
	40.02	20.02	3	∆ 0.02	20.02	3	80.02	10.02	3	40.02			/9/ IIIL/		
	Ta	C	a ;	Y.	EN	1	À	2	2	Se					
	A0.02	20.02	3	A0.02	707	•	A 02	20.02	3	<u>6</u> 2	The second second second				
	ij	OII	2	3	15	1	⊒	ī	3	7					
	40.02	20.02	3 8	3	A0.02	6 6 6	400	20.02	3	40.02					
	27	2	1,	<	ð		<	c	1 :	8					
	<0.02	<0.02	0.00	3	∆ 0.02	10.02	3	20.02		2000	Section of the second				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

R 815/24

Solvent:

24002546

Nitric Acid

Lot #

M6028

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number:

57048 070124

Lot Number: Description:

Cadmium (Cd)

Nominal Concentration (µg/mL):

NIST Test Number:

6UTB

1000

Recommended Storage:

Expiration Date:

070127 Ambient (20 °C)

Weight shown below was dliuted to (mL):

2000.07

0.100 Flask Uncertainty 5E-05 Balance Uncertainty

2%

40.0 (mL) Nitric Acid

Formulated By:

Alban PROBAN

Aleah O'Brady

070124

Reviewed By:

Pedro L. Rentas

070124

Expanded

Weight (g) Conc. (µg/mL) Uncertainty

Cadmium nitrate tetrahydrate (Cd)

IN024 CDM092021A1

1000

99.999

0.10

36.5

5.4797

5.4804

1000.1

2.0

10022-68-1

0.01 mg/m3

orl-rat 60.2mg/kg

3108

RM#

Number Lot

Conc. (µg/mL)

8

8

Weight (g)

Target

Actual

Actual

Nominal

Purity

Uncertainty Assay Purity (%)

+/- (µg/mL)

CAS#

SDS Information

(Solvent Safety Info. On Attached pg.)
OSHA PEL (TWA) LD50

NIST SRM

m/z-> -z/m m/z-> 1.0E7 2.0E7 5.OE4 1.0E5 2.5E4 5.0M4 [1] Spectrum No.1 010 110 0 220 120 20 [12.514 sec]:58148.D# [Count] [Linear] 230 130 30 240 140 40 N00 150 50 2000 160 60 170 70 180 80 061 Ö 200 100

1 of 2

Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	F	בַ ע	ğ (# \$	Z :	Δ.	Ş.	2		Ī	
	10:04	3 6	9 6	2 6	3 6	A 8	800	40.02			
	2	3 5	3 5	۶ (3 5	3 5	3	2			
	20.02	3 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6	20.02	3 8	3 5	3 ;	3	Т			
	Nu.	Š) <u>ç</u>	3 5	5 5	7 0	p ,	Dγ			
	20.02	3.6	20.02	80.02	8	3 8	3	40.02	SCORE CONTRACTOR		
	29	1 5	, <u>4</u>	1 14	1 15	1 10	5	H	SOUTH	_	
	40,02	60.02	20.2	20.02	20.02	8.62	3	A0.02	AND MANAGEMENT OF THE PARTY OF	race Me	
	Za	Mo	8H	Mn	3kM	ַ בַ		E		fetals	
(T) = Target analyte	40.02	40.02	40.2	<0.02	40.01	20.02		40.02		Verifica	
get anal	×	7	ď	Pd	ွှ	2	:	Z.		tion	
yte	802	40.02	<0.02	<0.02	<0.02	<0.02	0.00	<0000		by ICP-	
	Sc	Sm	Ru	RЬ	R	Re	1	P.		S S	
	40.02	40.02	40.02	40.02	<0.02	<0.02	40.02	000		ug/mL)	
	Ta	S	Sr	Z	Age	8	č	S	200000000		
	0.02	40.02	40.02	40.2	40.02	40.02	7.07	3	The second second		
	11	Sn	Tm	Ħ	Ħ	Te	10				
	<0.02	<0.02	<0.02	40.02	40.02	<0.02	20.02	5			
	Zt	Zn	ĸ	뀾	<	U	*	THE PERSON NAMED IN COLUMN 1			
	<0.02	<0.02	40.02	<0.02	40.02	40,02	20.02				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution

Catalog Number: CHEM-CLP-4
Lot Number: S2-MEB711673
Matrix: 3% (v/v) HNO3

3% (v/v) HF

Value / Analyte(s): 1 000 μg/mL ea:

Boron, Molybdenum,

Silicon, Tin,

Titanium

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE CERTIFIED VALUE ANALYTE CERTIFIED VALUE Boron, B $1\ 000\pm 6\ \mu g/mL$ Molybdenum, Mo $1\ 000\pm 6\ \mu g/mL$ Silicon, Si $1\ 000\pm 7\ \mu g/mL$ Tin, Sn $1\ 000\pm 6\ \mu g/mL$

Titanium, Ti $1000 \pm 7 \mu g/mL$

Density: 1.030 g/mL (measured at 20 \pm 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
В	ICP Assay	3107	110830
Мо	ICP Assay	3134	130418
Si	ICP Assay	3150	130912
Sn	ICP Assay	3161a	140917
Ti	ICP Assay	3162a	130925

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods Characterization of CRM/RM by One Method Certified Value, X_{CRM/RM}, where two or more methods of characterization are Certified Value, X_{CRM/RM}, where one method of characterization used is the weighted mean of the results: is used is the mean of individual results: $X_{CRM/RM} = \Sigma(w_i) (X_i)$ $X_{CRM/RM} = (X_a) (u_{char} a)$ X_i = mean of Assay Method i with standard uncertainty u_{char i} Xa = mean of Assay Method A with $\mathbf{w_i}$ = the weighting factors for each method calculated using the inverse square of u_{char a} = the standard uncertainty of characterization Method A $\mathbf{w_i} = (1/u_{\text{char i}})^2 / (\Sigma (1/(u_{\text{char i}})^2)$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM}$ = k ($u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2$)^{1/2} CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 a + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$ k = coverage factor = 2 k = coverage factor = 2 $\mathbf{u_{char}} = \left[\sum ((\mathbf{w_i})^2 (\mathbf{u_{char}}_i)^2)\right]^{1/2}$ where $\mathbf{u_{char}}_i$ are the errors from each characterization method u_{char a} = the errors from characterization ubb = bottle to bottle homogeneity standard uncertainty $\mathbf{u_{bb}}$ = bottle to bottle homogeneity standard uncertainty u_{lts} = long term stability standard uncertainty (storage) u_{lts} = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty u_{ts} = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

 An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (μg/mL)

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT **HF Note:** This standard should not be prepared or stored in glass.

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganic ventures.com; info@inorganic ventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

November 02, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- November 02, 2026

- Sealed TCT Rag Open Date:

- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

could for bug opon buto.		•	
This CDM/DM should not be up	and langer than one year for six	months in the case of a 2	n ml

- I his CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

Michael 2 Booth

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Michael Booth Director, Quality Control

Certifying Officer:

Paul Gaines

Chairman / Senior Technical Director

Paul R Laine



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution

Catalog Number: CLPP-CAL-1

Lot Number: T2-MEB714417

Matrix: 5% (v/v) HNO3

Value / Analyte(s): 5 000 µg/mL ea:

Calcium, Potassium, Magnesium, Sodium,

2 000 μg/mL ea:

Aluminum, Barium,

1 000 µg/mL ea:

Iron,

500 μg/mL ea:

Nickel, Vanadium, Zinc, Cobalt,

Manganese, 250 μg/mL ea:

Silver, Copper,

200 μg/mL ea: Chromium, 50 μg/mL ea: Beryllium

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE Aluminum, Al	CERTIFIED VALUE 2 000 ± 7 μg/mL	ANALYTE Barium, Ba	CERTIFIED VALUE 2 000 ± 9 µg/mL
Beryllium, Be	50.00 ± 0.26 μg/mL	Calcium, Ca	5 000 ± 22 μg/mL
Chromium, Cr	200.0 ± 1.0 μg/mL	Cobalt, Co	500.0 ± 2.4 μg/mL
Copper, Cu	250.0 ± 1.0 μg/mL	Iron, Fe	1 000 ± 4 μg/mL
Magnesium, Mg	5 000 ± 20 μg/mL	Manganese, Mn	500.0 ± 2.0 μg/mL
Nickel, Ni	500.0 ± 2.2 μg/mL	Potassium, K	5 000 ± 19 μg/mL
Silver, Ag	250.0 ± 1.1 μg/mL	Sodium, Na	5 000 ± 18 μg/mL
Vanadium, V	499.7 ± 2.2 μg/mL	Zinc, Zn	500.0 ± 2.2 μg/mL

Density: 1.118 g/mL (measured at 20 ± 4 °C)

Assay Information:

133	ay iiii Oi iii atioii.			
	ANALYTE	METHOD	NIST SRM#	SRM LOT#
	Ag	ICP Assay	3151	160729
	Ag	Volhard	999c	999c
	Al	ICP Assay	3101a	140903
	Al	EDTA	928	928
	Ва	ICP Assay	3104a	140909
	Ва	Gravimetric		See Sec. 4.2
	Ве	ICP Assay	3105a	090514
	Ве	Calculated		See Sec. 4.2
	Ca	ICP Assay	3109a	130213
	Ca	EDTA	928	928
	Co	ICP Assay	3113	190630
	Co	EDTA	928	928
	Cr	ICP Assay	3112a	170630
	Cr	Calculated		See Sec. 4.2
	Cu	ICP Assay	3114	121207
	Cu	EDTA	928	928
	Fe	ICP Assay	3126a	140812
	Fe	EDTA	928	928
	K	ICP Assay	3141a	140813
	K	Gravimetric		See Sec. 4.2
	Mg	ICP Assay	3131a	140110
	Mg	EDTA	928	928
	Mn	ICP Assay	3132	050429
	Mn	EDTA	928	928
	Na	ICP Assay	3152a	120715
	Na	Gravimetric		See Sec. 4.2
	Ni	ICP Assay	3136	120619
	Ni	EDTA	928	928
	V	IC Assay	3165	160906
	V	EDTA	928	928
	Zn	ICP Assay	3168a	120629
	Zn	EDTA	928	928

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods Characterization of CRM/RM by One Method Certified Value, X_{CRM/RM}, where two or more methods of characterization are Certified Value, X_{CRM/RM}, where one method of characterization used is the weighted mean of the results: is used is the mean of individual results: $X_{CRM/RM} = \Sigma(w_i) (X_i)$ $X_{CRM/RM} = (X_a) (u_{char} a)$ X_i = mean of Assay Method i with standard uncertainty u_{char i} Xa = mean of Assay Method A with $\mathbf{w_i}$ = the weighting factors for each method calculated using the inverse square of u_{char a} = the standard uncertainty of characterization Method A $\mathbf{w_i} = (1/u_{\text{char i}})^2 / (\Sigma (1/(u_{\text{char i}})^2)$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{\frac{1}{2}}$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 a + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$ k = coverage factor = 2 k = coverage factor = 2 $\mathbf{u_{char}} = [\Sigma((\mathbf{w_i})^2 (\mathbf{u_{char}}_i)^2)]^{1/2}$ where $\mathbf{u_{char}}_i$ are the errors from each characterization method u_{char a} = the errors from characterization ubb = bottle to bottle homogeneity standard uncertainty $\mathbf{u_{bb}}$ = bottle to bottle homogeneity standard uncertainty ults = long term stability standard uncertainty (storage) u_{lts} = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty u_{ts} = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

 An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (μg/mL)

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

Note: This solution contains Silver (Ag), please refer to our Sample Preparation Guide for more information.

https://www.inorganicventures.com/sample-preparation-guide/samples-containing-silver

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganic ventures.com; info@inorganic ventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

January 27, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- January 27, 2027
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

Sealed TCT Bag Open Date:	
· Sealeo TCT Bao Oberi Dale	

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

Certifying Officer:

Paul Gaines

Chairman / Senior Technical Director

DD9784.



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution

CLPP-CAL-3 Catalog Number: T2-MEB714159 Lot Number: Matrix: 7% (v/v) HNO3 Value / Analyte(s):

> Arsenic, Lead, Selenium, Thallium,

500 µg/mL ea: Cadmium

1 000 µg/mL ea:

3.0 **CERTIFIED VALUES AND UNCERTAINTIES**

ANALYTE CERTIFIED VALUE ANALYTE CERTIFIED VALUE 1 000 ± 8 µg/mL Cadmium, Cd $500.0 \pm 2.1 \,\mu g/mL$ Arsenic, As Lead, Pb 1 000 ± 5 µg/mL Selenium, Se 1 000 ± 8 µg/mL

Thallium, TI 1 000 ± 7 µg/mL

Density: 1.043 g/mL (measured at 20 \pm 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
As	ICP Assay	3103a	100818
Cd	ICP Assay	3108	130116
Cd	EDTA	928	928
Pb	ICP Assay	3128	101026
Pb	EDTA	928	928
Se	ICP Assay	3149	100901
TI	ICP Assay	3158	151215

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods Characterization of CRM/RM by One Method Certified Value, X_{CRM/RM}, where two or more methods of characterization are Certified Value, X_{CRM/RM}, where one method of characterization used is the weighted mean of the results: is used is the mean of individual results: $X_{CRM/RM} = \Sigma(w_i) (X_i)$ $X_{CRM/RM} = (X_a) (u_{char} a)$ X_i = mean of Assay Method i with standard uncertainty u_{char i} Xa = mean of Assay Method A with $\mathbf{w_i}$ = the weighting factors for each method calculated using the inverse square of u_{char a} = the standard uncertainty of characterization Method A $\mathbf{w_i} = (1/u_{\text{char i}})^2 / (\Sigma (1/(u_{\text{char i}})^2)$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{\frac{1}{2}}$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 a + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$ k = coverage factor = 2 k = coverage factor = 2 $\mathbf{u_{char}} = \left[\sum ((\mathbf{w_i})^2 (\mathbf{u_{char}}_i)^2)\right]^{1/2}$ where $\mathbf{u_{char}}_i$ are the errors from each characterization method u_{char a} = the errors from characterization ubb = bottle to bottle homogeneity standard uncertainty $\mathbf{u_{bb}}$ = bottle to bottle homogeneity standard uncertainty ults = long term stability standard uncertainty (storage) u_{lts} = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty u_{ts} = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

 An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (μg/mL)

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

8.0 HAZARDOUS INFORMATION

Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganic ventures.com; info@inorganic ventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

January 13, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- January 13, 2027
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

 Sealed TCT Bag C 	pen Date:

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

Certifying Officer:

Paul Gaines

Chairman / Senior Technical Director

20178Ci

800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



Certified Reference Material CRM

M5810 M5811

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT

Part Number: Lot Number: Description:

58126 051523 Iron (Fe)

R: 01/03/24

Solvent: 21110221 Lot # Nitric Acid

Formulated By:

J. Brans

であるから

5.0%

250.0

Nitric Acid

Giovanni Esposito

051523

Reviewed By:

Pedro L. Rentas

051523

Purity Uncertainty Assay 0.12 Flask Uncertainty Expanded SDS Information

Weight (g) Target Weight (g) Conc. (µg/mL) +/- (µg/mL) CAS#

IN346 2302010-500 10000 99.995 0.10 100.0 50.0034 50.0111 10001.5 20.0 7439-89-6

1. Iron (Fe)

Compound

RM#

Number E E

Conc. (µg/mL)

36

Purity (%)

8

Nominal

Nominal Concentration (µg/mL):

NIST Test Number:

BTUB 10000

5E-05 Balance Uncertainty

Recommended Storage:

Ambient (20 °C) 051526

Expiration Date:

Weight shown below was diluted to (mL):

5000.1

Uncertainty

(Solvent Safety Info. On Attached pg.) OSHA PEL (TWA)

LD50

SRM

5 mg/m3 orl-rat 7500mg/kg 3126a

70 BO 90

100

m/2->

10

20

30

40

S O

60

1.054

2.0E4

[1] Spectrum No.1 [30.763 sec]:58126.D# [Count] [Linear]

1.0E8

200

m/z->

110

120

130

5.0E7

1.0E8-

5.0E7

230 240

250

260

1 of 2

Lot # 051523

T/2->

210

220

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

		Sb Sb As Ba Be Bi		
		40.02 40.02 40.02 40.02 40.02		
		5 8 ប		
		40.02 40.02 40.03 40.10		
		A 유 유 유 유 무 모 모 모 모 모 모 모 모 모 모 모 모 모 모 모		
		4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4		
		######################################		
		40 02 40 02 40 02 40 02 40 02	Trace N	
		N H M M L L	fetals	
		40.02 40.02 40.10 40.2 40.2	Verifica	
The Total and the	l	N S R a K X	tion b	
		40.02 40.02 40.02 40.02	y ICP-M	
		S R R R R R	S (µg/	
	1000	60 00 00 00 00 00 00 00 00 00 00 00 00 0	mĽ)	
		N S S S S S S S S S S S S S S S S S S S		
	20.02	200000000000000000000000000000000000000		
	E	4		
	40,02	40.00		
	72	2 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4		
	<0.02	40.02 40.02 40.02		

(I) = larger analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

* All standard containers are meticulously cleaned prior to use.
* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.
* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST
* Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

M6000,M6001,M6002,M6003,M6004,M6005,M6006,M6007,M6008



Certificate of Analysis

Refine your results. Redefine your industry. RD:05/14/2024

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Multi Analyte Custom Grade Solution

Catalog Number:

WW-LFS-1

Lot Number:

T2-MEB723367

Matrix:

5% (v/v) HNO3

Value / Analyte(s):

1 000 μg/mL ea: Potassium, 600 μg/mL ea: Phosphorus, 300 μg/mL ea:

Iron,

200 μg/mL ea:

Sodium,

Magnesium, Aluminum, Cerium, Selenium,

Thallium,

100 μg/mL ea:

Lead, Calcium,

80 µg/mL ea: Arsenic, 70 µg/mL ea: Mercury, 50 µg/mL ea: Nickel,

40 μg/mL ea: Chromium,

30 μg/mL ea:

Copper, Boron,

Vanadium,

20 μg/mL ea:

Zinc, Strontium,
Barium, Beryllium,
Cadmium, Cobalt,
Manganese, Lithium,

7.5 µg/mL ea: Silver

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE Aluminum, Al	CERTIFIED VALUE 200.0 ± 0.7 µg/mL	ANALYTE Arsenic, As	CERTIFIED VALUE 80.0 ± 0.7 µg/mL
Barium, Ba	20.00 ± 0.09 μg/mL	Beryllium, Be	20.00 ± 0.13 μg/mL
Boron, B	30.00 ± 0.18 μg/mL	Cadmlum, Cd	20.00 ± 0.09 μg/mL
Calcium, Ca	100.0 ± 0.4 μg/mL	Cerium, Ce	200.0 ± 0.8 µg/mL
Chromium, Cr	40.00 ± 0.30 μg/mL	Cobalt, Co	20.00 ± 0.10 μg/mL
Copper, Cu	30.00 ± 0.13 μg/mL	Iron, Fe	300.0 ± 1.3 μg/mL
Lead, Pb	100.0 ± 0.4 μg/mL	Lithium, Li	20.00 ± 0.08 µg/mL
Magneslum, Mg	200.0 ± 0.8 μg/mL	Manganese, Mn	20.00 ± 0.08 µg/mL
Mercury, Hg	70.0 ± 0.3 µg/mL	Nickel, Ni	50.00 ± 0.22 μg/mL
Phosphorus, P	600.0 ± 2.7 μg/mL	Potassium, K	1 000 ± 4 µg/mL
Selenium, Se	200.0 ± 1.3 μg/mL	Silver, Ag	7.50 ± 0.03 µg/mL
Sodium, Na	300.0 ± 1.4 μg/mL	Strontium, Sr	20.01 ± 0.08 μg/mL
Thailium, Ti	200.0 ± 1.4 μg/mL	Vanadium, V	30.00 ± 0.13 μg/mL
Zinc, Zn	20.00 ± 0.09 μg/mL		

1.034 g/mL (measured at 20 \pm 4 °C) Density:

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Ag	ICP Assay	3151	160729
Ag	Volhard	999c	999c
Ag	Calculated		See Sec. 4.2
Al	ICP Assay	3101a	140903
Al	EDTA	928	928
As	ICP Assay	3103a	100818
В	ICP Assay	3107	190605
Ва	ICP Assay	3104a	140909
Ва	Gravimetric		See Sec. 4.2
Ве	ICP Assay	3105a	090514
Ca	ICP Assay	3109a	130213
Ca	EDTA	928	928
Cd	ICP Assay	3108	130116
Cd	EDTA	928	928
Се	ICP Assay	3110	090504
Ce	EDTA	928	928
Co	ICP Assay	3113	190630
Со	EDTA	928	928
Cr	ICP Assay	3112a	170630
Cu	ICP Assay	3114	121207
Cu	EDTA	928	928
Fe	ICP Assay	3126a	140812
Fe	EDTA	928	928
Hg	ICP Assay	3133	160921
Hg	EDTA	928	928
K	ICP Assay	3141a	140813
K	Gravimetric		See Sec. 4.2
Li	ICP Assay	3129a	100714
Li	Gravimetric		See Sec. 4.2
Mg	ICP Assay	3131a	140110
Mg	EDTA	928	928
Mn	ICP Assay	3132	050429
Mn	EDTA	928	928
Na	ICP Assay	Traceable to 3152A	S2-NA700842
Na	Gravimetric		See Sec. 4.2
Ni	ICP Assay	3136	120619
Ni	EDTA	928	928
P	ICP Assay	3139a	060717
P	Acidimetric	84L	84L
Pb	ICP Assay	3128	101026
Pb	EDTA	928	928
Se	ICP Assay	3149	100901
Sr	EDTA	928	928
Sr	ICP Assay	Traceable to 3153a	K2-SR650985
TI	ICP Assay	3158	151215
V	IC Assay	3165	160906
V	EDTA	928	928
Zn	ICP Assay	3168a	120629
Zn	EDTA	928	928

Page 4 of 6

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) (X_i)$

 X_i = mean of Assay Method i with standard uncertainty $u_{char\ i}$

w_i = the weighting factors for each method calculated using the inverse square of the variance:

 $w_i = (1/u_{char})^2 / (\Sigma(1/(u_{char})^2))$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k \left\{ u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts} \right\}^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{1/2}$ where u_{char} is are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Characterization of CRM/RM by One Method

Certified Value, X_{CRMRM}, where one method of characterization is used is the mean of individual results:

 $X_{CRM/RM} = (X_a) (u_{char})$

X_g = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{chara} + u^2_{bb} + u^2_{tts} + u^2_{ts})^{1/2}$

k = coverage factor = 2

uchar a = the errors from characterization

u_{bb} = bottle to bottle homogeneity standard uncertainty

u_{lts} = long term stability standard uncertainty (slorage) u_{ts} = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

Low Silver Note: This solution contains "LOW" levels of Silver. Please store this entire bottle inside a sealed glass jar.

8.0 HAZARDOUS INFORMATION

Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

August 30, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- August 30, 2026
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRMRM can be supported by long term stability studies conducted on properly stored and handled CRMRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Da	te:
--------------------------	-----

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

Certifying Officer:

Paul Gaines

Chairman / Senior Technical Director

DD978hi.



Certificate of Analysis

Refine your results. Redefine your industry. RD:05/14/2024

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 **ACCREDITATION / REGISTRATION**

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Multi Analyte Custom Grade Solution

Catalog Number:

WW-LFS-2

Lot Number:

U2-MEB731108

Matrix:

5% (v/v) HNO3

tr. HF

Value / Analyte(s):

200 µg/mL ea:

Silica,

80 µg/mL ea: Antimony, 70 µg/mL ea:

Tin,

40 µg/mL ea: Molybdenum,

20 µg/mL ea: Titanium

3.0 **CERTIFIED VALUES AND UNCERTAINTIES**

ANALYTE Antimony, Sb **CERTIFIED VALUE** 80.1 ± 0.6 µg/mL

ANALYTE Molybdenum, Mo **CERTIFIED VALUE** 40.03 ± 0.18 µg/mL

Silica, SIQ2

200.2 ± 1.3 μg/mL

Tin, Sn

 $70.0 \pm 0.4 \, \mu g/mL$

Titanium, Ti

20.01 ± 0.13 µg/mL

Density:

1.025 g/mL (measured at 20 ± 4 °C)

Assay Information:

ANALYTE Mo	METHOD ICP Assay	NIST SRM# 3134	SRM LOT# 130418
Мо	Calculated		See Sec. 4.2
Sb	ICP Assay	3102a	140911
SiO2	ICP Assay	3150	130912
Sn	ICP Assay	3161a	140917
П	ICP Assay	3162a	130925
Ti	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) (X_i)$

X_i = mean of Assay Method i with standard uncertainty u_{char i}

 $\mathbf{w_i}$ = the weighting factors for each method calculated using the inverse square of the variance:

 $w_i = (1/u_{char i})^2 / (\Sigma (1/(u_{char i})^2))$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k \left\{ u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts} \right\}^{\frac{1}{2}}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

u_{lts} = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Characterization of CRM/RM by One Method

Certified Value, X_{CRM/RM}, where one method of characterization is used is the mean of Individual results:

 $X_{CRM/RM} = (X_a) (u_{char e})$

X_a = mean of Assay Method A with

u_{char a} = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k \left(u^2_{char} + u^2_{bb} + u^2_{bs} + u^2_{ts}\right)^{1/2}$

k = coverage factor = 2

uchar a = the errors from characterization

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/Δ

6.0 INTENDED USE

- 6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.
- **6.2** For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures <u>Terms and Conditions of Sale.</u> https://www.inorganicventures.com/terms-and-conditions-sale. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.Inorganicventures.com/TCT HF Note: This standard should not be prepared or stored in glass.

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous.
 Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

March 17, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- March 17, 2028
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

 Sealed TCT Bag Open Date 	
--	--

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control 3D978hi.

Certifying Officer:

Paul Gaines
Chairman / Senior Technical I

Chairman / Senior Technical Director

M4371

Hydroxylamine Hydrochloride, Crystal BAKER ANALYZED® A.C.S. Reagent

Suitable for Mercury Determination (hydroxylammonium chloride)

Rec - 06.07.12





Material No.: 2196-01

Batch No.: 0000215387

Manufactured Date: 2018/06/27 Retest Date: 2025/06/25

Revision No: 1

Certificate of Analysis

Meets ACS Reagent Chemical Requirements,

Test	Specification	Result
Assay (NH2OH·HCl) (by KMnO4 titrn)	>= 96.0 %	99.1
Clarity of Alcohol Solution	Passes Test	PT
Residue after Ignition	<= 0.050 %	0.017
Titrable Free Acid (meq/g)	<= 0.25	0.19
Ammonium (NH4)	Passes Test	PT
Sulfur Compounds (as SO ₄)	<= 0.005 %	< 0.003
Trace Impurities - ACS - Heavy Metals (as Pb)	<= 5 ppm	4
Trace Impurities - Iron (Fe)	<= 5 ppm	< 3
Trace Impurities - Mercury (Hg)	<= 0.050 ppm	< 0.005

For Laboratory, Research or Manufacturing Use

Country of Origin:

CN

Packaging Site:

Paris Mfg Ctr & DC



Phillipsburg, NJ 9001:2015, FSSC22000
Paris, KY 9001:2008
Mexico City, Mexico 9001:2008
Gliwice, Poland 9001:2015, 13485:2012
Selangor, Malaysia 9001:2008
Dehradun, India, 9001:2008, 14001:2004, 13485:2003
Mumbai, India, 9001:2015, 17025:2005
Panoli, India 9001:2015

Jamie Ethier
Vice President Global Quality

WAZY DX.



Manufacturer:

Saint-Gobain Performance Plastics 11 Sicho Drive Poestenkill, NY 12140

Certificate of Conformance

	Part Number/ D1069103 0		1069103 N/A
Description:	*PTFE BOILING STONES-450 GR	AMS	
Lot Number:	26275770	Lot Quantity:	10 EA
	Date of Manufacture 03/23/20 (MM/DD/YY)		N/A
(Refer to th	Post Processing Run Number: ne attached Certificate for Additional Detail)		N/A

We certify the material listed above confirms in full with the following specifications:

All items have been manufactured, inspected, tested, and accepted in accordance with our Quality Management system, ISO 9001-2015. Documentation substantiating this certification is kept on record per the Company's retention policy and is available for review.

All materials and processes used in manufacturing conform to the materials and/or manufacturing specifications and notes indicated on the purchase order, drawing, specifications, quality assurance requirements, or other applicable documents effective on the date of manufacture.

Saint-Gobain does not warrant the product for any particular application and it is the responsibility of the user to conduct tests that are deemed necessary to determine the suitability of the product for any particular use. Saint-Gobain's sole responsibility shall be for failure to manufacture the product in accordance with specifications and requirements of the buyer, and from defects in material and workmanship. This warranty is expressly made in lieu of any and all other warranties and Saint-Gobain's sole liability shall be to replace any product not in conformance with the specification and requirements of the buyer.

Quality Approval:	goodla Kondla	Date:	05/13/20	
	,			

Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

Nitric Acid

40.0

(mL)

Nitric Acid

Expanded

20370011

2.0%



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Lot # Solvent:

 Part Number:
 57034

 Lot Number:
 070221

Description: Selenium (Se)

Expiration Date: 070224

Recommended Storage: Ambient (20 °C)

Nominal Concentration (µg/mL): 1000

NIST Test Number: 6UTB 5E-05 Balance Uncertainty

Volume shown below was diluted to (mL): 2000.02 0.058 Flask Uncertainty


Formulated By: Giovanni Esposito 070221

Lector Denta 070221

Reviewed By: Pedro L. Rentas 070221

SDS Information

	Part	Lot	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Uncertainty	(Solv	ent Safety Info. On A	Attached pg.)	NIST
Compound	Number	Number	Factor	Vol. (mL)	Pipette (mL)	Conc. (µg/mL)	Conc. (µg/mL)	Conc. (µg/mL)	+/- (μg/mL)	CAS#	OSHA PEL (TWA)	LD50	SRM
 Selenium(IV) oxide (Se) 	58134	021621	0.1000	200.0	0.084	1000	10000.2	1000.0	2.2	7446-08-4	0.2 mg/m3	orl-rat 68 mg/kg	3149

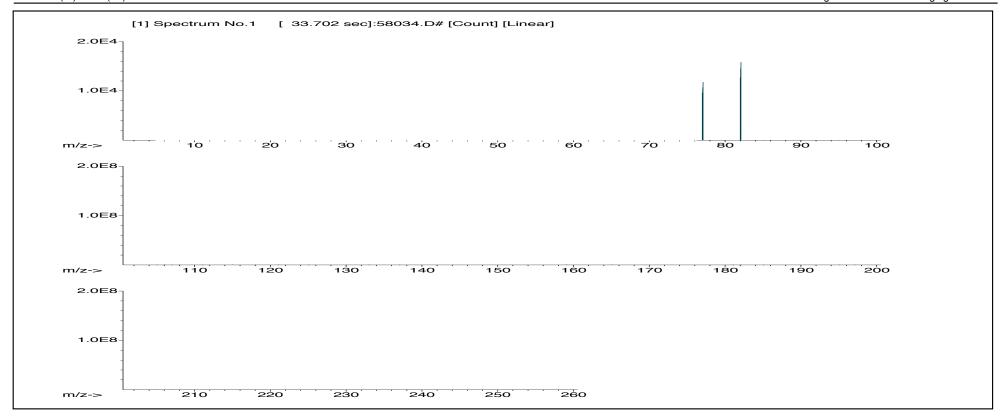

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Sn P. Shi

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

	Trace Metals Verification by ICP-MS (μg/mL)																		
Al	<0.02	Cd	<0.02	Dy	<0.02	Hf	<0.02	Li	<0.02	Ni	<0.02	Pr	< 0.02	Se	T	Tb	< 0.02	W	<0.02
Sb	< 0.02	Ca	< 0.2	Er	< 0.02	Но	< 0.02	Lu	< 0.02	Nb	< 0.02	Re	< 0.02	Si	< 0.02	Te	< 0.02	U	< 0.02
As	< 0.2	Ce	< 0.02	Eu	< 0.02	In	< 0.02	Mg	< 0.01	Os	< 0.02	Rh	< 0.02	Ag	< 0.02	Tl	< 0.02	V	< 0.02
Ba	< 0.02	Cs	< 0.02	Gd	< 0.02	Ir	< 0.02	Mn	< 0.02	Pd	< 0.02	Rb	< 0.02	Na	< 0.2	Th	< 0.02	Yb	< 0.02
Be	< 0.01	Cr	< 0.02	Ga	< 0.02	Fe	< 0.2	Hg	< 0.2	P	< 0.02	Ru	< 0.02	Sr	< 0.02	Tm	< 0.02	Y	< 0.02
Bi	< 0.02	Co	< 0.02	Ge	< 0.02	La	< 0.02	Mo	< 0.02	Pt	< 0.02	Sm	< 0.02	S	< 0.02	Sn	< 0.02	Zn	< 0.02
В	< 0.02	Cu	< 0.02	Au	< 0.02	Pb	< 0.02	Nd	< 0.02	K	<0.2	Sc	< 0.02	Ta	< 0.02	Ti	< 0.02	Zr	< 0.02

(T)= Target analyte

Physical Characterization: Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Part # 57034 Lot # 070221 Printed: 8/19/2021, 11:15:02 PM

^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

^{*} Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

^{*} All standard containers are meticulously cleaned prior to use.

^{*} Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

^{*} Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} All standards should be stored with caps tight and under appropriate laboratory conditions.

^{*} Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

19410105

2.0%

Nitric Acid

Nitric Acid



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Lot # Solvent:

> Part Number: 57014 030921 Lot Number:

Description: Silicon (Si)

60.0 **Expiration Date:** 030924 (mL)

Recommended Storage: Ambient (20 °C)


Nominal Concentration (µg/mL): 1000

> **NIST Test Number: 6UTB** 5E-05 Balance Uncertainty

Volume shown below was diluted to (mL): 3000.41 0.058 Flask Uncertainty

Formulated By: Lawrence Barry 030921 Reviewed By: Pedro L. Rentas 030921

									Expanded		SDS Information				
	Part	Lot	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Uncertainty	(Solve	Attached pg.)	NIST			
Compound	Number	Number	Factor	Vol. (mL)	Pipette (mL)	Conc. (µg/mL)	Conc. (µg/mL)	Conc. (µg/mL)	+/- (μg/mL)	CAS#	OSHA PEL (TWA)	LD50	SRM		
Ammonium hexafluorosilicate (Si)	58114	070120	0 1000	300.0	0 084	1000	10000 0	1000.0	2.1	16919-19-0	2 50 mg/m3	orl-rat 70 mg/kg	NA NA		

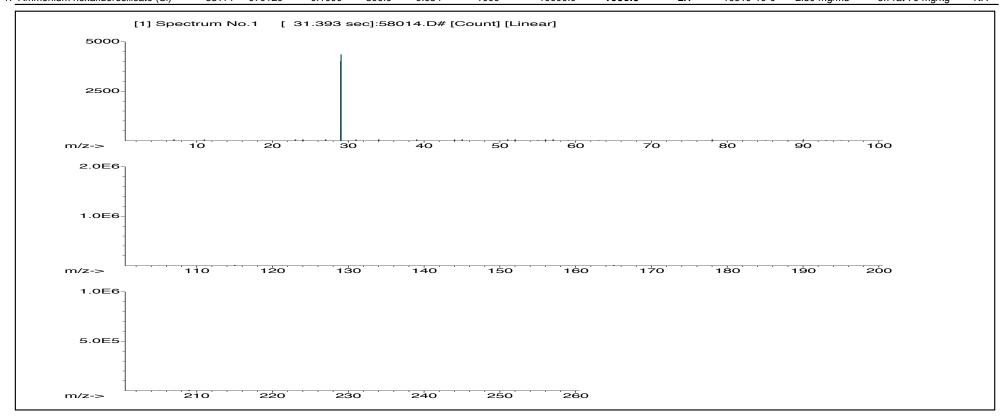

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Bu K. Spla

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace M	etals	Verifica	tion	by ICP-M	S (µ	g/mL)						
Al	< 0.02	Cd	<0.02	Dy	< 0.02	Hf	< 0.02	Li	< 0.02	Ni	<0.02	Pr	< 0.02	Se	<0.2	Tb	< 0.02	W	< 0.02
Sb	< 0.02	Ca	< 0.2	Er	< 0.02	Но	< 0.02	Lu	< 0.02	Nb	< 0.02	Re	< 0.02	Si	T	Te	< 0.02	U	< 0.02
As	<0.2	Ce	< 0.02	Eu	< 0.02	In	< 0.02	Mg	< 0.01	Os	< 0.02	Rh	< 0.02	Ag	< 0.02	T1	< 0.02	V	< 0.02
Ba	< 0.02	Cs	< 0.02	Gd	< 0.02	Ir	< 0.02	Mn	< 0.02	Pd	< 0.02	Rb	< 0.02	Na	<0.2	Th	< 0.02	Yb	< 0.02
Be	<0.01	Cr	< 0.02	Ga	< 0.02	Fe	< 0.2	Hg	<0.2	P	< 0.02	Ru	< 0.02	Sr	< 0.02	Tm	< 0.02	Y	< 0.02
Bi	< 0.02	Co	< 0.02	Ge	< 0.02	La	< 0.02	Mo	< 0.02	Pt	< 0.02	Sm	< 0.02	S	< 0.02	Sn	< 0.02	Zn	< 0.02
В	< 0.02	Cu	< 0.02	Au	< 0.02	Pb	< 0.02	Nd	< 0.02	K	< 0.2	Sc	< 0.02	Ta	< 0.02	Ti	< 0.02	Zr	< 0.02

(T)= Target analyte

Physical Characterization: Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # **57014** Lot # **030921** 2 of 2 Printed: 3/16/2021, 11:15:07 PM

Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

Nitric Acid

40.0

(mL)

Initial

Nitric Acid

Final

Expanded

Uncertainty

20370011

2.0%



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

NIST

CERTIFIED WEIGHT REPORT: Lot # Solvent:

 Part Number:
 58030

 Lot Number:
 031921

Description: Zinc (Zn)

Part

Expiration Date: 031924

Recommended Storage: Ambient (20 °C)

Nominal Concentration (µg/mL): 1000

NIST Test Number: 6UTB 5E-05 Balance Uncertainty

Dilution

Initial

Uncertainty

Volume shown below was diluted to (mL): 2000.02 0.058 Flask Uncertainty

Lot

Formulated By: Giovanni Esposito 031921

Licks Kenta


Reviewed By: Pedro L. Rentas 031921

SDS Information

(Solvent Safety Info. On Attached pg.)

Compound OSHA PEL (TWA) SRM Number Number Factor Vol. (mL) Pipette (mL) Conc. (μ g/mL) Conc. (μ g/mL) Conc. (μ g/mL) +/- (μg/mL) CAS# LD50 1000.0 1. Zinc nitrate hexahydrate (Zn) 58130 082020 0.1000 200.0 0.084 1000 10000.3 2.2 10196-18-6 1 mg/m3 orl-rat 1190mg/kg 3168

Nominal

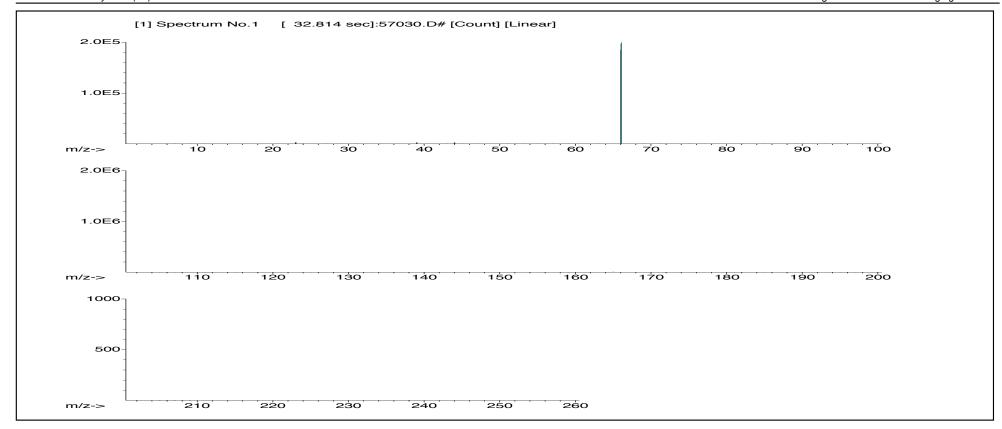

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Bn f. Sfla

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace M	etals	Verifica	tion	by ICP-M	S (µ	g/mL)						
Al	NI <0.02 Cd <0.02 Dy <0.02 Hf <0.02 Li <0.02 Ni <0.02 Pr <0.02 Se <0.2 Tb <0.02 W <0.02																		
Sb	< 0.02	Ca	< 0.2	Er	< 0.02	Но	< 0.02	Lu	< 0.02	Nb	< 0.02	Re	< 0.02	Si	< 0.02	Te	< 0.02	U	< 0.02
As	< 0.2	Ce	< 0.02	Eu	< 0.02	In	< 0.02	Mg	< 0.01	Os	< 0.02	Rh	< 0.02	Ag	< 0.02	Tl	< 0.02	V	< 0.02
Ba	< 0.02	Cs	< 0.02	Gd	< 0.02	Ir	< 0.02	Mn	< 0.02	Pd	< 0.02	Rb	< 0.02	Na	< 0.2	Th	< 0.02	Yb	< 0.02
Be	< 0.01	Cr	< 0.02	Ga	< 0.02	Fe	< 0.2	Hg	< 0.2	P	< 0.02	Ru	< 0.02	Sr	< 0.02	Tm	< 0.02	Y	< 0.02
Bi	< 0.02	Co	< 0.02	Ge	< 0.02	La	< 0.02	Mo	< 0.02	Pt	< 0.02	Sm	< 0.02	S	< 0.02	Sn	< 0.02	Zn	T
В	< 0.02	Cu	< 0.02	Au	< 0.02	Pb	< 0.02	Nd	< 0.02	K	<0.2	Sc	< 0.02	Ta	< 0.02	Ti	< 0.02	Zr	< 0.02

(T)= Target analyte

Physical Characterization: Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

^{*} Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

^{*} All standard containers are meticulously cleaned prior to use.

^{*} Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

 $[\]star$ Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} All standards should be stored with caps tight and under appropriate laboratory conditions.

^{*} Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



M4913- 16



Certificate of Analysis

1 Reagent Lane Fair Lawn, NJ 07410 201.796.7100 tel 201.796.1329 fax

Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System Standard ISO9001:2015 by SAI Global Certificate Number CERT – 0120632

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	P279	Quality Test / Release Date	01/12/2021
Lot Number	210306		
Description	POTASSIUM PERMANGANATE, A.C.S.		
Country of Origin	United States	Suggested Retest Date	Jan/2026

N/A			
Result Name	Units	Specifications	Test Value
APPEARANCE		REPORT	Dark purple to purple green crystals
ASSAY	%	>= 99	99.3
CHLORIDE & CHLORATE	%	<= 0.005	<0.005
IDENTIFICATION	PASS/FAIL	= PASS TEST	pass test
INSOLUBLE MATTER	%	<= 0.2	<0.2
MERCURY (Hg)	ppm	<= 0.05	<0.004
SULFATE (SO4)	%	<= 0.02	<0.02

Julian Burton

Julian Burton - Quality Control Manager - Fair Lawn



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com M5062 M5063

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Mass Spec Solution

Catalog Number:

MSHG-10PPM

Lot Number:

S2-HG709270

Matrix:

10% (v/v) HCI

Value / Analyte(s):

10 μg/mL ea:

Mercury

Starting Material:

Hg metal

Starting Material Lot#:

1959

Starting Material Purity:

99.9994%

3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value:

 $10.001 \pm 0.053 \,\mu g/mL$

Density:

1.020 g/mL (measured at 20 ± 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Hg	ICP Assay	3133	160921
Hg	EDTA	928	928
Ha	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) (X_i)$

 $\mathbf{X_i}$ = mean of Assay Method i with standard uncertainty $\mathbf{u_{char}}$ i

w_i = the weighting factors for each method calculated using the inverse square of

the variance.

 $\mathbf{w_i} = (1/u_{chari})^2 / (\Sigma (1/(u_{chari})^2)$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{its}^2 + u_{ts}^2)^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} i are the errors from each characterization method

u_{bb} = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Characterization of CRM/RM by One Method

Certified Value, $X_{CRM/RM}$, where one method of characterization is used is the mean of individual results:

X_{CRM/RM} = (X_a) (u_{char a})

Xa = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = U_{CRM/RM} = k (u²char a + u²bb + u²lts + u²ts) 1/2

k = coverage factor = 2

u_{char a} = the errors from characterization

ubb = bottle to bottle homogeneity standard uncertainty

u_{lts} = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

```
O Ag
          0.000011 M Eu <
                            0.000201 O Na
                                              0.000004 M Se <
                                                               0.015915 O Zn <
                                                                                 0.001510
0
   Al
          0.000001 O Fe
                            0.000001 M Nb <
                                              0.000201 O Si
                                                                0.000005 M Zr <
                                                                                 0.000201
M
   As <
          0.000402 M Ga <
                            0.000201 M Nd <
                                              0.000201 M Sm <
                                                               0.000201
M
   Au <
          0.003631 M Gd <
                            0.000201 M Ni <
                                              0.000402 M
                                                        Sn <
                                                               0.001007
M
   B <
          0.001208 M
                    Ge <
                            0.000201 M Os <
                                              0.000605 M
                                                        Sr <
                                                               0.000201
M Ba <
          0.000201 M Hf <
                            0.000201 O P <
                                              0.032370 M
                                                        Ta <
                                                               0.000201
M
  Be <
          0.000201 s
                                   M Pb <
                    Hq <
                                              0.000201 M Tb <
                                                               0.000201
M Bi <
          0.000201 M
                    Ho <
                            0.000201 M Pd <
                                              0.000403 M
                                                        Te <
                                                               0.002216
0
  Ca
          0.000007 M In <
                            0.000201 M Pr <
                                              0.000201 M Th <
                                                               0.000201
M
  Cd <
          0.000201 M Ir
                            0.000201 M
                                      Pt <
                                              0.000402 M Ti <
                                                               0.000402
                                              0.000201 O TI <
M
  Ce <
          0.000201 O K
                            0.000020 M
                                      Rb <
                                                               0.016508
  Co <
M
          0.000201 M La <
                            0.000201 M
                                      Re <
                                              0.000201 M Tm <
                                                               0.000201
  Cr <
0
          0.003021 O Li <
                            0.000107 M
                                      Rh <
                                              0.000201 M U <
                                                               0.008058
M
  Cs <
          0.001208 M Lu <
                            0.000201 M Ru <
                                              0.000201 M V <
                                                               0.000201
M
  Cu <
          0.000402 O
                    Mg
                            0.000001 O
                                      S <
                                             0.053950 M W <
                                                               0.000604
M Dy <
          0.000201 M Mn <
                            0.000604 M Sb <
                                             0.001208 M Y <
                                                               0.000201
M Er <
          0.000201 M Mo
                           0.000009 M Sc <
                                             0.000201 M Yb <
                                                               0.000201
```

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 200.59 +2 4 Hg(OH)(aq) 1+ **Chemical Compatibility -** Stable in HNO3. Avoid basic media forming insoluble carbonate. The sulfide, basic carbonate, oxalate, phosphate, arsenite, arsenate and iodide are insoluble in water.

Stability - 2-100 ppb levels not stable in 1% HNO3 / LDPE container, stable in 10% HNO3 packaged in borosilicate glass. 1-100 ppm levels stable in 7% HNO3 packaged in borosilicate glass. 1000-10,000 ppm solutions are chemically stable for years in 5-10% HNO3 / LDPE container.

Hg Containing Samples (Preparation and Solution) - Metal (soluble in HNO3); Oxide (Soluble in HNO3); Ores and Organic based (The literature has more references to the preparation of Hg containing samples than any other element. Please consult the literature for your specific sample type, since such preparations are prone to error. Or e-mail our technical staff and we will contact you to discuss your particular sample preparation questions in further detail.).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 202 amu	9 ppt	n/a	186W16O
ICP-OES 184.950 nm	0.03 / 0.005 μg/mL	1	
ICP-OES 194.227 nm	0.03 / 0.005 µg/mL	1	V
ICP-OES 253.652 nm	0.1 / 0.03 µg/mL	1	Ta, Co, Th, Rh, Fe,
			U

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

September 22, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- September 22, 2026
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

Sealed TCT	Bag	Open Date:		

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS Certificate Prepared By:

Uyen Truong
Supervisor, Product Documentation

Mya Truong

Certificate Approved By:

Michael Booth Director, Quality Control Michael 2 Booth

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director Paul R Laines

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

M.5192 R: 06/17/2

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Ammonium molybdate (Mo) Compound Nominal Concentration (µg/mL): m/z-> M/z-> Recommended Storage: m/z-> Volume shown below was diluted to (mL): 2.0E6 1.0E6 1.0E5 2.0E5 2000 1000 **NIST Test Number: Expiration Date:** Part Number: Lot Number: Description: [1] Spectrum No.1 110 210 0 58142 Number Part **BTU9** 1000 57042 Ambient (20 °C) 051722 051725 Molybdenum (Mo) 022222 Fot 120 220 20 [8.594 sec]:57042.D# [Count] [Linear] 3000.41 0.1000 Factor Dilution 130 230 30 5E-05 300.0 Vol. (mL) 0.058 Initial Flask Uncertainty Balance Uncertainty Pipette (mL) Conc. (µg/mL) Uncertainty 0.084 240 140 40 MKBQ8597V Ammonium hydroxide Nominal Lot # 0.5% 1000 250 150 50 Conc. (µg/mL) 10001.0 Initial (III) 15.0 160 260 60 Conc. (µg/mL) Ammonium hydroxide 1000.0 Final 170 70 Formulated By: Reviewed By: Uncertainty +/- (µg/mL) Expanded 2.1 180 80 13106-76-8 (Solvent Safety Info. On Attached pg.) Lawrence Barry OSHA PEL (TWA) Pedro L. Rentas 5 mg(Mo)/m3 190 90 SDS Information 200 100 orl-rat 333 mg/kg 051722 051722 3134 SRM TSIN

Printed: 6/16/2022, 1:36:08 PM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

		6	o !	B .	Be	1 20	Z,	As		2	A			
		H		A 073		_					-	Personal property and party and part		
						_					_			
		5	. 6	3	<u>υ</u>	5		<u>چ</u>	2		5	THE PERSON NAMED IN		
		40.02	20.02	3	0.02	20.02	3	40.02	2.03	3	40.02			
		Au	ç	,	റ്റ	G	1	ij	ij	,	ρ			
		0.02	20.02	0 0	40.02	<0.02	0.01	2	<0.02		<0.02			
		8	4	, ;	Î)	ŀ	E	5	H	;	¥			
		8	40.02	6	7	40.02	20.02	3	6.02	10.04	A) (7)		11000	Trace
	I	Z	Mo	1100	Ş	M	SIM	=	Ę	Ē	Ti		ic cal	Aptole
j	20.02	3	Н	707	3	40.02	10.05		A0.02	20.02	2000		ACTUIC	Vorific
(T)= Target analyte	,	Κ	7	۲,	J	2	S	,	3	2	N		acioi	±.
analyte	20.2	3	A),02	20.02		A).02	<0.02		A 93	20.02	2000		יאן וער-	5
	30	2	Sm	Ku	, ;	Z .	R		20	· :	7		CMC	1 31
	20.02	3	40.02	<0.02	10.0	2	40.02	10:02	3	40.02			19/IIIL)	/ / /
	12	3 (· n	Sr	146	Z	Ag	2	e.	Se				
	<0.02	20.02	A 3	<0.02	10.	3	40.02	20.02	3	A).2				
	Ti	1 2	S	Tm	111	7	=	LC	7	7				
	<0.02	10.02	3	40.02	20.02	3	<0.02	20.02	3	0.02				
	72	1	7,	Y	10	5	<	_	:	¥				
	<0.02	20.02	3	<0.02	20.02		40.02	20.02		<0.02				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57042

2 of 2



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution

Catalog Number: CHEM-QC-4

Lot Number: S2-MEB711674

Matrix: 3% (v/v) HNO3
 3% (v/v) HF

3 /0 (V/V) I II

Value / Analyte(s): 1 000 μg/mL ea:

Boron, Molybdenum,

Silicon, Tin,

Titanium

Second Source: Whenever possible, this solution was manufactured from a second set of concentrates in our manufacturing facility.

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE CERTIFIED VALUE ANALYTE CERTIFIED VALUE Boron, B $1\,000\pm7\,\mu\text{g/mL}$ Molybdenum, Mo $1\,000\pm5\,\mu\text{g/mL}$ Silicon, Si $1\,000\pm7\,\mu\text{g/mL}$ Tin, Sn $1\,000\pm5\,\mu\text{g/mL}$

Titanium, Ti $1 001 \pm 6 \mu g/mL$

Density: 1.032 g/mL (measured at 20 \pm 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
В	ICP Assay	3107	110830
Мо	ICP Assay	3134	130418
Si	ICP Assay	3150	130912
Sn	ICP Assay	3161a	140917
Ti	ICP Assay	3162a	130925

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods Characterization of CRM/RM by One Method Certified Value, X_{CRM/RM}, where two or more methods of characterization are Certified Value, X_{CRM/RM}, where one method of characterization used is the weighted mean of the results: is used is the mean of individual results: $X_{CRM/RM} = \Sigma(w_i) (X_i)$ $X_{CRM/RM} = (X_a) (u_{char} a)$ X_i = mean of Assay Method i with standard uncertainty u_{char i} Xa = mean of Assay Method A with $\mathbf{w_i}$ = the weighting factors for each method calculated using the inverse square of u_{char a} = the standard uncertainty of characterization Method A $\mathbf{w_i} = (1/u_{\text{char i}})^2 / (\Sigma (1/(u_{\text{char i}})^2)$ CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM}$ = k ($u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2$)^{1/2} CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{char}^2 a + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$ k = coverage factor = 2 k = coverage factor = 2 $\mathbf{u_{char}} = \left[\sum ((\mathbf{w_i})^2 (\mathbf{u_{char}}_i)^2)\right]^{1/2}$ where $\mathbf{u_{char}}_i$ are the errors from each characterization method u_{char a} = the errors from characterization ubb = bottle to bottle homogeneity standard uncertainty $\mathbf{u_{bb}}$ = bottle to bottle homogeneity standard uncertainty u_{lts} = long term stability standard uncertainty (storage) u_{lts} = long term stability standard uncertainty (storage) uts = transport stability standard uncertainty u_{ts} = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

 An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (μg/mL)

6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT **HF Note:** This standard should not be prepared or stored in glass.

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganic ventures.com; info@inorganic ventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

November 02, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- November 02, 2026

- Sealed TCT Rag Open Date:

- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

		-	
This CDM/DM should not be us	and langer than one year (or civ	months in the cook	of a 20 m

- Inis CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

Michael 2 Booth

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Michael Booth Director, Quality Control

Certifying Officer:

Paul Gaines

Chairman / Senior Technical Director

Paul R Saines

Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

5288



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT:

Part Number: Lot Number:

58119 071122

Solvent: 20510011 Nitric Acid

Description:

Expiration Date:

Potassium (K)

Ambient (20 °C)

2%

Nitric Acid

40.0

(mL)

Recommended Storage: Nominal Concentration (µg/mL):

10000

071125

NIST Test Number:

6UTB

5E-05 Balance Uncertainty


Weight shown below was diluted to (mL):

2000.02

0.058 Flask Uncertainty

Formulated By: Lawrence Barry 071122 Reviewed By: Pedro L. Rentas 071122

		Lat	Manada	5						Expanded	SDS Information						
Compound	D144	Lot	Nominal		Uncertainty	-	Target	Actual	Actual	Uncertainty	(Sol	vent Safety Info. On At	tached pg.)	NIST			
- Compound	RM#	Number	Conc. (µg/mL)	(%)	Purity (%)	(%)	Weight (g)	Weight (g)	Conc. (µg/mL)	+/- (µg/mL)	CAS#	OSHA PEL (TWA)	LD50	SRM			
1. Potassium nitrate (K)	IN034	KD022021A1	10000	99 999	0.10	37.6	52 102E	E2 1024	10000 0	00.0							

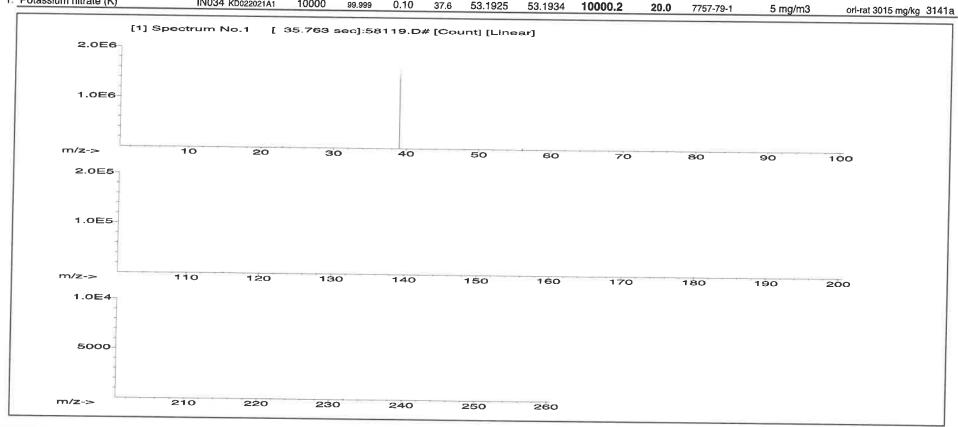



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace M	etals	Verifica	atior	by ICP-	MS	(µg/mL)						
Al	<0.02	Cd	<0.02	Dy	<0.02	Hf	<0.02	Li	<0.02	Ni	<0.02	Pr	<0.02	Se	<0.2	Tb	<0.02	W	<0.02
Sb	< 0.02	Ca	< 0.2	Er	< 0.02	Ho	< 0.02	Lu	< 0.02	Nb	< 0.02	Re	< 0.02	Si	< 0.02	Te	< 0.02	l u l	< 0.02
As	<0.2	Ce	< 0.02	Eu	< 0.02	In	< 0.02	Mg	< 0.01	Os	< 0.02	Rh	< 0.02	Ag	< 0.02	l ml	< 0.02	l v l	< 0.02
Ba	< 0.02	Cs	< 0.02	Gd	< 0.02	lr	< 0.02	Mn	< 0.02	Pd	< 0.02	Rb	< 0.02	Na	< 0.2	Th	< 0.02	Yb	< 0.02
Be	< 0.01	Cr	< 0.02	Ga	< 0.02	Fe	< 0.2	Hg	< 0.2	P	< 0.02	Ru	< 0.02	Sr	< 0.02	l Tm l	< 0.02	Y	<0.02
Bi	< 0.02	Co	< 0.02	Ge	< 0.02	La	< 0.02	Mo	< 0.02	Pt	< 0.02	Sm	< 0.02	S	< 0.02	Sn	<0.02	Zn	<0.02
В	<0.02	Cu	<0.02	Au	<0.02	Pb	<0.02	Nd	<0.02	K	T	Sc	<0.02	Ta	< 0.02	Ti	< 0.02	Zr	<0.02

(T)= Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

But All

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # **58119**

Lot # 071122

2 of 2

Printed: 8/2/2022, 11:20:01 PM

Certified Deference Metaric Com

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

<u>ئ</u>

Certified Reference Material CRM
[N 403 | 20 | 128 | 125 | 1

ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com

070622 070622 Pedro L. Rentas Lawrence Barry Formulated By: Reviewed By: Nitric Acid Nitric Acid 20510011 Fot # 20.0 (mL) Solvent: 2% 0.058 Flask Uncertainty 5E-05 Balance Uncertainty 1000.12 Ambient (20 °C) Lithium (Li) Weight shown below was diluted to (mL): 57103 070622 070625 10000 **6UTB** Nominal Concentration (µg/mL): NIST Test Number: Lot Number: Description: Expiration Date: Recommended Storage: Part Number: CERTIFIED WEIGHT REPORT:

Γ						ar]	[9.619 sec]:58103.D# [Count] [Linear]	# [C	58103.D	sec]:(_	No.1	ctrum	[1] Spectrum No.1	
2	Byfill 0241 ischi	2					1000								
W	0.10 10.0 100.0134 100.0173 10000.4 20.0 7790-69-4 5 mg/m3 oct-24 1428 mg/m NA	5 ma/m3	7790-69-4	20.0	10000.4	100.0173	100.0134	10.0	0.10	99.999	10000 89.889 0.	IN019 LIZO42018A1	IN019		Lithium nitrate (Li)
SRM	LD50	RM# Number Conc. (µg/mL) (%) Purity (%) (%) Weight (g) Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA) LD50	CAS#	+/- (ug/mL)	Conc. (ug/mL)	Weight (g)	Weight (g)	(%)	Purity (%)	98	Conc. (µg/mL)	Number	RM#		Dunodino
L	Attached oo.)	(Solvent Safety Info, On Attached on)	(Soly	Uncertainty	Actual	Actual	Target	ASSAY	Nominal Punty Uncertainty Assay Target	runty	Nominal	707	i		7
	ition	SDS Information		Expanded								-			

1.056	0.0 8	m/z->∕ 500 250	20° 20° 10° 10° 10° 10° 10° 10° 10° 10° 10° 1	m/z->>
L'ON EUROPE		.0	0	010
_		ON N	120	880
9.619 sec]:58103.D# [Count] [Linear]		.0	086	230
3103.D# [Cc		0	041	0.86
ount) (Linea		0 0	150	A Manual Corpo Increased
		.00	.0	- We related to Contract
		0	0 4	
		. <mark>0</mark>	180	
		.0	180	
		001	800	

Printed: 1/18/2023, 4:01:43 PM

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace Me	stale	Varifics	tion	hy ICP.	MC	(lm/m/)						
SHIPPING IN		STREET, STREET	THE RESIDENCE OF THE PERSON NAMED IN			-	THE PARTY		2011124		1	2	(M)						
A1	2002	3	2000	2	88	30	800	E	F	1	89	4		I.	-				
2 :	70'00	3	70.00	5	70.02	1	70105	3	1	Σ,	70.02	=	Z0:02	3	40.2	19	Ø.02	≥	40.02
3	<0.02	రి	40.2	山	<0.02	Ho	40.02	Ē	40.02	ź	40.02	2	Q .02	SS.	<0.02	T _e	<0.02	ח	<0.02
As	₩2	ප	₹0.02	嵒	<0.02	편	₹0.02	Mg	<0.01	ő	<0.02	Rh A	<0.02	Ag	<0.02	E	<0.02	>	Ø 02
Ba	<0.02	రో	<0.02	3	<0.02	卢	<0.02	Mn	<0.02	R	ZO:02	2	Ø.02	Z	40.2	£	200	\$	500
Be	<0.01	ඊ	<0.02	පී	40.02	괊	<0.2	黑	\$07	Δ.	<0.02	Ra	900	J.	<0.02	ع ا	8	*	200
B.	40.02	රි	40.02	පී	20.0 2	3	<0.02	₩ W	40.02	Æ	<0.02	SB	<0.02	S	<0.05	5	8	- E	200
В	<0.02	ರೆ	<0.02	Αn	<0.02	2	<0.02	P	<0.02	24	<0.2	S	40.02	E	<0.02	F	000	7 12	200

Physical Characterization:

(T)= Target analyte

Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

All standard containers are meticulously cleaned prior to use. the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57103

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

R: 03/01/23(12)



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

									-			
CENTIFIED WEIGHT REPORT:						Lot #)			
Part Number: Lot Number:		57058			Solven	t: 2111022	Solvent: 21110221 Nitric Acid		T	Errore Br		
Description:		Cerlum (Ce)	3							0	K	
		00000			2%		Nitric Acid	-	Formulated By:	: Lawrence Barry	020623	Lon
Recommended Storage: Nominal Concentration (ug/mL):		020626 Ambient (20 °C) 1000	(Ç)			(JE)			1/2	to Herris	1	
NIST Test Number: 6UTB Weight shown below was diluted to (mL):	dilute	6UTB of to (mL):	1000.12	3E-05 E	5E-05 Balance Uncertainty 0.058 Flask Uncertainty		:		Reviewed By:	Pedro L. Rentas	29020	
		Ę		Purity 1	Nominal Purity Uncertainty Assay.	y Target	Actual	Actual	Expanded Uncertainty	SDS Information (Solvent Safety Info. On Attached pg.)	ation Attached pg.)	NIST
Compound	25. 25.		Number Conc. (ug/mL) (%) Purity (%) (%)	3	Purity (%) (%)		Weight (g)	Conc. (ug/mL)	Weight (g) Weight (g) Conc. (ug/ml.) +/- (ug/ml.) CAS#	CAS# OSHA PEL (TWA)	1D50	SRM

Compound	RM#	Lot	Nominal Conc. (vg/mL)	Purity (%)	Purity Uncertainty Assay (%) Purity (%) (%)	Assay (%)	Target Weight (g)	Actual Weight (g)	Actual Actual Uncertainty Weight (g) Conc. (ug/mt.) +/- (ug/mt.)	Uncertainty +/- (ug/mL)	SS	(Solvent Safety Info. On Attached pg.) CAS# OSHA PEL (TWA) LD50	ched pg.) LD50	NIST
Cerium nitrate hexahydrate (Ce)	1N146	IN146 Z512CEB1	1000	99.989	0.10	32.8	3.04919	3.04921 1000.0	1000.0	20	II ==	₹Z	4 2	AN
[1] Spectrum N	lo.1 [43.472	sec]:58158.D#	[1] Spectrum No.1 [43.472 sec]:58158.D# [Count] [Linear]							Ш				$\ \cdot \ $
1.0€9_														
- 1.4 m) 1														
5.0E8														
	*	at.												
m/2->	10	20	30		40		50	0.9	70		80	001 06		
2.0€6□				•										
-1-1				•										
1,056												ν_{μ}		
1-1														
					 ,									
w/2->	110	120	130	0	140		150	160	170		180	190 200		
5.0£7				5										
2.5E7														

250

240

220

210

Printed: 2/6/2023, 2:46:41 PM

Certified Reference Material CRM





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

	20.0	20:0	<0.02	707	20:0	207	707
	H	_	_	_	_	_	_
	=	ב		→	¥	Z	Z
	<0.02	<0.02	<0.02	<0.02	<0.02	₹0.02	<0.02
	110	Te	E	Ē	Tm	Sn	I
	<0.2	<0.02	<0.02	<0.7	<0.02	<0.02	<0.02
	S	S.	Ag	Na	Š	S	Ē
/mL)	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02
, (µg/	à:	Re	뙲	Rb	Ru	Sm	S
by ICP-MS	<0.02	<0.05	<0.02	<0.02	<0.02	<0.05	40.2
	ï	S _o	ő	Pd	а,	굺	×
Verification	<0.02	<0.02	<0.01	<0.02	Ø2	<0.02	<0.02
letals	n	T.	Mg	Mn	Hg	Mo	PN
Trace M	<0.02	<0.02	<0.02	<0.02	8	₹0.02	<0.02
 Ta	出	Но	ű	ľг	Fe	Ľ	P
	<0.02	40.02	₹0.02	<0.02	<0.00 √	<0.02	<0.02
	À	岿	昂	ਣ	ලී	පී	Au
	<0.02	40.2	H	40.02	<0.02	40.02	<0.02
	3	చ	ඊ	ర	ඊ	රි	ਹੈ
	<0.02	40.0 2	40.2	<0.02	Q .01	<0.02	<0.02
	A	S	As	Ba	Be	2	æ

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

(T)= Target analyte

My J. M.

Certified by:

^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

^{*} Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). All standard containers are meticulously cleaned prior to use.

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} All standards should be stored with caps tight and under appropriate laboratory conditions.
* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

CERTIFIED WEIGHT REPORT:

Part Number: Lot Number:

Certified Reference Material CRM

7 20 23

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Lot #

Solvent: 20510011 Nitric Acid

2%

40.0 (<u>l</u>

Nitric Acid

Formulated By:

Giovanni Esposito

011623

Pedro L. Rentas

011623

Giovannie

Jacob P

Description: Aluminum (AI)

011623 58113

Expiration Date: 011626

Nominal Concentration (µg/mL): Recommended Storage: 10000 Ambient (20 °C)

Weight shown below was diluted to (mL): **NIST Test Number:** 6UTB 2000.02 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Reviewed By:

Compound ₽ ₩ Number ē Conc. (µg/mL) Nominal 10000 99.999 Purity Uncertainty Assay 38 Purity (%) 0.10 7.30 8 273.9779 Weight (g) Target 274.0078 Weight (g) Conc. (µg/mL) Actual 10001.1 Actual +/- (µg/mL) Uncertainty Expanded 20.0 7784-27-2 CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) SDS Information LD50 NIST SRM

1. Aluminum nitrate nonahydrate (Al) IN022 ALM112021A1 m/z-> m/z-> m/z-> 1.0 € 6 2.0 € 6 2.5E6 5.0E6 2.5E5 5.0E5 [1] Spectrum No.1 210 110 0 220 120 20 [15.014 sec]:58113.D# [Count] [Linear] 230 130 30 240 140 40 250 150 50 260 160 60 170 0 180 80 190 90 2 mg/m3 200 100 ori-rat 3671 mg/kg 3101a

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com 031523 031523 Giovanni Esposito Pedro L. Rentas Liovanni Formulated By: Reviewed By: Certified Reference Material CRM Nitric Acid Nitric Acid Solvent: 21110221 Fot# 60.0 (mL) % 5E-05 Balance Uncertainty 0.058 Flask Uncertainty 3000.41 Ambient (20 °C) Calcium (Ca) Weight shown below was diluted to (mL): 031523 031526 10000 **6UTB** Recommended Storage: Nominal Concentration (µg/mL): Part Number: Lot Number: Description: **Expiration Date:** NIST Test Number: CERTIFIED WEIGHT REPORT:

Compound	RM#	Lot Number	Nominal Purity Conc. (µg/mL) (%)	Punty (%)	Purity Uncertainty Assay (%) Purity (%) (%)		Target Weight (g)	Actual Weight (g)	Expanded Actual Actual Uncertainty (Sc Weight (g) Conc. (µg/mL) +/- (µg/mL) CAS#	Expanded Uncertainty +/- (ug/mL)	(Solv	SDS Information (Solvent Safety Info. On Attached pg.) NS# OSHA PEL (TWA) LD50	Attached pg.) LD50	NIST
1. Calcium carbonate (Ca)	IN014	INO14 caboragezat	10000 99.999	666.66	0.10	38.9	75.1990	75.2093	10001.4	20.0	471-34-1	5 mg/m3	ort-rat	3109a
[1] S ₁	[1] Spectrum No.1		4.00	8ec]:6	12.514 sec]:58120.D# [Count] [Linear]	<u> </u>	unti (Line	ari						
1.0E4														
m/z->	0	.0		000	.0	400400	0	0	2		0		001	
2. 4 4														
m/z->	0	120		90	140		150	160	071	0	180	190		
6.0E4														
m/z->	019	220		230	240		250	260						

Printed: 3/16/2023, 1:45:15 PM





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace Me	tals	Verificat	io Io Io	by ICP-N	MS ((ng/mL)		ı				
MACHINE.	· · · · · · · · · · · · · · · · · · ·	NOT THE OWNER.	STATE OF THE STATE	1	THE PERSON NAMED IN	STATE OF THE PARTY OF	1500 NOT 150		THE STATE OF THE S	STATE OF THE PERSON NAMED IN	STATE	0		- Harris	THE REAL PROPERTY OF	THE PARTY OF		Market Market	
F	<0.02	జ	<0.02	Ą	40.02	Ħ	<0.02	LI	<0.02	Z	<0.02	P.	<0.02	š	<0.2	13	<0.02	≱	<0.02
જ	<0.02	రే	F	占	₹0.02	윒	₹0.02	3	20.02	ź	<0.02	æ	<0.02	ន	<0.02	Je	<0.02	Þ	₹0.02
As	<0.2	පී	₹0.02	超	<0.02	Я	<0.02	Mg	10.0>	ő	<0.02	招	<0.02	Ag	<0.02	F	<0.02	>	<0.02
Ba	<0.02	ඊ	<0.02	3	<0.02	ㅂ	<0.002	Ma	40.02	Z	<0.02	8	<0.02	Z	<0.2	Ę	<0.02	χg	40.02
Be	<0.01	Ö	<0.02	පී	40.02	Ę.	40.2	Hg	<0.2	۵,	<0.02	R	<0.02	ઢ	<0.02	E,	<0.02	7	₹0.02
ã	<0.02	රි	40.02	පි	<0.02	2	<0.02	Mo	<0.02	盂	<0.02	Sm	<0.02	Ø	₹0.02	Sn	<0.02	2	<0.02
m	<0.02	₫	<0.02	Αŭ	<0.02	£	<0.02	PZ	<0.02	×	40.2	Sc	<0.02	Ta	<0.02	Ħ	<0.02	Z	40.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



Certified by:

Printed: 3/16/2023, 1:45:15 PM

^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

All standard containers are meticulously cleaned prior to use. the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994). * All Standards should be stored with caps tight and under appropriate laboratory conditions.



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: Inorganic ICV Solutions

QATS LABORATORY INORGANIC REFERENCE MATERIAL INITIAL CALIBRATION VERIFICATION SOLUTIONS (ICV1, ICV5, AND ICV6)

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION:

For use with the CLP SFAM01.0 SOW and revisions.

CAUTION:

Read instructions carefully before opening bottle(s) and proceeding with

the analyses.

Contains Metals in Dilute Acidic or Cyanide in Basic Aqueous Solutions HAZARDOUS MATERIAL

> Safety Data Sheets Available Upon Request

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014", "ICV5-0415", and "ICV6-0400", respectively.

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY
APTIM Federal Services, LLC
2700 Chandler Avenue - Building C
Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in $\mu g/L$ (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

ICV1-1014

For ICP-AES analysis, use a 10-fold dilution by pipetting 10 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid.

Page 1 of 2





RMs ICV 1, 5, 6 SFAM (1)



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: Inorganic ICV Solutions

ICV1-1014

For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.

ICV5-0415

For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting 1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K₂Cr₂O₇ and 5% (v/v) nitric acid.

ICV6-0400

For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6 concentrate into a 100 mL volumetric flask and dilute to volume with Type II water. Distill this solution along with the samples before analysis. The cyanide concentrate is prepared from $K_3Fe(CN)_6$, Type II water, and 0.1 % sodium hydroxide, and will decompose rapidly if exposed to light.

NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.

(D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS

Element Cor (after	ncentration (µg/L)						
	er 10-fold dilution)	Concentration (µg/L) (after 50-fold dilution)					
Al	2500	500					
Sb	1000	200					
As	1000	200					
Ва	520	100					
Be	510	100					
Cd	510	100					
Ca	10000	2000					
Cr	520	100					
Co	520	100					
Cu	510	100					
Fe	10000	2000					
Pb	1000	2000					
Mg	6000	1200					
Mn	520						
Ni	530	100					
K	9900						
Se	1000	2000					
Ag	250	200					
Na	10000	50					
Ti	1000	2000					
V	500	210					
Zn	1000	100 200					

	ICV5-0415		ICV6-0400
Element	Concentration (µg/L) (after 100-fold dilution)	Analyte	Concentration (µg/L) (after 100-fold dilution)
Hg	4.0	CN-	99



MATERIAL CERTIFICATE OF COMPLIANCE

DATE: JUNE 12, 2023

CUSTOMER:

PCI SCIENTIFIC SUPPLY, INC

PURCHASE ORDER NO.

6054931

CATALOG NO.

BOI5021-450L

PRODUCT DESCRIPTION:

BOILING STONES, TFE, 454GMS

QUANTITY:

10 EACH

LOT NO.

W126678

SPECIFICATION (S):

Made from Virgin PTFE Resin

We certify that we have complied with the terms and conditions of the above Purchase Order and the Part Specifications in the manufacturing of the above product.

Laura Valencia

Quality Assurance Inspector

F:U:J:CF:PCISCI:GOC-55118-BQI5021-061223

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: Part Number: Lot Number: Description: 58024 060523 Chromium (Cr) 21110221 Lot # Nitric Acid Solvent: Lavense

2.0% 40.0 Nitric Acid

(III)

Formulated By:

Lawrence Barry

060523

060523

Nominal Concentration (µg/mL): Recommended Storage: **Expiration Date:** 1000 Ambient (20 °C) 060526

Compound Volume shown below was diluted to (mL): NIST Test Number: Number Part **BTU9** Number Lot 2000.02 Factor Dilution Vol. (mL) Pipette (mL) Conc. (µg/mL) 0.058 5E-05 Initial Flask Uncertainty **Balance Uncertainty** Uncertainty Nominal Conc. (µg/mL) Conc. (µg/mL) Initial Final Reviewed By: +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) Pedro L. Rentas **SDS Information**

P20

TSIN SRM

3112a

 Chromium(III) nitrate nonahydrate (Cr) 58124 071122 0.1000 200.0 0.084 1000 10000.1 1000.0 12 7789-02-8 0.5 mg(Cr)/m3 ort-rat 3250 mg/kg

m/z->	N 5 10	5.0E5	5.0E5	m/z->	5000	1.004
				3		
N 0		110		o .		
h				7		(
N N N N		120		N. O		(
230		130		۵. ۵.		
						(
240		140		ò		
N		<u></u>		(h O		
250		150		0		
260		160		0		
		170		70		
		380		8 2.		
		0				
		190		90		
		N 0- 0		100		
		Ŏ		0		

Part # 58024



Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			_				_			=
	B	ᄧ	Ве	В	As	Sb	Δ	Monthly		
	A).02	4 0.02	0,01	A .02	40.2	△0.02	△0.02			
	δ	පි	Ω	င္တ	දි	ర్జ	Ω			
	40.02	40.02)	40.02	40.02	40,2	△0.02			
	Æ	ဂ္ဂ	වූ	ନ୍ଥ	멸	녆	Dy	80		
	40.02	40.02	40.02	<0.02	40.02	40.02	40.02	mineral differences		
	3	Ľ	स्र	Ħ	ď	ᅜ	Ж	Sheriff tool		
	40.02	40.02	40.2	A).02	<0.02	40.02	40.02		I race M	1
	폺	Мо	В.	Ķ	ВМ	Ē	П	MISSON ISSUE	Metals	1
3	A0.02	40.02	40.2	40.02	40.01	∆ .02	40.02	SI RECEIPTOR	Verification	
Towns and the	~	ን	70	굕	ô	₹	3	SHEWARDS	Clon	-
	∆ 0.2	40.02	40.02	40,02	40.02	40.02	40.02	THE PARTY OF THE P	by ICP-M	
	Sc	Sm	잗	공	Rh	æ	Pr		S (Hi	5
	<0.02	<0.02	<0.02	40.02	40,02	40.02	<0.02		g/mL)	
	Ta	S	ñ	Z.	Ą	Si.	Se			
	40.02	<0.02	40.02	402	40.02	40.02	402			
	==	Sn	Tm	Ħ	ᄇ	급	176			
	40,02	40.02	40,02	40,02	<0.02	40,02	<0.02	Contract Contraction		
	Z	Zn	~	뀱	۷	Ϥ	W	可能を発展		
	<0.02	< 0.02	<0.02	<0.02	40.02	40.02	<0.02	SALES OF SALES		

(I)= larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

M5697



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT:

Part Number:

58029

Lot Number:

102523

Description:

Expiration Date:

NIST Test Number:

Copper (Cu)

Ambient (20 °C)

2.0%

Lot #

24002546

40.0

Nitric Acid Formulated By:

(mL)

Solvent:

Nitric Acid

Reviewed By:

Expanded

Uncertainty

+/- (µg/mL)

Pedro L. Rentas 102523

Recommended Storage: Nominal Concentration (µg/mL):

1000

102526

6UTB

Part

Number

5E-05 Balance Uncertainty

Volume shown below was diluted to (mL):

2000.02

0.058 Flask Uncertainty

Lot Number Dilution Factor

Initial

Uncertainty

Nominal Pipette (mL) Conc. (µg/mL)

Initial

Final Conc. (µg/mL) Conc. (µg/mL)

CAS#

(Solvent Safety Info. On Attached pg.) OSHA PEL (TWA)

SDS Information

Benson Chan

LD50

102523

SRM

NIST

1. Copper(II) nitrate trihydrate (Cu)

Compound

100223

0.1000

200.0

58129 0.084 1000 10000.1 1000.0 2.2 10031-43-3 1 mg/m3 ori-rat 794 mg/kg 3114 [1] Spectrum No.1 [33.422 sec]:58029.D# [Count] [Linear] 1.0E6 5.0E5 10 $m/z \rightarrow$ 20 30 50 60 70 80 90 100 5.0E7 2.5E7 m/z->110 120 130 140 150 160 170 180 190 200 2.0E7 1.0E7 m/z-> 210 220 230 240 250 260





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

0.5	Trace Metals Verification by ICP-MS (µg/mL)																		
Al	<0.02	Cd	<0.02	Dy	<0.02	Hf	<0.02	Li	<0.02	Ni	<0.02	Pr	<0.02	Se	<0.2	Тъ	<0.02	W	<0.02
Sb	<0.02	Ca	<0.2	Er	<0.02	Ho	<0.02	Lu	<0.02	Nb	<0.02	Re	<0.02	Si	<0.02	Te	<0.02	ΰ	<0.02
As	<0.2	Ce	<0.02	Eu	<0.02	In	<0.02	Mg	<0.01	Os	<0.02	Rh	<0.02	Ag	<0.02	п	<0.02	v	<0.02
Ba	<0.02	Cs	<0.02	Gd	<0.02	Ir	<0.02	Mn	<0.02	Pd	<0.02	Rb	<0.02	Na	<0.2	Th	<0.02	Yb	<0.02
Ве	<0.01	Cr	<0.02	Ga	<0.02	Fe	<0.2	Hg	<0.2	P	<0.02	Ru	<0.02	Sr	<0.02	Tm	<0.02	Y	<0.02
Bi	<0.02	Co	<0.02	Ge	<0.02	La	<0.02	Mo	<0.02	Pt	<0.02	Sm	<0.02	s	<0.02	Sn	<0.02	Zn	<0.02
В	<0.02	Cu	T	Au	<0.02	Pb	<0.02	Nd	<0.02	K	<0.2	Sc	<0.02	Та	<0.02	Ti	<0.02	Zr	<0.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

Box 1. 8/1

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

irt # 58029

Lot # 102523

2 of 2

Printed: 10/26/2023, 1:20:31 PM

Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Lot#

24002546

CERTIFIED WEIGHT REPORT:

Part Number:

58025

102623

Lot Number: Description:

Expiration Date:

Manganese (Mn)

Ambient (20 °C)

2.0%

60.0

Nitric Acid

(mL)

Solvent:

Nitric Acid

Initial

60

160

Reviewed By:

Expanded

+/- (µg/mL)

Formulated By:

102623

102623

Recommended Storage: Nominal Concentration (µg/mL):

1000

102626

NIST Test Number:

6UTB

Balance Uncertainty 5E-05

Volume shown below was diluted to (mL):

3000.41

0.058 Flask Uncertainty

40

140

240

Uncertainty

Vol. (mL) Pipette (mL) Conc. (µg/mL)

Conc. (µg/mL) Conc. (µg/mL)

Final Uncertainty

70

170

(Solvent Safety Info. On Attached pg.)

CAS#

SDS Information

NIST SRM

Compound

10

110

Part

Number

Number

20

120

Lot

Factor

30

130

Dilution

Initial

Nominal

OSHA PEL (TWA)

Benson Chan

Pedro L. Rentas

LD50

1. Manganese(II) nitrate tetrahydrate (Mn) 58125 071123 0.1000 300.0 0.084 1000 10000.1 1000.0 2.1 20694-39-7 5 mg/m3 orl-rat >300mg/kg 3132 [1] Spectrum No.1 [34.243 sec]:57025.D# [Count] [Linear] 5.0E6 2.5E6

50

150

m/z - >1.0E8

m/z->

1.0E8

5.0E7

5.0E7

m/z->210 220 230

250

260

180

80

190

90

200

100



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Trace Metals Verification by ICP-MS (μg/mL)																		
Al	<0.02	Cd	<0.02	Dy	<0.02	Hf	<0.02	Li	<0.02	Ni	<0.02	Pr	<0.02	Se	<0.2	Tb	<0.02	W	<0.02
Sb	<0.02	Ca	<0.2	Er	<0.02	Ho	<0.02	Lu	<0.02	Nb	<0.02	Re	<0.02	Si	<0.02	Te	<0.02	U	<0.02
As	<0.2	Ce	<0.02	Eu	<0.02	In	<0.02	Mg	<0.01	Os	<0.02	Rh	<0.02	Ag	<0.02	T1	<0.02	l v	<0.02
Ba	<0.02	Cs	<0.02	Gd	<0.02	Ir _.	<0.02	Mn	T	Pd	<0.02	Rb	<0.02	Na	<0.2	Th	<0.02	Yb	<0.02
Be	<0.01	Cr	<0.02	Ga	<0.02	Fe	<0.2	Hg	<0.2	P	<0.02	Ru	<0.02	Sr	<0.02	Tm	<0.02	Y	<0.02
Bi	<0.02	Co	<0.02	Ge	< 0.02	La	<0.02	Mo	<0.02	Pt	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	Zn	<0.02
В	<0.02	Cu	<0.02	Au	<0.02	Pb	<0.02	Nd	<0.02	K	<0.2	Sc	<0.02	Ta	<0.02	Ti	<0.02	Zr	<0.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

^{*} Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the balances that are calibrated with weights traceable to NIST (see above).

^{*} Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} All standards should be stored with caps tight and under appropriate laboratory conditions.

^{*} Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM MSTHT

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Part Number: R: 12/20/23 Lot #

Nitric Acid

Solvent: 24002546

2%

Nitric Acid

Formulated By:

Lawrence Barry

100923

60.0

Lot Number: Description: 57082 100923 Lead (Pb)

Expiration Date: 100926

Recommended Storage: **NIST Test Number:** BIN9 1000 Ambient (20 °C)

Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): 3000.41 0.06 Flask Uncertainty 5E-05 Balance Uncertainty Reviewed By:

Cot

Nominal

Purity

Uncertainty Assay

|--|--|

Target Weight (a) Con Actual Actual Uncertainty +/- (ua/mL) Expanded #SAC SDS Information
(Solvent Safety Info. On Attached pg.)
(SONA PEL (TWA) TSIN

Pedro L. Rentas

100923

m/z->	1.000	m/z-> 2.0E6	Ф. ОП 4	m/z->	5.OE4	1.005
				2		
N.	anning process	110		ō		
		0				
990		120		N.		
N O		130		30		
		1				
		140		6		
		,				•
n D		150		धा ०		•
						h
		160		00		
		170		70		
		Ó.		O		
		1 00 00 00 00 00 00 00 00 00 00 00 00 00		8		
		200				
		190		9		
		200		8		

www.absolutestandards.com



r			H !			_				
2000	3 8	A 25	A) (2)	2 E	A) .	& 20.02 —	60.02			
1	? 8	3 5	<u>۽</u> ڊ	3 5	<u>ئ</u>	င္မ	Ω			
20.02	3 8	3 8	3 8	2 6 5 6	3	402	<0.02			
211	6	9 6	β §	5 5	i	라 -	Dу	MANAGE		
2002	20.02	3 5	3 6 6	300	9 8	4007	<0.02	MESTREAT IN THE STATE OF		
3	! [1 12	7 15	r E	1 8	5	HH			ا
l-i	20.02	2 6	20.02	20.02	10.01	3	20.02		race Me	
Z	MO	H9	M	Mg.	į	7	E	I	tals	-
40,02	20.02	8 6	20.02	10.05	2002	3	40.02		Verifica	
~	7	, -	Pd	S	140	1	Zi		tion	
40.2	<0.02	40.02	40.02	40.02	2002		40.02		by ICP-I	
Sc	Sm	R	공	2	K		P		S	
<0.02	40.02	40.02	40.02	40.02	20.02	000	A) 02	ľ	Fa/mL	
Ta	S	Sr	Na	\$6	2	2 8	ŝ			ı
40.02	40.02	40.02	402	40.02	40.02	2 6	A			
11	Sh	Tm	Ħ	Ħ	le.	5				
40.02	A.02	40.02	40.02	40.02	40.02	20.00	8			
72	Zn	×	상	۷	c	7	W			
40.02	40.02	40.02	40.02	40.02	40.02	20.02	200			

Physical Characterization:

(1)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- * All standard containers are meticulously cleaned prior to use.

the preparation of all standards.

- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com

Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number





www.absolutestandards.com

800-368-1131

Absolute Standards, Inc.

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

	100			-	_	-	-		-	-		_	
			В	Be	1	B B	As	30	3 ;	À			
		40.02	40,02	10.0		A 8	∆ 02	20,02	0	A) (1)			
	İ	ဦ	ဌ	δ	9	2	೭	2	, 8	2			
		D 002	40.02	40,02	70.02	3	<u>&</u>	40.2	20.02	3			
		A	පි	ନ୍ଥ	Ę	5	달	Ę	Ŋ	?	ı		
		∆ 0.02	40,02	40,02	20.02	3 1	A	A),02	20.02	200			
		3	E	रू	5	. :	3,	뜽	2				
		4	A).02	<u> </u>	20.02	8 8	3	40,02	20.02			-race V	
3		£	₹,	픘	M	- 141.6 - 141.6	ş	Ē	_		ı	etals	
	20.00	3 8	A 3	A ci	40.02	65	2	A 20.02	40.02			Verifica	
Target	r	4 ;	y	70	2	5	?	\$	Z		l		ı
arialyte	7.0	3 2	3 8	40.02	40,02	20.02	5 1	D 02	H	THE PERSON NAMED IN	ŀ		
	×	9 .5	î	7	중	Š	2 2	7.7 1	7	M	Ş	3	
•	20,02	2002	9 6	3	A 20 20	20.02	200	3	40.02	MANUAL PROPERTY.	y' /	2 <u>m</u>	
	=	, ₀	2 5	e	Z	Ag	٤	2	Š	MANAGES .			
	40,02	20.02	60.02	3 1	<u>A</u>	40.02	20.02	3	40.2	SELECT.			
	11	y y	, E	1 :	₹	=	ä	3	7				
	40.02	40,02	2002	8 8	3	∆ .02	20.02	3	6000				
	Zr	72	-	4 5	ş	<	-	: :	W	Name of the			
	40,02	40.02	40.02	20.02	3	Ø.02	40.02	20.02	Ann				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this Kandard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
* Printed acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



Certified Reference Material CRM R:8/25)

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT Copper(II) nitrate trihydrate (Cu) Nominal Concentration (µg/mL): m/z-> m/z-> m/z-y 2.0∈7 5.0E7 Recommended Storage: 1.0≡7 2.5円ア 5.0E5 1.0E6 Volume shown below was diluted to (mL): **NIST Test Number: Expiration Date:** Part Number: Description: Lot Number: [1] Spectrum No.1 20 110 10 58129 Number Part 58029 071723 1000 **BTU9** Ambient (20 °C) 071726 Copper (Cu) 022723 Number Lot 120 220 NO [33.422 sec]:58029.D# [Count] [Linear] 2000.02 0.1000 Dilution Factor 230 130 30 Val. (mL) 0.058 200.0 5E-05 Initia Flask Uncertainty Balance Uncertainty Pipette (mL) Conc. (µg/mL) Uncertainty 240 40 0.084 0 21110221 Nominal Lot # 2.0% 1000 250 150 0 Conc. (µg/mL) Conc. (µg/mL) Nitric Acid Solvent: 10000.5 (mL) Initial 40.0 160 200 60 Nitric Acid 1000.0 Final 170 70 Formulated By: Reviewed By: +/- (µg/mL) Uncertainty Expanded 2.2 180 80 10031-43-3 CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) Pedro L. Rentas Benson Chan 190 00 SDS Information 1 mg/m3 200 100 ori-rat 794 mg/kg LDSO 071723 071723 3114 TSIN SRM

Printed: 8/24/2023, 4:18:28 PM

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	[, <u>p</u>	. E	, <u>F</u>	ı A	35	- -		Γ	
	F					_		Statement of the last		
	20.02	200	8 2	20.02	40.2	40.02	0.02			
	2	. გ	. τ	<u>က</u>	<u>ြ</u>	ర్జ	Ω			
	-	, <u>6</u> , <u>9</u> 2	0.02	A).02	0.02	6 2	40.02	To and the second		
	Au	. Ce	ှင့	8	臣	Ħ	Dy			
	€0.02	0.02	40.02	40.02	40.02	40.02	40.02			
	2	: [₹	F7'	5	Ήο	ЭH	DEPOSITOR NAMED IN		
	∆ 0.02	40.02	40.2	40.02	40.02	40.02	<0.02	HINNESS MAINSTERN	Irace M	1
	Z	Mo	ВH	Mn	Mg	£	Ē	WESTERSTE	etais	
Tarnet analyte	40,02	40.02	0.2	40.02	40.01	<0.02	<0.02	MESSENSITIVATION	Verifica	
de anak	×	29	ש	ъ	õ	¥	Z	STREET, SALES	tion	
40	∆0.2	40.02	40.02	40.02	40.02	<0.02	40.02	A SUSTAINMENT OF THE	oy ICP-N	
	Sc	Sm	Ŗ.	&	Rh	Re	뀨		is (hi	
	40.02	40.02	40.02	40.02	40.02	40,02	40.02		J/mL)	
	Ta	Ø	Sr	Z	A	S:	%			
	40,02	40.02	40.02	40:2	40.02	<0.02	<0.2			
	11	Sn	Tm	Ħ	ⅎ	금	Tb			ı
	40.02	40,02	40,02	40.02	<0.02	40.02	<0.02			
	Zr	Z	κ	44	<	4	W	THE STREET, ST		
	<0.02	40.02	♦ 0.02	40.02	<0.02	<0.02	<0.02			

(I) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

2 of 2

^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

^{*} All standard containers are meticulously cleaned prior to use.
* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com



M5768 [M576] (B) R:1/3/24 Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Magnesium nitrate hexahydrate (Mg) IN030 маровгозат Compound Nominal Concentration (µg/mL): m/z-> ~-z/m m/z-> Weight shown below was diluted to (mL): Recommended Storage: 2.0≡4 1.0E4 5.0E5 1.0E6 1000 2000 NIST Test Number: **Expiration Date:** Part Number: Lot Number: Description: [1] Spectrum No.1 110 210 0 쭕 **BTUB** 58112 091823 10000 Ambient (20°C) (M5+18), (M5+16) 091826 Magnesium (Mg) Number 120 ğ 20 [19.923 sec]:58112.D# [Count] [Linear] Conc. (µg/mL) 2000.02 0.058 Flask Uncertainty 10000 Nominal 130 230 30 5E-05 Balance Uncertainty 99.999 Purity Uncertainty Assay 8 Purity (%) (%) 140 0.10 240 40 Solvent: 24002546 Nitric Acid 8.51 150 234.9118 Weight (g) Target Lot # Ē Weight (g) Conc. (µg/mL) 234.9126 Nitric Acid Actual 160 260 0 10000.0 Actual 170 6 +/- (µg/mL) Expanded Uncertainty Reviewed By: Formulated By: 20.0 180 80 13446-18-9 (Solvent Safety Info. On Attached pg.)
OSHA PEL (TWA) LD50 Pedro L. Rentas Lawrence Barry 190 **SDS Information** Ö Z 200 100 orl-rat 5440 mg/kg 3131a 091823 091823 SRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	555	В	Ве	Ва	As	Sb	A		
						_			
	∆0.02	0.02	40.01	<0.02	60.2	<0.02	<0.02		
	₽ C	ဝ	Ω	Ŝ	ද	ದ್	Ω		
	∆ 0.02	<0.02	<0.02	<0.02	40.02	40.2	<0.02		
	Αu	င္စာ	က္အ	8	탇	耳	Dy		
	₹0,02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02		
	73	Ľ.	Fe	F	In I	Ho	Hf		ı
	<0.02	40,02	40.2	<0.02	<0.02	<0.02	<0.02	I acc	-1
	Z.	Mo	Hg	Mn	Mg	ŗ	5	Mergis	2
)	<0.02	<0.02	<0.2	<0.02	⊷]	<0.02	<0.02	Verifica	No.
	×	7.	Р	Pd	S _O	Ş	Z.		
	40.2	40.02	40.02	<0.02	<0.02	40.02	<0.02	יטע וכד-ו	3
	Sc	Sm	Ru	Rb	Rh	Re	Pr	AU (F	
	<0.02	<0.02	<0.02	40.02	40.02	<0.02	<0.02	g/mL)	
	Ta	CO.	Sr	Na	δķ	Σ:	Se		١
	<0.02	<0.02	<0.02	<0.2	<0.02	<0.02	40.2		
	Ti	Sn	Im	Th	∄	Te	-Tι-		
	<0.02	0.02	0.02	40.02	40.02	40.02	<0.02		
	Zr	Z	ĸ	4,4	٧	u	¥		
	<0.02	40.02	40.02	40.02	A).02	<0.02	40.02		

(1) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Part Number: 57004 102523 02/09/24 Lot # Solvent:

24002546 Nitric Acid

2.0% (IE)

Nominal Concentration (µg/mL):

NIST Test Number:

BTU₉ 1000

Volume shown below was diluted to (mL):

2000.02

0.058

Flask Uncertainty Balance Uncertainty

5E-05

Number

Number Lot

Vol. (mL.)

Part

Dilution Factor

hitia

Uncertainty

Recommended Storage:

Ambient (20 °C) 102526

Expiration Date:

Lot Number: Description:

Beryllium (Be)

40.0

Nitric Acid

Benson Chan

102523

Formulated By:

Reviewed By:

Pedro L. Rentas 102523

Pipette (mL) Conc. (µg/mL) Nominal Conc. (µg/mL) Conc. (µg/mL) Final +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) SDS Information LD50 NIST SRM





800-368-1131



Certified Reference Material CRM

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace M	etals	Verifical	cation	by ICP-M	1) SI	ua/mL)						
	THE STATE		PENNINE BUILDING	AUTHORNSON				STREET, STREET,	SERVICE SECURITY	SECTION SECTION	HENCON BUILDING	NAME OF TAXABLE PARTY.	. ш					A STATE OF THE PARTY OF THE PAR	
IA	<0.02	3	<0.02	δ	<0.02	H	<0.02	Ľ	<0.02	ž	<0.02	左	<0.02	Se	<0.2	176	<0.02	M	<0.02
Sp	<0.02	J	40.2	à	40.02	Н	<0.02	3	<0.02	£	<0.02	Re	<0.02	š	<0.02	ę	₹0.02	ם	40.02
As	407	ඊ	<0.02	립	₹0.02	ជ	<0.02	Mg	<0.01	ő	<0.02	묎	<0.05	Ag	<0.02	F	<0.02	>	<0.02
Ba	<0.02	ర	<0.02	3	<0.02	ㅂ	₹0.02	Mn	<0.02	Z	₹0.05	8	<0.02	ğ	40.2	Ħ	<0.02	Ą.	<0.02
å	Т	Ö	<0.02	5	40.02	£	<0.7	Hg	<0.2	Δ,	<0.02	Ru	40.02	Ş	<0.02	Tm	₹0.02	>	<0.02
Ä	<0.02	රි	<0.02	පී	40.02	ڌ	40.02	Mo	<0.02	盂	40.02	Sm	40.02	S	<0.02	S	<0.02	77	<0.02
æ	<0.02	ರೆ	<0.02	Αm	<0.02	£	40.02	PN	<0.02	M	<0.2	Sc	40.02	Ta	<0.02	F	<0.02	Z	<0.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:



All standard containers are meticulously cleaned prior to use.

2 of 2

^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

^{*} Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

122



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT:

Part Number: Description: Lot Number: 57050 071123 Tin (Sn)

Salvents: 21110221

Nitric Acid Hydrochloric acid

Lot #

22D0562008

Nominal Concentration (µg/mL): Recommended Storage: **NIST Test Number:** Expiration Date: 1000 Ambient (20 °C) 071126

Weight shown below was diluted to (mL): **BTU9** 499.93

RM#

Number

Conc. (µg/mL) Nominal

(%)

Uncertainty Assay
Purity (%) (%)

Weight (g)

Target

ρţ

0.058 Flask Uncertainty 5E-05 Balance Uncertainty

> 10.0 30.0

3 6%

Nitric Acid

Formulated By:

Benson Chan

071123

Hydrochloric acid

Reviewed By:

Pedro L. Rentas

071123

Weight (g)	ACTUAL	
Conc. (µg/ml.)	Actual Ur	
'- (µg/mL)	certainty	xpanded
CAS# OSHA PEL (TWA) LD50	(Solvent Safety	SUS
PEL (TWA)	y Info. On Attache	Information
LD50	d pg.)	
SRM	TSIN	

1. Ammonium hexafluorostannate(IV) (Sn) m/z-> ---x/m --Z/111 2.5E4 5.0E4 1.0ES 2.0E6 2.5E5 S.OEG [1] Spectrum No.1 210 110 0 IN010 SND042023A1 120 220 N [15.034 sec]:58150.D# [Count] [Linear] 1000 230 130 8 240 140 0.10 40 44.2 250 150 Ö 1.13107 1.13286 160 260 60 1001.6 170 70 2.0 180 80 16919-24-7 190 90 7 mg/m3 200 100 ₹ 3161a

Part # 57050

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Bi Bi Bi	I
	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	
	58555	
	40.02 40.02 40.02 40.02 40.02	
	AC CS EE DY	
	4 4 4 4 4 A A A A A A A A A A A A A A A	
	HH Ho Hr Fe La	
	40.00 40.00 40.00 40.00 40.00 40.00	Trace M
	Nd Min Li	letals
(T) = Tamet anshra	40.02 40.02 40.02 40.02	Verifica
angk	* 7 ~ 8 S 4 X	Ition
4	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	by ICP-I
	S R R R R	m) S
	4444	a/mL)
	T _R S _r S _s S _s	
	402 402 402 402 402	
	T I I I I	
	40.02 40.02 40.02 40.02	
	Z Z ≺ Z < ⊂ €	
	4 4 5 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	

(I) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.
* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.
* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM

R: 02109124





ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com 091923 091923 (Solvent Safety Info On Attach SDS Information Pedro L. Rentas Lawrence Barry Formulated By: Reviewed By: Expanded Nitric Acid Final Nitric Acid 40.0 (III) hital 24002546 2.0% Nominal Balance Uncertainty Flask Uncertainty 5E-05 0.058 Initial 2000.02 Dilution Ambient (20 °C) Cobalt (Co) Volume shown below was diluted to (mL): 57027 091923 091926 ĕ 1000 **6UTB** Part Description: **Expiration Date:** Recommended Storage: Nominal Concentration (ug/mL): NIST Test Number: Part Number: Lot Number: CERTIFIED WEIGHT REPORT:

						100	10000	CHICAGO CONTROL CONTRO	URCH LABILLY	ianioc)	(Solvent Safety Into, On Attached pg.)	ttacned pg.)	22
Compound	Number	Number	Factor	Vol. (mL)	Pipette (mL) (conc. (ug/mL)	Conc. (µg/mL)	Conc. (ug/ml.)	+/- (ng/mL)	CAS#	Number Number Factor Vol. (mL) Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) +/- (µg/mL) CAS# OSHA PEL (TWA)	1050	SRM
Cobalt(II) nitrate hexahydrate (Co) 58127 050923 0,1000 200.0	58127	050923	0.1000		0.084	1000	10000	100001	00	10008.00.0	Company CO O	200	0770
								2000	1	0.770.001	O.UZ IIIgiritis	STEE SOCIETY OF HIGHER OF HIGHER OF HIGHER OF HIGHER	3113
(2									
			0 770		LA SPOLL NO	LOS ESTADOS NO CONTRACTOR SECTION SECT	F 1						

1.056	5.0E5	m/z->	5.0E7	1.0E8	5.0E7
		0		0	
		0		120	
L 34-243 Secj.baok7.D# [Count] [Linear]		Ō		130	
		.0		140	
		.09		50	
		. O		160	
				170	
		02			
		80		160	
		00		081	
		001		500	

Lot # 091923

250

240

230

220

010

W/Z->

Certified Reference Material CRM





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace M	etals	Verifical	tion	by ICP-M	4S (F	g/mL)						
1							STREET, SQUARE, SQUARE,	No section lives	ALL DESCRIPTION OF THE PERSON	10.000	Market Mark	MINNSH.	Sanday Marine	NAME OF TAXABLE PARTY.	Service of the last	SECOND STATES		No.	A STATE OF STREET
IV	<0.02	ಶ	1	Š	40.02 Dy 40.02	Ħ	<0.02	П	<0.02	Z	<0.02	Æ	<0.02	B	<0.2	£	<0.02	M	<0.02
ౙ	40.02	రే	40 7	占	<0.02	H9	<0.02	.3	₹005	Ź	₹0.02	2	<0.02	Š	40.02	T _e	40.05	5	40.02
As	40.2	ප	40.02	呂	40.02	ų	<0.02	Mg	10.05	ඊ	₹0.02	뙲	<0.02	Ag	40.02	F	<0.02	>	₩ 40.02
쯃	40.02	చ	40.02	3	4002	ㅂ	<0.02	Ma	<0.02	콘	₹000	2	40.02	N _a	40.2	Ę	20:0>	g,	Ø.02
2	10.05	ඊ	20.0 2	පී	40.02	હ	40.2	쁀	\$ 20	تم	₹0.02	콥	<0.02	Şt	40.02	Tm	Ø.02	٨	Ø.02
遥	40 .02	රි	۳	Ğ,	4002	ដ	<0.02	Mo	40.02	Æ	20'0 >	S	<0.02	S	40.02	Sn	40.02	Zn	Ø.02
æ	<0.02	ට්	<0.02	Αn	<0.02	윤	Z0.0>	P	<0.02	м	40.2	S	₩	Fee Fee	40,02	Ħ	Ø.02	Z	Ø.02

(T)= Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



^{*} The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.



Lot # 091923

All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

^{*} All standards should be stored with caps tight and under appropriate laboratory conditions.
* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

M5801



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: 1. Arsenic (As) Compound Nominal Concentration (µg/mL): M/2-> m/z-> -z/m 5.OE4 2.5E4 Recommended Storage: 1.0E5 2.0日5 1000 Volume shown below was diluted to (mL): 500 **NIST Test Number: Expiration Date:** Part Number: Description: Lot Number: [1] Spectrum No.1 210 110 0 58133 Number Part **SUTB** 1000 111326 57033 111323 Ambient (20 °C) Arsenic (As) 020522 Number 120 D D ONN NO [34.433 sec]:57033.D# [Count] [Linear] 0.1000 4000.0 Dilution Factor 230 130 30 Vol. (mL) 5E-05 400.0 initial 0.06 Pipette (mL) Conc. (µg/mL) Flask Uncertainty Balance Uncertainty Uncertainty 240 140 40 0.084 24002546 Nominal 2.0% Lot # 100 250 160 50 Conc. (µg/mL) Conc. (µg/mL) Nitric Acid 10001.0 Solvent: Initial 80.0 260 160 60 Nitric Acid 1000.0 Fina 170 0 Formulated By: Reviewed By: +/- (µg/ml.) Uncertainty Expanded 2.0 180 Thomas 80 7440-38-2 (Solvent Safety Info. On Attached pg.) 190 OSHA PEL (TWA) Pedro L. Rentas Lawrence Barry 90 SDS Information 0.5 mg/m3 100 000 orl-rat 500 mg/kg LD50 111323 111323 3103a NIST SRM

Printed: 2/8/2024, 5:01:04 PM

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	- H H H > /0 >	8	-
	As Sb Ba Bi Bi		
	4002 4002 4002 4002 4002		
	5 8 ជ ង 8 ជ ប		
	402 402 402 402 402 402		
	₹ ७८८ = = ⊅		
	6000 6000 6000 6000		
	322428		
	40.02 40.02 40.02 40.02 40.02	Trace N	
	N H M L L	letals	
9	40.2 40.2 40.2 40.2 40.2	Verifica	
= Target	M R P B O R R	E S S	
Target analyte	40.02 40.02 40.02 40.02	by ICP-N	
	S R R R R R	id) St	
R	4444 444 444 444 444 444 444 444 444 4	g/mL)	
	Ta Sr Na Sc		
	40.2 40.2 40.2 40.2 40.2 40.2		
	######################################		
(e)	40.02 40.02 40.02 40.02 40.02 40.02		
	Z Z Y Z < C &		
	40.02 40.02 40.02 40.02 40.02		

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:



- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- * All standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57033

800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



Certified Reference Material CRM

Solvent: MKBQ8597V Ammonium hydroxide

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: R - 02 00 124 M.5814

Part Number: Lot Number: 57005 071123

Description: Boron (B)

Nominal Concentration (µg/mL): Recommended Storage: 1000 Ambient (20 °C)

Expiration Date:

071126

2.0%

Ammonium hydroxide

Formulated By:

Benson Chan

071123

tento

40.0

Weight shown below was diluted to (mL): 1999.48 0.058 Flask Uncertainty

RM#

Number

Purity (%)

3

NIST Test Number: Ĕ Nominal Purity 5E-05 Balance Uncertainty Uncertainty Assay Target Actual Reviewed By: Expanded Pedro L. Rentas **SDS Information**

071123

1. Boric acid (B) IN018 BV092016A1 Conc. (µg/mL) 9 8 0.10 17.3 11.55772 Weight (g) 11.56201 1000.4 120 10043-35-3 2 mg/m3 orl-rat 2660 mg/kg 3107

Actual +/- (µg/mL) Uncertainty CAS# (Solvent Safety Info. On Attached pg.)
OSHA PEL (TWA) LD50 OSHA PEL (TWA)

NIST SRM

Weight (g) Conc. (µg/mL)

[1] Spectrum No.1 [12.275 sec]:58105.D# [Count] [Linear]

17/Z-V <-Z/111 m/z-> 2.5EG 5.0E6 2.5E6 S.OE6 1.0E4 2.0≡4 110 1210 0 120 220 Ŋ 130 230 30 140 240 40 150 250 (I) O 200 160 60 170 70

180

190

200

80

90

100

Part # 57005

Printed: 2/8/2024, 5:01:07 PM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

	B B B B B		
	40.02 40.02 40.02 40.02 40.02		
	58 ៦ ៦ ៦ ៦ ៦		
	40.02 40.02 40.02 40.02 40.02 40.02		
	A C C C E E Dy		
	40.02 40.02 40.02 40.02		
	322442	١.	
	402 402 402 402 402	Trace M	
	Hg Mh	etals	
(T) = Target analyte	40.02 40.02 40.02 40.02	Verifica	
get ans	z z o z o z z	ation	
alyte	40.02 40.02 40.02 40.02 40.02 40.02	by ICP	
	S R R R R R	-MS (
	666666666666666666666666666666666666666	//g/mL)	
	Ta S Na Ag		
	40.02 40.02 40.02 40.02 40.02 40.02		
	T I I I I		
	4444 4422 4422 4422 4422 4422 4422 442		
	\$ 2 × \$ × C \$		
	4000 4000 4000 4000		

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- the preparation of all standards.
- All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

R102109124

MURIC

Solvent: 21110221

Nitric Acid

Lot #

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number: **Lot Number:**

57115 041723

Description:

Phosphorous (P)

Expiration Date:

041726

Nominal Concentration (µg/mL): Recommended Storage: NIST Test Number: 10000 Ambient (20 °C)

BTUB

5E-05 Balance Uncertainty

Weight shown below was diluted to (mL): 2000.02

Number 5 Conc. (µg/mL) Nominal 0.058 Flask Uncertainty Purity 3 Uncertainty Assay Purity (%) E Target

1. Ammonium dihydrogen phosphate (P)

IN008 PV082019A1

10000

99,999

0.10

27.5

RM#

Compound

22%

40.0

Nitric Acid

Formulated By:

Lawrence Barry

041723

into

Reviewed By:

Pedro L. Rentas

Expanded SDS Information 041723

Weight (g) 72.7287 Weight (g) Conc. (ug/mL) 72.7289 Actual 10000.0 Actual +/- (µg/mL) Uncertainty 20.0 7722-76-1 CAS# (Solvent Safety Info. On Attached pg.)

OSHA PEL (TWA) LD50 5 mg/m3 orl-rat >2000mg/kg 3186 NIST SRM

Part # 57115

1 of 2

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

	Г						, .	1	Г	ĺ
	F	3 <u>5</u>	i Re	, OC	AS	- 20	# ≥			
	20.02	20.02	10.0	A0.02	20.2	20.02	A0.02			
	3	, Ç	, 5	ဂ္ဂ	Ç	. E	8			
	A0,02	40.02	A)02	0.02	6 002	40.2	A 0.02	COLUMN DESCRIPTION		
	Æ	- ද	ନ୍ଥ	5	먑	Ē.	Ş			
	A0.02	A.02	A).02	40.02	40.02	A0.02	40.02			
	3	7	냚	뱌	Ħ	퓽	H	Ì		
	40.02	40,02	6 2	40,02	40.02	40.02	40.02		race Me	
	ž	Мо	Hg	Mn	Mg	Ţ	Ľ		letals	
Towns and the	40.02	40,02	402	40.02	40.01	40.02	<0.02		Verifica	
	×	'n	۳	ਣ	Š	¥	Z	į	tion	
	A	40,02	T	40,02	40.02	40.02	40,02		by ICP-A	
	Sc	Sm	R _L	R.	æ	æ	27	ı,	E SI	
	40.02	40.02	40.02	40.02	40.02	A0.02	40.02	ľ		The second
	T _B	S	Ş	Z	≱	S	&			
	40.02	∆ .02	6.02	<u>\$</u>	∆ 0,02	40.02	40.2			
	17	Sp	Tm	닭	ㅂ	Te	T T			
	<0.02	<0.02	<0.02	∆ 0.02	40.02	40,02	40,02	STREET, STREET		
	Zr	Zn	₩.	\$	<	□	W			
	<0.02	6002	A).02	A0.02	& .02 .03	A0.02	40.02	TO THE REAL PROPERTY.		

(I)= larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. *Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.
* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

*All Standards should be stored with caps tight and under appropriate laboratory conditions.
*Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

2 of 2

Part # 57115

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



R1 02/09/124 Certified Reference Material CRM

M5816

CERTIFIED WEIGHT REPORT

Part Number:

Lot Number: Description:

57016 122923

Solvent:

122923

ASTM Type 1 Water

Lot #

Expiration Date: 122926 Sulfur (S)

Nominal Concentration (µg/mL): NIST Test Number: 1000

Recommended Storage:

Ambient (20 °C)

Weight shown below was diluted to (mL): 4000.0 5E-05 Balance Uncertainty 0.06 Flask Uncertainty

Nominal

Purity

Uncertainty Assay

Target

Actual

Uncertainty

Expanded

Reviewed By:

Pedro L. Rentas

122923

tento

Formulated By:

Benson Chan

122923

 Ammonium sulfate (S) IN117 SLBR7225V Number Conc. (µg/mL) 1000 99.9 38 Purity (%) 0.10 24.3 38 Weight (g) 16.4979 Weight (g) Conc. (µg/mL) 16.4980 1000.0 +/- (µg/mL) 20 7783-20-2 CAS# SDS Information
(Solvent Safety Info. On Attached pg.)
LD50 ¥ orl-rat 4250mg/kg 3181 SRM

1/Z-V m/z-> m/z-> N.SES S.OEB 5.OE7 1.0**E**8 N. SES 5.0E5 [1] Spectrum No. 1 210 110 0 120 ななり 0 [33.603 sec]:57016.D# [Count] [Linear] 130 230 30 140 240 40 250 150 000 160 200 00 170 0 180 80 190 00 200 100

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Part # 57016

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

(I) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

Certified Reference Material CRM

109/24

M5817

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number: Lot Number: 071123 57116

Solvent:

071123

ASTM Type 1 Water

Burense

Formulated By:

Lawrence Barry

071123

Lot #

Expiration Date: Description: 071126 Sulfur (S)

Nominal Concentration (µg/mL): NIST Test Number: 10000 Ambient (20 °C)

Recommended Storage:

EU1B

Weight shown below was diluted to (mL): 1999.48 Nominal 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Reviewed By: Pedro L. Rentas SDS Information

 Ammonium sulfate (S) IN117 SLBR7225V 10000 99.9 0.10 24.3 82.4675 82,4682 10000.1 20.0 7783-20-2 Z orl-rat 4250mg/kg 3181

Number Ĕ Conc. (µg/mL) Purity 8 Uncertainty Assay Purity (%) 8 Weight (g) Target Weight (g) Conc. (µg/mL) Actual Actual +/- (µg/mL) OSHA PEL (TWA)

Expanded

071123

Uncertainty (Solvent Safety Info. On Attached pg.)
OSHA PEL (TWA) LD50 SRM NIST

m/z->	1.005	m/z-> 2.0E5	2.565	5.0E5	1000	2000
0		110		0		
N N O		120		20		
230		30		9 0		
240		140		40		
250		150		50		
260		160		8		
		170		70		
		180		8.		
		190		90		
		200		100		

Part # 57116

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	B B B B As Al	
	40.02 40.02 40.02 40.02	
•	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	
	5848888	
1	40.2 40.2 40.02 40.02	
	A C C C C C C C C C C C C C C C C C C C	
	40.02 40.02 40.02 40.02 40.02 40.02	
	出 元 元 元 元 元 元 元 元 元 元 元 元 元 元 元 元 元 元 元	_
	40.02 40.02 40.02 40.02 40.02	Trace Ma
	Ma Ma Ma Ma	200
(T)= Tarnet analyte	40.02 40.02 40.02 40.02 40.02	Variety.
hansh	K B B B B B B B B B B B B B B B B B B B	
Ď	402 402 402 402 402	
	 	
	4002 4002 4002 4002 4002 4002 4002	
	S S S S S	
	40.2 40.02 40.02 40.02 40.02 T	
	T I I I I	
	4000 4000 4000 4000 4000	
	Z	
	666666666666666666666666666666666666666	

Physical Characterization:

(1)= larger analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
 * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions.
 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57116

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: Lot #

Part Number: Lot Number: Description: 57015 091123 Phosphorous (P) Solvent: 24002546 2% 40.0 Nitric Acid Nitric Acid

Formulated By:

Lawrence Barry

091123

Pedro L. Rentas

091123

SDS information

rento

Nominal Concentration (µg/mL): Recommended Storage: **Expiration Date:** 1000 091126 Ambient (20 °C) (JE)

Weight shown below was diluted to (mL): **NIST Test Number:** BITUB Lot 2000.02 Nominal 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Purity Uncertainty Assay Target Actual Uncertainty Reviewed By: Expanded

 Ammonium dihydrogen phosphate (P) IN008 Pvos2018A1 [1] Spectrum No.1 RM# Number [12.074 sec]:58115.D# [Count] [Linear] Conc. (µg/mL) 1000 99.999 3 Purity (%) 0.10 27.5 3 Weight (g) 7.2729 Weight (g) Conc. (µg/mL) 7.2730 1000.0 +/- (µg/mL) 2.0 7722-76-1 CAS# (Solvent Safety Info. On Attached pg.)
OSHA PEL (TWA) LD50 5 mg/m3 rl-rat >2000mg/ki 3186 SRM

Part # 57015

--z/m

210

220

230

240

250

260



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	ľ	В	<u> </u>	Ħ.	뮸	200	Ę,	3		ş	2	4		
		A 022	20.02	3	- 60 10	70.02	3	70		A	2002	200		
ř.		<u>ნ</u>	8	,	Ω	Ç	?	g		ვ. 	2	2		
		A 68	20705	3	A 20.02	20.02	3	40.02		2	20,02	3		
		A II	Ę	1	ට ව	2	2	달	2	Į,	Ų			
		3	40.02		3	♦0.02)	8	20.02	3	∆ .02			
		ÿ	<u>_</u>		₹1	4		<u> </u>	0.0	F .	H	1		
	2000	3	<u> </u>	4.4	3	∆ 02		6 002	20.02	3	40.02	-		Trace M
	1	ž	š	200	Ç	¥	9	X	Į,	•	5			<u>P</u>
3	20,02	3	<u>8</u>	7.03	3	∆ 0,02	1000	<u>^</u>	40,02	2	A 0,02			Verifica
Target	ŀ	4	7	7	,	Z	Ş	Ş	8		Z			†:
Target analyte	ê	9	A)	_		8	10:04	3	A0.02		A) (2)		3	אי וכפרו
	Se.	•	S	¥.	,	루	2	P	₽	:	Ŗ	Manager Street	F	100
	40.02		A S	40.02		A	70.05	3	<u>\$</u> 0.02	***************************************	A		g/ IIIL)	7
	Ta	,	^	ş		Z.	A	•	S	ş	ß	SANSON COM		
	40.02	70.02	3	∆ 0,02	i d	3	20,02	3	∆	ć	3			
	111	ě	?	Ĭ'n	Ē	;	Η	!	7	č				
	40.02	70.02	3	∆0,02	2000	3	∆ 0.02	2	200	20.02	300			
	Zr	2	7	<u>~</u>	16	\$	\ -		9	*				
	40.02	20.02	3	20.02	70.0>	3	<u></u>		A) (2)	20.02				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
 * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Sodium Chloride, Crystal BAKER ANALYZED® A.C.S. Reagent







Material No.: 3624-01

Batch No.: 0000281938

Manufactured Date: 2021-06-07

Retest Date: 2026-06-07

Revision No.: 1

Certificate of Analysis

Test	Specification	Result
Assay (NaCl) (by Ag titrn)	≥ 99.0 %	100.0 %
pH of 5% Solution at 25°C	5.0 - 9.0	6.3
Insoluble Matter	≤ 0.005 %	0.003 %
lodide (I)	≤ 0.002 %	< 0.002 %
Bromide (Br)	≤ 0.01 %	< 0.01 %
Chlorate and Nitrate (as NO ₃)	≤ 0.003 %	< 0.001 %
ACS - Phosphate (PO ₄)	≤ 5 ppm	< 5 ppm
Sulfate (SO ₄)	≤ 0.004 %	< 0.004 %
Barium (Ba)	Passes Test	Passes Test
ACS - Heavy Metals (as Pb)	≤ 5 ppm	< 5 ppm
ron (Fe)	≤ 2 ppm	< 1 ppm
Calcium (Ca)	≤ 0.002 %	< 0.001 %
Magnesium (Mg)	≤ 0.001 %	< 0.001 %
Potassium (K)	≤ 0.005 %	0.001 %

For Laboratory, Research, or Manufacturing Use Meets Reagent Specifications for testing USP/NF monographs Country of Origin: USA

Packaging Site: Paris Mfg Ctr & DC





Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

ACCREDITATION / REGISTRATION 1.0

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Custom Grade Solution

Catalog Number:

CGY10

Lot Number:

V2-Y740548

Matrix:

2% (v/v) HNO3

Value / Analyte(s):

10 000 µg/mL ea:

Yttrium

Starting Material:

Yttrium Oxide

Starting Material Lot#:

2661 and 06230520YL

Starting Material Purity:

99.9984%

CERTIFIED VALUES AND UNCERTAINTIES 3.0

Certified Value:

 $10000 \pm 30 \mu g/mL$

Density:

1.032 g/mL (measured at 20 \pm 4 °C)

Assay Information:

Assay Method #1

10011 ± 25 µg/mL

EDTA NIST SRM 928 Lot Number: 928

Assay Method #2

9997 ± 50 µg/mL

ICP Assay NIST SRM 3167a Lot Number: 190730

Assay Method #3

9984 ± 31 µg/mL

Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRMRM}, where two or more methods of characterization are used is the weighted mean of the results:

$X_{CRM/RM} = \Sigma(w_i) (X_i)$

X_i = mean of Assay Method I with standard uncertainty uchar i

; = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{char})^2 / (\Sigma (1/(u_{char})^2))$$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{1/2}$ where u_{char} i are the errors from each characterization method

u_{bb} = bottle to bottle homogeneity standard uncertainty

u_{its} = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

- ------

Characterization of CRM/RM by One Method
Gertified Value, Xanuary, where one method of characterizat

Gertified Value, X_{CRM/RM}, where one method of characterization is used is the mean of individual results:

XCDM/DM = (Xa) (Uchar a)

X_a = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char} a + u^2_{bb} + u^2_{lts} + u^2_{ts})^{V_2}$

k = coverage factor = 2

uchar a = the errors from characterization

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

u_{ts} = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

M	Ag	<	0.004600	M	Eu		0.009037	М	Na		0.086360	M:	Se	<	0.005200	M	Zn		0.030125
M	Al		0.014862	0	Fe		0.002410	М	Nb	<	0.000570	0	Si		0.024100	0	Zr	<	0.002600
М	As	<	0.003500	М	Ga	<	0.000570	M	Nd		0.000923	M	Sm		0.000461				
М	Au	<	0.001700	М	Gd	<	0.003500	M	Ni	<	0.005700	M	Sn	<	0.002300				
0	В		0.002209	M	Ge	<	0.005200	M	Os	<	0.001200	M	Sr	<	0.004600				
0	Ba	<	0.002500	М	Hf	<	0.000570	n	Р	<		M	Ta	<	0.000570				
0	Be	<	0.001400	М	Hg	<	0.000570	M	Pb		0.005020	M	Tb		0.001044				
M	Bi	<	0.003500	М	Но		0.009037	М	Pd	<	0.005100	М	Te	<	0.002300				
0	Ca		0.009841	М	In	<	0.002300	M	Pr	<	0.002300	М	Th	<	0.000570				
M	Cd	<	0.000570	М	lr	<	0.000570	M	Pt	<	0.000570	M	Ti	<	0.003500				
M	Ce	<	0.002300	0	K		0.018677	М	Rb	<	0.000570	М	TI	<	0.000570				
M	Co	<	0.000570	M	La		0.000461	М	Re	<	0.000570	М	Tm	<	0.003500				
M	Cr	<	0.004000	0	Li	<	0.009300	М	Rh	<	0.008000	M	U	<	0.000570				
M	Cs	<	0.000570	M	Lu		0.000582	М	Ru	<	0.000570	M	V		0.001265				
M	Си		0.002610	0	Mg		0.001486	n	S	<		M	W	<	0.002300				
М	Dy		0.003815	М	Mn		0.000582	М	Sb		0.005422	S	Υ	<					
M	Er		0.003615	M	Мо	<	0.005700	М	Sc	<	0.001200	M	Yb		0.001827				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures <u>Terms and Conditions of Sale</u>, https://www.inorganicventures.com/terms-and-conditions-sale. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.Inorganicventures.com/TCT

chemically stable for years in 2-5% HNO3 / LDPE container.

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 88.91 +3 6 Y(OH)(H2O)x+2 Chemical Compatibility -Soluble in HCl, H2SO4 and HNO3. Avoid HF, H3PO4 and neutral to basic media. Stable with most metals and inorganic anions forming an insoluble carbonate, oxide, oxalate, and fluoride. Avoid mixing with elements / solutions containing moderate amounts of fluoride.

Stability - 2-100 ppb levels stable for months in 1% HNO3 / LDPE container. 1-10,000 ppm solutions

Y Containing Samples (Preparation and Solution) - Metal (Soluble in acids); Oxide (Dissolve by heating in H2O/ HNO3); Ores (Carbonate fusion in Pt0 followed by HCl dissolution); Organic Matrices (Dry ash and dissolve in 1:1 H2O / HCl or HNO3).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axiai view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 89 amu	0.8 ppt	N/A	73Ge16O, 178Hf+2
ICP-OES 360.073 nm	0.005 / 0.000036 μg/mL	1	Ce, Th
ICP-OES 371.030 nm	0.004 / 0.00007 µg/mL	1	Се
ICP-OES 377.433 nm	0.005 / 0.0009 µg/mL	1	Ta, Th

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

February 20, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- February 20, 2029
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

_	Sealed TCT	Bag Oper	Date:	

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 **NAMES AND SIGNATURES OF CERTIFYING OFFICERS** Certificate Prepared By:

Uyen Truong Custom Processing Supervisor

Mayyand Man Paul R. Laine

Certificate Approved By:

Muzzammil Khan Stock Laboratory Supervisor

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



Certified Reference Material CRM

M5962 R! 06/14/24



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/z->		i,	m/z->		10 c	÷ is	1. Selenium (Se)	Compound		<		Nominal Co	Re			CERTIFIED WEIGHT REPORT	מדודודה שובום
210	1.008	2.008	110	1.008	/z-> 10	[1] Spectrum No.1				Volume shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:	1	Lot Number: Description:	Part Number:	1 11000H
0			0		Ū	Z	58134	Number	Part	as dilute					lie ie ii	_	
220			120		N 0	r.	071223	Number	Lot	d to (mL):	6UTB	1000	Ambient (20 °C)		060624 Selenium (Se)	57034	
Ŋ			4		ω	3.702	0.1000	Factor	Dilution	2000.07			<u>೦</u>		Se)		
230			130		90	sec]:58	200.0	Val. (mL	Initial	0.100	5E-05						
240			140		40	33.702 sec]:58034.D# [Count] [Linear]	0.084	Vol. (mL) Pipette (mL) Conc. (µg/mL)	Uncertainty	Flask Uncertainty	Balance Uncertainty						
250			150		50	Count) [L	1000	Conc. (µg/mL)	Nominal	ťγ	ainty			2.0%	24007540	24002546	
260			160		. 60	inear 2	10002.5	Conc. (µg/mL	Initial				(mL)	40.0	Zin Zin	Solvent:	
o							1000.0	Conc. (µg/mL) Conc. (µg/mL)	Final					Nitric Acid			(1)
			170		70		2.2	.) +/- (µg/mL)	Uncertainty	Expanded	Reviewed By:	K	N	Formulated By:	M		10
			180		80		7782-49-2	C	(So		y:	200	11	Ву:			
			190		90		2 0.2 mg/m3	OSHA PEL (TWA)	(Solvent Safety Info. On Attached pg.)	SDS Information	Pedro L. Rentas	lenco		Benson Chan	M		
			200		100			NA)). On Atta	rmation	ntas	,	/	5			
			-		J		orl-rat 6700 mg/kg	LDS0	ched pg.)		060624			060624			
							3149	SRM	NIST		4			4-1		_	

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							I race M	1etals	Verifica	lion	oy ICP-M	S (1)	g/mL)						
A	40.02	CQ.	<0.02	Dy	<0.02	HH	<0.02	11	<0.02	Z.	<0.02	Pr	<0.02	Se	H	-T	40.02	W	40,02
ЗЪ	<0.02	င္ဖ	<0.2	퍜	<0.02	н	<0.02	Į.	<0.02	₽	<0.02	Re	40.02	S:	<0.02	Te	<0.02	U	<0.02
As	<0.2	ზ	<0.02	臣	<0.02	Ħ	<0.02	Mg	<0.01	°	<0.02	Rh	40.02	Ag	<0.02	∄	40.02	۷	<0.02
Ва	<0.02	Ç	<0.02	æ	<0.02	ŀ	<0.02	Mn	<0.02	Pd	40.02	₽.	<0.02	Na	<0.2	Ħ	<0.02	4	<0.02
Ве	<0.01	Ç	40.02	Ga	<0.02	F	<0.2	Ж	402	P	<0.02	R _L	<0.02	St	<0.02	Tm	<0.02	¥	<0.02
В:	40.02	င္ပ	<0.02	දූ	<0.02	Ľ	<0.02	Mo	<0.02	7	<0.02	Sm	40.02	S	<0.02	Sn	40.02	Zn	<0.02
В	<0.02	υ	<0.02	Au	<0.02	Рь	<0.02	M	<0.02	×	40.2	Sc	<0.02	Ta	<0.02	Ħ	<0.02	Zr	<0.02

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
 * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

 * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- * All standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

CERTIFIED WEIGHT REPORT:
Part Number:
Lot Number: Lithium nitrate (Li) Nominal Concentration (µg/mL): m/z-> Recommended Storage: Volume shown below was diluted to (mL): NIST Test Number: **Expiration Date** [1] Spectrum No.1 [32.093 sec]:58003.D# [Count] [Linear] Description: 210 10 Part Lot Number Number 58103 070622 0.1000 57003 062124 Lithium (Li) 6UTB 062127 Ambient (20 °C) 1000 220 120 20 250.11 230 25.0 0.004 Initial Uncertainty Nominal Initial Final

Vol. (mL) Pipette (ml.) Conc. (µg/mL) Conc. (µg/mL)

Conc. (µg/mL) 0.016 Flask Uncertainty 5E-05 Balance Uncertainty HEBSON OF PSON 240 40 1000 24002546 Lot# 2.0% 250 150 50 Nitric Acid Solvent: 10000.4 (mL) 260 1000.0 Nitric Acid 7/01/24 Formulated By: Reviewed By: +/- (µg/mL) Uncertainty Giovannie Capacito 2.0 7790-69-4 5 mg/m3 orl-rat 1426 mg/kg NA SDS Information
(Solvent Safety Info. On Attached pg.)
CAS# OSHA PEL (TWA) LD50 Pedro L. Rentas Giovanni Esposito 9 0 062124 062124 SRM

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

\$

Certified Reference Material CRM

20

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Part # 57003 Lot # 062124

1 of 2

Printed: 6/24/2024, 11:20:08 PM

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

40.02 40.02	A0.02	022	A 3		<0.02	<0.02			
3 5 5 5	3 ° °	ა ზ	ç		C C	Ω			
A A A A A A A A A A A A A A A A A A A	A0.02	2000		40.02	40.2	<0.02			
ද වූ	3	- 00	3	Eu	먁	Dy			
40.02	3	40.02	40.02	<0.02	<0.02	<0.02			
7	7	F.	4	F	Но	Н			
3	40.02	40.2	<0.02	40.02	<0.02	<0.02		Trace M	
Z.	Mo	Hg	Mn	Mg	Li			letals	
<0.02	<0.02	<0.2	<0.02	<0.01	<0.02	1	3	Verifica:	١
×	7	Þ	Ы	os Os	ß	N		tion	١
<0.2	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	3	y ICP-M	١
Sc	Sm	Ru	Rb	Rh	Re	7	T.	Brl) S	۱
<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	20.02	4	/mL)	
Ta	s	Sr	Na	Ag	2	9 5	e	ı	١
<0.02	<0.02	<0.02	40.2	<0.02	20.02	6 8 E	A) 3		I
11	Sn	Tm	H	II	1 10	1	7		١
<0.02	<0.02	<0.02	<0.02	20.02	20.02	3	<0.02		
12	Zn	×	Ϋ́	<	: 0	1	W		
20.02	40.02	<0.02	<0.02	20.02	200	2000	<0.02		

(T) = Target analyte

Physical Characterization:

Al Sh As Ba Ba Bi

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

	Puri	굺
	Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in	certif
	cids,	fied va
•	18.2	alue is
=	ă	St
	egohr	he cc
	2	ž
•	lei.	en
	9	3
	ΣĖ	
	ä	9
	wate	calc
	Ţ	믔
	ca	E
	ğ	0
	ate.	TOTT
	C	g
	las	Ze.
	S	3
	9	2
	las	7
	ΝS	an c
	ar	7
	9	2
	nd	. 🗒
	the	
	hig	: =
	nes	usp.
	L b	ď
	Ē	. 5
	₹	5
	ra	2
	2	Č,
	ac	ŭ
	en	. 6
	als	- 0
	2	1 4
	e	ď
	Se	100
	Ö	- 8
	5	

the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* All standards on prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are prepared gravimetrically using balances that are calibrated.

* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

Part # 57003 Lot # 062124

Printed: 6/24/2024, 11:20:08 PM

2 of 2

Certificate of Analysis 6652M , 8782M

MORGANIC NE NE SE SEGENE YOU TREST

info@inorganicventures.com P: 800-669-6799/540-585-3030 P: 540-585-3030 R:2/22/24

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com



ACCREDITATION / REGISTRATION

Number QSR-1034). the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (GSR Certificate INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for

PRODUCT DESCRIPTION

Catalog Number:

Single Analyte Custom Grade Solution Product Code:

CGTN

2% (v/v) HNO3 :xintsM T2-TI719972 Lot Number:

muineill 1 000 hg/mL ea: Value / Analyte(s): tr. HF

Starting Material Lot#: 2094 Starting Material: Ti Metal

Starting Material Purity: 99.9975%

1002 ± 5 µg/mL Certified Value: **CERTIFIED VALUES AND UNCERTAINTIES**

1.012 g/mL (measured at 20 \pm 4 °C) Density:

Assay Information:

ICP Assay NIST SRM 3162a Lot Number: 130925 1002 ± 4 µg/mL Assay Method #1

The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance $\frac{1}{1000}$

Certified Value, X_{CRM/RM}, where one method of characterization is used is the mosn of individual results:

XCRANGAM = (x_a) (ucher a) X = x_a mass of Keesy Method A with x_a = x_a the standard uncertainty of

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expressed at approximately the 95% confidence level using a coverage factor of $K=\Sigma$.

Characterization of CRM/RM by One Method Characterization of CRM/RM by Two or More Methods

4.0 TRACEABILITY TO NIST

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration

4.2 Balance Calibration

used for testing are annually compared to master weights and are traceable to NIST. - All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRWIRMs.

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below, solutions tested by ICP-MS were analyzed in an III bA-Bitter of ore each element, is reported below, solutions tested by ICP-MS were analyzed in an III bA-Bitter of the properties
e2 M 078220.0 > gN O 882000.0 > u3 M 8g < 0.000536 M Eu <

ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to

Page 2 of 4

INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

> uR M 882000.0

> 9A M 886 0.000.0

> bq M 882000.0 > rq M 888200.0 > rq M 682000.0 > dg M 271100.0

> q O f81200.0 > dq M f82800.0

> iN O 882000.0 > aO M 841200.0

> dN O 322500.0 > N M 862000.0

M - Checked by ICP-MS

Mn < Mg < Li <

> 0H

> 6H

ΉŁ

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

M 976800.0 > 8 | 345600.0 M 576800.0 > 8 M 782600.0

by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

> mT M 882000.0 > U M 882000.0 > V M 682000.0 W M

> 6T M 882000.0 > AT M 882000.0

sT M 034450.0 > dT M E70100.0

s 852000.0 M 882000.0

O.000269 O

O.043560 O

n2 M 068010.0 89Z000.0 > mS M 89Z000.0

> II

JS

674000.0 228610.0

892000.0 892000.0

0.000268

699630.0

0.001341

892000.0

0.010560

960000'0

960000.0

73260.0 > nZ O 402100.0 038540.0 > nZ O 267400.0

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/ml)

7.7 Storage and Handling Recommendations

oM M 882000.0

0.000268 M K 0.000268 M K 0.000268 M K

0.000872 O Fe > 0.008586 M Ga <

O 892000.0

O S37000.0 M 882000.0

M 882000.0

M 603100.0

M 885800.0

M £83200.0 > 00 M GG8020 O.004577 M Gd <

INTENDED USE

W Et < O Cn <

O B <

IA O

4.1 Thermometer Calibration

volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is - This product is traceable to MIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRMINM uncertainty error and the measurement, weighing and

Page 3 of 4

- Chemical Testing - Accredited / AZLA Certificate Number 863.01

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- QSR Certificate Number QSR-1034

1.01 ISO 9001 Qualify Management System Registration

MOITATY STANDARD DOCUMENTATION 0.01

Homogeneity data indicate that the end user should take a minimum ample size of 0.0.2 m L to assume

This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. The Coth series alongs mirranament to be the Coth series alongs mirranament to be the Coth series alongs mirranament.

HOMOGENEITY

Please refer to the Safety Data Sheet for information regarding this CRWRM.

NOITAMROANI SUOGRASAH HF Note: This standard should not be prepared or stored in glass.

Ollinger		C INTOTINATION (ICP_OEC n.	Idoseomeni	
ss radial/axial view):	are given	Estimated D.L. Estimated D.L.	Technique/Line	
Interferences (Underline 11)	Order	idq 41	ICP-MS 48 amu	
Interferences (underlined indicates severe) 32S16O, 32S14N,	A/N	add		
14N160180,				
14N17N2, 36Ar12C,				
48Ca, [96X=2				
7-V001 (no a				
(where X = Zr, Mo, Ru)]		10000 () 1900 ()	ICP-OES 323.452 nm	
Ce, Ar, Ni		Jm/gu Se000.0 \ +200.0	ICP-0ES 334.941 nm	
		m/pu 820000.0 \ 8500.0	ICP-OES 336.121 nm	
ла, Та, Сг, U М М9 Ω-	1 1		F Note: This standar	ŀ
W, Mo, Co		In/gy 4500000 \ cocos-	nous prepries sur res	٠

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/a

1:1:1 H2O / HF./ H2SO4 or fuse ash with pyrosulfate if oxide is as plastic pigment and likely in brookite Volentily), Oxide - Northere are repetation; and sociation; restore (Dissolved by heating in 1737 HZO / HF / HZSO4); Oxide - Northere history (~800EC) brooklie (fuse in Pt0 with KZSZO7); Ores (fuse in Pt0 with KZZZO7); Ores (fuse in Pt0 with provide it as plastic pigment and likely in brooktie (fuse in Pt0 with provide it as plastic pigment and likely in brooktie TI Containing Samples (Preparation and Solution) - Metal (Soluble in H2O / HF caution -powder reacts

HNO3 / LDPE container. 1-10,000 ppm single element solutions as the Ti(F)6-2 chemically stable for years in 2-5% HNO3 / trace HF in an LDPE container. with a fendency to hydrolyze forming the hydrated oxide in all dilute acids except HE.

Stability - 2-100 ppb levels stable (Alone or mixed with all other metals) as the Ti(F)6-2 for months in 1%

HNO3 / LDPE container. 1-10.000 ppm sincle element solutions as the Ti(F)8-2 chemically stable for year media. Unstable at ppm levels with metals that would pull F-away (i.e. Do not mix with Alkaline or Rare Earths or high levels of transition elements unless they are fluorinated). Stable with most inorganic anions with a tendency to hydrolyze forming the hydrafed oxide in all dilute adds except HF. Chemical Compatibility - Soluble in concentrated HCI, HF, H3PO4 H2SO4 and HNO3. Avoid neutral to basic Atomic Weight, Valence; Coordination Number; Chemical Form in Solution - 47.87 +4 6 Ti(F)6-2

- For more information, visit www.inorganicventures.com/TCT

reported density. Do not pipette from the container. Do not refurn removed aliquots to container. - After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the renorded density. Do not pipelte from the container. Do not return removed alticular to container.

Twitte sociate in the secied 101 beg, trainspleaded for the orderiver in the shalfy concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss. - While stored in the sealed TCT bag, transpiration of this CRWRM is negligible. After opening the sealed TCT bag, transpiration in a negligible in the capture managed in the capture

- Store between approximately 4° - 30° C while in sealed TCT bag.

Page 4 of 4

Chairman / Senior Technical Director

- Sealed TCT Bag Open Date:

NAMES AND SIGNATURES OF CERTIFYING OFFICERS

- The date after which this CRM/RM should not be used.

CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

norganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.859.5790; 540.855.3030, Fax: 540.555.3012; Inorga - Reference Material Producer - Accredited / A2LA Certificate Number 883.02 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- This CRMRM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRMRM being stored and handled in accordance with the instructions given in Sec. 7.1.

stability studies conducted on properly stored and handled CRWRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability. - The lot expiration date reflects the period of time that the stability of a CRMRM can be supported by long term

- The certification is valid within the measurement uncertainty specified provided the CRWRM is stored and handled in accordance with instructions given in $Sec\ 7.1$. This certification is nullified if instructions in $Sec\ 7.1$ are not followed or if the CRWRM is damaged, confaminated, or otherwise modified.

Thomas Kozikowski Manager, Quality Control Certificate Approved By:

thibils Validity

- June 17, 2027 11.2 Lot Expiration Date

June 17, 2022 11.1 Certification Issue Date

Paul Gaines Certifying Officer:

0.Sr

0.11



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

M5985 R:6/14/24

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Custom Grade Solution

Catalog Number:

CGIN10

Lot Number:

U2-IN729349

Matrix:

5% (v/v) HNO3

Value / Analyte(s):

10 000 μg/mL ea:

Indium

Starting Material:

Indium Metal

Starting Material Lot#:

2511

Starting Material Purity:

99.9995%

3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value:

 $10022 \pm 30 \mu g/mL$

Density:

1.044 g/mL (measured at 20 ± 4 °C)

Assay Information:

Assay Method #1

10021 ± 56 µg/mL

ICP Assay NIST SRM 3124a Lot Number: 110516

Assay Method #2

10035 ± 25 µg/mL

EDTA NIST SRM 928 Lot Number: 928

Assay Method #3

10001 ± 33 µg/mL

Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

$X_{CRM/RM} = \Sigma(w_i) (X_i)$

X_i = mean of Assay Method i with standard uncertainty uchar i

w_i = the weighting factors for each method calculated using the inverse square of

 $w_i = (1/u_{char\ i})^2 / (\Sigma (1/(u_{char\ i})^2)$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k \left(u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts}\right)^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} i are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

u_{lts} = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Certified Value, $X_{\text{CRM/RM}}$, where one method of characterization is used is the mean of individual results:

Characterization of CRM/RM by One Method

 $X_{CRM/RM} = (X_n) (u_{char})$

X_a = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k \left(u^2_{chara} + u^2_{bb} + u^2_{lts} + u^2_{ls}\right)^{1/2}$

k = coverage factor = 2

u_{char a} = the errors from characterization

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

M	Ag	<	0.000760	М	Eu	<	0.000760	0	Na		0.012771	M	Se	<	0.023000	М	Zn	<	0.006100
М	ΑI		0.003385	0	Fe		0.004462	М	Nb	<	0.000760	0	Si		0.024619	М	Zr	<	0.000760
М	As	<	0.004600	М	Ga	<	0.000760	М	Nd	<	0.000760	М	Sm	<	0.000760				
М	Au	<	0.002300	M	Gd	<	0.000760	0	Ni	<	0.005100	М	Sn	<	0.000760				
0	В		0.003692	M	Ge	<	0.001600	М	Os	<	0.000760	0	Sr	<	0.000610				
М	Ba	<	0.001600	M	Hf	<	0.000760	n	Р	<		М	Ta	<	0.000760				
0	Be	<	0.000130	M	Hg	<	0.003100	M	Pb		0.001400	М	Tb	<	0.000760				
M	Bi	<	0.000760	М	Но	<	0.000760	М	Pd	<	0.001600	М	Te	<	0.000760				
0	Ca		0.004616	S	In	<		М	Pr	<	0.000760	М	Th	<	0.000760				
M	Cd	<	0.000760	М	lr	<	0.000760	M	Pt	<	0.000760	0	π	<	0.001100				
M	Ce	<	0.000760	0	K		0.007078	М	Rb	<	0.000760	М	TI	<	0.000760				
M	Co	<	0.000760	М	La	<	0.000760	М	Re	<	0.000760	М	Tm	<	0.000760				
0	Cr	<	0.001300	0	Li	<	0.000130	М	Rh	<	0.000760	М	U	<	0.000760				
М	Cs	<	0.000760	M	Lu	<	0.000760	М	Ru	<	0.000760	М	٧	<	0.001600				
М	Cu	<	0.003800	0	Mg		0.000707	n	S	<		М	W	<	0.001600				
М	Dy	<	0.000760	0	Mn		0.000149	M	Sb	<	0.000760	М	Υ	<	0.000760				
М	Er	<	0.000760	М	Мо	<	0.002300	М	Sc	<	0.000760	M	Yb	<	0.000760				

n - Not Checked For s - Solution Standard Element

M - Checked by ICP-MS O - Checked by ICP-OES

i - Spectral Interference

INTENDED USE 6.0

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures <u>Terms and Conditions of Sale.</u> https://www.inorganicventures.com/terms-and-conditions-sale. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 114.82 +3 6 In(H2O)6+3 Chemical Compatibility -Soluble in HCl, HNO3, and H2SO4. Avoid neutral and basic media. Stable with most metals and inorganic anions. The oxalate, sulfide, carbonate, hydroxide and phosphate are insoluble in water.

Stability - 2-100 ppb levels stable for months in 1% HNO3 / LDPE container. 1-10,000 ppm solutions chemically stable for years in 2-5% HNO3 / LDPE container.

In Containing Samples (Preparation and Solution) -Metal (Best dissolved in HCl / HNO3); Oxide (Soluble in mineral acids); Ores (Carbonate fusion in Pt0 followed by HCl dissolution); Organic Matrices (Sulfuric/peroxide digestion or dry ash and dissolution in dilute HCl).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 115 amu	1 ppt	n/a	115Sn, 99Ru16O
ICP-OES 158.583 nm	0.05 / 0.002 μg/mL	1	
ICP-OES 230.606 nm	0.1 / 0.03 μg/mL	1	Ni, Os
ICP-OES 325.609 nm	0.2 / 0.05 μg/mL	1	Mn, Mo, Th

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; Inorganicventures.com; Info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

February 21, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- February 21, 2028
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

0 TOT D 0	n Date:	
- Sealed TCT Bag Ope	en Date:	

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director 20178hi

Sulfuric Acid
BAKER INSTRA-ANALYZED® Reagent
For Trace Metal Analysis
Low Selenium





Material No.: 9673-33

Batch No.: 23D2462010 Manufactured Date: 2023-03-22

Retest Date: 2028-03-20

Revision No.: 0

Certificate of Analysis

Test	Specification	Result
ACS - Assay (H2SO4)	95.0 - 98.0 %	96,1 %
Appearance	Passes Test	Passes Test
ACS - Color (APHA)	≤ 10	5
ACS – Residue after Ignition	≤ 3 ppm	< 1 ppm
ACS - Substances Reducing Permanganate (as SO2)	≤ 2 ppm	< 2 ppm
Ammonium (NH ₄)	≤ 1 ppm	1 ppm
Chloride (CI)	≤ 0.1 ppm	< 0.1 ppm
Nitrate (NO₃)	≤ 0.2 ppm	< 0.1 ppm
Phosphate (PO4)	≤ 0.5 ppm	< 0.1 ppm
Trace Impurities – Aluminum (Al)	≤ 30.0 ppb	< 5.0 ppb
Arsenic and Antimony (as As)	≤ 4.0 ppb	< 2.0 ppb
Trace Impurities – Boron (B)	≤ 10.0 ppb	8.5 ppb
Trace Impurities – Cadmium (Cd)	≤ 2.0 ppb	< 0.3 ppb
Trace Impurities - Chromium (Cr)	≤ 6.0 ppb	< 0.4 ppb
Trace Impurities - Cobalt (Co)	≤ 0.5 ppb	< 0.3 ppb
Trace Impurities - Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities - Gold (Au)	≤ 10.0 ppb	0.5 ppb
Heavy Metals (as Pb)	≤ 500.0 ppb	< 100.0 ppb
Trace Impurities - Iron (Fe)	≤ 50.0 ppb	1.3 ppb
Trace Impurities - Lead (Pb)	≤ 0.5 ppb	< 0.5 ppb
Trace Impurities - Magnesium (Mg)	≤ 7.0 ppb	0.8 ppb
Trace Impurities – Manganese (Mn)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities – Mercury (Hg)	≤ 0.5 ppb	< 0.1 ppb
Trace Impurities - Nickel (Ni)	≤ 2.0 ppb	0.3 ppb
Trace Impurities – Potassium (K)	≤ 500.0 ppb	< 2.0 ppb
Trace Impurities - Selenium (Se)	≤ 50.0 ppb	< 0.1 ppb
Trace Impurities – Silicon (Si)	≤ 100.0 ppb	31.5 ppb
Trace Impurities – Silver (Ag)	≤ 1.0 ppb	< 0.3 ppb

>>> Continued on page 2 >>>

Sulfuric Acid
BAKER INSTRA-ANALYZED® Reagent
For Trace Metal Analysis
Low Selenium





Material No.: 9673-33 Batch No.: 23D2462010

Test	Specification	Result
Trace Impurities – Sodium (Na)	≤ 500.0 ppb	5.4 ppb
Trace Impurities – Strontium (Sr)	≤ 5.0 ppb	< 0.2 ppb
Trace Impurities – Tin (Sn)	≤ 5.0 ppb	< 0.8 ppb
Trace Impurities – Zinc (Zn)	≤ 5.0 ppb	0.4 ppb

For Laboratory, Research, or Manufacturing Use

Country of Origin: USA

Packaging Site: Phillipsburg Mfg Ctr & DC





300 Technology Drive Christiansburg, VA 24073 USA

inorganicventures.com

Certificate of Analysis

M6074

M6075 M6076 M6077

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

EXP. 9/6/2029

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Multi Analyte Custom Grade Solution

Catalog Number:

CHEM-CLP-4

Lot Number:

V2-MEB746762

Matrix:

3% (v/v) HNO3

3% (v/v) HF

Value / Analyte(s):

1 000 µg/mL ea:

Boron,

Molybdenum,

Silicon,

Tin,

Titanium

3.0 CERTIFIED VALUES AND UNCERTAINTIES

ANALYTE Boron, B **CERTIFIED VALUE**

ANALYTE Molybdenum, Mo **CERTIFIED VALUE**

1 000 ± 5 μg/mL

Silicon, Si

1 000 ± 5 µg/mL

Tin, Sn

1 000 ± 5 µg/mL

Titanium, Ti

1 000 ± 7 μg/mL

1 000 I 5 pg/mL

1 000 ± 6 µg/mL

Density:

1.033 g/mL (measured at 20 \pm 4 °C)

Assay Information:

ANALYTE	METHOD	NIST SRM#	SRM LOT#
В	ICP Assay	3107	190605
В	Calculated		See Sec. 4.2
Мо	ICP Assay	traceable to 3134	U2-MO739068
Si	ICP Assay	Traceable to 3150	S2-SI702546
Sn	ICP Assay	3161a	140917
Ti	ICP Assay	traceable to 3162a	T2-TI725816

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

$X_{CRM/RM} = \Sigma(w_i) (X_i)$

X_i = mean of Assay Method i with standard uncertainty u_{char i}

w_i = the weighting factors for each method calculated using the inverse square of the variance:

 $w_i = (1/u_{char i})^2 / (\Sigma(1/(u_{char i})^2))$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} i are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Characterization of CRM/RM by One Method

Certified Value, X_{CRW/RM}, where one method of characterization is used is the mean of individual results:

X_{CRM/RM} = (X_a) (u_{char a})

X_a = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (2) = $U_{CRM/RM} = k (u_{chara}^2 + u_{bb}^2 + u_{its}^2 + u_{ts}^2)^{1/2}$

k = coverage factor = 2

uchar a = the errors from characterization

ubb = bottle to bottle homogeneity standard uncertainty

uits = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL) 5.0

INTENDED USE 6.0

- 6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.
- 6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale. https://www.inorganicventures.com/terms-and-conditions-sale. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT HF Note: This standard should not be prepared or stored in glass.

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669,6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

September 06, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- September 06, 2029
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

 Sealed TCT 	Bag Open Date:	

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

Paul R Sains

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Joseph Burns Custom VS Manager

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

M6125 Receive -> 11/22/24

CORCO CHEMICAL CORPORATION

Manufacturers of ACS Reagents and Semiconductor Grade Chemicals

Office and Plant 299 Cedar Lane Fairless Hills, PA 19030

Phone: 215-295-5006 Fax: 215-295-0781

Hydrogen Peroxide 30%, ACS Reagent Grade

SPECIFICATION	MAXIMUM LIMITS
Appearance	Colorless and free from suspended matter or sediment
Assay	29-32%
Color (APHA)	10
Residue after Evaporation	0.002%
Titratable Acid	0.0006 meq/g
Chloride (CI)	3 ppm
Nitrate (NO ₃)	2 ppm
Phosphate	2 ppm
Sulfate (SO ₄)	5 ppm
Ammonium (NH ₄)	5 ppm
Heavy Metals (as Pb)	1 ppm
Iron (Fe)	0.5 ppm







R -> 11/12/24

Material No.: 9606-03 Batch No.: 24D1062002

Manufactured Date: 2024-03-26

Retest Date: 2029-03-25

Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay (HNO3)	69.0 – 70.0 %	69.7 %
Appearance	Passes Test	Passes Test
Color (APHA)	≤ 10	5
Residue after Ignition	≤ 2 ppm	1 ppm
Chloride (CI)	≤ 0.08 ppm	< 0.03 ppm
Phosphate (PO ₄)	≤ 0.10 ppm	< 0.03 ppm
Sulfate (SO ₄)	≤ 0.2 ppm	< 0.2 ppm
Trace Impurities - Aluminum (AI)	≤ 40.0 ppb	< 1.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Barium (Ba)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Boron (B)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 50 ppb	< 1 ppb
Trace Impurities – Calcium (Ca)	≤ 50.0 ppb	2.3 ppb
Trace Impurities - Chromium (Cr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Germanium (Ge)	≤ 20 ppb	< 10 ppb
Trace Impurities - Gold (Au)	≤ 20 ppb	< 5 ppb
Heavy Metals (as Pb)	≤ 100 ppb	100 ppb
Trace Impurities – Iron (Fe)	≤ 40.0 ppb	< 1.0 ppb
Trace Impurities - Lead (Pb)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities - Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Magnesium (Mg)	≤ 20 ppb	< 1 ppb
Trace Impurities – Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Nickel (Ni)	≤ 20.0 ppb	< 5.0 ppb

>>> Continued on page 2 >>>

Nitric Acid 69% CMOS





Material No.: 9606-03 Batch No.: 24D1062002

Test Specification Result

For Microelectronic Use

Country of Origin: USA

Packaging Site: Phillipsburg Mfg Ctr & DC

Cloak

Director Quality Operations, Bioscience Production



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/z->	1.0 m 4	1000	m/z-> 2000	6.0E6	1.0E8	Compound RM# Number 1. Magnesium nitrate hexahydrate (Mg) IN030 маровгогаал	Nominal Concentration (µg/mL): NIST Test Number: Weight shown below wa	Expiration Date:	Par Lo
N 10			ō		[1] Spectrum No.1	nydrate (Mg)	NIST Test Number: 6UTB Weight shown below was diluted to (mL):	Expiration Date: nended Storage:	Part Number: Lot Number: Description:
					3 Z 0	RIM# Nu NO30 MGD0	10000 6UTB diluted to (mi	112 Ami	112 Ma
	Ñ	· - -	20			- 11		112127 Ambient (20 °C)	58112 112124 Magnesium
ļ. 	130		30		9.923	Nominal Conc. (µg/mL) 10000	2000.07	0	IPM TO
					ec];581	(%) (%) Purity (5E-05 B	9	5
	4		A •		*	Uncertainty Purity (%) 0.10	5E-05 Balance Uncertainty 0.100 Flask Uncertainty		10 x 1/13/250 Nont:
			70		Count	Assay (%) v	ainty ity	2%	vent: 2
	150		50			Target Weight (g) 234.9183		40.0 (mL)	24012496
	100		G .		.j [6	Actual Weight (g)		Nitric Acid	Nitric Acid
	170		70		- 11	Actual Conc. (µg/mL)			bid.
					No.	Uncertainty +/- (µg/mL)	Reviewed By:	Formulated By:	32
	80		8 .		2440-	CAS	By:	M By	iovanni
	190		0		3	vent	Pedro L. Rentas SDS Inform		e Esta
	NO 0		1 0.		on-rai	o. On Attachec	ro L. Remas SDS Information	osito	ato a
					on-rat 5440 mg/kg 3131a	рд.) Ш50	112124	112124	

Part # 58112

1 of 2

www.absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

В	B	Ве		Z J	Às	Sb	À				
<0.02	<0.02	10.01	0 0	A) 00	02	<0.02	<0.02				
Cu	ಽ	5) (ک 	కి	Ω Ω	2				
<0.02	<0.02	40.02		△ 0.02	<0.02	40.2	<0.02				
Αu	ဂ္ဂ	Ca Ca	}	2	핃	막	Dy		l		
<0.02	<0.02	\$0.02	3	40.02	<0.02	<0.02	<0.02				
Pb	2	2	3	F	'n	Но	H		l		
<0.02	<0.02	61	2	40.02	<0.02	<0.02	20.02			Trace Mo	
Nd	Mo	811	Ç,	Mn	Mg	Ľ	Ε		ı	etals	I
<0.02	<0.02	2 6	3	<0.02	Н	<0.02	20.02	200	۱	Verifica	
7	7	, -	0	Pd	õ	8	3		ı	tion Circle	
707	20.02	0.02	3	40.02	<0.02	<0.02	\$0.02	3	ľ	ov ICP-N	
oc.	O DIE	2	R R	장	R	Ke	1 7	2		S (F	
70.0>	20.02	000	S	40.02	△0.02	20.02	20.02	200	ľ		
18	j 0	n :	Ş	2	Ag	2	i E	6	ı		
70.02	20.02	2003	40.02	∆ 0.2	<0.02	20.02	3 6	3			
E	4 5	G :	ij	Th	=	1 6	d :	7			
10.02	3 6	200	A 0.02	20.02	20.02	\$0.02	3 8	2003			
	7.	7n	~	Ϋ́D	í <	; c	≓ :	8			
20.02	2 6 6	A) (22	0.02	20.02	\$0.02	60.02	3	₹0.0 2	Name of the last		

(I) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58112

2 of 2

www.absolutestandards.com

Part Number:

Lot Number:



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT:

Formulated By: Diovannie Giovanni Esposito 2 Septe 101124

Pedro L. Rentas

101124

Recommended Storage: **Expiration Date:** Description: 101124

Manganese (Mn)

Ambient (20 °°)

Manganese (20 °°) 1000

Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): **NIST Test Number:** ETUB ត្ត 4000.2 Nominal 0.10 Flask Uncertainty 5E-05 Balance Uncertainty Purity Uncertainty Assay Target Actual Actual Reviewed By: Uncertainty Expanded (Solvent Safety Info. On Attached pg.)

RM#

Number

Conc. (µg/mL)

8

Purity (%)

8

Weight (g)

Weight (g) Conc. (µg/ml.)

+/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM NIST T SDS Information

 Manganese(II) nitrate hydrate (Mn) IN031 MNM082020A1 1000 99.999 0.10 20.8 19.2322 19.2344 1000.1 2. 0 15710-66-4 5 mg/m3 orl-rat >300mg/kg 3132

m/z->	5.0E7	1.0E8	5.0E7	1.0E8	7-2/2	N UI	5. OE6
							[1] 88
0		110			0		[1] Spectrum No.1
			•				NO.1
N N O		120			0		و
230		100			30		1.243
ō		Ō					ec]:57(
N 40		140			40		[34.243 sec]:57025.D# [Count] [Linear]
							Coun
N D		150			6		t] [Line
N O		300			0		2
J		J					
		170			70		
		-			Ó		
		0			80		
		90			0		
		N 0	on.		100		



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Г							Trace Me	etals	Verifica	tion	by ICP-	SM	(µg/mL)						
A	40.02	2	40.02	Dγ	40.02	H	<0.02	<u>E</u>	<0.02	Z	<0.02	꾸	<0.02	Se	40.2	<u>4</u>	<0.02	*	<0.02
dS	<0.02	ರಿ	<0.2	뎍	<0.02	Н	<0.02	Ę	40.02	ş	<0.02	Re	<0.02	ž.	40.02	Te	<0.02	c	<0.02
As	40.2	င္ပ	40.02	띹	<0.02	In	<0.02	Mg	40.01	0°	<0.02	쫑	<0.02	A	8,02	1	<0.02	<	40.02
Ba	40.02	ς,	<0.02	ନୁ	40.02	F.	40.02	Mn	H	Pd	<0.02	&	40.02	Z	40,2	1	<0.02	충	< 0.02
Ве	40.01	ប៉	40.02	ଦ୍ମ	40.02	7,	40.2	Hg	40.2	Þ	<0.02	Ru	40.02	Sr	0.02	Tm	<0.02	×	<0.02
Bi	0.02	ဝ	<0.02	ନ୍ମ	40.02	La	<0.02	Mo	40.02	7	40.02	Sm	<0.02	S	A.02	Sn	<0.02	Zn	60.02
B	<0.02	Cu	<0.02	Au	<0.02	Pb	<0.02	Nd	<0.02	×	40.2	S	<0.02	Ta	40.02	크	<0.02	Zr	<0.02
									}										

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

Jon 7 Mills

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

M6137

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Custom Grade Solution

Catalog Number:

CGSI1

Lot Number:

V2-SI744713

Matrix:

tr. HNO3

tr. HF

Value / Analyte(s):

1 000 µg/mL ea:

Silicon

Starting Material:

Silica

Starting Material Lot#:

1771

Starting Material Purity:

99.9981%

3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value:

999 ± 6 µg/mL

Density:

1.003 g/mL (measured at 20 ± 4 °C)

Assay Information:

Assay Method #1

999 ± 5 µg/mL

ICP Assay NIST SRM Traceable to 3150 Lot Number: S2-Si702546

Assay Method #2

1000 ± 7 µg/mL

Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

$X_{CRM/RM} = \Sigma(w_i) (X_i)$

 $\mathbf{X_i}$ = mean of Assay Method \mathbf{i} with standard uncertainty \mathbf{u}_{char} \mathbf{i} \mathbf{w}_{i} = the weighting factors for each method calculated using the inverse square of the variance:

 $w_i = (1/u_{char i})^2 / (\Sigma (1/(u_{char i})^2)$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{its} + u^2_{bs})^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$ where u_{char} are the errors from each characterization method ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Characterization of CRM/RM by One Method

Certified Value, X_{CRM/RM}, where one method of characterization is used is the mean of individual results:

 $X_{CRM/RM} = (X_a) (u_{char a})$

X, = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u_{chara}^2 + u_{bb}^2 + u_{its}^2 + u_{ts}^2)^{1/2}$

k = coverage factor = 2

uchar a = the errors from characterization

u_{bb} = bottle to bottle homogeneity standard uncertainty ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

 All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL) 5.0

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

M	Ag	<	0.000310	M	Eu	<	0.000310	0	Na		0.001656	M	Se	<	0.022000	М	Zn	<	0.002500
M	Al		0.010787	M	Fe	<	0.027000	M	Nb	<	0.001300	s	Si	<		0	Zr	<	0.001900
М	As	<	0.001900	М	Ga	<	0.001300	M	Nd	<	0.000310	М	Sm	<	0.000310				
М	Au	<	0.000910	М	Gd	<	0.000310	M	Ni	<	0.005500	М	Sn		0.000096				
M	В		0.016180	M	Ge	<	0.001900	M	Os	<	0.000610	0	Sr		0.000092				
M	Ba		0.000096	M	Hf		0.000423	i	Р	<		M	Ta		0.002542				
0	Be	<	0.000570	M	Hg	<	0.000610	M	Pb	<	0.000310	М	Tb	<	0.000310				
M	Bi	<	0.000310	М	Но	<	0.000610	М	Pd	<	0.000610	M	Te	<	0.000910				
0	Ca		0.011557	M	ln	<	0.000310	M	Pr	<	0.000310	M	Th	<	0.001900				
M	Cd	<	0.000310	M	lr	<	0.000310	M	Pt	<	0.000310	М	Ti		0.001078				
M	Ce	<	0.000610	0	K		0.000577	M	Rb	<	0.009100	М	TI	<	0.000310				
M	Co	<	0.001600	M	La	<	0.000310	M	Re	<	0.000310	М	Tm	<	0.000310				
М	Cr	<	0.010000	0	Li	<	0.000460	М	Rh	<	0.000310	М	U	<	0.000310				
М	Cs	<	0.000310	M	Lu	<	0.000310	M	Ru	<	0.000310	0	V	<	0.001300				
М	Cu	<	0.002500	0	Mg		0.001348	0	S	<	0.570000	М	W	<	0.001900				
М	Dу	<	0.000310	М	Mn	<	0.002500	M	Sb	<	0.000310	M	Υ	<	0.000310				
M	Er	<	0.000310	M	Мо	<	0.000310	0	Sc	<	0.000590	M	Yb	<	0.000310				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 **INTENDED USE**

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures <u>Terms and Conditions of Sale</u>, https://www.inorganicventures.com/terms-and-conditions-sale. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit www.inorganicventures.com/TCT

Atomic Welght; Valence; Coordination Number; Chemical Form in Solution - 28.09 +4 6 Si(OH)x(F)y2-Chemical Compatibility -Soluble in HCl, HF, H3PO4 H2SO4 and HNO3 as the Si(OH)x(F)y2-. Avoid neutral to basic media. Unstable at ppm levels with metals that would pull F- away (i.e. Do not mix with Alkaline or Rare Earths, or high levels of transition elements unless they are fluorinated. Stable with most inorganic anions with a tendency to hydrolyze forming silicic acid (silicic acid is soluble up to ∼100 ppm in water) in all dilute acids

Stability - 2-100 ppb levels - stability unknown - (alone or mixed with all other metals) as the Si(OH)x(F)y2-. 1-10,000 ppm single element solutions as the Si(OH)x(F)y2- chemically stable for years in 2-5 % HNO3 / trace HF in a LDPE container.

Si Containing Samples (Preparation and Solution) -Metal (Soluble in 1:1:1 H2O / HF / HNO3); Oxide - SiO2, amorphic (dissolve by heating in 1:1:1 H2O / HF / HNO3); Oxide - quartz (fuse in Pt0 with Na2CO3); Geological Samples(fuse in Pt0with Na2CO3 followed by HCI solution of the fuseate); Organic Matrices containing silicates and non volatile silicon compounds (dry ash at 4500C in Pt0 and dissolve by gently warming with 1:1:1 H2O / HF / H2SO4 or fuse / ash with Na2CO3 and dissolve fuseate with HCI / H2O); Silicone Oils - dimethyl silicones depolymerize to form volatile monomer units when heated (Measure directly in alcoholic KOH / xylene mixture where sample is treated first with the KOH at 60-1000C to "unzip" the Si- O-Si polymeric structure or digest with conc. H2SO4 / H2O2 followed by cooling and dissolution of the dehydrated silica with HF.) Note that the direct analysis of silicone oils in an organic solvent will result in false high results due to high vapor pressure of volatile monomer units like hexamethylcyclotrisiloxane. The KOH forms the K2+Si(CH3)2O= salt which is not volatile at room temperature.

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

	•		
Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 28 amu	4000 - 8000 ppt	N/A	N2, 12C16O
ICP-OES 212.412 nm	0.02/0.01 µg/mL	1	Hf, Os, Mo, Ta
ICP-OES 251.611 nm	0.012/0.003 µg/mL	1	Ta, U, Zn, Th
ICP-OES 288.158 nm	0.03/0.004 µg/mL	1	Ta, Ce, Cr, Cd, Th

HF Note: This standard should not be prepared or stored in glass.

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

QUALITY STANDARD DOCUMENTATION 10.0

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

July 10, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- July 10, 2029
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

NAMES AND SIGNATURES OF CERTIFYING OFFICERS 12.0 Certificate Prepared By:

Uyen Truong Custom Processing Supervisor

Mayyand Man
Paul R. Laine

Certificate Approved By:

Muzzammil Khan Stock Laboratory Supervisor

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director

www.absolutestandards.com



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com

CERTIFIED WEIGHT REPORT: 1. Sodium nitrate (Na) Neminal Concentration (µg/mL): Recommended Storage: Weight shown below was diluted to (mL): m/z-> m/z-> M/X-Y NIST Test Number: 2.5E6 5.0E6 2.500 5.0E6 2.5E5 5.0E5 **Expiration Date:** Part Number: Lot Number: Description: [1] Spectrum No.1 210 110 IN036 NAV01201511 0 RM# **6UTB** 072427 58111 072424 10000 Ambient (20 °C) Sodium (Na) Number Lot 120 220 NO [8.935 sec]:58111.D# [Count] [Linear] Conc. (µg/mL) 10000 4000.2 Nominal M6144 R->1/13/2 Solvent: 130 30 99.999 5E-05 Balance Uncertainty Purity 0.10 Flask Uncertainty (96) Uncertainty Assay Purity (%) 0.10 240 140 4 26.9 8 2% 24002546 Nitric Acid 148.7096 Weight (g) Target (mL) 250 150 50 ###### Weight (g) Conc. (µg/mL) Nitric Acid Actual 160 260 0 10000.0 Actual 170 70 +/- (µg/mL) Uncertainty Reviewed By: Formulated By: Expanded 20.0 7631-99-4 180 80 CAS# (Solvent Safety Info. On Attached pg.) Pedro L. Rentas Benson Chan OSHA PEL (TWA) **SDS** Information 180 90 5 mg/m3 200 100 orl-rat 3430 mg/kg 3152a 072424 072424 TSIN MES.

Printed: 1/10/2025, 4:48:22 PM

1 of 2

www.absolutestandards.com



Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

ĺ	B	В	Be	Ba	As	Sb	≥	9		
	<0.02	<0.02	40.01	<0.02	40.2	<0.02	<0.02			
İ	5	င္ပ	Ω	C _C	දි	C C	S			
	<0.02	<0.02	<0.02	<0.02	<0.02	40.2	<0.02			
l	Au	ဂ္ဂ	ନ୍ଥ	<u>ਨ</u>	Eu	即	Дy			
	△0.02	<0.02	<0.02	△0.02	<0.02	40.02	<0.02	STATE OF STREET		
	Pb	La	Fe	F	In	Но	Hf			
	<0.02	<0.02	<0.2	<0.02	<0.02	<0.02	<0.02		Trace M	
	N.	Mo	Hg	Mn	Mg	L	Ш		etals	
	<0.02	40.02	40.2	<0.02	<0.01	<0.02	<0.02		Verifica	
	×	7	Þ	Pd	0°	ğ	Z.		tion	
	<0.2	<0.02	0.02	△0.02	40.02	△0.02	<0.02	,	by ICP-N	
	Sc	Sm	Ru	Rb	Rh	Re	Pr		ES (II	
	<0.02	<0.02	<0.02	<0.02	<0.02	40.02	<0.02		g/mL)	
	Ta	S	Sr	Z	Ag	S:	%			
	<0.02	<0.02	△0.02	Т	<0.02	<0.02	40.2			
	11	Sn	Tm	Ħ	1	Te	41	i		
	<0.02	△0.02	<0.02	<0.02	40.02	<0.02	<0.02			
	Zr	Zn	۲	\$	<	C	W			
	40.02	40.02	<0.02	<0.02	<0.02	<0.02	<0.02	IIIO SCOTI		

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

All standard containers are meticulously cleaned prior to use.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

All Standards should be stored with caps tight and under appropriate laboratory conditions.


Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58111

Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

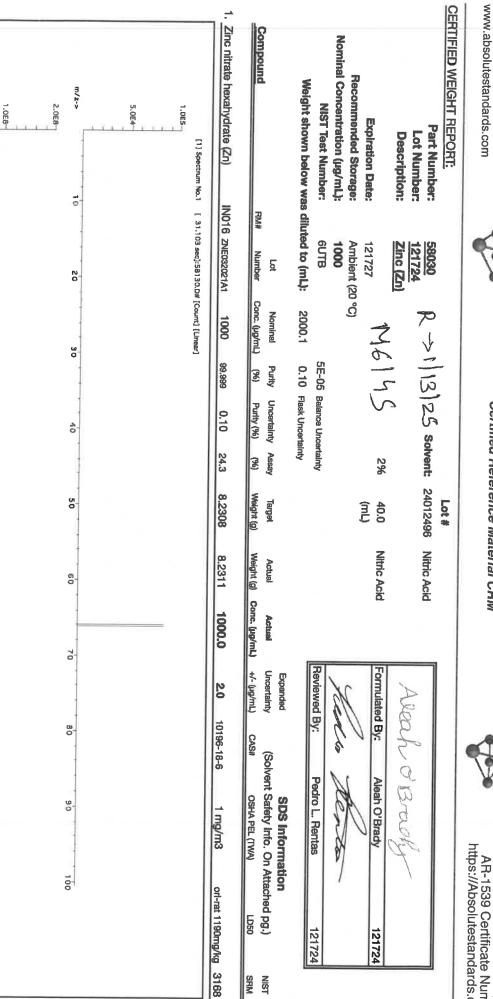

NIST SRM

m/z->

210

220

230

240

250

260

m/z->

110

120

130

140

50

160

170

180

190

200

1.0E8

5.0E7



Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			20.02	ra	20.02	30	702	7	40.02	Z	<0.02	P	№ 0.02	Au	40.02	5	40.02	00
7,		1	3	7	3	2		: :	0 60	240	10.04	La	70.02	CC	20.02	S	20.02	<u>5</u>
107		Sn	20:02	v.	<u>A</u> .02	Sm	8	¥	A 22	5	3	3	3	2	3	3	5	1
7,		2		>		1	40.00	-	10.6	27.7	10.4	70	20.02	Ca	20.02	Z.	10.0	Be
ped		B	20.02	S	A) (72	Z ::	3	0	3	5	5	5	3	>		2		
9 6	000	1	, é	TVG	20.02	NO	20.02	Pa	20.02	Mn	<0.02	H	40.02	2	0.02	င္တ	40.02	Ba
¥		1	3	2	3	Į r	8	1		0	10.02	11.1	10.04	ţ	20.02	ç	7.03	AS
_			20.02	Ag	40.02	25	A .02	ွ	A) ()	× ×	3	3	3	Į.	3	3	3	-
<		3	23		0.00	1	40.00	540	10.04	F	20.02	HO	20.02	H	4.0	Ca	<0.02	S
		Te	٥.03 -	S	A (2)	200	3	<u> </u>	3	<u> </u>	3	5	5	1		1	200	1
: :			104	26	20.02	7	70.02	2	20.02	<u> </u>	<0.02	Ħ	<0.02	Dy	0.02	2	40.02	Δ]
8)	200	Ca	2000	7	5											
												ı		I				I
										0.000	1100011							
					0	S U C	DV C		Verifica	S IN I	I TACO V							
					1													

(T) = Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58030



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

R: 4/20/21

Instructions for QATS Reference Material: Inorganic ICV Solutions

QATS LABORATORY INORGANIC REFERENCE MATERIAL INITIAL CALIBRATION VERIFICATION SOLUTIONS (ICV1, ICV5, AND ICV6)

* M6150

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION:

For use with the CLP SFAM01.0 SOW and revisions.

CAUTION:

Read instructions carefully before opening bottle(s) and proceeding with

the analyses.

Contains Metals In Dilute Acidic or Cyanide in Basic Aqueous Solutions HAZARDOUS MATERIAL

> Safety Data Sheets Available Upon Request

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014", "ICV5-0415", and "ICV6-0400", respectively.

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY
APTIM Federal Services, LLC
2700 Chandler Avenue - Building C
Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in µg/L (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

ICV1-1014

<u>For ICP-AES analysis</u>, use a 10-fold dilution by pipetting 10 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid.

Page 1 of 2











QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: Inorganic ICV Solutions

ICV1-1014

For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.

ICV5-0415

For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting 1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K₂Cr₂O₇ and 5% (v/v) nitric acid.

ICV6-0400

For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6 concentrate into a 100 mL volumetric flask and dilute to volume with Type II water. Distill this solution along with the samples before analysis. The cyanide concentrate is prepared from K₃Fe(CN)₈, Type II water, and 0.1 % sodium hydroxide, and will decompose rapidly if exposed to light.

NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.

(D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS

	ICV1-1014	
Element	Concentration (µg/L) (after 10-fold dilution)	Concentration (µg/L) (after 50-fold dilution)
Al	2500	500
Sb	1000	200
As	1000	200
Ba	520	100
Be	510	100
Cd	510	100
Ca	10000	2000
Cr	520	100
Co	520	100
Cu	510	100
Fe	10000	2000
Pb	1000	200
Mg	6000	1200
Mn	520	100
Ni	530	110
K	9900	2000
Se	1000	200
Ag	250	50
Na	10000	2000
TI	1000	210
V	500	100
Zn	1000	200

	ICV5-0415	SPILE/	ICV6-0400
Element	Concentration (µg/L) (after 100-fold dilution)	Analyte	Concentration (µg/L) (after 100-fold dilution)
Hg	4.0	CN-	99

Hydrochloric Acid, 36.5-38.0%

BAKER INSTRA-ANALYZED® Reagent
For Trace Metal Analysis





M6151

R-> 1/15/25

Material No.: 9530-33

Batch No.: 22G2862015 Manufactured Date: 2022-06-15

Retest Date: 2027-06-14

Revision No.: 0

Certificate of Analysis

Test	Specification	Result
ACS - Assay (as HCI) (by acid-base titrn)	36.5 - 38.0 %	
ACS - Color (APHA)	50.5 - 36.0 % ≤ 10	37.9 %
ACS - Residue after Ignition	≤ 3 ppm	5
ACS - Specific Gravity at 60°/60°F		< 1 ppm
ACS – Bromide (Br)	1.185 - 1.192	1.191
ACS - Extractable Organic Substances	≤ 0.005 %	< 0.005 %
ACS - Free Chlorine (as Cl2)	≤ 5 ppm	< 1 ppm
Phosphate (PO ₄)	≤ 0.5 ppm	< 0.5 ppm
Sulfate (SO ₄)	≤ 0.05 ppm	< 0.03 ppm
Sulfite (SO₃)	≤ 0.5 ppm	< 0.3 ppm
Ammonium (NH ₄)	≤ 0.8 ppm	0.3 ppm
Trace Impurities - Arsenic (As)	≤ 3 ppm	< 1 ppm
Trace Impurities - Aluminum (AI)	≤ 0.010 ppm	< 0.003 ppm
Arsenic and Antimony (as As)	≤ 10.0 ppb	1.3 ppb
Trace Impurities - Barium (Ba)	≤ 5.0 ppb	< 3.0 ppb
Trace Impurities - Beryllium (Be)	≤ 1.0 ppb	0.2 ppb
Trace Impurities - Bismuth (Bi)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Boron (B)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 20.0 ppb	< 5.0 ppb
Trace Impurities - Calcium (Ca)	≤ 1.0 ppb	< 0.3 ppb
	≤ 50.0 ppb	163.0 ppb
Trace Impurities - Chromium (Cr)	≤ 1.0 ppb	0.7 ppb
Trace Impurities - Cobalt (Co)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities - Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities – Gallium (Ga)	≤ 1.0 ppb	< 0.2 ppb
Frace Impurities – Germanium (Ge)	≤ 3.0 ppb	< 2.0 ppb
Frace Impurities – Gold (Au)	≤ 4.0 ppb	0.6 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Frace Impurities – Iron (Fe)	≤ 15 ppb	6 ppb

>>> Continued on page 2 >>>

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





Material No.: 9530-33 Batch No.: 22G2862015

Test	Specification	Result
Trace Impurities – Lead (Pb)	≤ 1.0 ppb	< 0.5 ppb
Trace Impurities - Lithium (Li)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Magnesium (Mg)	≤ 10.0 ppb	2.9 ppb
Trace Impurities - Manganese (Mn)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities – Mercury (Hg)	≤ 0.5 ppb	0.1 ppb
Trace Impurities – Molybdenum (Mo)	≤ 10.0 ppb	< 3.0 ppb
Trace Impurities - Nickel (Ni)	≤ 4.0 ppb	< 0.3 ppb
Trace Impurities - Niobium (Nb)	≤ 1.0 ppb	0.8 ppb
Trace Impurities - Potassium (K)	≤ 9.0 ppb	< 2.0 ppb
Trace Impurities - Selenium (Se), For Information Only		< 1.0 ppb
Trace Impurities - Silicon (Si)	≤ 100.0 ppb	< 10.0 ppb
Trace Impurities - Silver (Ag)	≤ 1.0 ppb	0.5 ppb
Trace Impurities – Sodium (Na)	≤ 100.0 ppb	2.3 ppb
Trace Impurities – Strontium (Sr)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Tantalum (Ta)	≤ 1.0 ppb	1.6 ppb
Trace Impurities – Thallium (TI)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Tin (Sn)	≤ 5.0 ppb	4.0 ppb
Trace Impurities – Titanium (Ti)	≤ 1.0 ppb	1.5 ppb
Trace Impurities – Vanadium (V)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Zinc (Zn)	≤ 5.0 ppb	0.8 ppb
Frace Impurities – Zirconium (Zr)	≤ 1.0 ppb	0.3 ppb

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





Material No.: 9530-33 Batch No.: 22G2862015

Test

Specification

Result

For Laboratory, Research, or Manufacturing Use Product Information (not specifications): Appearance (clear, fuming liquid) Meets ACS Specifications Storage Condition: Store below 25 °C.

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC



Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



M6156

Certified Reference Material CRM

R > 6/12/24

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Lot # Solvent: Part Number: 57042 MKBQ8597V Ammonium hydroxide Lot Number: 032123 Description: Molybdenum (Mo) 0.5% 15.0 Formulated By: Lawrence Barry 032123 Ammonium hydroxide **Expiration Date:** 032126 (mL) **Recommended Storage:** Ambient (20 °C) Nominal Concentration (µg/mL): 1000 **NIST Test Number: 6UTB** 5E-05 Balance Uncertainty Reviewed By: Pedro L. Rentas 032123 Volume shown below was diluted to (mL): 3000.41 0.058 Flask Uncertainty **SDS Information** Expanded Part Lot Dilution Initial Uncertainty Nominal Initial Final Uncertainty (Solvent Safety Info. On Attached pg.) NIST Compound Vol. (mL) Pipette (mL) Conc. (µg/mL) CAS# OSHA PEL (TWA) . Number Number Factor Conc. (µg/mL) Conc. (µg/mL) +/- (µg/mL) SRM 1. Ammonium molybdate (Mo) 58142 1000.0 112322 0.1000 300.0 0.084 1000 10001.4 5 mg(Mo)/m3 2.1 13106-76-8 orl-rat 333 mg/kg 3134 [1] Spectrum No.1 [8.594 sec]:57042.D# [Count] [Linear] 2.0E5 1.0E5 m/z->10 20 30 40 50 60 70 80 90 100 2000 1000 m/z->110 120 130 140 150 160 170 180 190 200 2.0E6 1.0E6 $m/z \rightarrow$ 210 220 230 240 250 260



Certified Reference Material CRM



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace M	etals	Verifica	tion	by ICP-M	S (µ	g/mL)						
Al	<0.02	Cd	<0.02	Dy	<0.02	Hf	<0.02	Li	<0.02	Ni	<0.02	Pr	<0.02	Se	<0.2	Tb	<0.02	W	<0.02
Sb	<0.02	Ca	<0.2	Er	<0.02	Но	<0.02	Lu	<0.02	Nb	<0.02	Re	<0.02	Si	<0.02	Te	< 0.02	U	<0.02
As	<0.2	Ce	<0.02	Eu	<0.02	In	<0.02	Mg	<0.01	Os	<0.02	Rh	<0.02	Ag	<0.02	Tl	< 0.02	V	<0.02
Ba	<0.02	Cs	<0.02	Gd	<0.02	Ir	< 0.02	Mn	<0.02	Pd	<0.02	Rb	<0.02	Na	<0.2	Th	< 0.02	Yb	< 0.02
Be	<0.01	Cr	<0.02	Ga	<0.02	Fe	<0.2	Hg	<0.2	P	<0.02	Ru	<0.02	Sr	<0.02	Tm	< 0.02	Y	<0.02
Bi	<0.02	Co	<0.02	Ge	<0.02	La	<0.02	Mo	T	Pt	<0.02	Sm	<0.02	S	<0.02	Sn	< 0.02	Zn	<0.02
В	<0.02	Cu	<0.02	Au	<0.02	Pb	<0.02	Nd	<0.02	K	<0.2	Sc	<0.02	Ta	<0.02	Ti	<0.02	Zr	<0.02

(T)= Target analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.
- * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number:

58111 122223

Sodium (Na)

Lot Number: Description:

Nominal Concentration (µg/mL):

NIST Test Number:

6UTB 10000

Weight shown below was diluted to (mL):

3000.4

0.06 Flask Uncertainty 5E-05 Balance Uncertainty

RW#

Number Lot

Nominal

Purity

Uncertainty Assay Purity (%)

Target

Actual

8

38

Recommended Storage:

Ambient (20 °C)

122226

Expiration Date:

Lot # M5807

Solvent:

24002546 Nitric Acid

2%

60.0 (III)

Nitric Acid

Formulated By: 13827 P Aleah O'Brady Back

Reviewed By: Pedro L. Rentas

122223

22223

Actual Uncertainty Expanded (Solvent Safety Info. On Attached pg.) **SDS Information** TSIN

CAS#

SE

1. Sodium nitrate (Na) IN036 NAV01201511 Conc. (µg/mL) 10000 98.999 0.10 26.9 111.5406 Weight (g) Weight (g) Conc. (µg/mL) 111.5479 10000.7 +/- (µg/mL) 20.0 7631-99-4 OSHA PEL (TWA) 5 mg/m3 ori-rat 3430 mg/kg 3152a

1 m/z-> 17/z-Y m/z-> N.5E6 5.0E6 2.5E6 5.0E6 2.5E5 5.0E5 [1] Spectrum No.1 210 110 0 220 120 NO. [8.935 sec]:58111.D# [Count] [Linear] 130 230 30 140 240 6 150 250 50 160 260 0 170 70 180 80 190 90 100 200

Part # 58111



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	As Ba Ba Ba	
	40.2 40.2 40.2 40.0 40.0 40.0 40.0 40.0	
	585855	
	40.02 40.02 40.02 40.02 40.02 40.02	
	돌 유 교 교 및 및 및 및 및 및 및 및 및 및 및 및 및 및 및 및 및	
	4422	
	27. 24 年 27. 24. 24. 24. 24. 24. 24. 24. 24. 24. 24	
	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Trace M
	Mo Mg Lu	letals
(T) = Tar	4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Verifica
) = Target analyte	N N O B o K N	ation
ılytе	4000 4000 4000 4000 4000 4000	by ICP-
	S R R R R	NO C
	444	(m/)
	T _a S ₇ S ₈	
	402 402 402 402 402	
	in Signal in the	I
	40.02 40.02 40.02 40.02	

	600000000000000000000000000000000000000	

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.
* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Certified Reference Material CRM

M6030



AR-1539 Certificate Number https://Absolutestandards.com ANAB ISO 17034 Accredited

R = 8 | 5 | 24

www.absolutestandards.com

CERTIFIED WEIGHT REPORT:

800-368-1131

Absolute Standards, Inc.

Part Number: Solvent: 24002546 Lot # Nitric Acid

Lot Number: Description: 57047 122823 Silver (Ag)

Recommended Storage: **Expiration Date:** 1000 122826

Weight shown below was diluted to (mL): 4000.30

Silver nitrate (Ag)

IN035 J0612AGA1

1000.0

0.10

63.7

6.27992

6.27998

1000.0

2.0

7761-88-B

10 ug/m3

Z

3151

Nominal Concentration (µg/mL): NIST Test Number: **6UTB** Ambient (20 °C) 0.058 Flask Uncertainty 5E-05 Balance Uncertainty

2% <u>E</u> 80.0 Nitric Acid

Formulated By:

Benson Chan

122823

122823

Reviewed By: Pedro L. Rentas

Compound RM# Number 헏 Conc. (µg/mL) Nominal Purity Uncertainty Assay 8 Purity (%) 38 Weight (g) Target Weight (g) Conc. (µg/mL) Actual Actual +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) SDS Information NIST SRM

m/z-> m/z-> W-2/m 5.0E6 5.0E5 1.0≡6 2.5E6 5.0E6 1.0€7 [1] Spectrum No.1 210 110 0 120 NNO NO [14.044 sec]:58147.D# [Count] [Linear] 230 130 30 140 240 ò 150 250 50 260 160 00 170 0 180 0 190 000 200 100

www.absolutestandards.com



							race Me	letals	Verificat	tion	by ICP-I	S	ug/mL)						
	The state of the s						The Park of	, j											
A	<0.02	Ω	<0.02	Dy	<0.02	出	<0.02	Ľ	<0.02	Z	<0.02	7	<0.02	Se	<0.2	4	40.02	W	<0.02
4S	40.02	ဂ္ဂ	40.2	덬	40.02	Ж	40.02	Li	<0.02	3	40.02	₽ Re	40.02	S:	40.02	ď	A 0.02	a	\$0.02
As	40.2	Ç	<0.02	땹	<0.02	In	<0.02	Mg	<0.01	တ္တ	40.02	짜	<0.02	Agr	7	∄	<0.02	<	40.02
Ва	<0.02	రి	40,02	82	<0.02	듁	40.02	Mn	<0.02	Pd	<0.02	R.	40.02	N	40.2	∄	<u>\$</u>	상	<0.02
Ве	40.01	Ω	<0.02	හු	<0.02	ਲੋਂ	40.2	Hg	40.2	Þ	40.02	R	A0.02	Ž,	40,02	ď	♦ 0.02	<	40.02
쯨	<0.02	င္ပ	40.02	ନ	<0.02	5	< 0.02	Mo	<0.02	77	40.02	Sin	△ 0.02	c/a	40.02	S	A) (2)	7,	40.07
В	<0.02	δ	<0.02	Au	<0.02	광	<0.02	Z	<0.02	*	40.2	Sc	<0.02	ī	<0.02	Ħ	<0.02	2	<0.02

Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.
 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).


Lot # 071724

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



R:10/18/24 Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

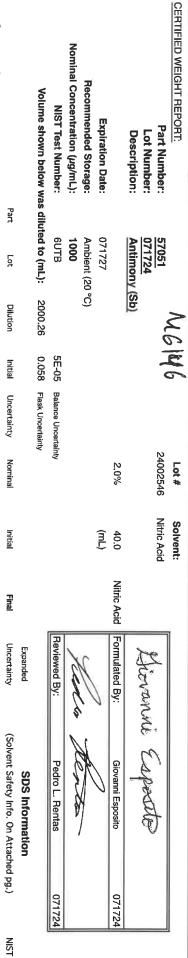

Compound

Number

Number

Factor

Vol. (mL) Pipette (mL) Conc. (µg/mL)

Conc. (µg/mL) Conc. (µg/mL)


+/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM

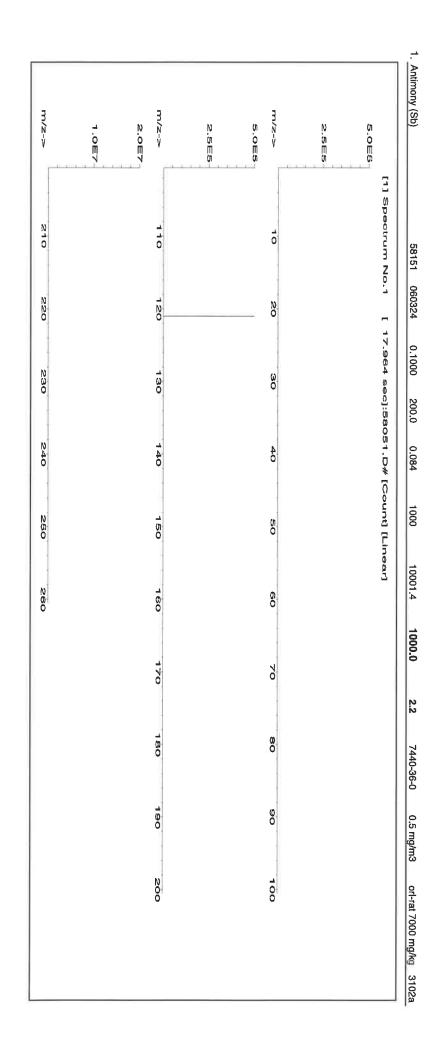

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	l				Н			Trace M	etals	Verifica		by ICP-M	3 <i>t</i> t) S	J/mL)						
1																				
	<u>A</u>	<0.02	δ	<0.02	Dy	<0.02	Hf	<0.02	Ľ	<0.02	Z	<0.02	7	<0.02	Se	<0.2	Тb	<0.02	W	<0.02
	Sb	Т	೧	<0.2	ቪ	<0.02	Но	<0.02	Ľ	< 0.02	3	<0.02	Re	<0.02	Si	40.02	Te	<0.02	u	<0.02
	As	<0.2	င္ပ	<0.02	Eu	<0.02	ln	<0.02	Mg	<0.01	õ	<0.02	22	<0.02	A ₆₉	<0.02	⊒	<0.02	<	<0.02
	Ba	<0.02	ß	<0.02	8	<0.02	lr	<0.02	Mn	<0.02	Pd	<0.02	RЬ	<0.02	Na	40.2	∄	<0.02	ΥЪ	<0.02
	Be	<0.01	단	<0.02	Ga	<0.02	Fe	<0.2	Hg	<0.2	P	<0.02	Ru	<0.02	Sr	<0.02	Tm	<0.02	×	<0.02
	Ві	<0.02	င	<0.02	ဝူ	<0.02	La	<0.02	Мо	<0.02	ጉ	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	Zn	<0.02
	В	<0.02	υ	<0.02	Au	<0.02	Pb	<0.02	M	<0.02	×	<0.2	Sc	<0.02	Ta	<0.02	11	<0.02	Zr	<0.02
										(T) – Target analyte	et analy	ďρ								

(I) = larget analyte

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

 * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

- * All standard containers are meticulously cleaned prior to use.

 * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

o soot to the manual crossing



Instructions for QATS Reference Material: ICP-AES ICS

QATS LABORATORY INORGANIC REFERENCE MATERIAL INTERFERENCE CHECK SAMPLE SET FOR ICP-AES (ICSA WITH ICSB)

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION: For use with the CLP SFAM01.0 SOW and revisions.

Read instructions carefully before opening bottle(s) and proceeding with the

analyses,

N6152

Contains Heavy Metals HAZARDOUS MATERIAL

Safety Data Sheets Available Upon Request

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more bottles of Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA and ICSAB mixture use "ICSA-1211+ICSB-0710".

CAUTION: The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.**

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY APTIM Federal Services, LLC 2700 Chandler Avenue - Building C Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

The interference check sample set is to be used to verify inter-element and background correction factors of inductively-coupled plasma (ICP) spectrometers. This reference material set consists of two (2) concentrated solutions. The ICSA solution contains the four (4) interferent elements: Al, Ca, Fe, and Mg. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be,

Page 1 of 2

RM ICP-AES ICSA-1211 B-0710 SFAM.docx

QATS Form 20-007F189R01, 01-17-2023

The Quality Assurance Technical Support (QATS) contract is operated by APTIM Federal Services, LLC.



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"



Instructions for QATS Reference Material: ICP-AES ICS

Cd, Co, Cr, Cu, Mn, Ni, Pb, Tl, Se, V, and Zn. This instruction sheet provides the nominal values for ICP-AES Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:

ICSA-1211, Interferents: Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO $_3$. Analyze this ICSA solution by ICP-AES.

ICSB-0710, Analytes, mixed with ICSA-1211, Interferents: Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO₃. Analyze this ICSAB solution by ICP-AES.

(D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-AES ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

"CERTIFIED VALUES" FOR INTERFERENCE CHECK SAMPLE ICP-AES ICSA-1211, AND ICSA-1211 MIXED WITH ICSB-0710	Table 1.

HgiH timid (J\bu)	wod Limit (J\gy)	A haq 4 haq+ (J\by)	High Himid (A\g4)	Low Limit (µg/L)	A hsq (J\gy)	свог	Flement
285000	509000	247000	294000	216000	S22000	200	IA
117	979	818	0.09	0.09-	(0.0)	09	9S
120	4.88	104	0.01	0.01-	(0.0)	01	sA
757	337	(537)	506	⊅6 ŀ-	(0.9)	200	Ba
078	420	967	0.3	0.8-	(0.0)	0.8	Be
1120	928	279	0.8	0.4-	(0.1)	0.8	Cd
271000	188000	532000	282000	208000	242000	2000	БЭ
429	097	242	0.28	42.0	(0.23)	01	Cr
848	t0t	974	0.03	0.03-	(0.0)	09	0)
883	434	119	0.72	0.62-	(0.2)	52	nე
114500	84400	99300	116500	00998	101000	100	Еe
0.63	39.0	(0.64)	0.01	0.01-	(0.0)	01	dЯ
286000	210000	248000	294000	216000	S22000	2000	ВМ
78 9	430	703	22.0	0.8-	(0.7)	91	uΜ
1100	018	1 26	42.0	0.86-	(0.2)	07	!N
0.18	0.11	(0.94)	35.0	0.36-	(0.0)	35	əs
232	021	201	0.01	0.01-	(0.0)	01	₽A
133	0.88	(801)	0.82	0.82-	(0.0)	52	ΙL
999	714	167	0.03	0.08-	(0.0)	90	Λ
9601	608	796	0.09	0.09-	(0.0)	09	uZ

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value \pm 1 times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value \pm 15 percent of the listed certified value.



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

Instructions for QATS Reference Material: ICP-AES ICS

QATS LABORATORY INORGANIC REFERENCE MATERIAL INTERFERENCE CHECK SAMPLE SET FOR ICP-AES (ICSA WITH ICSB)

NOTE: These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

APPLICATION: For use with the CLP SFAM01.0 SOW and revisions.

CAUTION: Read instructions carefully before opening bottle(s) and proceeding with the

analyses.

Contains Heavy Metals
HAZARDOUS MATERIAL

Safety Data Sheets Available Upon Request M6153

(A) SAMPLE DESCRIPTION

Enclosed is a set of one (1) or more bottles of Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-1211" and for the ICSAB mixture use "ICSA-1211+ICSB-0710".

<u>CAUTION:</u> The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.**

(B) BREAKAGE OR MISSING ITEMS

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.


QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY
APTIM Federal Services, LLC
2700 Chandler Avenue - Building C
Las Vegas, NV 89120

(C) ANALYSIS OF SAMPLES

The interference check sample set is to be used to verify inter-element and background correction factors of inductively-coupled plasma (ICP) spectrometers. This reference material set consists of two (2) concentrated solutions. The ICSA solution contains the four (4) interferent elements: Al, Ca, Fe, and Mg. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be,

Page 1 of 2











QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY "An ISO 9001:2015 Certified Program"

APTIM

Instructions for QATS Reference Material: ICP-AES ICS

Cd, Co, Cr, Cu, Mn, Ni, Pb, Tl, Se, V, and Zn. This instruction sheet provides the nominal values for ICP-AES Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:

ICSA-1211, Interferents: Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO₃. Analyze this ICSA solution by ICP-AES.

ICSB-0710, Analytes, mixed with ICSA-1211, Interferents: Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO₃. Analyze this ICSAB solution by ICP-AES.

(D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-AES ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

Table 1. "CERTIFIED VALUES" FOR INTERFERENCE CHECK SAMPLE ICP-AES ICSA-1211, AND ICSA-1211 MIXED WITH ICSB-0710

Element	CRQL	Part A (µg/L)	Low Limit (µg/L)	High Limit (µg/L)	Part A +Part B (µg/L)	Low Limit (µg/L)	High Limit (µg/L)
Al	200	255000	216000	294000	247000	209000	285000
Sb	60	(0.0)	-60.0	60.0	618	525	711
As	10	(0.0)	-10.0	10.0	104	88.4	120
Ва	200	(6.0)	-194	206	(537)	337	737
Be	5.0	(0.0)	-5.0	5.0	495	420	570
Cd	5.0	(1.0)	-4.0	6.0	972	826	1120
Ca	5000	245000	208000	282000	235000	199000	271000
Cr	10	(52.0)	42.0	62.0	542	460	624
Co	50	(0.0)	-50.0	50.0	476	404	548
Cu	25	(2.0)	-23.0	27.0	511	434	588
Fe	100	101000	85600	116500	99300	84400	114500
Pb	10	(0.0)	-10.0	10.0	(49.0)	39.0	59.0
Mg	5000	255000	216000	294000	248000	210000	286000
Mn	15	(7.0)	-8.0	22.0	507	430	584
Ni	40	(2.0)	-38.0	42.0	954	810	1100
Se	35	(0.0)	-35.0	35.0	(46.0)	11.0	81.0
Ag	10	(0.0)	-10.0	10.0	201	170	232
TI	25	(0.0)	-25.0	25.0	(108)	83.0	133
V	50	(0.0)	-50.0	50.0	491	417	565
Zn	60	(0.0)	-60.0	60.0	952	809	1095

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value \pm 1 times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value \pm 15 percent of the listed certified value.



Certificate of Analysis

ustry. R: 8/5/24

M6019

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Custom Grade Solution

Catalog Number:

CGSR1

Lot Number:

U2-SR730227

Matrix:

0.1% (v/v) HNO3

Value / Analyte(s):

1 000 μg/mL ea:

Strontium

Starting Material:

SrCO3

Starting Material Lot#:

M2-2192

Starting Material Purity:

99.9993%

3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value:

1001 ± 3 µg/mL

Density:

1.000 g/mL (measured at 20 ± 4 °C)

Assay Information:

Assay Method #1

998 ± 4 µg/mL

ICP Assay NIST SRM Traceable to 3153a Lot Number: K2-SR650985

Assay Method #2

1001 ± 3 µg/mL

EDTA NIST SRM 928 Lot Number: 928

Assay Method #3

1001 ± 2 µg/mL

Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

Characterization of CRM/RM by Two or More Methods

Certified Value, X_{CRM/RM}, where two or more methods of characterization are used is the weighted mean of the results:

$X_{CRM/RM} = \Sigma(w_i) (X_i)$

X_i = mean of Assay Method i with standard uncertainty uchar i

w = the weighting factors for each method calculated using the inverse square of the variance:

 $\mathbf{w_i} = (1/u_{\mathrm{char}\,i})^2/(\Sigma(1/(u_{\mathrm{char}\,i})^2)$

CRM/RM Expanded Uncertainty (±) = $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{lts} + u^2_{ts})^{1/2}$

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{1/2}$ where u_{char} i are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

uits = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty (stora

4.0 TRACEABILITY TO NIST

Characterization of CRM/RM by One Method

X_a = mean of Assay Method A with

 $X_{CRM/RM} = (X_a) (u_{char})$

Certified Value, $X_{CRM/RM}$, where one method of characterization is used is the mean of individual results:

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to $0.3 \ \mu m$.

М	Ag	<	0.001980	М	Eu	<	0.000495	0	Na		0.000200	М	Se	<	0.013862	0	Zn		0.000143
0	Al		0.000370	0	Fe		0.000410	M	Nb	<	0.000495	i	Si	<		М	Zr	<	0.000495
M	As	<	0.000495	М	Ga	<	0.000495	М	Nd	<	0.000495	M	Sm	<	0.000495				
M	Au	<	0.000989	М	Gd	<	0.000495	0	Ni	<	0.007631	M	Sn	<	0.000990				
M	В	<	0.039606	М	Ge	<	0.000495	М	Os	<	0.000494	s	Sr	<					
М	Ba		0.006486	M	Hf	<	0.000495	i	Р	<		М	Ta	<	0.000495				
М	Be	<	0.000990	M	Hg	<	0.000989	M	Pb	<	0.002970	М	Tb	<	0.000495				
М	Bi	<	0.000495	M	Но	<	0.000495	М	Pd	<	0.003957	М	Te	<	0.027724				
0	Ca		0.004255	M	ln	<	0.000495	M	Pr	<	0.000495	М	Th	<	0.000990				
M	Cd		0.001339	M	lr	<	0.000494	M	Pt	<	0.002970	М	Tī	<	0.005940				
М	Çe	<	0.004950	0	K	<	0.008184	М	Rb	<	0.002970	М	TI	<	0.000495				
M	Co	<	0.000495	M	La	<	0.000495	М	Re	<	0.000495	М	Tm	<	0.000495				
0	Cr	<	0.003207	0	Li	<	0.000884	0	Rh	<	0.012829	М	U	<	0.001485				
М	Cs	<	0.000990	M	Lu	<	0.002970	М	Ru	<	0.000989	М	٧	<	0.001980				
M	Cu		0.000099	0	Mg		0.000064	i	S	<		М	W	<	0.003960				
М	Dy	<	0.000495	0	Mn		0.000066	М	Sb	<	0.014852	0	Υ	<	0.000995				
М	Er	<	0.000495	М	Мо	<	0.001980	М	Sc	<	0.001980	М	Yb	<	0.000495				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale.

https://www.inorganicventures.com/terms-and-conditions-sale. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at $20^{\circ} \pm 4^{\circ}$ C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 87.62 +2 6 Sr(H2O)6+2 Chemical Compatibility - Soluble in HCl, and HNO3. Avoid H2SO4, HF and neutral to basic media. Stable with most metals and inorganic anions forming insoluble silicate, carbonate, hydroxide, oxide, fluoride, sulfate, oxalate, chromate, arsenate and tungstate in neutral aqueous media.

Stability - 2-100 ppb levels stable for months in 1% HNO3 / LDPE container. 1-10,000 ppm solutions chemically stable for years in 1 - 3.5% HNO3 / LDPE container.

Sr Containing Samples (Preparation and Solution) -Metal (Best dissolved in diluted HNO3); Ores (Carbonate fusion in Pt0 followed by HCl dissolution); Organic Matrices (Dry ash and dissolution in dilute HCl).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 88 amu	1200 ppt	N/A	72Ge16O, 176Yb+2,
			176Lu+2 , 176Hf+2
ICP-OES 407.771 nm	0.0004 / 0.00006 µg/mL	1	U, Ce
ICP-OES 421.552 nm	0.0008 / 0.00004 μg/mL	1	Rb
ICP-OES 460.733 nm	0.07 / 0.003 μg/mL	1	Се

8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

10.0 QUALITY STANDARD DOCUMENTATION

10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Ve. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; Inorganicventures.com; Info@inorganicventures.com

11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

11.1 Certification Issue Date

March 03, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

11.2 Lot Expiration Date

- March 03, 2028
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

11.3 Period of Validity

- Sealed TCT Bag Open Date:	
-----------------------------	--

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

Certificate Approved By:

Thomas Kozikowski Manager, Quality Control

Certifying Officer:

Paul Gaines Chairman / Senior Technical Director 20178hi

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



Certified Reference Material CRM

M6023

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

		Weight shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:	Expiration Date:		Description:	Lot Number:	Part Number:	CERTIFIED WEIGHT REPORT:
Lot		ted to (mL):	8TUB	1000	Ambient (20 °C)	062727		Thalllum (TI)	062724	57081	
Nominal		2000.1			င္ပိ						
Purity Uncertainty Assay		0.10 Flask Uncertainty	5E-05 Balance Uncertainty				2%			Solvent:	
Target						(mL)	40.0			Solvent: 24002546	Lot #
Actual							Nitric Acid			Nitric Acid	
Actual											
Uncertainty	Expanded		Reviewed By:	Juna	1		Formulated By:	4	TO SE	>	
(Solvent Safety Info. On Attached pg.)	SDS Information		Pedro L. Rentas	" freshies	A A		Aleah O'Brady	0	San O Basin	7	
ched pg.) NIST			062724				062724			,	
7											

RW#

Number

Conc. (µg/mL) (%)

Purity (%) (%)

Weight (g) Weight (g) Conc. (µg/mL) +/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM

~-Z/III	5.0E5	1.0E6	m/z->	5000	1.0€4	1.0E6	2.0E6	
N			-1				El opegrum No.	
210			10		ö		3	
220			120		N O			
							4 0	
230			130		9		[]4.044 sec]:57081.D# [Count] [Linear]	
240			<u> </u>		4		57081.	
ō			140		40		<u> </u>	
250			1		OI.			
0			160		60			
			4		70			
			170		0			
			180		80			1000
			190		90			or any
			200		100			
			ŏ		ŏ			See all see al
								0

Part # 57081



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

		œ	Id	: !	H.	52	į	As	30	2	2				
		40.02	20.02	5 8	200	20.02	e i	<u>۵</u>	20.02	3	40.02				
	ŀ	5	S	, (,	C	, {	3	Ç	>	5				
		4000	40.02	20.02	3	<0.02	0.02	3	2.0	>	<0.02				
		A	ද	Ç,	?	Gd	į	ŗ	돡	,	Þ		l		
	20,02	3	♦ 0.02	20.02	3	0.02	20.02	3	40.02		A0.02	Towns of the last			
		ğ	L _a	7	1	=	Е	- - -	Но	!	H.		l.		
	70.02	3	∆ .02	7.05	5	∆ 0.02	20.02	3	A).02		40.02			race M	
		ź.	Mo	9H		š	1V192		Į,	ı	1.4	Service III		S	
(T) = Target analyte	20.02	3	A 0.02	40.2	,	∆ 0.02	10.02	2	&.02 20.02	40.04	2003	450 E 3 00 W	200	Serifics	
et anal	F	4 ;	P	70	· ¦	2	ç	,	Z	142	Z			₹. 2	
yte	2.05	0.01	3	<0.02	1000	<0.02	<0.02	,	∆ 0.02	20.00	3		200	200	
	Sc	E	3	R	i	ア	공		Re	2	P			ころと	
	A0.02	20.02	3	<0.02	40.04	<n 02<="" td=""><td>40.02</td><td>10101</td><td>2000</td><td>20.02</td><td>3000</td><td></td><td>/HI /Br</td><td></td><td></td></n>	40.02	10101	2000	20.02	3000		/HI /Br		
	Ta	ç	n	Ş	TAG	Z	Ag	5	2	č					
	40,02	20.02	3	∆.02	7.07	3	A).02	40.04	3	46					
	11	DC	?	ď	120	7	Ħ	č	ş-1	10					ı
	40.02	20.02	3	40.02	70.02	4	H	70.02	3	∆ 0.02					
	Zr	120	1	×	ID	ş	<	0	1	\$					
	40.02	40.02		A).02	20,02	8	A) (2)	20.02	3	<u>&</u>	THE RESIDENCE AND PARTY OF THE				

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

* All standard containers are meticulously cleaned prior to use.

* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

* All Standards should be stored with caps tight and under appropriate laboratory conditions.

* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



Certified Reference Material CRM

M6021

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT Part Number: Lot Number: 57023 062424 24002546 Nitric Acid Solvent:

Nitric Acid

Ambient (20 °C) 2.0% (III) 40.0

Formulated By:

Aleah O'Brady

062424

ASSET O DE LONG

Recommended Storage:

Expiration Date:

062427

Description:

Vanadium (V)

Nominal Concentration (µg/mL): Volume shown below was diluted to (mL): NIST Test Number: **6UTB** 1000 2000.3 5E-05 0.06 Balance Uncertainty Flask Uncertainty Reviewed By:

Pedro L. Rentas

062424

Ammonium metavanadate (V) Compound 58123 Number Part 021224 Number ρţ 0.1000 Dilution Factor Vol. (mL) Pipette (mL) Conc. (µg/mL) 200.0 Initial Uncertainty 0.084 Nominal 1000 Conc. (µg/mL) Conc. (µg/mL) 10000.3 nitial 1000.0 Final +/- (µg/mL) Uncertainty Expanded 22 7803-55-6 CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) 0.05 mg/m3 **SDS Information** orl-rat 58.1mg/kg LD50 3165 NIST SRM

V-4 K	2.588	m/z->- 5.0E8	1.0E7	m/z->	1.006	2.006
210		110		ō		
220		1 0		N.		
0		0				
NGO O		130		90		
240		140		4.0		
0						
000		150		50		
260		160		60		ı
0		0				
		170		70		
		180		80		
		C				
		190		90		
		200		100		
		C		O		

Part # 57023



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	r		_	-	_	-	-	-	-		T	۰
		3	B!	Ве	152	2	5	<i>?</i>	≥		ı	
		A 8	40.00	<u> 0</u> ,01	20.02	2 6	4 6 5	3	<0.02			
		3 8	3	유	S.	<u>ج</u>	2 5	?	8			
	20.00	3 8	3	40.02	40.02	20.02	3 6	3	A)(2)	THE REAL PROPERTY.		
		<u> </u>		<u>ئ</u>	2	Ę	1 12	7	ΔÅ			
	20.02	3 6	9 9	S	∆0.02	20.02	20.02	3	40.02	AND DESIGNATION		
	70	3 2	7 6	ş)	==	d	, но	1	HF			
	20.02	868	3 6	7	∆ .02	40.02	40.02	0.00	co oz		Irace M	1
	Z	MIO	1 0	5	M _D	Mg	Ē	. [etals	
(T) = Targ	8,02	20.02	200	3	∆ 002	10.0	40.02	10.02	2000		Verifica	
Target analyte	Ě	1 3	, ,	,	2	õ	Z	2			tion	
yte	40,2	40.02	20.02	3	& 83 83	40.02	40,02	20.02	3		by ICP-N	
	Sc	Sm	20	,		2	Re	7		ŀ	E S	
	40.02	40.02	40.02		4	∆.02	<0.02	20.02		ľ	g/mL)	
	Ta	s	Sr		Z,	Ag	δ;	8				ı
	<0.02	40.02	40.02		3	∆ 0.02	6.02	<0.2				
	н	Sh	Tm	Ě	,	=	Te	16				
	<0.02	40.02	<0.02	10.02	3	40.02	40.02	40.02	The second second second			
	Zr	Zn	×	10	\$	V	Ϥ	₹	NAME AND ADDRESS OF			
	<0.02	∆ 0.02	40,02	20.02	3	-)	A).02	0.02	The state of the s			

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- * The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. * Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- * All standard containers are meticulously cleaned prior to use.
- * Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- * Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- * All Standards should be stored with caps tight and under appropriate laboratory conditions.

 * Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

 * Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).