

284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789

8900, Fax: 908 789 8922

### **Prep Standard - Chemical Standard Summary**

Order ID :	Q3375	
Druer ID .	(J) (J) (J)	

Mercury, Metals ICP-TAL

**Prepbatch ID:** PB170158,PB170170,

Sequence ID/Qc Batch ID: LB137584,

Stan	dard	ID .
JIAII	luaru	IU.

Test:

MP86978,MP87072,MP87149,MP87545,MP87570,MP87575,MP87578,MP87581,MP87582,MP87652,MP87653,MP87654,MP87655,MP87655,MP87655,MP87656,MP87656,MP87656,MP87656,MP87666,MP87660,MP87661,MP87663,MP87664,MP87666,MP87660,MP87666,MP87666,MP87660,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,MP8760,

### Chemical ID:

M4916,M5062,M5581,M5582,M5658,M5697,M5798,M5799,M5800,M5882,M5884,M5962,M5979,M5981,M6021,M6023,M6026,M6027,M6028,M6030,M6032,M6079,M6086,M6128,M6137,M6140,M6142,M6145,M6151,M6158,M6159,M6160,M6161,M6162,M6170,M6171,M6172,M6176,M6178,M6187,M6196,M6200,W3112,





**Metals STANDARD PREPARATION LOG** 

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
169	1:1HNO3	MP86978	08/28/2025	11/27/2025	Sagar Kanani	None	None	,
								08/28/2025

FROM	1250.00000ml of M6162 + 1250.00000ml of W311	2 = Final Quantity: 2500.000 ml
------	--	---------------------------------

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
65	POTASSIUM PERMANGANATE SOLUTION 5 %	MP87072	09/04/2025	03/04/2026		METALS_SCA LE_3 (M SC-3)		09/04/2025

**FROM** 100.00000gram of M4916 + 2000.00000ml of W3112 = Final Quantity: 2000.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone \; : \; 908 \; 789 \; 8900, \\$ 

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
67	SODIUM CHLORIDE - HYDROXYL- CHLORIDE	MP87149	09/09/2025	02/03/2026		METALS_SCA LE_2 (M SC-2)		09/10/2025
	SOLUTION							

<b>FROM</b>	2000.00000ml of W3112 + 240.00000gram of M5884 + 240.00000ml of M6196 = Final Quantity: 2000.000 ml

Recipe ID	NAME.	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
1122	ICPMS CALIB BLANK(S0/ICB/CCB)	MP87545	10/07/2025	11/07/2025	Janvi Patel	None	METALS_PIP ETTE_1 (ICP	

FROM 25.00000ml of M6200 + 4925.00000ml of W3112 + 50.00000ml of M6187 = Final Quantity: 5000.000 ml



284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	PipetteID	Supervised By
3880	<u>——</u>	MP87570	10/07/2025	11/07/2025	Janvi Patel		METALS_PIP	Sarabjit Jaswal
							ETTE_1 (ICP	10/16/2025

**FROM** 

5.00000ml of M5658 + 5.0000ml of M5798 + 5.0000ml of M5800 + 5.0000ml of M5962 + 5.0000ml of M6021 + 5.0000ml of M6023 + 5.0000ml of M6027 + 5.0000ml of M6028 + 5.0000ml of M6030 + 5.0000ml of M6160 + 5.0000ml of M6176 + 35.0000ml of MP87545 = Final Quantity: 100.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
3881	M&B SPIKE-2	MP87575	10/07/2025	11/07/2025	Janvi Patel		METALS_PIP ETTE_1 (ICP	•

**FROM** 

 $10.00000 ml of M5979 + 10.00000 ml of M6178 + 12.50000 ml of M6032 + 12.50000 ml of M6140 + 12.50000 ml of M6142 + \\ 2.50000 ml of M5799 + 2.50000 ml of M6137 + 5.0000 ml of M6159 + 32.50000 ml of MP87545 = Final Quantity: 100.000 ml$ 



284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal	
3882	M&B SPIKE-3	MP87578	10/07/2025	11/07/2025	Janvi Patel		METALS_PIP ETTE_1 (ICP	•	
	A)								

FROM 0.62500ml of M6026 + 12.50000ml of M5697 + 12.50000ml of M6128 + 12.50000ml of M6145 + 11.87500ml of MP87545 = Final Quantity: 50.000 ml

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal
3900	M&B SPIKE-4	MP87581	10/07/2025	11/07/2025	Janvi Patel		METALS_PIP ETTE_1 (ICP	,

FROM 6.25000ml of M6086 + 6.25000ml of M6171 + 6.25000ml of M6172 + 6.25000ml of MP87545 = Final Quantity: 25.000 ml





**Metals STANDARD PREPARATION LOG** 

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
4025	M&B SPIKE-5	MP87582	10/07/2025	11/07/2025	Janvi Patel		METALS_PIP ETTE_1 (ICP	10/16/2025

FROM 15.00000ml of M5979 + 15.00000ml of M6178 + 20.00000ml of MP87545 = Final Quantity: 50.000 ml

Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
871	MERCURY INTERMEDIATE B 250PPB WORKING STD.	MP87652	10/20/2025	10/21/2025	Sagar Kanani		METALS_PIP ETTE_5 (HG	•

FROM 1.00000ml of M6187 + 2.50000ml of M5062 + 96.50000ml of W3112 = Final Quantity: 100.000 ml





Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal		
1340	Hg 0.00 PPB STD	MP87653	10/20/2025	10/21/2025	Sagar Kanani		METALS_PIP ETTE_5 (HG			
	A)									

**FROM** 2.50000ml of M6187 + 247.50000ml of W3112 = Final Quantity: 250.000 ml

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1341	Hg 0.2 PPB STD	MP87654	10/20/2025	10/21/2025	Sagar Kanani		METALS_PIP	
							ETTE_5 (HG	10/28/2025

**FROM** 2.50000ml of M6187 + 247.30000ml of W3112 + 0.20000ml of MP87652 = Final Quantity: 250.000 ml





**Metals STANDARD PREPARATION LOG** 

Recip ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal	
1342	Hg 2.5 PPB STD	MP87655	10/20/2025	10/21/2025	Sagar Kanani	None	METALS_PIP ETTE_5 (HG		
	A)								

**FROM** 2.50000ml of M6187 + 245.00000ml of W3112 + 2.50000ml of MP87652 = Final Quantity: 250.000 ml

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	ScaleID	PipetteID	Supervised By
1343			10/20/2025		Sagar Kanani		METALS_PIP	Sarabjit Jaswal
							ETTE_5 (HG	10/28/2025

FROM 2.50000ml of M6187 + 242.50000ml of W3112 + 5.00000ml of MP87652 = Final Quantity: 250.000 ml





**Metals STANDARD PREPARATION LOG** 

1344 Hg 7.5 PPB STD MP87657 10/20/2025 10/21/2025 Sagar Kanani None METALS_PIP ETTE_5 (HG 10/28/2025	Recipe ID	NAME	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
	1344	Hg 7.5 PPB STD	MP87657	10/20/2025	10/21/2025	Sagar Kanani	None	_	•

<b>FROM</b>	2.50000ml of M6187 + 240.00000ml of W3112	+ 7.50000ml of MP87652	= Final Quantity: 250.000 ml
-------------	---	------------------------	------------------------------

Recipe				Expiration	<u>Prepared</u>			Supervised By
<u>ID</u>	<u>NAME</u>	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
1345	Hg 10.0 PPB STD	MP87658	10/20/2025	10/21/2025	Sagar Kanani		METALS_PIP	
							ETTE_5 (HG	10/28/2025

FROM 2.50000ml of M6187 + 237.50000ml of W3112 + 10.00000ml of MP87652 = Final Quantity: 250.000 ml



 ${\tt 284~Sheffield~Street,~Mountainside,~New~Jersey~07092,~Phone:908~789~8900,}\\$ 

Alliance

### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME_	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal	
1346	Hg ICV SOLUTION	MP87659	10/20/2025	10/21/2025	Sagar Kanani	None	METALS_PIP ETTE_5 (HG		
	A)								

**FROM** 2.50000ml of M6161 + 2.50000ml of M6187 + 245.00000ml of W3112 = Final Quantity: 250.000 ml

Recipe			,	Expiration	<u>Prepared</u>	o	D: (/ ID	Supervised By
<u>ID</u> 1351	NAME ICB (Hg 0.00 PPB SOLUTION)	NO. MP87660	Prep Date 10/20/2025		<u>By</u> Sagar Kanani	<u>ScaleID</u> None	PipetteID  METALS PIP	Sarabjit Jaswal
1001	102 (11g 0.50 1 1 2 00E0 110N)	<u> </u>	10,20,2020	10/21/2020	Cagai Ranani		ETTE_5 (HG	

**FROM** 2.50000ml of M6187 + 247.50000ml of W3112 = Final Quantity: 250.000 ml



 $284 \; Sheffield \; Street, \; Mountainside, \; New \; Jersey \; 07092, \; Phone: \; 908 \; 789 \; 8900, \\$ 

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

Recipe ID	NAME	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipetteID</u>	Supervised By Sarabjit Jaswal		
1358	CCV (Hg 5.0 PPB SOLUTION)	MP87661	10/20/2025	10/21/2025	Sagar Kanani		METALS_PIP ETTE_5 (HG			
	A)									

FROM 485.00000ml of W3112 + 5.00000ml of M6187 + 10.00000ml of MP87652 = Final Quantity: 500.000 ml

Recipe ID	<u>NAME</u>	<u>NO.</u>	Prep Date	Expiration Date	<u>Prepared</u> <u>By</u>	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
1349	CRA/CRI (Hg 0.2 PPB SOLUTION)	MP87663	10/20/2025	10/21/2025	Sagar Kanani		METALS_PIP ETTE_5 (HG	

**FROM** 2.50000ml of M6187 + 247.30000ml of W3112 + 0.20000ml of MP87652 = Final Quantity: 250.000 ml



284 Sheffield Street, Mountainside, New Jersey 07092, Phone: 908 789 8900,

Fax: 908 789 8922

### **Metals STANDARD PREPARATION LOG**

1350 CHK STD (Hg 7.0 PPB SOLUTION) MP87664 10/20/2025 10/21/2025 Sagar Kanani None METALS_PIP ETTE_5 (HG 10/28/2025	Recipe ID	<u>NAME</u>	NO.	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
	1350	, 3	MP87664	10/20/2025	10/21/2025	Sagar Kanani		_	

**FROM** 2.50000ml of M6187 + 240.50000ml of W3112 + 7.00000ml of MP87652 = Final Quantity: 250.000 ml

Recipe				<u>Expiration</u>	<u>Prepared</u>			Supervised By
<u>ID</u>	NAME	<u>NO.</u>	Prep Date	<u>Date</u>	<u>By</u>	<u>ScaleID</u>	<u>PipetteID</u>	Sarabjit Jaswal
887	AQUA REGIA FOR HG ON 7471A	MP87665	10/20/2025	10/21/2025	Sagar Kanani	None	None	
								10/28/2025

FROM 150.00000ml of M6151 + 50.00000ml of M6187 = Final Quantity: 200.000 ml





**Metals STANDARD PREPARATION LOG** 

Recipe ID	<u>NAME</u>	<u>NO.</u>	Prep Date	Expiration Date	Prepared By	<u>ScaleID</u>	<u>PipettelD</u>	Supervised By Sarabjit Jaswal
68	STANNOUS CHLORIDE SOLUTION	MP87666	10/20/2025	10/21/2025	J	METALS_SCA LE_3 (M SC-3)		10/28/2025

FROM 450.00000ml of W3112 + 50.00000gram of M5882 + 50.00000ml of M6200 = Final Quantity: 500.000 ml



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3227-05 / Potassium Permanganate (2.5kg)	210800	03/31/2026	11/30/2022 / mohan	07/28/2021 / mohan	M4916
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	MSHG-10PPM / MERCURY HCI 125mL 10ug/mL	S2-HG709270	09/22/2026	05/28/2022 / mohan	01/27/2022 / mohan	M5062
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	26397-103 / PTFE BOILING STONES	W126678	03/20/2026	03/20/2025 / jaswal	06/12/2023 / jaswal	M5581
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	26397-103 / PTFE BOILING STONES	W126678	12/31/2025	06/17/2023 / Al-Terek	06/12/2023 / jaswal	M5582
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58024 / Chromium, Cr, 500 ml, 1000 PPM	060523	06/05/2026	08/28/2023 / jaswal	08/25/2023 / jaswal	M5658
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
	58029 / Cu, 1000 PPM,	102523	10/25/2026	04/03/2024 /	10/27/2023 /	M5697



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57004 / Be, 1000 PPM, 125 ml	102523	10/25/2026	02/09/2024 / bin	02/09/2024 / bin	M5798
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57050 / Sn, 1000 PPM, 125 ml	071123	07/11/2026	02/09/2024 / bin	02/09/2024 / bin	M5799
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57027 / CO, 1000 PPM, 125 ml	091923	09/19/2026	05/31/2024 / bin	02/09/2024 / bin	M5800
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3980-01 / Stannous Chloride (cs/4x500g)	232820	08/31/2028	04/30/2024 / mohan	04/25/2024 / mohan	M5882
	•	•	•	•		
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Supplier Seidler Chemical	ItemCode / ItemName  BA-3624-05 / Sodium Chloride, Crystal (cs/4x2.5kg)	Lot # 0000281938	-	1		
	BA-3624-05 / Sodium Chloride, Crystal		Date	Opened By 04/30/2024 /	Received By 04/25/2024 /	Lot #



Fax: 908 789 8922

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGTI1-1 / TITANIUM 125mL 1000ug/mL	T2-TI719972	08/05/2026	08/06/2025 / Janvi	02/22/2024 / Jaswal	M5979
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57092 / U, 1000 PPM, 125 ml	060724	06/07/2027	07/29/2024 / Jaswal	06/11/2024 / Jaswal	M5981
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57023 / V, 1000 PPM, 125 ml	062424	06/24/2027	09/28/2024 / jaswal	08/05/2024 / Jaswal	M6021
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57081 / TI, 1000 PPM, 125 ml	0624724	06/27/2027	08/05/2024 / kareem	08/05/2024 / Jaswal	M6023
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57182 / Pb, 10000 PPM, 125 ml	110923	11/09/2026	12/05/2024 / janvi	08/05/2024 / Jaswal	M6026
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57028 / Ni, 1000 PPM, 125 ml	062024	06/20/2027	06/04/2025 / Janvi	08/05/2024 / Jaswal	M6027



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57048 / Cd, 1000 PPM, 125 ml	070124	07/01/2027	08/05/2024 / kareem	08/05/2024 / Jaswal	M6028
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57047 / Ag, 1000 PPM, 125 ml	122823	12/28/2026	08/05/2024 / kareem	08/05/2024 / Jaswal	M6030
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57056 / Ba, 1000 PPM, 125 ml	010924	01/09/2027	01/14/2025 / Jaswal	08/05/2024 / Jaswal	M6032
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57040 / Zr, 1000 PPM, 125 ml	071423	07/14/2026	01/15/2025 / Jaswal	09/30/2024 / Jaswal	M6079
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58120 / Calcium, 500 ml, 10000 PPM	082324	08/23/2027	03/06/2025 / JANVI	10/14/2024 / jaswal	M6086
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58025 / Mn, 1000 PPM, 500 ml	101124	10/11/2027	01/13/2025 / kareem	01/13/2025 / kareem	M6128



Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGSI1-1 / SILICON 125mL 1000ug/mL	V2-SI744713	07/10/2029	01/14/2025 / Jaswal	10/03/2024 / Jaswal	M6137
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58126 / Fe, 10000 PPM, 500 ml	011025	01/10/2028	06/25/2025 / Janvi	01/13/2025 / Jaswal	M6140
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58119 / K, 10000 PPM, 500 ml	103024	10/30/2027	05/06/2025 / JANVI	01/13/2025 / Jaswal	M6142
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58030 / Zinc, Zn, 500 ml, 1000 PPM	121724	12/17/2027	02/04/2025 / Jaswal	01/13/2025 / Jaswal	M6145
		121724 Lot #	12/17/2027  Expiration Date			M6145  Chemtech Lot #
Standards, Inc.	1000 PPM	<u> </u>	Expiration	Jaswal  Date Opened /	Jaswal Received Date /	Chemtech
Standards, Inc. Supplier	ItemCode / ItemName  BA-9530-33 / Hydrochloric Acid, Instra-Analyzed	Lot #	Expiration Date	Date Opened / Opened By 02/18/2025 /	Received Date / Received By 01/15/2025 /	Chemtech Lot #



Fax: 908 789 8922

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	58113 / AI, 10000 PPM, 500 ml	011325	03/18/2026	03/18/2025 / kareem	02/09/2025 / kareem	M6159
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57051 / Sb, 1000 PPM, 125 ml	071724	07/17/2027	03/24/2025 / kareem	10/18/2024 / kareem	M6160
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
EPA	ICV-5 / ICV (HG)STOCK SOLN	ICV 5 0415	12/31/2025	05/01/2025 / mohan	03/30/2024 / mohan	M6161
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	24H0162012	11/27/2025	05/27/2025 / Sagar	04/27/2025 / Sagar	M6162
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Seidler Chemical	BA-2186-03 / Hydrogen Peroxide (cs/4x4L)	24D1961001	10/31/2025	06/25/2025 / Sagar	05/20/2025 / Sagar	M6170
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date /	Chemtech Lot #
Absolute Standards, Inc.	58112 / Mg, 10000 PPM, 500 ml	011525	01/15/2028	07/15/2025 / Janvi	02/13/2025 / Janvi	M6171




Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Inorganic Ventures	CGNA10-5 / Sodium, 500 ml, 10000 PPM	V2-NA740547	07/29/2026	07/29/2025 / Janvi	01/25/2025 / Janvi	M6172
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57038 / Sr, 1000 PPM, 125 ml	092724	09/27/2027	08/06/2025 / Janvi	08/06/2025 / Janvi	M6176
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	57042 / Mo, 1000 PPM, 125 ml	080528	08/05/2028	08/06/2025 / Janvi	08/06/2025 / Janvi	M6178
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L)	24H0162012	01/28/2026	08/29/2025 / Sagar	08/08/2025 / Sagar	M6187
	1			I	Danibard Data /	Chemtech
Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Lot #
Supplier PCI Scientific Supply, Inc.	H330-500 / HYDROXYLAMINE HYDROCHLORIDE ACS 500G	Lot # 243373		-		
PCI Scientific	H330-500 / HYDROXYLAMINE HYDROCHLORIDE ACS		Date	Opened By 09/04/2025 /	<b>Received By</b> 08/04/2025 /	Lot #



Fax: 908 789 8922

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	DIW / DI Water	Daily Lab-Certified	07/03/2029	07/03/2024 / lwona	07/03/2024 / Iwona	W3112





1 Reagent Lane Fair Lawn, NJ 07410 201,796,7100 tel

Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System

Standard ISO9001:2015 by SAI Global Certificate Number CERT - 0120633 201,796,1329 fax

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	T142	Quality Test / Release Date	08/17/2023
Lot Number	232820		
Description	STANNOUS CHLORIDE, DIHYDR	ATE CERTIFIED ACS (Suitable for Me	rcury Determination)
Country of Origin	United States	Suggested Retest Date	Aug/2028
Chemical Origin	Inorganic-non animal		
BSE/TSE Comment	No animal products are used as sta processing aids, or any other mater	arting raw material ingredients, or used rial that might migrate to the finished pr	in processing, including lubricants, oduct.

N/A	H. M. C. S. C.		Was I was a state of
Result Name	Units	Specifications	Test Value
APPEARANCE		REPORT	Clear crystals
ASSAY	%	Inclusive Between 98 - 103	100.65
CALCIUM	%	<= 0.005	0.0017
IDENTIFICATION	PASS/FAIL	= PASS TEST	PASS TEST
IRON (Fe)	%	<= 0.003	0.0011
LEAD (Pb)	%	<= 0.01	0.0006
MERCURY (Hg)	ppm	<= 0.05	<0.05
POTASSIUM (K)	%	<= 0.005	0.0001
SODIUM (Na)	%	<= 0.01	<0.01
SOLUBILITY IN HCL	PASS/FAIL	= PASS TEST	PASS TEST
SULFATE (SO4)	PASS/FAIL	= P.T. (ABOUT 0.003%)	P.T. (ABOUT 0.003%)

Harout Sahagian - Quality Control Supervisor - Fair Lawn



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

R1815/24

CERTIFIED WEIGHT REPORT: 1. Barium nitrate (Ba) Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): Recommended Storage: **NIST Test Number: Expiration Date:** Part Number: Lot Number: Description: IN023 BAD022019A1 RV# 57056 010924 Barium (Ba) **6UTB** 1000 Ambient (20 °C) 010927 Number Pot Conc. (µg/mL) 2000.02 Nominal 1000 0.058 Flask Uncertainty 99.999 5E-05 Balance Uncertainty Purity Uncertainty Assay 3 Purity (%) 0,10 Solvent: 24002546 52.3 8 2% Weight (g) 3.82417 Target Lot # 40.0 Nitric Acid Weight (g) Conc. (µg/mL) 3.82441 Nitric Acid Actual 1000.1 Actual +/- (µg/mL) Reviewed By: Formulated By: Uncertainty Expanded Giovannie 2.0 10022-31-B CAS# (Solvent Safety Info. On Attached pg.)
# OSHA PEL (TWA) LD50 Giovanni Esposito Pedro L. Rentas であるとん SDS Information 0.5 mg/m3 orl-rat 355 mg/kg 3104a 010924 010924 NIST SRM

m/z->	N En En	m/z-> 5.0E6	1.055	m/z-> 2.0E5	1.0EG	2.0E6
Model disease (Model ment), Ten Carelli,	ina atta i camana anna a dia 1, 2002 fa diamin'i cama	encontribution of grant of the second of the				and the section of the section of
N 0		110		ō		
N 22		120		Ŋ		
ö		Ö		N.		
230		130		<b>3</b>		
N40		140		4		
				*		
N G		<b>1</b> 00		0		
280		<b>1</b>		00		
		170		70		
		Ö		5		
		8		80		
		1 90 1 90		90		
		No.		40		
		200		100		



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	ſ	B	В		ᆏ	Ва	2	D <sub>C</sub>	0	2	≥		ĺ		
e.		۵ 69	0.02	10.01	3	-	10.1	3	40.02		A).02	STREET, STREET			
		ဥ	င	2	5	င္ပ	ξ	3	Ç	)	8	Column A Lance			
		A 02	<b>6</b> .02	20.02	3	& 0.02	20.02	3	40,2		200				
		AII	ටු	Va.	?	2	E	7	ĮĮ1	7	T V		ı		
	20.00	3	40.02	20.02	3	<u>0.02</u>	<0.02	3	<b>∆</b> .02	10.04	2003	THE STREET	STATE OF TAXABLE PARTY.		
		Ş	2	FG.	1 ;	=	Þ	1	픙	111	311	STATE OF	I.		
	70.02	3	<b>∆</b> 0.02	8	, ;	A 02	<0.02		<u>&amp;</u>	20.02	2000			race M	
	I de	2	Mo	냺		<u> </u>	Mg		Ē,	1				S R T T	
(T) = Tarc	20.02	3 6	A)(2)	802	2000	3	40.01		A0.02	20.03	200	THE PROPERTY AND PERSONS ASSESSMENT	40111100	Serifica	
Target analyte	2	4 ;	¥	Þ	ć	2	ဝွ		ş	2	1	OF SHAPPS		5.	
STO	.ĕ.	20.02	3	40.02	10.02	3	<b>∆</b> .02	10.04	3	40.02			by ICI	797	
	Se	1 2 1	3	잗	20	9	잗	18	ರ ೯	7	1		NO C	ころ	
	40.02	20.02	3	<b>∆</b> 0.02	20.02	3	80.02	10.02	3	40.02			/9/ IIIL/		
	Ta	C	a ;	Y.	EN	1	À	2	2	Se					
	A0.02	20.02	3	A0.02	707	•	A 02	20.02	3	<u>6</u> 2	The second second second				
	ij	OII	2	3	15	1	⊒	ī	3	7					
	40.02	20.02	3 8	3	A0.02	6 6 6	400	20.02	3	40.02					
	27	2	1,	<	ð		<	c	1 :	8					
	<0.02	<0.02	0.00	3	<b>∆</b> 0.02	10.02	3	20.02		2000	Section of the second				

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

## Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Revel = 10/14/2024 M 6085/M6086/M6087

CERTIFIED WEIGHT REPORT: Nominal Concentration (µg/mL): Recommended Storage: Weight shown below was diluted to (mL): **NIST Test Number: Expiration Date:** Part Number: Lot Number: Description: 10000 082324 **BTU9** 082327 58120 Ambient (20 °C) Calcium (Ca) ĕ 4000.1 Nominal 0.15 Flask Uncertainty 5E-05 Balance Uncertainty Purity Uncertainty Solvent: 24002546 Nitric Acid Assay 2% Lot # <u>a</u> 80.0 Target Nitric Acid Actual Actual Formulated By: Reviewed By: Uncertainty Expanded Thorana (Solvent Safety Info. On Attached pg.) Giovanni Esposito Pedro L. Rentas Broade **SDS Information** 082324 082324 NIST

RM#

Number

Conc. (µg/mL)

38

Purity (%)

8

Weight (g)

Weight (g)

Conc. (µg/ml.)

+/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM

~~Z/m	5.OFA	1.065		2. TI 4	5.014	71/2-2	1.0E4	2.0€4	
									(1) Sp
Ŋ		110				10			[1] Spectrum No. 1
									n No. 1
220		120	and the second			N O			
27									2.514
NSO		130				30			89C]:5
240		140	<u>.</u>			40			[ 12.514 sec]:58120.D# [Count] [Linear]
Ö		Ō	1			Appropriates  Ap	******************************	indudate authrämbeler	O≫ [Co
250		150	1.			50			unt) [L
									inearj
280		160	): ): )			00			
		170	<b>!</b>			70			
		ا م				80			
		9	5]			C			
		190				90			
			9 7 5						
		N C				100			

www.absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

m	Bi	Be	Ba	As	Sb	A			
H							The same		
8.02	8.02	<0.01	<b>∆</b> .02	<b>∆</b> 0.2	40.02	€0.02	Section Sectin Section Section Section Section Section Section Section Section		
δ	ŝ	ਨ	ß	ზ	ဂ္ဂ	δ			
40.02	40.02	40.02	<0.02	<0.02	H	<0.02	STATE VIEW OF THE		
Au	႙	ဌာ	ନୁ	댎	野	Dy			
40,02	<0.02	40.02	<0.02	<0.02	<0.02	<0.02			
3	La		片	'n	Но	Ж			
<0.02	<0.02	30	<0.02	40.02	<0.02	<0.02		race Me	
Ä	Mo	Hg	Mn	Mg	Ę	E.		etals	
40.02	<0.02	<0.2	<0.02	40.01	<0.02	<0.02		Verifica:	
*	P	P	Pd	0°	Ä	Z	ALC: UNKNOWN	uon I	
<b>∆</b> 02	40.02	<0.02	40.02	<0.02	<b>♦</b> 0.02	<0.02		by ICP-IV	
Sc	Sm	Ru	Rb	R.	Re	7		S (Mi	,
<0.02	<0.02	<0.02	<0.02	40.02	<0.02	<0.02		J/mL)	
Ta	S	Sr	Z	Ag	Si	Se.	Missipped		
40.02	<b>40.02</b>	40.02	40.2	<0.02	<0.02	<0.2	Male In Line Street		
ㅂ	Sn	Tm	Th.	Ħ	Te	41			
40,02	40.02	<0.02	<b>40,02</b>	<b>60.02</b>	<0.02	<0.02	DESCRIPTION OF THE PERSON NAMED IN		
Zr	Zn	ĸ	<del>ነ</del>	۷	U	W	Number		
<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02			

(T) = Target analyte

## **Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above)

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

R 815/24

Solvent:

24002546

Nitric Acid

Lot #

M6028

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT:

Part Number:

57048 070124

Lot Number: Description:

Cadmium (Cd)

Nominal Concentration (µg/mL):

NIST Test Number:

6UTB

1000

Recommended Storage:

**Expiration Date:** 

070127 Ambient (20 °C)

Weight shown below was dliuted to (mL):

2000.07

0.100 Flask Uncertainty 5E-05 Balance Uncertainty

2%

40.0 (mL) Nitric Acid

Formulated By:

Alban PROBAN

Aleah O'Brady

070124

Reviewed By:

Pedro L. Rentas

070124

Expanded

Weight (g) Conc. (µg/mL) Uncertainty

Cadmium nitrate tetrahydrate (Cd)

IN024 CDM092021A1

1000

99.999

0.10

36.5

5.4797

5.4804

1000.1

2.0

10022-68-1

0.01 mg/m3

orl-rat 60.2mg/kg

3108

RM#

Number Lot

Conc. (µg/mL)

8

8

Weight (g)

Target

Actual

Actual

Nominal

Purity

Uncertainty Assay Purity (%)

+/- (µg/mL)

CAS#

**SDS Information** 

(Solvent Safety Info. On Attached pg.)
# OSHA PEL (TWA) LD50

**NIST** SRM

m/z-> -z/m m/z-> 1.0E7 2.0E7 5.OE4 1.0E5 2.5E4 5.0M4 [1] Spectrum No.1 010 110 0 220 120 20 [ 12.514 sec]:58148.D# [Count] [Linear] 230 130 30 240 140 40 N00 150 50 2000 160 60 170 70 180 80 061 Ö 200 100

1 of 2

www.absolutestandards.com

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

		₩ !	묤	Ве	ן ל	炗	As	. 0	ç	2		I		
	10.04	200	A (2)	10.02	0.02	3	4	20.02	3	<b>♦</b> 0.02				
	2	2 8	3	Ţ.	) {	,	င္ပ	2	?	2				
	70.02	2 6 6	8	40.02	20.02	3	<u>8</u> .92	2.0	5	H				
	- Au	} {	3	G	2	2	달	Ę	, t	Ų				
	20.02	3 6	3	40.02	20.02	3	8	40.02		0.02	THE STATE OF THE PARTY OF THE P			
	20	2 5	<del>,</del>	4	ing.	4	5	Ho	:	H		L	4	
	20.02	20.02	3	<b>∆</b> 0,2	<0.02	3	A Si	40.02	1 1	40.02	The State of the S	I dec Me	-1	
	20	MIO	5,	He	Mn	, ,	<b>₹</b>	5	1	E	STATE OF THE PARTY	אפרשוט	5	
<li>(T) = Target analyte</li>	40,02	20.02	5	<b>∆</b> 0.2	<0.02		<b>≙</b> 01	<0.02		40.00		vernica	1	
jet anal	×	7	,	9	Pd		<u>ک</u>	Ş	:	Z.		Con		
yte	A0.22	\$0.02		A) (2)	<0.02	10.00	3	<0.02	40.02	20.00		יטא וכף-		
	Sc	Sm	•	2	RЪ	1	<u> </u>	Re	1.1	P		MU		
	<b>40.02</b>	40.02		<b>∆</b>	<b>∆</b> 0,02	20.02	3	40.02	10.02	000		Jg/mL)		
	Ta	S		ę	Z	200	>	S.	č	200	Spillings		ı	
	Ð.02	40.02	40.04	3	40.2	20.02	3	<u>0.02</u>	7.03	à				
	Ti	Sn	1111	7	7	1	3	i.	10					
	<0.02	40.02	20.07	3	<b>₩</b>	20.02	3	40.02	20.02	500	Age of the owner that the			
	Zt	Zn		<	<b>¥</b>	~	7	_ _	*					
	<0.02	<0.02	20.02	3	40.02	20.02		40.02	70.02		MATERIAL SECTION AND ADDRESS OF THE PERSON A			

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 57048

2 of 2

### 800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



## Certified Reference Material CRM

M6026

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

R: 8/5/24

CERTIFIED WEIGHT REPORT: Part Number: 57182 Solvent: 24002546 Lot# Nitric Acid

Description: Lot Number: 110923 Lead (Pb)

2%

Nitric Acid

Formulated By:

Lawence Barry

110923

Revenue

1 40.0

Recommended Storage: **Expiration Date:** 10000 110926 Ambient (20 °C)

Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): NIST Test Number: **6UTB** Cot 2000.02 0.058 Flask Uncertainty 5E-05 Balance Uncertainty Reviewed By: Expanded

RW#

Nominal

Purity

Uncertainty Assay

 Lead(II) nitrate (Pb) IN029 PBD122016A1 10000 99.999 0.10 62.5 32.0006 32.0040 10001.1 20.0 10099-74-8 0.05 mg/m3 intryns-rat 93 mg/kg 3128

Number Conc. (µg/mL) 38 Purity (%) 36

Weight (g) Target Weight (g) Conc. (µg/mL) Actual Actual +/- (µg/mL) Uncertainty CAS# # OSHA PEL (TWA) LD50 OSHA PEL (TWA) SDS information TSIN SRM

Pedro L. Rentas

110923

1.0E7 [1] Spectrum No.1 [ 17.284 sec]:58182.D# [Count] [Linear]

180

190

200

70

80

90

100

Part # 57182

1 of 2



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace Me	Metals	Verifica	Tti-	by ICP-	NS (	µg/mL)				Ш		
≥	40.02	8	40.02	Dy	40.02	Hf	<b>40.02</b>	E	<b>₹</b> 0.02	Z:	A),02	P	-0	<0.02	4	Se	Se	Se   <0.2   Tb	Se   <0.2   Tb
Sb dS	40.02	ರಿ	<b>40.2</b>	Ħ,	40.02	쁑	<b>40.02</b>	댭	<0.02	¥	<0.02	Re		40.02	<0.02 Si		Si 40.02	Si 40.02	Si <0.02 Te <0.02
As	402	දි	40.02	핃	40.02	5	40.02	Mg	<0.01	õ	<0.02	R.		40.02		Ag	Ag <0.02	Ag <0.02 TI	Ag <0.02 TI <0.02
Ва	40.02	ಭ	△0.02	S	<0.02	F	40.02	M	<0.02	곱	0.02	짱		40.02		Na.	Na 40.2	Na <0.2 Th	Na <0.2 Th <0.02
Ве	40.01	<u>ب</u>	△0.02	င္အ	40.02	뀮	40.2	ВH	<b>∆</b> 0.2	۳	40.02	æ		40,02		Sr.	Sr.	Sr <0.02 Tm	Sr <0.02 Tm
₩.	<b>40.02</b>	င	40.02	පි	40.02	E	40.02	Mo	<0.02	⊋	40.02	Sm		40.02		ω	S 40.02	S <0.02 Sn	S <0.02 Sn <0.02
B	A0.02	δ	<b>40.02</b>	Au	<b>40.02</b>	3	T	Æ	<0.02	×	40.2	Sc	_	40.02		Ta	Ta <0.02	Ta <0.02 Ti	Ta <0.02 Ti

### Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Sor I Mill

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \*Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

  Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



M4913- 16



### Certificate of Analysis

1 Reagent Lane Fair Lawn, NJ 07410 201.796.7100 tel 201.796.1329 fax

Thermo Fisher Scientific's Quality System has been found to conform to Quality Management System Standard ISO9001:2015 by SAI Global Certificate Number CERT – 0120632

This is to certify that units of the lot number below were tested and found to comply with the specifications of the grade listed. Certain data have been supplied by third parties. Thermo Fisher Scientific expressly disclaims all warranties, expressed or implied, including the implied warranties of merchantability and fitness for a particular purpose. Products are for research use or further manufacturing. Not for direct administration to humans or animals. It is the responsibility of the final formulator and end user to determine suitability based upon the intended use of the end product. Products are tested to meet the analytical requirements of the noted grade. The following information is the actual analytical results obtained.

Catalog Number	P279	Quality Test / Release Date	01/12/2021
Lot Number	210306		
Description	POTASSIUM PERMANGANATE, A.C.S.		
Country of Origin	United States	Suggested Retest Date	Jan/2026

N/A			
Result Name	Units	Specifications	Test Value
APPEARANCE		REPORT	Dark purple to purple green crystals
ASSAY	%	>= 99	99.3
CHLORIDE & CHLORATE	%	<= 0.005	<0.005
IDENTIFICATION	PASS/FAIL	= PASS TEST	pass test
INSOLUBLE MATTER	%	<= 0.2	<0.2
MERCURY (Hg)	ppm	<= 0.05	<0.004
SULFATE (SO4)	%	<= 0.02	<0.02

Julian Burton

Julian Burton - Quality Control Manager - Fair Lawn



### Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com M5062 M5063

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

### 1.0 ACCREDITATION / REGISTRATION

**INORGANIC VENTURES** is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



### 2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Mass Spec Solution

Catalog Number:

MSHG-10PPM

Lot Number:

S2-HG709270

Matrix:

10% (v/v) HCI

Value / Analyte(s):

10 μg/mL ea:

Mercury

Starting Material:

Hg metal

Starting Material Lot#:

1959

Starting Material Purity:

99.9994%

### 3.0 CERTIFIED VALUES AND UNCERTAINTIES

**Certified Value:** 

 $10.001 \pm 0.053 \,\mu g/mL$ 

Density:

1.020 g/mL (measured at 20 ± 4 °C)

### **Assay Information:**

ANALYTE	METHOD	NIST SRM#	SRM LOT#
Hg	ICP Assay	3133	160921
Hg	EDTA	928	928
Ha	Calculated		See Sec. 4.2

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value, X<sub>CRM/RM</sub>, where two or more methods of characterization are used is the weighted mean of the results:

 $X_{CRM/RM} = \Sigma(w_i) (X_i)$ 

 $\mathbf{X_i}$  = mean of Assay Method i with standard uncertainty  $\mathbf{u_{char}}$  i

w<sub>i</sub> = the weighting factors for each method calculated using the inverse square of

the variance.

 $\mathbf{w_i} = (1/u_{chari})^2 / (\Sigma (1/(u_{chari})^2)$ 

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{its}^2 + u_{ts}^2)^{1/2}$ 

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$  where  $u_{char}$  i are the errors from each characterization method

u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

### Characterization of CRM/RM by One Method

Certified Value,  $X_{CRM/RM}$ , where one method of characterization is used is the mean of individual results:

X<sub>CRM/RM</sub> = (X<sub>a</sub>) (u<sub>char a</sub>)

Xa = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (±) = U<sub>CRM/RM</sub> = k (u<sup>2</sup>char a + u<sup>2</sup>bb + u<sup>2</sup>lts + u<sup>2</sup>ts) 1/2

k = coverage factor = 2

u<sub>char a</sub> = the errors from characterization

u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty

u<sub>its</sub> = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

### 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

### 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

```
O Ag
          0.000011 M Eu <
                            0.000201 O Na
                                              0.000004 M Se <
                                                               0.015915 O Zn <
                                                                                 0.001510
0
   Al
          0.000001 O Fe
                            0.000001 M Nb <
                                              0.000201 O Si
                                                                0.000005 M Zr <
                                                                                 0.000201
M
   As <
          0.000402 M Ga <
                            0.000201 M Nd <
                                              0.000201 M Sm <
                                                               0.000201
M
   Au <
          0.003631 M Gd <
                            0.000201 M Ni <
                                              0.000402 M
                                                        Sn <
                                                               0.001007
M
   B <
          0.001208 M
                    Ge <
                            0.000201 M Os <
                                              0.000605 M
                                                        Sr <
                                                               0.000201
M Ba <
          0.000201 M Hf <
                            0.000201 O P <
                                              0.032370 M
                                                        Ta <
                                                               0.000201
M
  Be <
          0.000201 s
                                   M Pb <
                    Hq <
                                              0.000201 M Tb <
                                                               0.000201
M Bi <
          0.000201 M
                    Ho <
                            0.000201 M Pd <
                                              0.000403 M
                                                        Te <
                                                               0.002216
0
  Ca
          0.000007 M In <
                            0.000201 M Pr <
                                              0.000201 M Th <
                                                               0.000201
M
  Cd <
          0.000201 M Ir
                            0.000201 M
                                      Pt <
                                              0.000402 M Ti <
                                                               0.000402
                                              0.000201 O TI <
M
  Ce <
          0.000201 O K
                            0.000020 M
                                      Rb <
                                                               0.016508
M Co <
          0.000201 M La <
                            0.000201 M
                                      Re <
                                              0.000201 M Tm <
                                                               0.000201
  Cr <
0
          0.003021 O Li <
                            0.000107 M
                                      Rh <
                                              0.000201 M U <
                                                               0.008058
M
  Cs <
          0.001208 M Lu <
                            0.000201 M Ru <
                                              0.000201 M V <
                                                               0.000201
M
  Cu <
          0.000402 O
                    Mg
                            0.000001 O
                                      S <
                                             0.053950 M W <
                                                               0.000604
M Dy <
          0.000201 M Mn <
                            0.000604 M Sb <
                                             0.001208 M Y <
                                                               0.000201
M Er <
          0.000201 M Mo
                           0.000009 M Sc <
                                             0.000201 M Yb <
                                                               0.000201
```

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

### 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

### 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.inorganicventures.com/TCT

**Atomic Weight; Valence; Coordination Number; Chemical Form in Solution -** 200.59 +2 4 Hg(OH)(aq) 1+ **Chemical Compatibility -** Stable in HNO3. Avoid basic media forming insoluble carbonate. The sulfide, basic carbonate, oxalate, phosphate, arsenite, arsenate and iodide are insoluble in water.

**Stability -** 2-100 ppb levels not stable in 1% HNO3 / LDPE container, stable in 10% HNO3 packaged in borosilicate glass. 1-100 ppm levels stable in 7% HNO3 packaged in borosilicate glass. 1000-10,000 ppm solutions are chemically stable for years in 5-10% HNO3 / LDPE container.

**Hg Containing Samples (Preparation and Solution) -** Metal (soluble in HNO3); Oxide (Soluble in HNO3); Ores and Organic based (The literature has more references to the preparation of Hg containing samples than any other element. Please consult the literature for your specific sample type, since such preparations are prone to error. Or e-mail our technical staff and we will contact you to discuss your particular sample preparation questions in further detail.).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 202 amu	9 ppt	n/a	186W16O
ICP-OES 184.950 nm	0.03 / 0.005 μg/mL	1	
ICP-OES 194.227 nm	0.03 / 0.005 µg/mL	1	V
ICP-OES 253.652 nm	0.1 / 0.03 µg/mL	1	Ta, Co, Th, Rh, Fe,
			U

### 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

### 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

### 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

### 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

September 22, 2021

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- September 22, 2026
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

Sealed TCT	Bag	Open Date:		

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS Certificate Prepared By:

Uyen Truong
Supervisor, Product Documentation

Mya Truong

### Certificate Approved By:

Michael Booth Director, Quality Control Michael 2 Booth

### Certifying Officer:

Paul Gaines Chairman / Senior Technical Director Paul R Laines



### MATERIAL CERTIFICATE OF COMPLIANCE

**DATE: JUNE 12, 2023** 

**CUSTOMER:** 

PCI SCIENTIFIC SUPPLY, INC

**PURCHASE ORDER NO.** 

6054931

CATALOG NO.

BOI5021-450L

PRODUCT DESCRIPTION:

**BOILING STONES, TFE, 454GMS** 

**QUANTITY:** 

10 EACH

LOT NO.

W126678

**SPECIFICATION (S):** 

Made from Virgin PTFE Resin

We certify that we have complied with the terms and conditions of the above Purchase Order and the Part Specifications in the manufacturing of the above product.

Laura Valencia

**Quality Assurance Inspector** 

F:U:J:CF:PCISCI:GOC-55118-BQI5021-061223



# MATERIAL CERTIFICATE OF COMPLIANCE

**DATE: JUNE 12, 2023** 

**CUSTOMER:** 

PCI SCIENTIFIC SUPPLY, INC

**PURCHASE ORDER NO.** 

6054931

CATALOG NO.

BOI5021-450L

PRODUCT DESCRIPTION:

**BOILING STONES, TFE, 454GMS** 

**QUANTITY:** 

10 EACH

LOT NO.

W126678

**SPECIFICATION (S):** 

Made from Virgin PTFE Resin

We certify that we have complied with the terms and conditions of the above Purchase Order and the Part Specifications in the manufacturing of the above product.

Laura Valencia

**Quality Assurance Inspector** 

F:U:J:CF:PCISCI:GOC-55118-BQI5021-061223

# Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



# Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: Nominal Concentration (µg/mL): Recommended Storage: Volume shown below was diluted to (mL): NIST Test Number: **Expiration Date:** Part Number: Lot Number: Description: Part **BTU9** 1000 58024 060523 Ambient (20 °C) 060526 Chromium (Cr) Lot 2000.02 Dilution 0.058 5E-05 Initial Flask Uncertainty Balance Uncertainty Uncertainty 21110221 Nominal Lot # 2.0% Nitric Acid Solvent: (III) Initial 40.0 Nitric Acid Final Formulated By: Reviewed By: Uncertainty Expanded Lavense (Solvent Safety Info. On Attached pg.) Pedro L. Rentas Lawrence Barry **SDS Information** 060523 060523

Chromium(III) nitrate nonahydrate (Cr) 58124

071122

0.1000

200.0

0.084

1000

10000.1

1000.0

12

7789-02-8

0.5 mg(Cr)/m3

ori-rat 3250 mg/kg 3112a

Compound

Number

Number

Factor

Vol. (mL) Pipette (mL) Conc. (µg/mL)

Conc. (µg/mL) Conc. (µg/mL)

+/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

TSIN SRM

m/z->	20 10 10	m/z-> 5.0E5	5.0E5	m/z->	5000	1.0日4
N 0		110		0		
o,		J				
220		120		N.		
				: 2		(
230		130		۵. 0		( ( (
240		40		<b>6</b>		
h						(
250		1 0		<b>S</b>		
N		<u>.</u>				
280		160		0		
		170		70		
		0				
		180		(b) O		
		190		90		
		N 0		100		

Part # 58024



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

			_				_			=
	B	ᄧ	Ве	В	As	Sb	Δ	Monthly		
	A).02	<b>4</b> 0.02	40,01	<b>A</b> .02	<b>40.2</b>	△0.02	△0.02			
	δ	පි	Ω	င္တ	දි	ర్జ	Ω			
	<b>40.02</b>	<b>40.02</b>	<b></b> )	40.02	40.02	40,2	△0.02			
	Æ	ဂ္ဂ	වූ	ନ୍ଥ	멸	녆	Dy	80		
	<b>40.02</b>	40.02	40.02	<0.02	40.02	40.02	40.02	mineral differences		
	3	Ľ	स्र	Ħ	ď	ᅜ	Ж	SHEET STATES		
	<b>40.02</b>	40.02	40.2	A).02	<0.02	40.02	40.02		I race M	1
	폺	Мо	В.	Ķ	ВМ	Ē	П	MISSON ISSUE	Metals	1
3	A0.02	40.02	40.2	40.02	40,01	<b>∆</b> .02	40.02	SI RECEIPTOR	Verification	
Towns and the	~	ን	70	굕	ô	₹	3	SHEWARDS	Clon	-
	<b>∆</b> 0.2	40.02	40.02	40,02	40.02	40.02	40.02	THE PARTY OF THE P	by ICP-M	
	Sc	Sm	잗	공	Rh	æ	Pr		S (Hi	5
	<0.02	<0.02	<0.02	40.02	40,02	40.02	<0.02		g/mL)	
	Ta	S	ñ	Z.	Ą	Si.	Se			
	40.02	<0.02	40.02	402	<b>40.02</b>	40.02	402			
	==	Sn	Tm	Ħ	ᄇ	급	176			
	40,02	40.02	40,02	40,02	<0.02	40,02	<0.02	Contract Contraction		
	Z	Zn	~	뀱	۷	Ϥ	W	可能を発展		
	<0.02	<b>&lt;</b> 0.02	<0.02	<0.02	40.02	40.02	<0.02	SALES OF SALES		

(I)= larget analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in

the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

# Certified Reference Material CRM

A: 10/23/23 M5697



CERTIFIED WEIGHT REPORT:						Lot #	Solvent:					
Part Number:		3029				24002546	Nitric Acid		Complete	q		r=
Lot Number:		102523										
Description:		Copper (Cu)	<b>ب</b>						I man Commission			
						2.0%	40.0	Nitric Acid	Formulated By:	Benson Chan	102523	m
Expiration Date:		102526					(mL)		1	2		1
Recommended Storage:		Ambient (20 °C)	(C)						1	The state of the s		
Nominal Concentration (µg/mL):		1000							Land	Kera		
NIST Test Number:		6UTB		5E-05	Balance Uncertainty	ainty			Reviewed By:	Pedro L. Rentas	102523	m
Volume shown below was diluted to (mL):	ras diluted		2000.02	0.058	Flask Uncertainty	\$		•				1
									Expanded	SDS Information	-	
	Part	Lot	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Uncertainty	(Solvent Safety Info. On Attached pg.)	ched pg.)	NIST
Compound	Number Number	Vumber	Factor	Vol. (mL)		Conc. (µg/mL)	Conc. (µg/mL)	Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) Conc. (µg/mL) +/- (µg/mL)		CAS# OSHA PEL (TWA)	LD50	SRM

3114

orl-rat 794 mg/kg

1 mg/m3

10031-43-3

2.5

1000.0

100001

1000

0.084

200.0

0.1000

100223

58129

1. Copper(II) nitrate trihydrate (Cu)

		70 80 90 100		170 180 190 200		
unt] [Linear]		20 80		150 160		
[ 33.422 sec]:58029.D# [Count] [Linear]		40		041		
		30		120 130		
[1] Spectrum No.1		0		0		
1.0E6	5.0E5	m/z->	2.5E7	m/z-> 2.0E7	1.067	

Part # 58029

1 of 2

# Absolute Standards, Inc.

www.absolutestandards.com 300-368-1131





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# Certified Reference Material CRM

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

ification by ICP-MS (µg/mL)	<0.02   Pr   <0.02   Se   <0.2   Tb   <0.02   W	Nb <0.02 Re <0.02 Si <0.02 Te <0.02 U <0.02	<0.02   Rh <0.02   Ag <0.02   T1 <0.02   V	40.02 Rb 40.02 Na 40.2 Th 40.02 Yb	<0.02 Ru <0.02 Sr <0.02 Tm <0.02 Y	<0.02 Sm <0.02 S <0.02 Sn <0.02 Zn	40.2 Sc 40.02 Ta 40.02 Ti 40.02 Zr
Trace	L	(o <0.02	_	r   <0.02		_	Ì
		Ho	 	-	윤	۳.	£.
	<0.02	<b>40.02</b>	<0.02	<0.02	<0.02	<0.02	<0.02
- Control	Ď	ŭ	<u>ᇳ</u>	ন্ত —	<u>5</u>	පී	Αn
	<0.02	<0.7	<0.02	<0.02	<0.02	<0.02	Į-
	3	ರೆ	ಲೆ —	<u>ರ</u>	<u></u>	රි	ਠੌ
	<0.02	<b>40.02</b>	40.2	<0.02	10.0>	<0.02	<0.02
A STATE OF THE PARTY OF THE PAR	V	SP P	As	Ba	æ	Ä	В

(T) = Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.





Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# CERTIFIED WEIGHT REPORT:

02/09/24 Lot #

24002546

Nitric Acid Solvent:

Part Number: Lot Number: Description: 57004 102523

Beryllium (Be)

Nominal Concentration (µg/mL): Recommended Storage: NIST Test Number: 1000 Ambient (20 °C)

**Expiration Date:** 

102526

BTU<sub>9</sub>

Volume shown below was diluted to (mL): 2000.02

0.058

Flask Uncertainty Balance Uncertainty

5E-05

Number

Number Lot

Vol. (mL.)

Part

Dilution Factor

hitia

Uncertainty

Nominal

(IE) 40.0

2.0%

Nitric Acid

Benson Chan

102523

Formulated By:


Pedro L. Rentas

102523

Reviewed By:

Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) Conc. (µg/mL) Final +/- (µg/mL) Uncertainty Expanded CAS# (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) SDS Information LD50 NIST SRM

₹

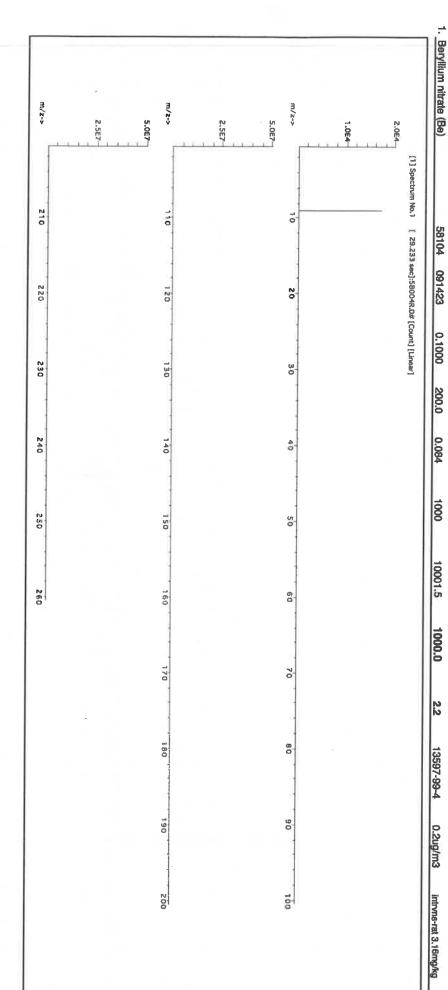

Part # 57004





Absolute Standards, Inc.

www.absolutestandards.com

800-368-1131



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

40.02 Cd 40.02 Dy 40.02 Cg 40.02 Br 40.02 Cg 40.02 Br 40.02 Cg 40.02 Gd T Cr 40.02 Gd 40.02 Co 40.02 Gg
40.02 Cd 40.02 40.02 Cc 40.02 40.02 Cc 40.02 7 Cr 40.02 40.02 Cc 40.02 40.02 Cc 40.02 40.02 Cc 40.02 40.02 Cc 40.02
40.02 Cd 40.02 40.02 Cc 40.02 40.02 Cc 40.02 7 Cr 40.02 40.02 Cc 40.02 40.02 Cc 40.02 40.02 Cc 40.02 40.02 Cc 40.02
40.02 40.02 40.02 40.02 40.02 40.02
a B B B B S B

(T) = Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

# Certified by:



All standard containers are meticulously cleaned prior to use.

2 of 2

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

<sup>\*</sup> Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

All Standards should be stored with caps tight and under appropriate laboratory conditions. Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com



# Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# CERTIFIED WEIGHT REPORT:

Part Number:

57050 071123 Tin (Sn) 202109 Salvents: 21110221 Lot # 1224 Nitric Acid

22D0562008

Hydrochloric acid

3 6% 10.0 30.0 Hydrochloric acid Nitric Acid Formulated By:

Benson Chan

071123

Nominal Concentration (µg/mL):

1000

Ambient (20 °C) 071126

Recommended Storage:

Expiration Date:

Description: Lot Number:

Reviewed By: Pedro L. Rentas

Weight shown below was diluted to (mL): **NIST Test Number: BTU9** 499.93 0.058 Flask Uncertainty 5E-05 Balance Uncertainty 071123

1. Ammonium hexafluorostannate(IV) (Sn) [1] Spectrum No.1 IN010 SND042023A1 RM# Number ρţ Conc. (µg/mL) Nominal 1000 (%) Uncertainty Assay
Purity (%) (%) 0.10 44.2 1.13107 Weight (g) Target 1.13286 Weight (g) Conc. (ug/ml.) Actual 1001.6 Actual +/- (µg/mL) Uncertainty Expanded 2.0 CAS# SDS Information
(Solvent Safety Info. On Attached pg.)
LD50 7 mg/m3 ₹ 3161a SRM

m/z-> ---x/m --Z/111 2.5E4 5.0E4 1.0ES 2.0E6 2.5E5 S.OEG 210 110 0 120 220 N [ 15.034 sec]:58150.D# [Count] [Linear] 230 130 8 240 140 40 250 150 Ö 160 260 60 170 70 180 80 190 90 200 100

1 of 2

Part # 57050

Lot # 071123

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Bi Bi Bi	I
	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	
	58555	
	40.02 40.02 40.02 40.02 40.02	
	AC CS EE DY	
	444 444 444 444 444 444 444 444 444 44	
	HH Ho Hr Fe La	
	40.00 40.00 40.00 40.00 40.00 40.00	Trace M
	Nd Min Li	letals
(T) = Tamet anshra	40.02 40.02 40.02 40.02	Verifica
angk	* 7 ~ 8 S 4 X	Ition
4	\$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$ \$	by ICP-I
	S R R R R	m) S
	4444	a/mL)
	T <sub>R</sub> S <sub>r</sub> S <sub>s</sub> S <sub>s</sub>	
	402 402 402 402 402	
	T I I I I	
	40.02 40.02 40.02 40.02	
	Z Z ≺ Z < ⊂ €	
	4 4 5 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	

(I) = larget analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. the preparation of all standards.


\* All standard containers are meticulously cleaned prior to use.
\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.


\* All standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com









800-368-1131 www.absolutestandards.com	Do.			8	Certified Re	d Reference A	Certified Reference Material CRM $[02]$ of $[25]$	MASON			AR-150 https://ak	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	creditec Numbe rds.con
CERTIFIED WEIGHT REPORT:						Fot#	Solvent:						
Part Number:		57027				24002546	Nitric Acid			2			
Lot Number: Description:		091923 Cobalt (Co)	ī						C fam	) may	D.		
1						2.0%	40.0	Nitric Acid	Formulated By:	Lawr	Lawrence Barry	091923	
Expiration Date:		091926					(Jw.)		1	\	0		
Recommended Storage:		Ambient (20 °C)	<b>်</b>						N.	X			
Nominal Concentration (ug/ml.):		1000							Leens	1	4		
NIST Test Number:		eUTB		5E-05	Balance Uncertainty	<b>\$</b>			Reviewed By:	Pedn	Pedro L. Rentas	091923	
Volume shown below was diluted to (mL):	r was dilute	d to (mL):	2000.02	0.058	0.058 Flask Uncertainty								
									Expanded	S	SDS Information		
	Part	ĕ	Dilution	Initial	Uncertainty	Nominal	Initial	Final	Uncertainty	(Solvent Sal	(Solvent Safety Info. On Attached pg.)	hed pg.)	NIST
Compound	Number	Number	Factor	Vol. (mL)	Vol. (ml.) Pipette (ml.) Conc. (µg/ml.)	nc. (ug/mL)	Conc. (µg/mL) Conc. (µg/mL) +/- (µg/mL)	Conc. (µg/ml.)		CAS# OSHA	OSHA PEL (TWA)	LDSO	SRM

[1] Speatrum No.1									Sulfill too willing	0110
	[ 34.243 sec	34.243 sec]:58027.D# [Count] [Linear]	[Count] [Lit	Lagr						
<b>5.0</b> Е5				70						
m/z-> 10 20		. <b>4</b>	9	<u>.</u>	20	80	0		00	
5.0E7										
TVZ-> 110 120	130	140	150	100	170	180		0	500	
5.0E7										

1 of 2

260

280

240

230

220

010

W/z->

Printed: 2/8/2024, 5:01:14 PM

# Certified Reference Material CRM





ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

							Trace M	etals	Verifical	tion	by ICP-M	4S (F	g/mL)						
1							STREET, STREET	No section lives	ALL DESCRIPTION OF THE PERSON	10.000	Market Mark	MINNSH.	Carlotte Anna	NAME OF TAXABLE PARTY.	Service of the last	SECOND STATES		No.	A STATE OF STREET
IV	<0.02	ಶ	1	Š	40.02 Dy 40.02	Ħ	<0.02	П	<0.02	Z	<0.02	Æ	<0.02	B	<0.2	£	<0.02	M	<0.02
ౙ	<b>40.02</b>	రే	<b>40</b> 7	占	<0.02	H9	<0.02	.3	₹005	Ź	₹0.02	2	<0.02	Š	40.02	T <sub>e</sub>	40.05	5	40.02
As	40.2	ප	40.02	呂	<b>40.02</b>	ų	<0.02	Mg	10.05	ő	₹0.02	됩	<0.02	Ag	<b>40.02</b>	F	<0.02	>	₩ 40.02
쯃	<b>40.02</b>	చ	<b>40.02</b>	3	<b>4002</b>	ㅂ	<0.02	Ma	<0.02	콘	₹000	2	40.02	N <sub>a</sub>	40.2	Ę	20:0>	g,	Ø.02
2	10.05	ඊ	<b>20.0</b> 2	త్ర	<b>40.02</b>	હ	40.2	쁀	\$ 20	م	₹0.02	콥	<0.02	Şt	<b>40.02</b>	Tm	Ø.02	٨	Ø.02
遥	<b>40</b> .02	රි	۳	Ğ,	<b>4002</b>	ដ	<0.02	Mo	<b>40.02</b>	Æ	<b>20'0</b> >	S	<0.02	S	<b>40.02</b>	Sn	40.02	Zn	Ø.02
æ	<0.02	ට්	<0.02	Αn	<0.02	윤	Z0.0>	P	<0.02	м	40.2	S	<b>₩</b>	Fee Fee	<b>40,02</b>	Ħ	Ø.02	Z	Ø.02

(T)= Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.



Lot # 091923

All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Sodium Chloride, Crystal BAKER ANALYZED® A.C.S. Reagent







Material No.: 3624-01

Batch No.: 0000281938

Manufactured Date: 2021-06-07

Retest Date: 2026-06-07

Revision No.: 1

# **Certificate of Analysis**

Test	Specification	Result		
Assay (NaCl) (by Ag titrn)	≥ 99.0 %	100.0 %		
pH of 5% Solution at 25°C	5.0 - 9.0	6.3		
Insoluble Matter	≤ 0.005 %	0.003 %		
lodide (I)	≤ 0.002 %	< 0.002 %		
Bromide (Br)	≤ 0.01 %	< 0.01 %		
Chlorate and Nitrate (as NO <sub>3</sub> )	≤ 0.003 %	< 0.001 %		
ACS - Phosphate (PO <sub>4</sub> )	≤ 5 ppm	< 5 ppm		
Sulfate (SO <sub>4</sub> )	≤ 0.004 %	< 0.004 %		
Barium (Ba)	Passes Test	Passes Test		
ACS - Heavy Metals (as Pb)	≤ 5 ppm	< 5 ppm		
ron (Fe)	≤ 2 ppm	< 1 ppm		
Calcium (Ca)	≤ 0.002 %	< 0.001 %		
Magnesium (Mg)	≤ 0.001 %	< 0.001 %		
Potassium (K)	≤ 0.005 %	0.001 %		

For Laboratory, Research, or Manufacturing Use Meets Reagent Specifications for testing USP/NF monographs Country of Origin: USA

Packaging Site: Paris Mfg Ctr & DC



Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



# Certified Reference Material CRM

M5962 R! 06/14/24



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/z->		i,	m/z->		10 c	÷ is	1. Selenium (Se)	Compound		<		Nominal Co	Re			CERTIFIED WEIGHT REPORT	מדודודה שובום
210	1.008	2.008	110	1.008	/z-> 10	[1] Spectrum No.1				Volume shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:	1	Lot Number: Description:	Part Number:	1 11000H
0			0		Ū	Z	58134	Number	Part	as dilute					in in in	_	
220			120		N 0	r.	071223	Number	Lot	d to (mL):	6UTB	1000	Ambient (20 °C)		060624 Selenium (Se)	57034	
Ŋ			4		ω	3.702	0.1000	Factor	Dilution	2000.07			<u>೦</u>		Se)		
230			130		90	sec]:58	200.0	Val. (mL	Initial	0.100	5E-05						
240			140		40	33.702 sec]:58034.D# [Count] [Linear]	0.084	Vol. (mL) Pipette (mL) Conc. (µg/mL)	Uncertainty	Flask Uncertainty	Balance Uncertainty						
250			150		50	Count) [L	1000	Conc. (µg/mL)	Nominal	ťγ	ainty			2.0%	24007540	24002546	
260			160		. 60	inear 2	10002.5	Conc. (µg/mL	Initial				(mL)	40.0	Zin Zin	Solvent:	
o							1000.0	Conc. (µg/mL) Conc. (µg/mL)	Final					Nitric Acid			(1)
			170		70		2.2	.) +/- (µg/mL)	Uncertainty	Expanded	Reviewed By:	K	N	Formulated By:	M		10
			180		80		7782-49-2	C	(So		y:	200	11	Ву:			
			190		90		2 0.2 mg/m3	OSHA PEL (TWA)	(Solvent Safety Info. On Attached pg.)	SDS Information	Pedro L. Rentas	lenco		Benson Chan	M		
			200		100			NA)	). On Atta	rmation	ntas	,	/	5			
			-		J		orl-rat 6700 mg/kg	LDS0	ched pg.)		060624			060624			
							3149	SRM	NIST		4			4-1		_	

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							I race M	1etals	Verifica	lion	oy ICP-M	S (1)	g/mL)						
A	40.02	CQ.	<0.02	Dy	<0.02	HH	<0.02	11	<0.02	Z.	<0.02	Pr	<0.02	Se	ı	-T	40.02	W	40,02
ЗЪ	<0.02	င္ဖ	<0.2	퍜	<0.02	н	<0.02	Ę	<0.02	₽	<0.02	Re	<0.02	S:	<0.02	Te	<0.02	U	<0.02
As	<0.2	ზ	<0.02	臣	<0.02	Ħ	<0.02	Mg	<0.01	°	<0.02	Rh	40.02	Ag	<0.02	∄	40.02	۷	<0.02
Ва	<0.02	Ç	<0.02	æ	<0.02	ŀ	<0.02	Mn	<0.02	Pd	40.02	₽.	<0.02	Na	<0.2	Ħ	<0.02	4	<0.02
Ве	<0.01	Ç	40.02	Ga	<0.02	F	<0.2	Ж	402	P	<0.02	R <sub>L</sub>	<0.02	St	<0.02	Tm	<0.02	¥	<0.02
В:	40.02	င္ပ	<0.02	දූ	<0.02	Ľ	<0.02	Mo	<0.02	7	<0.02	Sm	40.02	S	<0.02	Sn	40.02	Zn	<0.02
В	<0.02	Ω	<0.02	Au	<0.02	Рь	<0.02	M	<0.02	×	40.2	Sc	<0.02	Ta	<0.02	Ħ	<0.02	Zr	<0.02

(T) = Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
  \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- \* All standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

  \* Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

# Certificate of Analysis 6652M , 8782M

MORGANIC NE NE SE SEGENE YOU TREST

info@inorganicventures.com P: 800-669-6799/540-585-3030 P: 540-585-3030 R:2/22/24

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com



# ACCREDITATION / REGISTRATION

Number QSR-1034). the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (GSR Certificate INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for

# PRODUCT DESCRIPTION

Catalog Number:

Single Analyte Custom Grade Solution Product Code:

CGTN

2% (v/v) HNO3 :xintsM T2-TI719972 Lot Number:

muineill 1 000 hg/mL ea: Value / Analyte(s): tr. HF

Starting Material Lot#: 2094 Starting Material: Ti Metal

Starting Material Purity: 99.9975%

1002 ± 5 µg/mL Certified Value: **CERTIFIED VALUES AND UNCERTAINTIES** 

1.012 g/mL (measured at 20  $\pm$  4 °C) Density:

Assay Information:

ICP Assay NIST SRM 3162a Lot Number: 130925 1002 ± 4 µg/mL Assay Method #1

The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance  $\frac{1}{1000}$ 

Certified Value, X<sub>CRM/RM</sub>, where one method of characterization is used is the mosn of individual results:

XCRANGAM =  $(x_a)$  (ucher a) X =  $x_a$  mass of Keesy Method A with  $x_a$  =  $x_a$  the standard uncertainty of

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expressed at approximately the 95% confidence level using a coverage factor of  $K=\Sigma$ .

Characterization of CRM/RM by One Method Characterization of CRM/RM by Two or More Methods

4.0 TRACEABILITY TO NIST

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration

# 4.2 Balance Calibration

used for testing are annually compared to master weights and are traceable to NIST. - All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRWIRMs.

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below, solutions tested by ICP-MS were analyzed in an III bA-Bitter of ore each element, is reported below, solutions tested by ICP-MS were analyzed in an III bA-Bitter of the properties of the properties

e2 M 078220.0 > gN O 882000.0 > u3 M 8g < 0.000536 M Eu <

# ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to

Page 2 of 4

INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

> uR M 882000.0

> 9A M 886 0.000.0

> bq M 882000.0 > rq M 888200.0 > rq M 682000.0 > dg M 271100.0

> q O f81200.0 > dq M f82800.0

> iN O 882000.0 > aO M 841200.0

> dN O 322500.0 > N M 862000.0

M - Checked by ICP-MS

Mn < Mg < Li <

> 0H

> 6H

ΉŁ

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

M 976800.0 > 8 | 34500.0 M 576800.0 > 8 M 782600.0

by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

> mT M 882000.0 > U M 882000.0 > V M 682000.0 W M

> 6T M 882000.0 > AT M 882000.0

sT M 034450.0 > dT M E70100.0

s 853000.0 M 882000.0

O.000269 O

O.043560 O

n2 M 068010.0 89Z000.0 > mS M 89Z000.0

> II

JS

674000.0 228610.0

892000.0 892000.0

0.000268

699630.0

0.001341

892000.0

0.010560

960000'0

960000.0

73260.0 > nZ O 402100.0 038540.0 > nZ O 267400.0

# 5.0 TRACE METALLIC IMPURITIES (TMI ) DETERMINED BY ICP-MS AND ICP-OES (µg/ml)

7.7 Storage and Handling Recommendations

oM M 882000.0

0.000268 M K 0.000268 M K 0.000268 M K

0.000872 O Fe > 0.008586 M Ga <

O 892000.0

O S37000.0 M 882000.0

M 882000.0

M 603100.0

M 885800.0

M £83200.0 > 00 M GG8020 O.004577 M Gd <

INTENDED USE

W Et < O Cn <

O B <

IA O

# 4.1 Thermometer Calibration

volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is - This product is traceable to MIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRMINM uncertainty error and the measurement, weighing and

# Page 3 of 4

- Chemical Testing - Accredited / AZLA Certificate Number 863.01

10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- QSR Certificate Number QSR-1034

1.01 ISO 9001 Qualify Management System Registration

# MOITATY STANDARD DOCUMENTATION 0.01

Homogeneity data indicate that the end user should take a minimum ample size of 0.0.2 m L to assume

This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. The Coth series alongs mirranament to be the Coth of the Coth series alongs mirranament to be the Coth series alongs mirranament.

# HOMOGENEITY

Please refer to the Safety Data Sheet for information regarding this CRWRM.

# NOITAMROANI SUOGRASAH HF Note: This standard should not be prepared or stored in glass.

Ollinger		C INTOTINATION (ICP_OEC p	Idoseomeni	
ss radial/axial view):	are given	Estimated D.L. Estimated D.L.	Technique/Line	
Interferences (Underline 11 )	Order	idq 41	ICP-MS 48 amu	
Interferences (underlined indicates severe) 32S16O, 32S14N,	A/N	add		
14N160180,				
14N17N2, 36Ar12C,				
48Ca, [96X=2				
7-V001 (no a				
(where X = Zr, Mo, Ru)]		10000 () 1900 ()	ICP-OES 323.452 nm	
Ce, Ar, Ni		Jm/gu Se000.0 \ +200.0	ICP-0ES 334.941 nm	
		m/pu 820000.0 \ 8500.0	ICP-OES 336.121 nm	
ла, Та, Сг, U М М9 Ω-	1 1		F Note: This standar	ŀ
W, Mo, Co		In/gy 4500000 \ cocos-	nous prepries sur res	٠

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/a

1:1:1 H2O / HF./ H2SO4 or fuse ash with pyrosulfate if oxide is as plastic pigment and likely in brookite Volentily), Oxide - Northere are repetation; and sociation; restore (Dissolved by heating in 1737 HZO / HF / HZSO4); Oxide - Northere history (~800EC) brooklie (fuse in Pt0 with KZSZO7); Ores (fuse in Pt0 with KZZZO7); Ores (fuse in Pt0 with provide it as plastic pigment and likely in brooktie (fuse in Pt0 with provide it as plastic pigment and likely in brooktie TI Containing Samples (Preparation and Solution) - Metal (Soluble in H2O / HF caution -powder reacts

HNO3 / LDPE container. 1-10,000 ppm single element solutions as the Ti(F)6-2 chemically stable for years in 2-5% HNO3 / trace HF in an LDPE container. with a fendency to hydrolyze forming the hydrated oxide in all dilute acids except HE.

Stability - 2-100 ppb levels stable (Alone or mixed with all other metals) as the Ti(F)6-2 for months in 1%

HNO3 / LDPE container. 1-10.000 ppm sincle element solutions as the Ti(F)8-2 chemically stable for year media. Unstable at ppm levels with metals that would pull F-away (i.e. Do not mix with Alkaline or Rare Earths or high levels of transition elements unless they are fluorinated). Stable with most inorganic anions with a tendency to hydrolyze forming the hydrafed oxide in all dilute adds except HF. Chemical Compatibility - Soluble in concentrated HCI, HF, H3PO4 H2SO4 and HNO3. Avoid neutral to basic Atomic Weight, Valence; Coordination Number; Chemical Form in Solution - 47.87 +4 6 Ti(F)6-2

- For more information, visit www.inorganicventures.com/TCT

reported density. Do not pipette from the container. Do not refurn removed aliquots to container. - After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$  -  $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the renorded density. Do not pipelte from the container. Do not return removed alticular to container.

Twitte sociate in the secied 101 beg, trainspleaded for the orderiver in the shalfy concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss. - While stored in the sealed TCT bag, transpiration of this CRWRM is negligible. After opening the sealed TCT bag, transpiration in a negligible in the capture managed in the capture

- Store between approximately  $4^{\circ}$  - 30° C while in sealed TCT bag.

Page 4 of 4

Chairman / Senior Technical Director

- Sealed TCT Bag Open Date:

NAMES AND SIGNATURES OF CERTIFYING OFFICERS

- The date after which this CRM/RM should not be used.

CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

norganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.859.5790; 540.855.3030, Fax: 540.555.3012; Inorga - Reference Material Producer - Accredited / A2LA Certificate Number 883.02 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- This CRMRM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRMRM being stored and handled in accordance with the instructions given in Sec. 7.1.

stability studies conducted on properly stored and handled CRWRMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability. - The lot expiration date reflects the period of time that the stability of a CRMRM can be supported by long term

- The certification is valid within the measurement uncertainty specified provided the CRWRM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified it instructions in Sec 7.1 are not followed or if the CRWRM is damaged, confaminated, or otherwise modified.

Thomas Kozikowski Manager, Quality Control Certificate Approved By:

thibils Validity

- June 17, 2027 11.2 Lot Expiration Date

June 17, 2022 11.1 Certification Issue Date

Paul Gaines Certifying Officer:

0.Sr

0.11

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com

# Certified Reference Material CRM

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com			×	18 EZ X	ertified R	eference l	Certified Reference Material CRM	2	72/		ANA AR- https:	ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com	credited Number ards.com
CERTIFIED WEIGHT REPORT:						Lot #	Solvent:						
Part Number: Lot Number:		57092 060724				24002546	Nitric Acid		2	7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	1 parte		020
Description:		Uranium (U)	q						* APV	3			
						2.0%	40.0	Nitric Acid	Formulated By:		Giovanni Esposito	060724	
Expiration Date:		060727					(mf.)		7		2		
Recommended Storage:		Ambient (20 °C)	<b>်</b>							1	V		
Nominal Concentration (µg/mL):		1000							Jan	to the	Code		
NIST Test Number:		<b>6UTB</b>		5E-05 Balance	Balance Uncertainty	inty			Reviewed By:		Pedro L. Rentas	060724	
Volume shown below was diluted to (mL):	was dilute	d to (mL):	2000.07	0.100	0.100 Flask Uncertainty			-					<u> </u>
									Expanded		SDS Information	ion	
	Part	Lot	Dilution	Initial	Initial Uncertainty	Nominal	Initial	Final	Uncertainty	(Solvent	(Solvent Safety Info. On Attached pg.)	Attached pg.)	TSIN
Compound	Number	Number	Factor	Vol. (mL)	Vol. (mL) Pipette (mL) Conc. (µg/mL)	Conc. (µg/mL)	Conc. (µg/mL) Conc. (µg/mL)	Conc. (µg/mL)	+/- (ug/mL)	CAS#	OSHA PEL (TWA)	DSO.	SRM
1. Uranyl nitrate hexahydrate (U)	58192	58192 041524	0.1000		200.0	1000	10001	1000.0	c	4000004	200		
				1	500	200	2.10001	NOON!	217	13020-83-7	U.US ING/IIIS	on-rat 1040 mg/kg	3164

1.0E6	2 ************************************			3		•				
5.0E5										
m/z-> 5.0E4	10	O	O <sub>E</sub>	6	Og	O O	0,	08	OG	100
2.5E4										
m/z->	0	1 NO	130	64.0	160	160	170	180	190	000
5.0E5				***************************************						
m/a->	OF	8	230	240	250	260				

Lot # 060724





ANAB ISO 17034 Accredited AR-1539 Certificate Number https:///Absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Se
CP-MS (µg/m	40.02 Re <0.02 40.02 Rh <0.02 40.02 Rh <0.02 40.02 Rb <0.02 40.02 Sm <0.03 40.02 Sm <0.03
ication by I	Z S S Z a & x
letals Verif	Li <0.02 Lu <0.02 Mg <0.03 Mn <0.02 Hg <0.02 Mo <0.02 Nd <0.03
Trace A	Hf
	40.02 40.02 40.02 40.02 40.02 40.02 40.02 40.02 40.02 40.02 40.02 40.02
	0.02 Br 0.02 Br 0.02 Bu 0.02 Gd 0.02 Ga 0.02 Ga
	222222
	40.02 40.02 40.02 40.02 40.02 40.02
	B Bi B

(T) = Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.





2 of 2

<sup>\*</sup> The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

All standard containers are meticulously cleaned prior to use.

<sup>\*</sup> Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* All standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

# Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



# Certified Reference Material CRM

9 R19/30

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/2>	5.0m/	m/z->>	5.0E7	m/z-*-	G. O. M. G.	*. O M O	Zirconyl chloride octahydrate (Zr)	Compound		Velime	Recommended Storage: Nominal Concentration (μg/mL):	D.		CERTIFIED WEIGHT REPORT:
มา		110		10		[1] Spectrum No.1	drate (Zr)		Voiding Shown below was gildled to (mL):	NIST Test Number:	Recommended Storage: I Concentration (µg/mL):	Expiration Date:	Lot Number: Description:	RI.
U		e e		Ť		2 Z	58140	Number	as 01100					
) )		120		N 0		_	070621	Number	ed to (mL):	BTU9	Ambient (20 °C) 1000	071426	071423 Zirconium (Zr)	
		130		30		11.163	0.1000	Dilution	2000.02		Š		(Zr)	
		Ö		-		sec];5	200.0	Vol. (ml.	0.058	5E-05				
		4		<b>A</b>		41.153 sec]:57040.D# [Count] [Linear]	0.084	Initial Uncertainty Nominal Initial Vol. (ml.) Pipette (ml.) Conc. (μg/ml.) Conc. (μg/ml.)	Flask Uncertainty					
		150		<b>5</b>		[Count] [	1000	Nominal Conc. (µg/mL)	ήγ	tainty		2.0%	21110221	Lot #
		160		00		Linear]	10000.3	Initial Conc. (µg/mL			(mil.)	40.0	Nitric Acid	Solvent:
		Ü					1000.0	Final ) Conc. (µg/mL)				Nitric Acid		٠
		170		70			0 2.2	Uncertainty (mL) +/- (µg/mL)	Expanded	Reviewed By:	K	Formulated By:		
		180		80			13520-92-8	inty (S /mL) CAS#	e.	ы Ву:	M	ted By:		
		mã.		m			92-8	(Solvent :		Pe	Ex.	Be	À	
		190		<b>©</b>	ka et e remetagliet escuella et tillge e entre kun av av h		NA	(Solvent Safety Info. On Attached pg.) # OSHA PEL (TWA) LD50	SDS Information	Pedro L. Rentas		Benson Chan		
		200		100				On Attache	nation	S	1			
							NA	LD50		071423		071423		
							NA	NIST SRM		<u>[w]</u>		Iω	1	IJ



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Al Sb As Be Bi		
	40.02 40.02 40.02 40.02 40.02 40.02		
	5 8 5 5 5 5		
	40.02 40.02 40.02 40.02 40.02		
	Dy Er Ga		
	40.02 40.02 40.02 40.02 40.02 40.02		
	# # # # # # # # # # # # # # # # # # #		
	40.02 40.02 40.02 40.02 40.02	Trace N	
	Li Li Mg	/letals	
(T) = Tai	40.02 40.02 40.02 40.02 40.02	Verifica	
<ul><li>(T) = Target analyte</li></ul>	K P P B S N	tion b	
ê	40.02 40.02 40.02 40.02 40.02 40.02	y ICP-M	
	S B R R R	/Brl) S	
	40.02 40.02 40.02 40.02		
	Se S		
	60.2 60.2 60.2 60.2 60.2		
	r r r r		
	40.02 40.02 40.02 40.02 40.02 40.02		
	Z;		
	40,02 40,02 40,02 40,02 7		

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.

  \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

  \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com

Part Number:

Lot Number:



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT:

Formulated By: Diovannie Giovanni Esposito 2 Septe 101124

Pedro L. Rentas

101124

Recommended Storage: **Expiration Date:** Description: 101124

Manganese (Mn)

Ambient (20 °°)

Manganese (20 °°) 1000

Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): **NIST Test Number:** ETUB ត្ត 4000.2 Nominal 0.10 Flask Uncertainty 5E-05 Balance Uncertainty Purity Uncertainty Assay Target Actual Actual Reviewed By: Uncertainty Expanded (Solvent Safety Info. On Attached pg.)

RM#

Number

Conc. (µg/mL)

8

Purity (%)

8

Weight (g)

Weight (g) Conc. (µg/ml.)

+/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM NIST T SDS Information

 Manganese(II) nitrate hydrate (Mn) IN031 MNM082020A1 1000 99.999 0.10 20.8 19.2322 19.2344 1000.1 2. 0 15710-66-4 5 mg/m3 orl-rat >300mg/kg 3132

m/z->	5.0E7	1.0E8	5.0E7	1.0E8	7-2/2	N UI	5. OE6
							[1] 88
0		110			0		[1] Spectrum No.1
			•				NO.1
N N O		120			0		و
230		100			30		1.243
ō		Ō					ec]:57(
N 40		140			40		[ 34.243 sec]:57025.D# [Count] [Linear]
							Coun
N D		150			6		t] [Line
N O		300			<b>0</b>		2
J		•					
		170			70		
		-			Ó		
		0			80		
		90			0		
		N 0	on.		100		



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Г							Trace Me	etals	Verifica	tion	by ICP-	SM	(µg/mL)						
A	40.02	2	40.02	Dγ	40.02	H	<0.02	<u>E</u>	<0.02	Z	<0.02	꾸	<0.02	Se	40.2	<u>4</u>	<0.02	×	<0.02
dS	<0.02	ರಿ	<0.2	뎍	<0.02	Н	<0.02	Ę	40.02	ş	<0.02	Re	<0.02	ž.	40.02	Te	<0.02	c	<0.02
As	40.2	င္ပ	40.02	띹	<0.02	In	<0.02	Mg	40.01	0°	<0.02	쫑	<0.02	A	8,02	1	<0.02	<	40.02
Ba	40.02	ς,	<0.02	ନୁ	40.02	F.	40.02	Mn	H	Pd	<0.02	<b>&amp;</b>	40.02	Z	40,2	1	<0.02	충	<b>&lt;</b> 0.02
Ве	40.01	ប៉	40.02	ଦ୍ମ	40.02	7,	40.2	Hg	<0.2	Þ	<0.02	Ru	40.02	Sr	0.02	Tm	<0.02	×	<0.02
Bi	0.02	ဝ	<0.02	ନ୍ମ	40.02	La	<0.02	Mo	40.02	7	40.02	Sm	<0.02	S	A.02	Sn	<0.02	Zn	<b>60.02</b>
B	<0.02	Cu	<0.02	Au	<0.02	Pb	<0.02	Nd	<0.02	×	40.2	S	<0.02	Ta	40.02	크	<0.02	Zr	<0.02
									}										

(T) = Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

# Certified by:

Jon T. Mills

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



# Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

M6137

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

# 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



# 2.0 PRODUCT DESCRIPTION

Product Code:

Single Analyte Custom Grade Solution

Catalog Number:

CGSI1

Lot Number:

V2-SI744713

Matrix:

tr. HNO3

tr. HF

Value / Analyte(s):

1 000 µg/mL ea:

Silicon

Starting Material:

Silica

Starting Material Lot#:

1771

Starting Material Purity:

99.9981%

# 3.0 CERTIFIED VALUES AND UNCERTAINTIES

**Certified Value:** 

999 ± 6 µg/mL

Density:

1.003 g/mL (measured at 20 ± 4 °C)

# **Assay Information:**

Assay Method #1

999 ± 5 µg/mL

ICP Assay NIST SRM Traceable to 3150 Lot Number: S2-Si702546

Assay Method #2

1000 ± 7 µg/mL

Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

# Characterization of CRM/RM by Two or More Methods

Certified Value, X<sub>CRM/RM</sub>, where two or more methods of characterization are used is the weighted mean of the results:

# $X_{CRM/RM} = \Sigma(w_i) (X_i)$

 $\mathbf{X_i}$  = mean of Assay Method  $\mathbf{i}$  with standard uncertainty  $\mathbf{u}_{char}$   $\mathbf{i}$  $\mathbf{w}_{i}$  = the weighting factors for each method calculated using the inverse square of the variance:

 $w_i = (1/u_{char i})^2 / (\Sigma (1/(u_{char i})^2)$ 

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k (u^2_{char} + u^2_{bb} + u^2_{its} + u^2_{bs})^{1/2}$ 

k = coverage factor = 2

 $u_{char} = [\Sigma((w_i)^2 (u_{char})^2)]^{\frac{1}{2}}$  where  $u_{char}$  are the errors from each characterization method ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

# Characterization of CRM/RM by One Method

Certified Value, X<sub>CRM/RM</sub>, where one method of characterization is used is the mean of individual results:

 $X_{CRM/RM} = (X_a) (u_{char a})$ 

X, = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (1) =  $U_{CRM/RM} = k (u_{chara}^2 + u_{bb}^2 + u_{its}^2 + u_{ts}^2)^{1/2}$ 

k = coverage factor = 2

uchar a = the errors from characterization

u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

# 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

# 4.1 Thermometer Calibration

 All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

# 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

# 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

# TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL) 5.0

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

M	Ag	<	0.000310	M	Eu	<	0.000310	0	Na		0.001656	M	Se	<	0.022000	М	Zn	<	0.002500
M	Al		0.010787	M	Fe	<	0.027000	M	Nb	<	0.001300	s	Si	<		0	Zr	<	0.001900
М	As	<	0.001900	М	Ga	<	0.001300	M	Nd	<	0.000310	М	Sm	<	0.000310				
М	Au	<	0.000910	М	Gd	<	0.000310	M	Ni	<	0.005500	М	Sn		0.000096				
M	В		0.016180	M	Ge	<	0.001900	M	Os	<	0.000610	0	Sr		0.000092				
M	Ba		0.000096	M	Hf		0.000423	i	Р	<		M	Ta		0.002542				
0	Be	<	0.000570	M	Hg	<	0.000610	M	Pb	<	0.000310	М	Tb	<	0.000310				
M	Bi	<	0.000310	М	Но	<	0.000610	М	Pd	<	0.000610	M	Te	<	0.000910				
0	Ca		0.011557	M	ln	<	0.000310	M	Pr	<	0.000310	M	Th	<	0.001900				
M	Cd	<	0.000310	M	lr	<	0.000310	M	Pt	<	0.000310	М	Ti		0.001078				
M	Ce	<	0.000610	0	K		0.000577	M	Rb	<	0.009100	М	TI	<	0.000310				
M	Co	<	0.001600	M	La	<	0.000310	M	Re	<	0.000310	М	Tm	<	0.000310				
М	Cr	<	0.010000	0	Li	<	0.000460	М	Rh	<	0.000310	М	U	<	0.000310				
М	Cs	<	0.000310	M	Lu	<	0.000310	M	Ru	<	0.000310	0	V	<	0.001300				
М	Cu	<	0.002500	0	Mg		0.001348	0	S	<	0.570000	М	W	<	0.001900				
М	Dу	<	0.000310	М	Mn	<	0.002500	M	Sb	<	0.000310	M	Υ	<	0.000310				
M	Er	<	0.000310	M	Мо	<	0.000310	0	Sc	<	0.000590	M	Yb	<	0.000310				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

# 6.0 **INTENDED USE**

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures <u>Terms and Conditions of Sale</u>, <a href="https://www.inorganicventures.com/terms-and-conditions-sale">https://www.inorganicventures.com/terms-and-conditions-sale</a>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

# 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

# 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between  $4^{\circ}$   $24^{\circ}$  C to minimize the effects of transpiration. Use at  $20^{\circ} \pm 4^{\circ}$  C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

# - For more information, visit www.inorganicventures.com/TCT

Atomic Welght; Valence; Coordination Number; Chemical Form in Solution - 28.09 +4 6 Si(OH)x(F)y2-Chemical Compatibility -Soluble in HCl, HF, H3PO4 H2SO4 and HNO3 as the Si(OH)x(F)y2-. Avoid neutral to basic media. Unstable at ppm levels with metals that would pull F- away (i.e. Do not mix with Alkaline or Rare Earths, or high levels of transition elements unless they are fluorinated. Stable with most inorganic anions with a tendency to hydrolyze forming silicic acid (silicic acid is soluble up to ∼100 ppm in water) in all dilute acids

Stability - 2-100 ppb levels - stability unknown - (alone or mixed with all other metals) as the Si(OH)x(F)y2-. 1-10,000 ppm single element solutions as the Si(OH)x(F)y2- chemically stable for years in 2-5 % HNO3 / trace HF in a LDPE container.

Si Containing Samples (Preparation and Solution) -Metal (Soluble in 1:1:1 H2O / HF / HNO3); Oxide - SiO2, amorphic (dissolve by heating in 1:1:1 H2O / HF / HNO3); Oxide - quartz (fuse in Pt0 with Na2CO3); Geological Samples(fuse in Pt0with Na2CO3 followed by HCI solution of the fuseate); Organic Matrices containing silicates and non volatile silicon compounds (dry ash at 4500C in Pt0 and dissolve by gently warming with 1:1:1 H2O / HF / H2SO4 or fuse / ash with Na2CO3 and dissolve fuseate with HCI / H2O); Silicone Oils - dimethyl silicones depolymerize to form volatile monomer units when heated (Measure directly in alcoholic KOH / xylene mixture where sample is treated first with the KOH at 60-1000C to "unzip" the Si- O-Si polymeric structure or digest with conc. H2SO4 / H2O2 followed by cooling and dissolution of the dehydrated silica with HF.) Note that the direct analysis of silicone oils in an organic solvent will result in false high results due to high vapor pressure of volatile monomer units like hexamethylcyclotrisiloxane. The KOH forms the K2+Si(CH3)2O= salt which is not volatile at room temperature.

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

	•		
Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 28 amu	4000 - 8000 ppt	N/A	N2, 12C16O
ICP-OES 212.412 nm	0.02/0.01 µg/mL	1	Hf, Os, Mo, Ta
ICP-OES 251.611 nm	0.012/0.003 µg/mL	1	Ta, U, Zn, Th
ICP-OES 288.158 nm	0.03/0.004 µg/mL	1	Ta, Ce, Cr, Cd, Th

HF Note: This standard should not be prepared or stored in glass.

# 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

# 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

# **QUALITY STANDARD DOCUMENTATION** 10.0

# 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

# 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

# 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

# 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

# 11.1 Certification Issue Date

July 10, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

# 11.2 Lot Expiration Date

- July 10, 2029
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

# 11.3 Period of Validity

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

# NAMES AND SIGNATURES OF CERTIFYING OFFICERS 12.0 Certificate Prepared By:

**Uyen Truong** Custom Processing Supervisor

Mayyand Man
Paul R. Laine

# Certificate Approved By:

Muzzammil Khan Stock Laboratory Supervisor

**Certifying Officer:** 


**Paul Gaines** Chairman / Senior Technical Director

Certified Reference Material CRM

https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

CERTIFIED WEIGHT REPORT: Lot#

Nominal Concentration (µg/mL): Recommended Storage: Weight shown below was diluted to (mL): NIST Test Number: **Expiration Date:** Part Number: Description: Lot Number: 58126 011025 Iron (Fe) **8TB** 10000 011028 Ambient (20 °C) 2000.07 R->1/18/25 M6140 0.100 Flask Uncertainty 5E-05 Balance Uncertainty Solvent: 22% 24012496 40.0 Nitric Acid Nitric Acid Reviewed By: Formulated By: Expanded Pedro L. Rentas Benson Chan SDS Information 011025 011025



Q

Nominal

Purity


Uncertainty

Target

Actual

Actual

Uncertainty

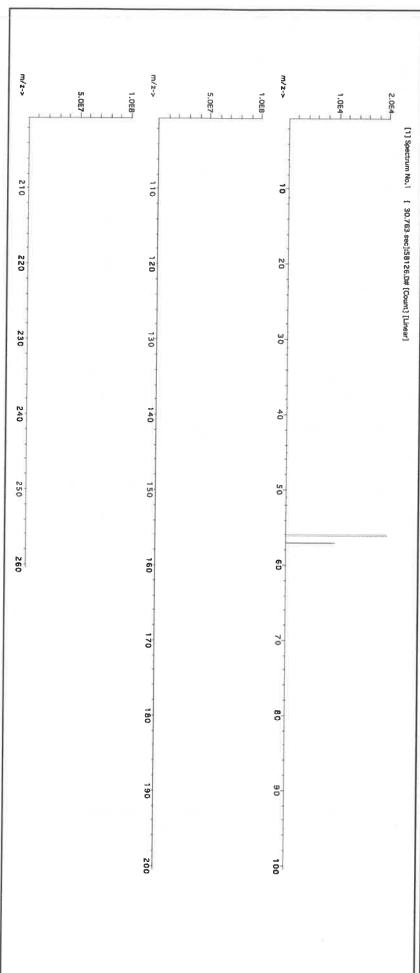

# Certified Reference Material CRM



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							11 000	Cana	4011100			q					N S S S S S S S S S S S S S S S S S S S		
1	200	2	2003		2003	3H	A A		A0 02	z	<b>&lt;</b> 0.02	Pr	<0.02	Se	<0.2	4	40.02	W	<0.02
	20.02	6	70.02	Ş	20.02	2.2.2	W. W.	,	40.00		1000			2		1	3	11	3
	9	5	400	Ęį.	AD 02	H <sub>o</sub>	40.02	Ŀ	40.02	Z	40.02	R	0.02	2	<0.02	Ţe.	20.02	C	20.02
_	40.00	í		1		•		-	5	?	3	5	3	A 6	3	1	40.07	∨	∆ 20.05 20.05
	8	ဂ္ဂ	40.02	Ец	20.02	In In	70.02	SIM	10.03	Ş	20.02	2	40.04	6	10.00				
	3	5	3	3	A) (2)	7	8,02	Mn	A0.02	ヱ	<b>∆</b> 0.02	Rb	40.02	Z	40.2	Th	<0.07Z	YD	20.02
_	0.04	(				1	1	:	3	9	3	0:	3	ę	2000	1	A 02	4	A0.02
_	0.01	Ü	40.02	Ga	Z0.02	148	-	128	7.05	۲	20.02	IVU.	40.02	Ş	-			1	
	3	3	3	ş,	A) ()2	200	40.02	Mo	<0.02	P	40,02	Sm	40.02	S	<0.02	Sn	40,02	20	20,02
_	0.01	9	000		3	7	3	Z	3	*	3	S	A 63	<del>]</del>	A0.02	1	8000	Zr	40.02

(T)= Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



# Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: 1. Potassium nitrate (K) Compound Nominal Concentration (µg/mL): Weight shown below was diluted to (mL): Recommended Storage: **NIST Test Number: Expiration Date:** Part Number: Lot Number: Description: IN034 KD062022A1 BTU9 57119 103024 Potassium (K) M6141 10000 103027 Ambient (20 °C) Number 5 Conc. (µg/mL) 4000.1 10000 716142 Nominal R->1/13/25 0.15 Flask Uncertainty 99.999 5E-05 Balance Uncertainty Purity 8 Uncertainty Purity (%) 0.10 Solvent: 24002546 Assay 37.7 E 2% Weight (g) 106.1040 Target 80.0 Lot # Nitric Acid Nitric Acid ###### Weight (g) Conc. (µg/mL) Actual 10001.1 Actual Reviewed By: Formulated By: +/- (µg/mL) Uncertainty Expanded 20,0 Tieranie. 7757-79-1 CAS# (Solvent Safety Info. On Attached pg.) Pedro L. Rentas Giovanni Esposito からからかん OSHA PEL (TWA) **SDS Information** 5 mg/m3 orl-rat 3750 mg/kg 3141a LD50 103024 103024 SRM NIST

m/z->	Ø000	m/z->	1.0E5	m/z->	1.0E6	2.0E6
			enge ennergen a somme representation and military are engeleen angula		and the second s	
N 0		10		<b>1</b>		
J				¥		
200		120		N O		
				•		
230		0		ů O		
240		0		0	00000000000000000000000000000000000000	м.
N		_				
N 0		150		Ø.		
N O		100				
0		0				
		170		7.		
		4				
		180		80		
		190		0		
		93				
		N 0		00		



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	ш	В	ᄪ	В	As	S	A			1
	<u> </u>	<u> </u>	•	20	to	-	_			ı
	40.02	0.02	40.01	40.02	40.2	40.02	<0.02			
	Ω.	ဝ	Ω	င္တ	င္ပ	က္ခ	Ω			I
	<0.02	<0.02	<0.02	<0.02	<0.02	402	<0.02			
	Αu	ද	ନ୍ଥ	ନୁ	달	띰	Ņ			I
	<0.02	40.02	40.02	<0.02	<0.02	<0.02	<0.02			
	B	7	듄	ᅡ	'n	Но	Hf	j		ı
	<0.02	<0.02	40.2	<0.02	<0.02	<0.02	<0.02		Trace M	
	Nd	Mo	Hg	Mn	Mg	Lu	Ľ		Metals	
Toront analyte	<0.02	<0.02	<b>40</b> 2	<0.02	10.0>	<0.02	<0.02		Verifica	
	×	7	Ъ	Pd	တ္တ	3	Z.	ı	tion	ı
2	Ţ	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	the second second	by ICP-	
	Sc	Sm	Ru	Rb	쫑	Re	7		SW	I
	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02	<0.02		( <i>µ</i> g/mL)	
	Ta	S	Sr	N <sub>B</sub>	Ag	Si	Se			ı
	<0.02	<0.02	<0.02	40.2	<0.02	<b>&lt;0.02</b>	<0.2			
	Ti	Sn	Im	H	1	Te	Тb			I
	<0.02	<0.02	40.02	<0.02	40.02	<0.02	<0.02			
	Zr	Zn	×	4	<	C	W			
	<0.02	<b>∆0,02</b>	40.02	<0.02	40.02	40.02	<0.02			

(i) = larget analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard


Certified by:


- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994)

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

# Www.absolutestandards.com CERTIFIED WEIGHT REPORT:

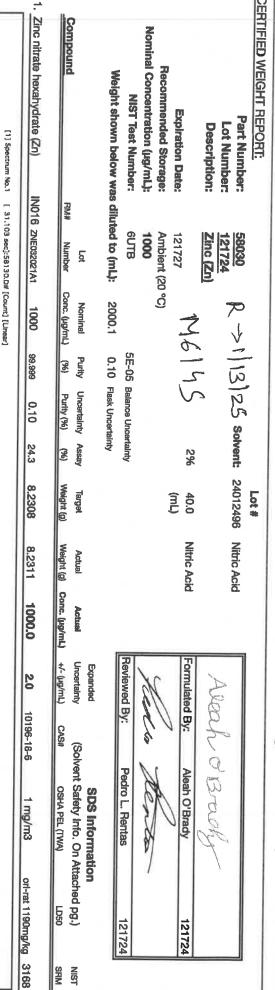

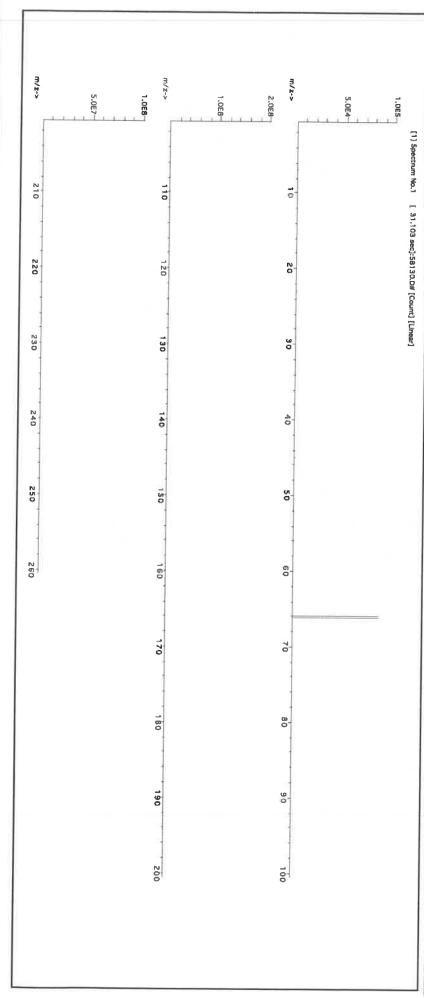

Part # 58030



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

																		-	
ľ		l	-	20.02	T d	20.02	30	702	7	40.02	Z	40.02	P	₹0.02	Au	<b>∆</b> 0.02	5	A).02	00
7				3	3	3	2	3	: :	6 6	200	20.02	La	70.02	CC	20.02	S	20.02	191
1			N.	20.02	v	<u>A</u> .02	Sm	<u>A</u> .83	P	A 23	5	3	3	3	2	3	3	5	2
ĭ			-	000	,		1	40.00	1	10.1	27.7	10%	70	20.02	Ca	20.02	ŭ	10.0	Be
jed		_	n.	20.02	S	A).(72	Z:	3	0	3	<u> </u>	3		3	>		2		
9 8		20.00	1 :	6	ING	20.03	Z	20.02	Pd	20.02	Mn	<0.02	H	40.02	2	40.02	င္တ	- - - - - - - - - - - - - - - - - - -	B
<del>-</del>			1	4	2 (	3	7	8	1 (	0 0	0	40.04	17.1	10.02	t	20.02	6	4.0	As
_			11	20.02	Ag	40.02	25	<u>A</u> ,23	ွှ	40.01	× o	3	3	3	Į.	3	3	3	
ς_			1			10:04	25	10.02	140	20.02	14	20.02	OH	20.02	H	200	Ca	40.02	S
C			Te	A).02	2	3	2	2000	ļ.	3	÷	3			1 3	-	5	10.04	2
-	_		1.5	7.0>	Se.	20.02	H	<b>4</b> .02	Z	40.02	1	A0.02	H	<0.02	Dγ	A) (2)	3	co or	Δ1
V		1	7	3	2	0.00			۱										-
			-			100			ı				۱	١	١				Ī
١						,/		wy 101 1	יניטוו	ACHINO	Crais	HI GOD IN							
								2 TO	1	Corifica	0+0								

(T) = Target analyte

# Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

Part # 58030

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





M6151

R-> 1/15/25

Material No.: 9530-33

Batch No.: 22G2862015 Manufactured Date: 2022-06-15

Retest Date: 2027-06-14

Revision No.: 0

# Certificate of Analysis

Test	Specification	Result
ACS - Assay (as HCI) (by acid-base titrn)	36.5 - 38.0 %	
ACS - Color (APHA)	50.5 - 36.0 % ≤ 10	37.9 %
ACS - Residue after Ignition	≤ 3 ppm	5
ACS - Specific Gravity at 60°/60°F		< 1 ppm
ACS – Bromide (Br)	1.185 - 1.192	1.191
ACS - Extractable Organic Substances	≤ 0.005 %	< 0.005 %
ACS - Free Chlorine (as Cl2)	≤ 5 ppm	< 1 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.5 ppm	< 0.5 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.05 ppm	< 0.03 ppm
Sulfite (SO₃)	≤ 0.5 ppm	< 0.3 ppm
Ammonium (NH <sub>4</sub> )	≤ 0.8 ppm	0.3 ppm
Trace Impurities - Arsenic (As)	≤ 3 ppm	< 1 ppm
Trace Impurities - Aluminum (AI)	≤ 0.010 ppm	< 0.003 ppm
Arsenic and Antimony (as As)	≤ 10.0 ppb	1.3 ppb
Trace Impurities - Barium (Ba)	≤ 5.0 ppb	< 3.0 ppb
Trace Impurities - Beryllium (Be)	≤ 1.0 ppb	0.2 ppb
Trace Impurities - Bismuth (Bi)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Boron (B)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Cadmium (Cd)	≤ 20.0 ppb	< 5.0 ppb
Trace Impurities - Calcium (Ca)	≤ 1.0 ppb	< 0.3 ppb
	≤ 50.0 ppb	163.0 ppb
Trace Impurities - Chromium (Cr)	≤ 1.0 ppb	0.7 ppb
Trace Impurities - Cobalt (Co)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities - Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities – Gallium (Ga)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Germanium (Ge)	≤ 3.0 ppb	< 2.0 ppb
Frace Impurities – Gold (Au)	≤ 4.0 ppb	0.6 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Frace Impurities – Iron (Fe)	≤ 15 ppb	6 ppb

>>> Continued on page 2 >>>

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





Material No.: 9530-33 Batch No.: 22G2862015

Test	Specification	Result
Trace Impurities – Lead (Pb)	≤ 1.0 ppb	< 0.5 ppb
Trace Impurities - Lithium (Li)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Magnesium (Mg)	≤ 10.0 ppb	2.9 ppb
Trace Impurities - Manganese (Mn)	≤ 1.0 ppb	< 0.4 ppb
Trace Impurities – Mercury (Hg)	≤ 0.5 ppb	0.1 ppb
Trace Impurities – Molybdenum (Mo)	≤ 10.0 ppb	< 3.0 ppb
Trace Impurities - Nickel (Ni)	≤ 4.0 ppb	< 0.3 ppb
Trace Impurities - Niobium (Nb)	≤ 1.0 ppb	0.8 ppb
Trace Impurities - Potassium (K)	≤ 9.0 ppb	< 2.0 ppb
Trace Impurities - Selenium (Se), For Information Only		< 1.0 ppb
Trace Impurities - Silicon (Si)	≤ 100.0 ppb	< 10.0 ppb
Trace Impurities - Silver (Ag)	≤ 1.0 ppb	0.5 ppb
Trace Impurities – Sodium (Na)	≤ 100.0 ppb	2.3 ppb
Trace Impurities – Strontium (Sr)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Tantalum (Ta)	≤ 1.0 ppb	1.6 ppb
Trace Impurities – Thallium (TI)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities – Tin (Sn)	≤ 5.0 ppb	4.0 ppb
Trace Impurities – Titanium (Ti)	≤ 1.0 ppb	1.5 ppb
Trace Impurities – Vanadium (V)	≤ 1.0 ppb	< 0.2 ppb
Frace Impurities – Zinc (Zn)	≤ 5.0 ppb	0.8 ppb
Frace Impurities – Zirconium (Zr)	≤ 1.0 ppb	0.3 ppb

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





Material No.: 9530-33 Batch No.: 22G2862015

Test

Specification

Result

For Laboratory, Research, or Manufacturing Use Product Information (not specifications): Appearance (clear, fuming liquid) Meets ACS Specifications Storage Condition: Store below 25 °C.

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC







R-02/02/2025

M-6158

Material No.: 9606-03 Batch No.: 24D1062002

Manufactured Date: 2024-03-26

Retest Date: 2029-03-25 Revision No.: 0

### Certificate of Analysis

Assay (HNOs) Appearance Appearance Appearance Passes Test Passes Test Passes Test Color (APHA) Residue after Ignition Chloride (Cl) Phosphate (POa) Sulfate (SOa) Sulfate (SOa) Sulfate (SOa) Arsenic and Antimony (as As) Arsenic in and Antimony (as As) Arsenic and Antimony (as As) Arsenic and Antimony (as As) Arsenic and Interest Bairum (Ba) Arace Impurities - Beryllium (Ba) Arace Impurities - Beryllium (Ba) Arace Impurities - Boron (B) Arace Impurities - Cadmium (Cd) Arace Impurities - Cadmium (Cd) Arace Impurities - Calcium (Ca) Arace Impurities - Calcium (Ca) Arace Impurities - Calcium (Ca) Arace Impurities - Color (Co) Arace Impurities - Calcium (Ca) Arace Impurities - Color (Cu) Arace Impurities - Color (Cu) Arace Impurities - Color (Cu) Arace Impurities - Color (Au) Arace Impurities - Color (Au) Arace Impurities - Color (Au) Arace Impurities - Lead (Pb) Arace Impurities - Lithium (Li) Arace Impurities - Manganese (Mn) Arace Impurities - Nickel (Ni) Arace Impurities - Manganese (Mn) Arace Impurities - Nickel (Ni) Arace Impurities - Manganese (Mn) Arace Impurities - Nickel (Ni) Ar	Test	Specification	Result
Appearance Color (APHA)  Residue after Ignition  Chloride (Cl)  Phosphate (POa)  Sulfate (SOa)  Trace Impurities - Barium (Ba)  Trace Impurities - Cobalt (Co)  Trace Impurities - Lead (Pb)  Trace Impur	Assay (HNO3)		
Second Capera	Appearance		
Residue after Ignition	Color (APHA)		
Chloride (Cf)  Phosphate (PO <sub>4</sub> )  Sulfate (SO <sub>4</sub> )  Sulfate (SO <sub>4</sub> )  Trace Impurities – Aluminum (AI)  Arsenic and Antimony (as As)  Trace Impurities – Beryllium (Ba)  Trace Impurities – Beryllium (Be)  Trace Impurities – Beryllium (Be)  Trace Impurities – Boron (B)  Trace Impurities – Cadrium (Cd)  Trace Impurities – Cadrium (Cd)  Trace Impurities – Cadrium (Ca)  Trace Impurities – Cadrium (Ca)  Trace Impurities – Cobalt (Co)  Trace Impurities – Cobalt (Co)  Trace Impurities – Cobalt (Co)  Trace Impurities – Copper (Cu)  Trace Impurities – Gallium (Ga)  Trace Impurities – Gold (Au)  Expressible 10.0 ppb  Trace Impurities – Gold (Au)  Expressible 10.0 ppb  Trace Impurities – Code (Au)  Expressible 10.0 ppb  Trace Impurities – Lichium (Li)  Expressible 10.0 ppb  Trace Impurities – Lichium (Li)  Expressible 10.0 ppb  Trace Impurities – Lichium (Li)  Expressible 10.0 ppb  Trace Impurities – Manganese (Mn)  Expressible 10.0 ppb  Trace Impurities – Nickel (Ni)	Residue after Ignition		5
Phosphate (PO <sub>4</sub> )         ≤ 0.10 ppm         < 0.03 ppm	Chloride (CI)		1 ppm
Sulfate (SO <sub>4</sub> ) ≤ 0.2 ppm < 0.2 ppm  Trace Impurities - Aluminum (AI) ≤ 40.0 ppb < 1.0 ppb  Arsenic and Antimony (as As) ≤ 5.0 ppb < 2.0 ppb  Trace Impurities - Barium (Ba) < 10.0 ppb < 1.0 ppb  Trace Impurities - Beryllium (Be) < 10.0 ppb < 1.0 ppb  Trace Impurities - Bismuth (Bi) < 20.0 ppb < 10.0 ppb  Trace Impurities - Boron (B) < 10.0 ppb < 5.0 ppb  Trace Impurities - Cadmium (Cd) < 50 ppb < 1 ppb  Trace Impurities - Calcium (Ca) < 50.0 ppb < 1.0 ppb  Trace Impurities - Chromium (Cr) < 30.0 ppb < 1.0 ppb  Trace Impurities - Chromium (Cr) < 30.0 ppb < 1.0 ppb  Trace Impurities - Cobalt (Co) < 10.0 ppb < 1.0 ppb  Trace Impurities - Copper (Cu) < 10.0 ppb < 1.0 ppb  Trace Impurities - Gallium (Ga) < 10.0 ppb < 1.0 ppb  Trace Impurities - Gold (Au) < 20 ppb < 10 ppb  Trace Impurities - Gold (Au) < 20 ppb < 100 ppb  Trace Impurities - Lithium (E) < 10.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) < 10.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) < 10.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) < 10.0 ppb < 1.0 ppb  Trace Impurities - Mangaese (Mn) < 10.0 ppb < 1.0 ppb	Phosphate (PO <sub>4</sub> )		< 0.03 ppm
Trace Impurities - Aluminum (AI)       ≤ 40.0 ppb       < 1.0 ppb	Sulfate (SO <sub>4</sub> )	• •	< 0.03 ppm
Arsenic and Antimony (as As)	Trace Impurities - Aluminum (AI)		
Trace Impurities - Barium (Ba)       ≤ 10.0 ppb       < 1.0 ppb		• •	• •
Trace Impurities – Beryllium (Be)  Trace Impurities – Bismuth (Bi)  Trace Impurities – Boron (B)  Trace Impurities – Cadmium (Cd)  Trace Impurities – Cadmium (Cd)  Trace Impurities – Calcium (Ca)  Trace Impurities – Chromium (Cr)  Trace Impurities – Chromium (Cr)  Trace Impurities – Cobalt (Co)  Trace Impurities – Cobalt (Co)  Trace Impurities – Copper (Cu)  Trace Impurities – Copper (Cu)  Trace Impurities – Gallium (Ga)  Trace Impurities – Gallium (Ga)  Trace Impurities – Gold (Au)  Trace Impurities – Gold (Au)  Express of the substitute of the			• •
Trace Impurities – Bismuth (Bi)		• •	< 1.0 ppb
Trace Impurities – Boron (B)			< 1.0 ppb
Trace Impurities - Cadmium (Cd)  Frace Impurities - Calcium (Ca)  Frace Impurities - Chromium (Cr)  Frace Impurities - Chromium (Cr)  Frace Impurities - Cobalt (Co)  Frace Impurities - Copper (Cu)  Frace Impurities - Callium (Ga)  Frace Impurities - Gallium (Ga)  Frace Impurities - Germanium (Ge)  Frace Impurities - Gold (Au)  Frace Impurities - Gold (Au)  Frace Impurities - Fron (Fe)  Frace Impurities - Lead (Pb)  Frace Impurities - Lithium (Li)  Frace Impurities - Magnesium (Mg)  Frace Impurities - Manganese (Mn)  Frace Impurities - Nickel (Ni)			• •
Trace Impurities – Calcium (Ca)		• •	< 5.0 ppb
Trace Impurities - Chromium (Cr)  Trace Impurities - Cobalt (Co)  Trace Impurities - Copper (Cu)  Trace Impurities - Copper (Cu)  Trace Impurities - Gallium (Ga)  Trace Impurities - Garmanium (Ge)  Trace Impurities - Gold (Au)  Heavy Metals (as Pb)  Trace Impurities - Iron (Fe)  Trace Impurities - Lead (Pb)  Trace Impurities - Lead (Pb)  Trace Impurities - Lithium (Li)  Trace Impurities - Magnesium (Mg)  Trace Impurities - Magnesium (Mg)  Trace Impurities - Manganese (Mn)  Trace Impurities - Magnesium (Mg)  Trace Impurities - Manganese (Mn)  Trace Impurities - Nickel (Ni)		• ,	< 1 ppb
Trace Impurities – Cobalt (Co)			2.3 ppb
Trace Impurities - Copper (Cu)  Trace Impurities - Gallium (Ga)  Trace Impurities - Germanium (Ge)  Trace Impurities - Gold (Au)  Example 10.0 ppb			< 1.0 ppb
Trace Impurities – Gallium (Ga)  Trace Impurities – Germanium (Ge)  Trace Impurities – Gold (Au)  Heavy Metals (as Pb)  Trace Impurities – Iron (Fe)  Trace Impurities – Lead (Pb)  Trace Impurities – Lead (Pb)  Trace Impurities – Lithium (Li)  Trace Impurities – Magnesium (Mg)  Trace Impurities – Magnese (Mn)  Trace Impurities – Nickel (Ni)		• •	< 1.0 ppb
Trace Impurities – Germanium (Ge)  Trace Impurities – Gold (Au)  Heavy Metals (as Pb)  Trace Impurities – Iron (Fe)  Trace Impurities – Lead (Pb)  Trace Impurities – Lead (Pb)  Trace Impurities – Lithium (Li)  Trace Impurities – Magnesium (Mg)  Trace Impurities – Magnesium (Mg)  Trace Impurities – Manganese (Mn)  Trace Impurities – Nickel (Ni)		• •	< 1.0 ppb
Trace Impurities – Gold (Au)  4 20 ppb  5 ppb  6 5 ppb  7 Trace Impurities – Iron (Fe)  6 40.0 ppb  6 20.0 ppb  7 Trace Impurities – Lithium (Li)  6 10.0 ppb  7 Trace Impurities – Magnesium (Mg)  7 Trace Impurities – Manganese (Mn)  7 Trace Impurities – Manganese (Mn)  7 Trace Impurities – Mickel (Ni)	· •		< 1.0 ppb
Heavy Metals (as Pb)    Second Policy   Second Policy   Second Policy		• • •	< 10 ppb
Trace Impurities – Iron (Fe)  \$\leq\$ 40.0 ppb \$\leq\$ 40.0 ppb \$\leq\$ 20.0 ppb \$\leq\$ 20.0 ppb \$\leq\$ 10.0 ppb \$\leq\$ 10.0 ppb \$\leq\$ 10.0 ppb \$\leq\$ 10.0 ppb \$\leq\$ 20 ppb \$\leq\$ 20 ppb \$\leq\$ 20 ppb \$\leq\$ 20 ppb \$\leq\$ 21.0 ppb \$\leq\$ 10.0 ppb \$\leq\$ 20 ppb \$\leq\$ 21.0 ppb			< 5 ppb
Trace Impurities – Lead (Pb)  ≤ 20.0 ppb  ≤ 20.0 ppb  < 10.0 ppb  < 10.0 ppb  < 1.0 ppb		• •	100 ppb
Frace Impurities – Lithium (Li)  Frace Impurities – Magnesium (Mg)  Frace Impurities – Manganese (Mn)  Frace Impurities – Manganese (Mn)  Frace Impurities – Nickel (Ni)  Frace Impurities – Nickel (Ni)		• •	< 1.0 ppb
Frace Impurities – Magnesium (Mg)  Frace Impurities – Manganese (Mn)  ≤ 20 ppb  ≤ 1.0 ppb  < 1 ppb  < 1.0 ppb  < 1.0 ppb		• •	< 10.0 ppb
Frace Impurities – Manganese (Mn) ≤ 10.0 ppb < 1.0 ppb			< 1.0 ppb
race Impurities - Nickel (Ni)			< 1 ppb
≤ 20.0 ppb < 5.0 ppb		• •	< 1.0 ppb
	THERET (INI)	≤ 20.0 ppb	< 5.0 ppb

>>> Continued on page 2 >>>





Material No.: 9606-03 Batch No.: 24D1062002

Test	Specification	D 1
Trace Impurities – Niobium (Nb)		Result
Trace Impurities – Potassium (K)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities – Silicon (Si)	≤ 50 ppb	16 ppb
	≤ 50 ppb	< 10 ppb
Trace Impurities – Silver (Ag)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Sodium (Na)	≤ 150.0 ppb	
Trace Impurities - Strontium (Sr)	≤ 30.0 ppb	< 5.0 ppb
Trace Impurities – Tantalum (Ta)		< 1.0 ppb
Trace Impurities – Thallium (TI)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Tin (Sn)	≤ 10.0 ppb	< 5.0 ppb
	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Titanium (Ti)	≤ 10.0 ppb	< 1.0 ppb
Frace Impurities – Vanadium (V)	≤ 10.0 ppb	
Frace Impurities – Zinc (Zn)	≤ 20.0 ppb	< 1.0 ppb
race Impurities – Zirconium (Zr)		< 1.0 ppb
Particle Count – 0.5 µm and greater	≤ 10.0 ppb	< 1.0 ppb
Particle Count – 1.0 µm and greater	≤ 60 par/mi	10 par/ml
and greater	≤ 10 par/ml	3 par/ml

Nitric Acid 69% **CMOS** 





Material No.: 9606-03 Batch No.: 24D1062002

Test Specification Result

For Microelectronic Use

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Croak Director Quality Operations, Bioscience Production





M-6162

R. Date & 0412712025

Material No.: 9606-03 Batch No.: 24H0162012 Manufactured Date: 2024-06-28

Retest Date: 2029-06-27 Revision No.: 0

### Certificate of Analysis

Assay (HNOs) Appearance Passes Test Passes Test Passes Test Color (APHA)  Residue after Ignition  S 2 ppm  Chloride (Cl)  Choride (Cl)  Choride (SOa)  Sulfate (SOa)  Sulfate (SOa)  Arsenic and Antimony (as As)  Trace Impurities - Barlum (Ba)  Trace Impurities - Barlum (Ba)  Trace Impurities - Barlum (Cd)  Trace Impurities - Barlum (Cd)  Trace Impurities - Coper (Cu)  Trace Impurities - Coper (Cu)  Trace Impurities - Coper (Cu)  Trace Impurities - Cold (Au)  Frace Impurities - Gold (Au)  Frace Impurities - Iron (Fe)  Trace Impurities - Iron (Fe)  Trace Impurities - Inon (Fe)  Trace Impurities - Lind magnesium (Mg)  Trace Impurities - Lind (Fe)  Trace Impurities - Lind (Fe)  Trace Impurities - Lind (Fe)  Trace Impurities - Coppe (Cu)  Tra	Test	Specification	Result
Appearance Color (APHA)	Assay (HNO3)	69.0 - 70.0 %	69.7 %
Color (APHA)       ≤ 10       5         Residue after Ignition       ≤ 2 ppm       < 1 ppm	Appearance		
Residue after Ignition       ≤ 2 ppm       < 1 ppm	Color (APHA)	≤ 10	
Chloride (CI)       ≤ 0.08 ppm       0.03 ppm         Phosphate (PO4)       ≤ 0.10 ppm       < 0.03 ppm	Residue after Ignition	≤ 2 ppm	
Phosphate (PO₄)         ≤ 0.10 ppm         < 0.03 ppm	Chloride (CI)	≤ 0.08 ppm	
Sulfate (SO <sub>4</sub> )       ≤ 0.2 ppm       < 0.2 ppm	Phosphate (PO <sub>4</sub> )	≤ 0.10 ppm	• •
Trace Impurities - Aluminum (Al)       ≤ 40.0 ppb       < 1.0 ppb	Sulfate (SO <sub>4</sub> )	≤ 0.2 ppm	
Arsenic and Antimony (as As)    \$\leq\$ 5.0 ppb	Trace Impurities - Aluminum (Al)	≤ 40.0 ppb	• •
Trace Impurities – Barium (Ba)	Arsenic and Antimony (as As)	≤ 5.0 ppb	
Trace Impurities – Beryllium (Be)  Trace Impurities – Bismuth (Bi)  Trace Impurities – Boron (B)  Trace Impurities – Cadmium (Cd)  Trace Impurities – Calcium (Ca)  Trace Impurities – Calcium (Ca)  Trace Impurities – Chromium (Cr)  Trace Impurities – Cobalt (Co)  Trace Impurities – Cobalt (Co)  Trace Impurities – Copper (Cu)  Trace Impurities – Copper (Cu)  Trace Impurities – Gallium (Ga)  Trace Impurities – Gallium (Ga)  Trace Impurities – Germanium (Ge)  Trace Impurities – Gold (Au)  Heavy Metals (as Pb)  Trace Impurities – Iron (Fe)  Trace Impurities – Lead (Pb)  Trace Impurities – Lead (Pb)  Trace Impurities – Magnesium (Mg)  Trace Impurities – Manganese (Mn)  Trace Impurities – Mickel (Ni)  ■ 200 ppb  ■ 21.0 ppb  ▼ 10.0 ppb  ▼ 10.0 ppb  ▼ 21.0 ppb  ▼ 10.0 ppb	Trace Impurities - Barium (Ba)	≤ 10.0 ppb	
Trace Impurities – Bismuth (Bi)    \$\leq 20.0 ppb	Trace Impurities - Beryllium (Be)	≤ 10.0 ppb	• •
Trace Impurities – Boron (B) ≤ 10.0 ppb 0.1 ppb  Trace Impurities – Cadmium (Cd) ≤ 50 ppb < 1 ppb  Trace Impurities – Calcium (Ca) ≤ 50.0 ppb 0.3 ppb  Trace Impurities – Chromium (Cr) ≤ 30.0 ppb 0.1 ppb  Trace Impurities – Cobalt (Co) ≤ 10.0 ppb	Trace Impurities - Bismuth (Bi)	≤ 20.0 ppb	• •
Trace Impurities - Cadmium (Cd) ≤ 50 ppb 0.3 ppb  Trace Impurities - Calcium (Ca) ≤ 50.0 ppb 0.3 ppb  Trace Impurities - Chromium (Cr) ≤ 30.0 ppb 0.1 ppb  Trace Impurities - Cobalt (Co) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Copper (Cu) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Gallium (Ga) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Germanium (Ge) ≤ 20 ppb < 1 ppb  Trace Impurities - Gold (Au) ≤ 20 ppb < 1 ppb  Trace Impurities - Gold (Au) ≤ 20 ppb < 1.0 ppb  Trace Impurities - Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities - Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1.0 ppb  Trace Impurities - Magnesee (Mn) ≤ 10.0 ppb < 1.0 ppb	Trace Impurities - Boron (B)	≤ 10.0 ppb	• •
Trace Impurities - Calcium (Ca) ≤ 50.0 ppb 0.3 ppb  Trace Impurities - Chromium (Cr) ≤ 30.0 ppb 0.1 ppb  Trace Impurities - Cobalt (Co) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Copper (Cu) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Gallium (Ga) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Germanium (Ge) ≤ 20 ppb < 1 ppb  Trace Impurities - Gold (Au) ≤ 20 ppb < 1 ppb  Trace Impurities - Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities - Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1.0 ppb  Trace Impurities - Manganese (Mn) ≤ 10.0 ppb < 1.0 ppb	Trace Impurities - Cadmium (Cd)	≤ 50 ppb	
Trace Impurities - Chromium (Cr) ≤ 30.0 ppb 0.1 ppb  Trace Impurities - Cobalt (Co) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Copper (Cu) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Gallium (Ga) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Germanium (Ge) ≤ 20 ppb < 1 ppb  Trace Impurities - Gold (Au) ≤ 20 ppb < 1 ppb  Heavy Metals (as Pb) ≤ 100 ppb < 50 ppb  Trace Impurities - Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities - Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1.0 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1.0 ppb	Trace Impurities - Calcium (Ca)		• •
Trace Impurities - Cobalt (Co) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Copper (Cu) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Gallium (Ga) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Germanium (Ge) < 20 ppb < 1 ppb  Trace Impurities - Gold (Au) ≤ 20 ppb < 1 ppb  Heavy Metals (as Pb) ≤ 100 ppb < 50 ppb  Trace Impurities - Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities - Lead (Pb) < 20.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities - Magnesee (Mn) ≤ 10.0 ppb < 1.0 ppb	Trace Impurities - Chromium (Cr)	≤ 30.0 ppb	
Trace Impurities - Copper (Cu) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Gallium (Ga) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Germanium (Ge) ≤ 20 ppb < 1 ppb  Trace Impurities - Gold (Au) ≤ 20 ppb < 1 ppb  Heavy Metals (as Pb) ≤ 100 ppb < 50 ppb  Trace Impurities - Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities - Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities - Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities - Magnesium (Mg) ≤ 20 ppb < 1.0 ppb	Trace Impurities - Cobalt (Co)	≤ 10.0 ppb	
Trace Impurities – Gallium (Ga) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities – Germanium (Ge) ≤ 20 ppb < 1 ppb  Trace Impurities – Gold (Au) ≤ 20 ppb < 1 ppb  Heavy Metals (as Pb) ≤ 100 ppb < 50 ppb  Trace Impurities – Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities – Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities – Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities – Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities – Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities – Manganese (Mn) ≤ 10.0 ppb	Trace Impurities - Copper (Cu)	≤ 10.0 ppb	• •
Trace Impurities – Germanium (Ge) ≤ 20 ppb < 1 ppb  Trace Impurities – Gold (Au) ≤ 20 ppb < 1 ppb  Heavy Metals (as Pb) ≤ 100 ppb < 50 ppb  Trace Impurities – Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities – Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities – Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities – Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities – Manganese (Mn) ≤ 10.0 ppb < 1.0 ppb	Trace Impurities - Gallium (Ga)	≤ 10.0 ppb	
Trace Impurities - Gold (Au)       ≤ 20 ppb       < 1 ppb	Trace Impurities - Germanium (Ge)	≤ 20 ppb	
Heavy Metals (as Pb) ≤ 100 ppb < 50 ppb  Trace Impurities – Iron (Fe) ≤ 40.0 ppb < 1.0 ppb  Trace Impurities – Lead (Pb) ≤ 20.0 ppb < 1.0 ppb  Trace Impurities – Lithium (Li) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities – Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities – Manganese (Mn) ≤ 10.0 ppb < 1.0 ppb	Trace Impurities - Gold (Au)	≤ 20 ppb	• •
Trace Impurities – Iron (Fe)       ≤ 40.0 ppb       < 1.0 ppb	Heavy Metals (as Pb)	≤ 100 ppb	
Trace Impurities – Lead (Pb)       ≤ 20.0 ppb       < 1.0 ppb	Trace Impurities - Iron (Fe)	≤ 40.0 ppb	
Trace Impurities – Lithium (Li)       ≤ 10.0 ppb       < 1.0 ppb	Trace Impurities - Lead (Pb)	≤ 20.0 ppb	• • • • • • • • • • • • • • • • • • • •
Trace Impurities – Magnesium (Mg) ≤ 20 ppb < 1 ppb  Trace Impurities – Manganese (Mn) ≤ 10.0 ppb < 1.0 ppb  Trace Impurities – Mickel (Ni)	Trace Impurities - Lithium (Li)	≤ 10.0 ppb	. ,
Trace Impurities - Manganese (Mn) ≤ 10.0 ppb < 1.0 ppb	Trace Impurities – Magnesium (Mg)	≤ 20 ppb	• •
Trace Impurities Mickel (Ni)	Trace Impurities - Manganese (Mn)	≤ 10.0 ppb	
	Trace Impurities – Nickel (Ni)	≤ 20.0 ppb	< 1.0 ppb

>>> Continued on page 2 >>>





Material No.: 9606-03 Batch No.: 24H0162012

Test	Specification	Result
Trace Impurities - Niobium (Nb)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities - Potassium (K)	≤ 50 ppb	< i ppb
Trace Impurities - Silicon (Si)	≤ 50 ppb	1 ppb
Trace Impurities - Silver (Ag)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Sodium (Na)	≤ 150.0 ppb	< 1.0 ppb
Trace Impurities - Strontium (Sr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities - Tantalum (Ta)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Thallium (TI)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Tin (Sn)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Titanium (Ti)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Vanadium (V)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Zinc (Zn)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Zirconium (Zr)	≤ 10.0 ppb	< 1.0 ppb
Particle Count – 0.5 µm and greater	≤ 60 par/ml	13 par/ml
Particle Count - 1.0 µm and greater	≤ 10 par/ml	5 par/ml

Nitric Acid 69% **CMOS** 





Material No.: 9606-03 Batch No.: 24H0162012

Test Specification Result

For Microelectronic Use

Country of Origin: USA Packaging Site: Phillipsburg Mfg Ctr & DC

Hydrogen Peroxide, 30% **CMOS** (Stabilized)





M-6170 R. Date. 8-05/2012025

Material No.: 2190-03 Batch No.: 24D1961001

Test	Specification	Result
Trace Impurities - Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Molybdenum (Mo)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Nickel (Ni)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Niobium (Nb)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Potassium (K)	≤ 600.0 ppb	176.7 ppb
Trace Impurities - Silicon (Si)	≤ 100.0 ppb	< 10.0 ppb
Trace Impurities - Silver (Ag)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Sodium (Na)	≤ 100.0 ppb	< 5.0 ppb
Trace Impurities - Strontium (Sr)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Tantalum (Ta)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities – Thallium (TI)	≤ 50.0 ppb	< 5.0 ppb
Trace Impurities – Tin (Sn)	190.0 - 500.0 ppb	• •
Trace Impurities – Titanium (Ti)	≤ 10.0 ppb	272.3 ppb
Trace Impurities – Vanadium (V)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Zinc (Zn)	≤ 50 ppb	< 1.0 ppb
Trace Impurities – Zirconium (Zr)	≤ 10.0 ppb	< 1 ppb
Particle Count - 0.2 µm and greater	= 10.0 pps ≤ 1175 par/ml	< 1.0 ppb
Particle Count - 0.5 µm and greater	≤ 100 par/ml	202 par/ml
	2 100 pai/IIII	33 par/ml

Hydrogen Peroxide, 30% **CMOS** (Stabilized)





Material No.: 2190-03 Batch No.: 24D1961001

**Test** 

Specification

Result

For Microelectronic Use

Country of Origin: USA Packaging Site: Paris Mfg Ctr & DC





Material No.: 2190-03

Batch No.: 24D1961001

Manufactured Date: 2024-04-17 Expiration Date: 2025-10-16

Revision No.: 0

### Certificate of Analysis

Test	Specification	Result
Assay (H2O2)	30.0 - 32.0 %	
Color (APHA)	≤ 10	31.6 %
Free Acid (µeq/g)	≤ 0.2	< 5
Residue after Evaporation	≤ 10 ppm	0.1
Ammonium (NH <sub>4</sub> )	≤ 10 ppm ≤ 3 ppm	2 ppm
Chloride (CI)	≤ 0.2 ppm	< 3 ppm
Nitrate (NO3)		< 0.2 ppm
Phosphate (PO <sub>4</sub> )	≤ 2 ppm	< 2 ppm
Sulfate (SO <sub>4</sub> )	≤ 1 ppm	1 ppm
Trace Impurities - Aluminum (AI)	≤ 3 ppm	< 3 ppm
Arsenic and Antimony (as As)	≤ 70.0 ppb	< 5.0 ppb
Trace Impurities - Barium (Ba)	≤ 10.0 ppb	< 10.0 ppb
Trace Impurities - Beryllium (Be)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Boron (B)	≤ 20.0 ppb	< 10.0 ppb
Trace Impurities – Cadmium (Cd)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Calcium (Ca)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Chromium (Cr)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities – Cobalt (Co)	≤ 20.0 ppb	1.5 ppb
Trace Impurities – Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Germanium (Ge)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Gold (Au)	≤ 10.0 ppb	< 10.0 ppb
Heavy Metals (as Pb)	≤ 10.0 ppb	< 5.0 ppb
Frace Impurities – Iron (Fe)	≤ 500.0 ppb	< 250.0 ppb
Frace Impurities – Iron (Fe)  Frace Impurities – Lead (Pb)	≤ 50.0 ppb	4.6 ppb
	≤ 10.0 ppb	< 10.0 ppb
Frace Impurities – Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
Frace Impurities – Magnesium (Mg)	≤ 10.0 ppb	< 1.0 ppb

>>> Continued on page 2 >>>

Lot # 011525


R->2015124

## Certified Reference Material CRM

Absolute Standards, Inc. 800-368-1131 www.absolutestandards.com



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

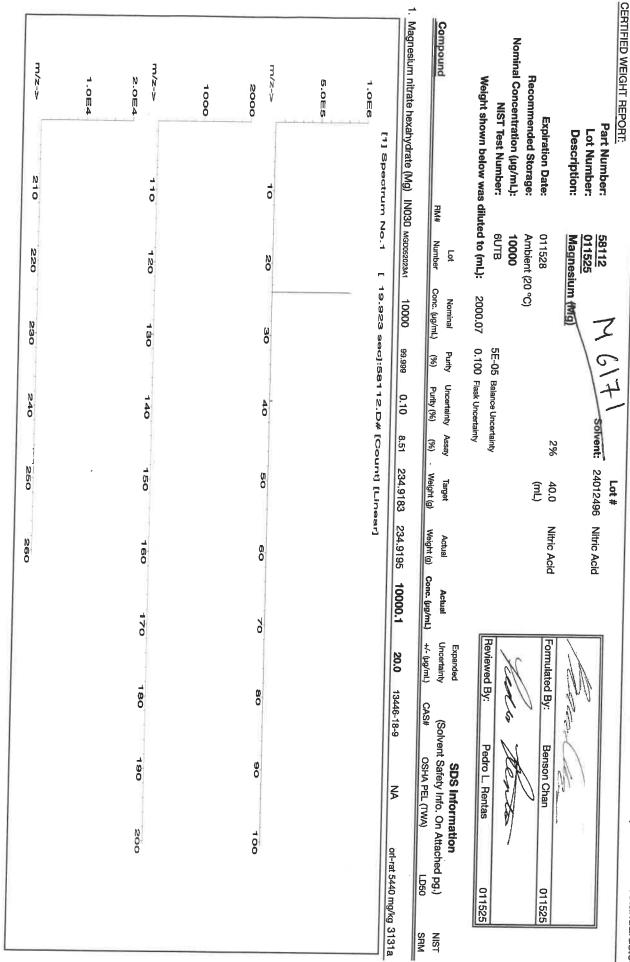



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	Al Sb Ba Be Bi
	<0.02 <0.02 <0.02 <0.02 <0.01 <0.01 <0.02
	58585
	40.02 40.02 40.02 40.02 40.02 40.02
	Dy Er Gd Ga
	40.00 40.00 40.00 40.00 40.00 40.00
	Hf Ho In He La Pb
	4000 4000 4000 4000 4000 4000 4000 400
	etals Lu Mg Mg Mo Nd
(T) = Target analyte	<b>Verific:</b>
get anal	Ation Ni Nb Os Pd Pt K
yte	\$\frac{\phi}{\phi}\$  CP-\$  \$\frac{\phi}{\phi}\$ 2  \$\frac{\phi}{\phi}\$ 2  \$\frac{\phi}{\phi}\$ 2  \$\frac{\phi}{\phi}\$ 2  \$\frac{\phi}{\phi}\$ 2  \$\frac{\phi}{\phi}\$ 2  \$\frac{\phi}{\phi}\$ 2
	Rh Rh Sm Sc
	9/mL)  -0.02 -0.02 -0.02 -0.02 -0.02 -0.02
	Si Sc Na Si
	40.2 40.02 40.02 40.02 40.02 40.02
	Th Th Sn
	4000
	Z;

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



### R > 1/25/25 M 6/72. Certificate of Analysis

300 Technology Drive Christiansburg, VA 24073 USA inorganicventures.com

P: 800-669-6799/540-585-3030 F: 540-585-3012 info@inorganicventures.com

### 1.0 **ACCREDITATION / REGISTRATION**

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



### 2.0 **PRODUCT DESCRIPTION**

Product Code:

Single Analyte Custom Grade Solution

Catalog Number:

CGNA<sub>10</sub>

Lot Number:

V2-NA740547

Matrix:

2% (v/v) HNO3

Value / Analyte(s):

10 000 μg/mL ea:

Sodium

Starting Material:

Sodium Carbonate

Starting Material Lot#:

2453 and 2606

Starting Material Purity:

99.9976%

### 3.0 **CERTIFIED VALUES AND UNCERTAINTIES**

**Certified Value:** 

 $10018 \pm 30 \, \mu g/mL$ 

Density:

1.033 g/mL (measured at 20  $\pm$  4 °C)

### Assay Information:

Assay Method #1

10026 ± 18 µg/mL

Gravimetric NIST SRM Lot Number: See Sec. 4.2

Assay Method #2

9986 ± 66 µg/mL

ICP Assay NIST SRM 3152a Lot Number: 200413

Assay Method #3

10002 ± 31 µg/mL

Calculated NIST SRM Lot Number: See Sec. 4.2

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

### $X_{CRM/RM} = \Sigma(w_i) (X_i)$

X<sub>i</sub> = mean of Assay Method i with standard uncertainty uchar i

w<sub>i</sub> = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\rm char\ i})^2/(\Sigma(1/(u_{\rm char\ i})^2)$$

CRM/RM Expanded Uncertainty (±) =  $U_{CRM/RM} = k \left(u^2_{char} + u^2_{bb} + v^2_{lts} + u^2_{ts}\right)^{1/2}$ 

k = coverage factor = 2

 $u_{cher} = [\Sigma((w_i)^2 (v_{cher})^2)]^{1/2}$  where  $u_{cher}$  are the errors from each characterization method

ubb = bottle to bottle homogeneity standard uncertainty

ults = long term stability standard uncertainty (storage)

uts = transport stability standard uncertainty

Characterization of CRM/RM by One Method
Certified Value, X<sub>CRM/RM</sub>, where one method of characterization
is used is the mean of individual results:

X<sub>CRM/RM</sub> = (X<sub>a</sub>) (u<sub>char a</sub>)

X<sub>m</sub> = mean of Assay Method A with

uchar a = the standard uncertainty of characterization Method A

CRM/RM Expanded Uncertainty (1) = U<sub>CRM/RM</sub> = k (u<sup>2</sup>char a + u<sup>2</sup>bb + u<sup>2</sup>its + u<sup>2</sup>ts)<sup>1/2</sup>

k = coverage factor = 2

uchar a = the errors from characterization

u<sub>bb</sub> = bottle to bottle homogeneity standard uncertainty

uits = long term stability standard uncertainty (storage)

uta = transport stability standard uncertainty

### 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

### 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to  $0.3 \ \mu m$ .

M	Ag	<	0.000860	М	Eu	<	0.000860	s	Na	<		0	Se	<	0.034000	0	Zn		0.000387
0	Al		0.003121	0	Fe		0.001622	М	Nb	<	0.000860	0	Si		0.044943	М	Zr	<	0.001800
M	As	<	0.001800	M	Ga	<	0.000860	M	Nd	<	0.000860	M	Sm	<	0.000860				
M	Au	<	0.005700	М	Gd	<	0.000860	0	Ni	<	0.000980	М	Sn	<	0.000860				
0	В	<	0.025000	М	Ge	<	0.003500	M	Os	<	0.029000	М	Sr		0.000436				
M	Ba		0.004494	M	Hf	<	0.000860	0	Р		0.005742	M	Ta	<	0.000086				
0	Be	<	0.000160	М	Hg	<	0.002900	M	Pb	<	0.002600	M	Tb	<	0.000860				
M	Bi	<	0.000860	М	Но	<	0.000860	М	Pd	<	0.004300	M	Te	<	0.004300				
0	Ca		0.112358	М	ln	<	0.000860	М	Pr	<	0.000860	M	Th	<	0.003500				
0	Cd	<	0.000730	М	lr	<	0.000940	M	Pt	<	0.000860	0	Ti		0.000399				
M	Ce	<	0.000860	0	K		0.349560	M	Rb		0.000436	M	TI	<	0.000860				
M	Co	<	0.000860	М	La	<	0.000860	M	Re	<	0.000860	M	Tm	<	0.000860				
0	Cr	<	0.002000	0	Li		0.000224	M	Rh	<	0.000860	M	U	<	0.000860				
M	Cs		0.000287	М	Lu	<	0.000860	M	Ru	<	0.000940	0	V	<	0.001500				
0	Cu	<	0.004100	М	Mg		0.097377	0	S		0.018726	M	W	<	0.007700				
M	Dy	<	0.000860	M	Mn	<	0.007700	М	Sb	<	0.000860	M	Υ	<	0.000860				
M	Er	<	0.000860	0	Мо	<	0.002800	0	Sc	<	0.000610	M	Yb	<	0.000860				

M - Checked by ICP-MS O - Checked by ICP-OES i - Spectral Interference n - Not Checked For s - Solution Standard Element

### 6.0 INTENDED USE

**6.1** This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures <u>Terms and Conditions of Sale.</u>

<a href="https://www.inorganicventures.com/terms-and-conditions-sale">https://www.inorganicventures.com/terms-and-conditions-sale</a>. The Terms and Conditions contain Information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

### 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.
- For more information, visit www.lnorganicventures.com/TCT

Atomic Weight; Valence; Coordination Number; Chemical Form in Solution - 22.99 +1 (6) Na+(aq) largely ionic in nature

Chemical Compatibility -Soluble in HCl, HNO3, H2SO4 and HF aqueous matrices. Stable with all metals and inorganic anions.

Stability - 2-100 ppb levels stable for months in 1% HNO3 / LDPE container. 1-10,000 ppm solutions chemically stable for years in 1-5% HNO3 / LDPE container.

Na Containing Samples (Preparation and Solution) - Metal (Dissolves very rapidly in water); Ores (Lithium carbonate fusion in graphite crucible followed by HCl dissolution - blank levels of Na in lithium carbonate critical); Organic Matrices (Sulfuric / peroxide digestion or nitric/sulfuric/perchloric acid decomposition).

Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):

Technique/Line	Estimated D.L.	Order	Interferences (underlined indicates severe)
ICP-MS 23 amu	310 ppt	n/a	46Ti+2, 46Ca+2
ICP-OES 330.237 nm	2.0 / 0.09 μg/mL	1	Pd, Zn
ICP-OES 588.995 nm	0.03 / 0.006 μg/mL	1	2nd order radiation from R.E.s on some optical designs
ICP-OES 589.595 nm	0.07 / 0.00009 μg/mL	1	2nd order radiation from R.E.s on some optical designs

### 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

### 9.0 HOMOGENEITY

This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous.
 Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

### 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com;

### 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

February 23, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- February 23, 2029
- The date after which this CRM/RM should not be used.
- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date:	
-----------------------------	--

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

**Certificate Prepared By:** 

**Uyen Truong Custom Processing Supervisor**  Mayyand Ma Paul R. Laine

### **Certificate Approved By:**

Muzzammil Khan Stock Laboratory Supervisor

**Certifying Officer:** 

**Paul Gaines** Chairman / Senior Technical Director



## Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

m/z->	22.55 Fin	s.oms	7)	1.000	2.5 Ee	8.0E6	1. Strontium nitrate (Sr)	Compound	Weight show	Nominal Concentration (µg/ml.):  NIST Test Number:	Expiration Date: Recommended Storage:	De	Part
N.			2	10		[1] Spectrum No.1	INO17	RM#	Weight shown below was diluted to (mL):	centration (µg/mL): NIST Test Number:	Expiration Date: nended Storage:	Description:	Part Number:
0		9	Ď.	O		-	IN017 SRZ022018A1	Lot Number C		607B	092727 Ambient (20 °C)	Strontium (Sr)	57038 092724
0		ğ	1. 3.	<b>9</b> .		4.4 00 01 8	1000	Nominat Conc. (µg/ml.)	2000.07				RV
			,			eo]:681	99.997	Purity (	0.100 FI	5E-05	3	-	8/6
		Č		ð		14.495 aso]:68138.D# [Count] [Linear]	0.10 41.2	Uncertainty Assay Purity (%) (%)	0.100 Flask Uncertainty	5E-05 Balance Uncertainty	,	. 1 2%	2->8/6/ Solvent:
		ő		On C		unt] [Linea	4.85470	Target Weight (g)				40.0	24002546
		0		0		۵	1	Actual Weight (g)				Nitric Acid	Nitric Acid
		170		70			1000.0	Actual Conc. (µg/mL)					
							2.0	Expanded Uncertainty +/- (µg/mL)	The state of the s	Reviewed By:	N	Formulated By:	
		180		80			10042-76-9	CAS#	9	P. C.		d By	
		190	, ,	0	athicists for facilities.			SDS Information (Solvent Safety Info. On Attached pg.) OSHA PEL (TWA) LC	a care at the land	Parim Bentas	A	Benson Chan	
		NOO		100			orl-rat >2000mg/kg 3153a	nation On Attached pg.) (A) LD50	77700	'	1	092724	

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

厐	В	Be	Ва	À	ds	A		
40,02	<0.02	10.0	40,02	80.2	40.02	<0.02		
C	C <sub>C</sub>	ð	گ	රී	δ	Cd		
<0.02	<0.02	<0.02	40.02	40.02	40.2	<0.02		
Au	Ge	G	වූ	臣	면	Dy		
<0.02	<0.02	<0.02	<0.02	<0.02	40.02	<0.02		
Pb	La	Fe	Ħ	Ĭ'n	Но	ЭH		
<0.02	<0.02	40.2	<0.02	40.02	\$0.02	<0.02	race M	
Nd	Mo	Нg	Mn	S <sub>N</sub>	Ľ	Ľ	etais	
<0.02	40.02	40.2	<0.02	10.04	<0.02	<0.02	Verifica	1 0 u pro-
*	ጆ	סי	Pd	õ	ş	Z	ation	
40.2	40.02	40.02	△0.02	40.02	40.02	40.02	by ICP	-
Sc	Sm	Ru	Rb	Rh	Re	Pr	N.	
<0.02	<0.02	<0.02	△0.02	40.02	40.02	<0.02	μg/mL)	
Ta	S	Sr	Z	₩ Э	S	Se		
<0.02	<0.02	3	40.2	<0.02	<0.02	<0.2		
=	Sn	īn	H	⊒	Je	7		
<0.02	40.02	<0.02	<0.02	40.02	40.02	0.02		
77	Zn	~	5	<	¢	W		
40.02	40,02	40.02	<0.02	40.02	40.02	40.02		

(I) = larger analyre

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard

Certifled by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in
- the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

Lead (Pb)   Company   Lead (Pb)   Lead (Pb)   Company   Lead (Pb)   Lead (Pb)   Company   Lead (Pb)		1.0 Mg	N.OE6	O . O . M . 4	1.0E5	5.0 M 4	1.0E6	1. Lead(II) nitrate (Pb)	Compound	Weight shown	Recommended Storage: Nominal Concentration (µg/mL):	Des	Part I Lot	CERTIFIED WEIGHT REPORT:
SE-05 Balance Uncertainty  294 40.0 Nitric Acid    Commutated By: Glovanni Esposito	madinimanikalan kemanikalan Jariagang dan Primi Majalah nigalah dan dalam Primi Majalah dalam	ann earligean aige an aide	1 0		ō		Spectrum	INO	RN	number: below was di	Storage: (µg/mL):	cription:	Part Number: Lot Number:	li-a
SE-05 Balance Uncertainty  294 40.0 Nitric Acid    Commutated By: Glovanni Esposito			N O		N: O:			29 PBD122016A:		luted to (mL)	Ambient (2	Lead (Pb	57082 031525	
(mL)  Nitric Acid  Formulated By: Giovanni Esposito  Weight (a)  Weight (b)  Weight (c)  Weight (c)  Weight (c)  Conc. (ug/mL)  2.0 10099-74-8 0.05 mg/m3  County (Lineear)  SO 90 70 80 90 10					<u>.</u>				Nominai Conc. (µg/mL		0°C)	4	260	a p
(mL)  Nitric Acid  Formulated By: Giovanni Esposito  Weight (a)  Weight (b)  Weight (c)  Weight (c)  Weight (c)  Formulated By: Pedro L. Rentas  Expanded  Expanded  Expanded  SDS Information  Expanded  CAS# OSHA PEL (TWA)  2.0 10089-74-8 0.05 mg/m3  COUNT! [Linear]			ŏ		0		90]:500	99.999	Purity (%)	0.10 FM		20	18/1	, )
(mL)  Nitric Acid  Formulated By: Giovanni Esposito  Weight (a)  Weight (b)  Weight (c)  Weight (c)  Weight (c)  Weight (d)  Conc. (ug/mL)  Conc. (ug/mL)  Weight (d)  Conc. (ug/mL)  Conc. (			140		0		90. D#	11	ncertainty A	lance Uncertal		, x	Solvent:	P
tric Acid  Formulated By: Giovanni Esposito  When the part of the			150		O.		Count) [L			T mby		%	int: 2	Lot #
Tormulated By: Giovanni Esposito  Reviewed By: Pedro L. Rentas  Expanded SDS Information  Actual Uncertainty (Solvent Safety Info. On Attac  Conc. (pg/ml.) +/- (pg/ml.) CAS# OSHA PEL (TWA)  1000.2 2.0 10059-74-8 0.05 mg/m3	)		10		<b>0</b> .		Inear)	П					157 Nitric Acid	465
Formulated By: Giovanni Esposito  Walker By: Pedro L. Rentas  Expanded SDS Information Uncertainty CAS# OSHA PEL (TWA)  2.0 10099-74-8 0.05 mg/m3  2.0 160 190 20	,							11	II .			Cid	Ċ	
Y: Giovanni Esposito  Y: Giovanni Esposito  Pedro L. Rentas  SDS Information (Solvent Safety Info. On Attac OSHA PEL (TVVA)  099-74-8 0.05 mg/m3			70		70					Reviewe	M	Formula	22	
Giovanni Esposito  Pedro L. Rentas  SDS Information  Nent Safety Info. On Attac  OSHA PEL (TWA)  0.05 mg/m3			180		89.0			10099-74-1	CAS#	d By:	1111	led By:	782	
ito  mation On Attached pg.) WA) LD  and LD  are the state of the stat			9		9				Solvent Safety Info. ( OSHA PEL (TV	Pedro L. Rentas	the	Giovanni	2	
031525 031525			200		100			3 intrvns-rat 93 mg/kg	On Attached pg.) VA) LD50		1		B	

www.absolutestandards.com

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

								yte	et analyte	(T) = Target									
40.02	Zr	40,02	Ħ	<0.02	Ta	<0.02	Sc	<0.2	*	<0.02	Z		8	<0.02	Au	<0.02	රී	<0.02	œ
40.02	Zn	<0,02	Sn	<0.02	S	<0.02	Sm	<0.02	72	△0.02	Mo	<0.02	5	40.02	ဂ္ဂ	<0.02	င္ပ	<0.02	B
40.02	~	40.02	Tm	\$0.02	Ş	<0.02	Ru	<0.02	Þ	40.2	T 60	40.2	F	<0.02	G <sub>R</sub>	40.02	Ω	<0.01	Ве
<0.02	4	40.02	Ħ	40.2	Z	<0.02	Rb	<0.02	Ьď	<0.02	M	<0.02	I	△0.02	ନୁ	40.02	ర్ల	60.02	Ва
<0.02	<	<0.02	Η	<0.02	æ.	<0.02	Rh	40.02	õ	<0.01	Mg	<0.02	5	<0.02	핃	<0.02	ဂ္ဂ	40.2	As
40,02	C	<0.02	å	<0.02	Si	<0.02	Re	<0.02	R	<0.02	ξ	<0.02	Ho	<0,02	택	0.2	Ω	<0.02	Зb
<0.02	¥	<0.02	41	<0.2	Sc	<0.02	ħ	<0.02	Z	<0.02	Ξ	<0.02	Ж	<0.02	Dy	<0.02	Ω	<0.02	Α
									I		1								
						ug/mL)	VS (	by ICP-I	tion	Verifica	etals	Trace Me							
																	I		Ì

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm delonized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
  \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).





M6187 R.D:-08108125

Material No.: 9606-03 Batch No.: 24H0162012 Ifactured Date: 2024-06-28

Manufactured Date: 2024-06-28 Retest Date: 2029-06-27

Revision No.: 0

### Certificate of Analysis

Test	Specification	Result
Assay (HNO3)	69.0 – 70.0 %	69.7 %
Appearance	Passes Test	Passes Test
Color (APHA)	≤ 10	5
Residue after Ignition	≤ 2 ppm	< 1 ppm
Chloride (CI)	≤ 0.08 ppm	0.03 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.10 ppm	< 0.03 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.2 ppm	< 0.2 ppm
Trace Impurities - Aluminum (AI)	≤ 40.0 ppb	< 1.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities - Barium (Ba)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Beryllium (Be)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Bismuth (Bi)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Boron (B)	≤ 10.0 ppb	0.1 ppb
Trace Impurities – Cadmium (Cd)	≤ 50 ppb	< 1 ppb
Trace Impurities – Calcium (Ca)	≤ 50.0 ppb	0.3 ppb
Trace Impurities – Chromium (Cr)	≤ 30.0 ppb	0.1 ppb
Trace Impurities – Cobalt (Co)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Copper (Cu)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Gallium (Ga)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Germanium (Ge)	≤ 20 ppb	< 1 ppb
Trace Impurities – Gold (Au)	≤ 20 ppb	< 1 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Trace Impurities - Iron (Fe)	≤ 40.0 ppb	< 1.0 ppb
Frace Impurities – Lead (Pb)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Lithium (Li)	≤ 10.0 ppb	< 1.0 ppb
race Impurities – Magnesium (Mg)	≤ 20 ppb	< 1 ppb
race Impurities – Manganese (Mn)	≤ 10.0 ppb	< 1.0 ppb
race Impurities – Nickel (Ni)	≤ 20.0 ppb	< 1.0 ppb

>>> Continued on page 2 >>>





Material No.: 9606-03 Batch No.: 24H0162012

Test	Specification	Result
Trace Impurities - Niobium (Nb)	≤ 50.0 ppb	< 1.0 ppb
Trace Impurities – Potassium (K)	≤ 50 ppb	< 1 ppb
Trace Impurities – Silicon (Si)	≤ 50 ppb	1 ppb
Trace Impurities – Silver (Ag)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Sodium (Na)	≤ 150.0 ppb	< 1.0 ppb
Trace Impurities - Strontium (Sr)	≤ 30.0 ppb	< 1.0 ppb
Trace Impurities – Tantalum (Ta)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Thallium (TI)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities ~ Tin (Sn)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities – Titanium (Ti)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities – Vanadium (V)	≤ 10.0 ppb	< 1.0 ppb
Trace Impurities - Zinc (Zn)	≤ 20.0 ppb	< 1.0 ppb
Trace Impurities - Zirconium (Zr)	≤ 10.0 ppb	< 1.0 ppb
Particle Count - 0.5 µm and greater	≤ 60 par/ml	13 par/ml
Particle Count - 1.0 µm and greater	≤ 10 par/ml	5 par/ml

Nitric Acid 69% CMOS





Material No.: 9606-03 Batch No.: 24H0162012

Test Specification Result

For Microelectronic Use


Country of Origin: USA

Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Croak

Director Quality Operations, Bioscience Production





Material No.: 9530-33 Batch No.: 24D1562005 Manufactured Date: 2024-03-18 Retest Date: 2029-03-17

Revision No.: 0

### Certificate of Analysis

Test	Specification	Result
ACS - Assay (as HCI) (by acid-base titrn)	36.5 - 38.0 %	37.6 %
ACS – Color (APHA)	≤ 10	5
ACS – Residue after Ignition	≤ 3 ppm	< 1 ppm
ACS - Specific Gravity at 60°/60°F	1.185 - 1.192	1.192
ACS – Bromide (Br)	≤ 0.005 %	< 0.005 %
ACS – Extractable Organic Substances	≤ 5 ppm	< 1 ppm
ACS - Free Chlorine (as Cl2)	≤ 0.5 ppm	< 0.5 ppm
Phosphate (PO <sub>4</sub> )	≤ 0.05 ppm	0.03 ppm
Sulfate (SO <sub>4</sub> )	≤ 0.5 ppm	< 0.3 ppm
Sulfite (SO₃)	≤ 0.8 ppm	0.3 ppm
Ammonium (NH <sub>4</sub> )	≤ 3 ppm	< 1 ppm
Trace Impurities - Arsenic (As)	≤ 0.010 ppm	< 0.003 ppm
Trace Impurities - Aluminum (Al)	≤ 10.0 ppb	< 5.0 ppb
Arsenic and Antimony (as As)	≤ 5.0 ppb	< 3.0 ppb
Trace Impurities - Barium (Ba)	≤ 1.0 ppb	< 1.0 ppb
Trace Impurities - Beryllium (Be)	≤ 1.0 ppb	< 1.0 ppb
Trace Impurities - Bismuth (Bi)	≤ 10.0 ppb	< 10.0 ppb
Trace Impurities - Boron (B)	≤ 20.0 ppb	2.2 ppb
Trace Impurities - Cadmium (Cd)	≤ 1.0 ppb	< 1.0 ppb
Trace Impurities - Calcium (Ca)	≤ 50.0 ppb	31.0 ppb
Trace Impurities - Chromium (Cr)	≤ 1.0 ppb	0.5 ppb
Trace Impurities – Cobalt (Co)	≤ 1.0 ppb	0.2 ppb
Trace Impurities - Copper (Cu)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities - Gallium (Ga)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Germanium (Ge)	≤ 3.0 ppb	< 2.0 ppb
Trace Impurities – Gold (Au)	≤ 4.0 ppb	< 0.2 ppb
Heavy Metals (as Pb)	≤ 100 ppb	< 50 ppb
Trace Impurities – Iron (Fe)	≤ 15 ppb	3 ppb

>>> Continued on page 2 >>>





Material No.: 9530-33 Batch No.: 24D1562005

Test	Specification	Result
Trace Impurities - Lead (Pb)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Lithium (Li)	≤ 1.0 ppb	< 0.1 ppb
Trace Impurities - Magnesium (Mg)	≤ 10.0 ppb	2.2 ppb
Trace Impurities - Manganese (Mn)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities - Mercury (Hg)	≤ 0.5 ppb	< 0.1 ppb
Trace Impurities - Molybdenum (Mo)	≤ 10.0 ppb	< 5.0 ppb
Trace Impurities - Nickel (Ni)	≤ 4.0 ppb	0.2 ppb
Trace Impurities - Niobium (Nb)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Potassium (K)	≤ 9.0 ppb	< 1.0 ppb
Trace Impurities – Selenium (Se), For Information Only		< 1.0 ppb
Trace Impurities – Silicon (Si)	≤ 100.0 ppb	< 10.0 ppb
Trace Impurities – Silver (Ag)	≤ 1.0 ppb	< 0.3 ppb
Trace Impurities – Sodium (Na)	≤ 100.0 ppb	2.0 ppb
Trace Impurities – Strontium (Sr)	≤ 1.0 ppb	< 0.2 ppb
Trace Impurities – Tantalum (Ta)	≤ 1.0 ppb	< 0.9 ppb
Trace Impurities – Thallium (TI)	≤ 5.0 ppb	< 2.0 ppb
Trace Impurities - Tin (Sn)	≤ 5.0 ppb	< 0.4 ppb
Trace Impurities – Titanium (Ti)	≤ 1.0 ppb	0.2 ppb
Frace Impurities – Vanadium (V)	≤ 1.0 ppb	< 0.2 ppb
Frace Impurities – Zinc (Zn)	≤ 5.0 ppb	< 0.2 ppb
Frace Impurities – Zirconium (Zr)	≤ 1.0 ppb	< 0.1 ppb

Hydrochloric Acid, 36.5-38.0% BAKER INSTRA-ANALYZED® Reagent For Trace Metal Analysis





Material No.: 9530-33 Batch No.: 24D1562005

Test Specification

Result

For Laboratory, Research, or Manufacturing Use Product Information (not specifications): Appearance (clear, fuming liquid) Meets ACS Specifications Storage Condition: Store below 25 °C.

Country of Origin: USA

Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Croak

Director Quality Operations, Bioscience Production

### Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

M6027

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

R1.8/5/24

CERTIFIED WEIGHT REPORT: Nominal Concentration (µg/mL): Recommended Storage: **Expiration Date:** Part Number: Lot Number: Description: 062027 57028 062024 Nickel (Ni) 1000 Ambient (20 °C) 24002546 2.0% Lot # Nitric Acid Solvent: 40.0 Nitric Acid Formulated By: Benson Chan

	Nickel(II) nitrate hexahydrate (Ni)	Compound	
	58128	Number	Part
	062023	Number	Lot
	0.1000	Factor	Dilution
	200.0	Vol. (mL)	Initial
	0.084	Pipette (mL)	Uncertainty
	1000	Conc. (µg/mL)	Nominal
	10000.4	Conc. (µg/mL)	Initial
	1000.0	Vol. (mL) Pipette (mL) Conc. (µg/mL) Conc. (µg/mL) Conc. (µg/mL) +/- (µg/mL)	Final
	2.2	+/- (µg/mL)	Uncertainty
	13478-00-7		(Solve
Ш	<b>1000.0</b> 2.2 13478-00-7 1 mg/m3	CAS# OSHA PEL (TWA)	(Solvent Safety Info. On Attached pg.)
	orl-rat 1620 mg/kg 3136	LD50	(ttached pg.)
	3136	SRM	TSIN

Volume shown below was diluted to (mL):

2000.07

0.100

Flask Uncertainty

5E-05 Balance Uncertainty

Reviewed By:

Pedro L. Rentas

062024

062024

Expanded

SDS Information

**NIST Test Number:** 

**BTUB** 

~-z/m	5.0E6	m/z->-	2500	m/z->	1.0E5	2.005
						3
N O		0		<b>1</b>		[1] Spectrum No.1
						3 Z 0
N N		200		N		pad pad
						9.136
230		30		30		9.135 sec]:58028.D# [Count] [Linear]
N		: 				58028
240		6		<b>4</b>		.b# [0
N G		1) 0		Ø,		Burno
Ò		Ŏ <sub>į</sub>		0:		Linea
N 0		5		0		
		170		8		
		80		80		
				<i>(</i> 0 :		
		190		90		
		200		100		
		ŏ		ŏ		

Part # 57028



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	6	<u> </u>	Be	Ба	As	8	2			
	70.02	A).02	A0.01	40.02	40.2	<b>△</b> 0.02	40.02	Action Services (ATE)		
	5	. ზ	ţ	రి	Ç	Ç	8			
	<0.02	0.02	40.02	40.02	40.02	40.2	<0.02			
	All	. පී	වූ	£	딸	덕	Дy			
	40.02	<b>∆</b> 0,02	40.02	<b>40.02</b>	40.02	40.02	40.02			
	3	<u> </u>	क्र	F	Б	Ж	Hf			
	<b>40.02</b>	0.02	<u> 0</u> 2	♦0.02	40.02	40.02	<0.02		Trace M	
	Z	Мо	Hg	Mn	Mg	Ŀ	Ľ		etals	
3=	40.02	40.02	40.2	<b>∆0.02</b>	10.0	0.02	40.02		Verifica	
	5	7	~	Pd	õ	R	Z		tion	
Target analyte	<b>⊕</b> 2	40.02	40,02	0.02	40.02	40,02	н		by ICP-N	
	જ	Sm	20	Rb	Rh	Re	꾸	DESCRIPTION OF THE PERSON OF T	S (h	
	40.02	₫002	40.02	40.02	40.02	40.02	<0.02		I/mL)	
	Ta	S	Ş	Na	Ag	83	Se			
	<0.02	40,02	40,02	402	40.02	40.02	40.2			
	=	Sn	Ħ	Ħ	∄	Te	4T			
	40.02	40.02	40.02	<b>∆</b> 0,02	40.02	40.02	<0.02			
	27	Zn	×	¥	۷	a a	₩			
	40.02	<b>∆</b> 0.02	A).02	40.02	<u>A</u>	<b>∆</b> 0.02	<b>∆</b> 0.02			

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

www.absolutestandards.com 800-368-1131 Absolute Standards, Inc.

# Certified Reference Material CRM

M6030



AR-1539 Certificate Number https://Absolutestandards.com ANAB ISO 17034 Accredited

CERTIFIED WEIGHT REPORT: Part Number: 57047 122823 R = 8 | 5 | 24 Lot #

Solvent: 24002546

Nitric Acid

Ambient (20 °C) Silver (Ag) 122826 2% <u>E</u> 80.0 Nitric Acid

Formulated By:

Benson Chan

122823

122823

Recommended Storage:

**Expiration Date:** 

Lot Number:

Description:

Nominal Concentration (µg/mL): NIST Test Number: Weight shown below was diluted to (mL): 1000 **6UTB** 헏 4000.30 Nominal 0.058 Flask Uncertainty Purity Uncertainty Assay 5E-05 Balance Uncertainty Target Actual Actual Uncertainty Reviewed By: Expanded (Solvent Safety Info. On Attached pg.) Pedro L. Rentas SDS Information

1. Silver nitrate (Ag) Compound IN035 J0612AGA1 RM# Number Conc. (µg/mL) 1000.0 8 Purity (%) 0.10 63.7 38 Weight (g) 6.27992 Weight (g) Conc. (µg/mL) 6.27998 1000.0 +/- (µg/mL) 2.0 7761-88-B CAS# 10 ug/m3 Z 3151 NIST SRM

[1] Spectrum No.1 [ 14.044 sec]:58147.D# [Count] [Linear]

www.absolutestandards.com



							race Me	letals	Verificat	tion	by ICP-I	S	ug/mL)						
	The state of the s						A STATE OF STATE	, j											
A	<0.02	Ω	<0.02	Dy	<0.02	出	<0.02	Ľ	<0.02	Z	<0.02	7	<0.02	Se	<0.2	4	40.02	W	<0.02
4S	40.02	ဂ္ဂ	40.2	덬	40.02	Ж	40.02	Li	<0.02	3	40.02	₽ Re	<b>40.02</b>	S:	40.02	ď	A).02	a	\$0.02
As	40.2	Ç	<0.02	땹	<0.02	In	<0.02	Mg	<0.01	တ္တ	40.02	짜	<0.02	Agr	7	∄	<0.02	<	40.02
Ва	<0.02	రి	40,02	82	<0.02	듁	40.02	Mn	<0.02	Pd	<0.02	R.	40.02	N	40.2	∄	<u>\$</u>	상	<0.02
Ве	40.01	Ω	<0.02	හු	<0.02	ਲੋਂ	40.2	Hg	40.2	Þ	40.02	R	A0.02	Ž,	40,02	ď	<b>♦</b> 0.02	<	40.02
쯨	<0.02	င္ပ	40.02	ନ	<0.02	5	<b>&lt;0.02</b>	Mo	<0.02	77	40.02	Sin	<b>△</b> 0.02	c/a	40.02	S	A) (2)	7,	40.07
В	<0.02	δ	<0.02	Au	<0.02	광	<0.02	Z	<0.02	*	40.2	Sc	<0.02	ī	<0.02	Ħ	<0.02	2	<0.02

Physical Characterization:

(T)= Target analyte

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

a			
- 8			

### Absolute Standards, Inc.

800-368-1131 www.absolutestandards.com



## Certified Reference Material CRM

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com



		071724				71724	
+	a report	Giovanni Esposito	0	The state of the s	Hends	Pedro L. Rentas	
78	Charles A	Formulated By:	7	1	Leston	Reviewed By:	
		Nitric Acid					
Nitric Acid		40.0	(mL)				
24002546		2.0%				Inty	_
						Balance Uncerta	Flask Uncertainty
						5E-05	0.058
	(Sb)			<b>်</b>			2000.26
57051	Antimony		071727	Ambient (20	1000	6UTB	diluted to (mL):
Part Number:	Lot Number: Description:	-	Expiration Date:	Recommended Storage:	ominal Concentration (µg/mL):	NIST Test Number:	Volume shown below was diluted to (mL):
	24002546	57051 071724 Antimony (Sb)	57051  57051  Antimony (Sb)  2.0%  40.0 Nitric Acid  Formulated By:	57051         24002546         Nitric Acid         Mitric Acid           071724         Antimony (Sb)         2.0%         40.0         Nitric Acid         Formulated By:           071727         (mL)	57051         24002546         Nitric Acid         Antimony (Sb)         2.0%         40.0         Nitric Acid         Formulated By:           071727         (mL)         (mL) </td <td>57051         24002546         Nitric Acid         Antimony (Sb)         Price and the Spiral Supervacion (mL)         Price and the Spiral Supervacion (mL)         Formulated By:           Ambient (20 °C)         (mL)         (mL)         Mitric Acid         Mitric Acid</td> <td>57051         24002546         Nitric Acid         After a Minimal Control         Minimal Control</td>	57051         24002546         Nitric Acid         Antimony (Sb)         Price and the Spiral Supervacion (mL)         Price and the Spiral Supervacion (mL)         Formulated By:           Ambient (20 °C)         (mL)         (mL)         Mitric Acid         Mitric Acid	57051         24002546         Nitric Acid         After a Minimal Control         Minimal Control

NIST SRM

LD50

(Solvent Safety Info. On Attached pg.)

OSHA PEL (TWA)

CAS#

+/- (µg/mL) Uncertainty Expanded

Conc. (µg/mL) Conc. (µg/mL)

Vol. (mL) Pipette (mL) Conc. (µg/mL)

Uncertainty

Initial

Dilution

Factor

Number Ľ

Number Part

Compound

SDS Information

1. Antimony (Sb)	58151	060324	0,1000	200.0	0.084	1000	10001.4	1000.0	2.2	7440-36-0	0.5 mg/m3	orl-rat 7000 mg/kg 3102a
5.0E5	[1] Spectrum No.1		17.964 se	9c]:5805	1.D# [C	[ 17.964 sec]:58051.D# [Count] [Linear]	oar]					
2.68												
m/z->> 5.0E5 2.5E5	0	ON	08		0	Og	09	0		08	06	00
m/z->-	011	08 -	130		041	150	160	170		180	000	0 0 0
ν-z/ш	21,0	220	230		240	250	260					

## Certified Reference Material CRM



Absolute Standards, Inc.

www.absolutestandards.com

800-368-1131



# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

							Trace M	<b>letals</b>	S Verifica	tion	by ICP-N	n) SV	a/mF)						
									The state of the state of									ı	
A1	<0.02	25	<0.02	Dy	<0.02	HŁ	<0.02	ΙΞ	<0.02	ï	<0.02	본	<0.02	Se	<0.2	£	<0.02	*	<0.02
Sb	Τ	చ	<0.2	臣	<0.02	Но	<0.02	2	<0.02	₽ R	<0.02	Re	<0.02	Si	<0.02	Te	<0.02	n	<0.02
As	<0.2	රී	<0.02	En	<0.02	In	<0.02	Mg	<0.01	ő	<0.02	Rh	<0.02	Ag	<0.02	I	<0.02	>	<0.02
Ba	<0.02	ర	<0.02	3	<0.02	Ir	<0.02	Mn	<0.02	Pd	<0.02	Rb	<0.02	Za	<0.2	Th	<0.02	χp	<0.02
Be	<0.01	ڻ	<0.02	Ga	<0.02	Fe	<0.2	Hg	<0.2	Ь	<0.02	Ru	<0.02	Sr	<0.02	Tm	<0.02	Ā	<0.02
Bi	<0.02	ပိ	<0.02	පී	<0.02	La	<0.02	Mo	<0.02	盂	<0.02	Sm	<0.02	S	<0.02	Sn	<0.02	Zn	<0.02
В	<0.02	Çn	<0.02	Au	<0.02	Pb	<0.02	PN	<0.02	M	<0.2	Sc	<0.02	Та	<0.02	Ξ	<0.02	Zr	<0.02

(T) = Target analyte

Certified by:

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.



All standard containers are meticulously cleaned prior to use. Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above). the preparation of all standards.

Lot # 071724

Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

<sup>\*</sup> All Standards should be stored with caps tight and under appropriate laboratory conditions.
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

### Absolute Standards, Inc. 800-368-1131

www.absolutestandards.com



## Certified Reference Material CRM

M6023

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

		Weight shown below was diluted to (mL):	NIST Test Number:	Nominal Concentration (µg/mL):	Recommended Storage:	Expiration Date:		Description:	Lot Number:	Part Number:	CERTIFIED WEIGHT REPORT:
Lot		ted to (mL):	8TUB	1000	Ambient (20 °C)	062727		Thalllum (TI)	062724	57081	
Nominal		2000.1			င္ပိ						
Purity Uncertainty Assay		0.10 Flask Uncertainty	5E-05 Balance Uncertainty				2%			Solvent:	
Target						(mL)	40.0			Solvent: 24002546	Lot #
Actual							Nitric Acid			Nitric Acid	
Actual											
Uncertainty	Expanded		Reviewed By:	Juna	1		Formulated By:	4	TO SE	>	
(Solvent Safety Info. On Attached pg.)	SDS Information		Pedro L. Rentas	" freshies	A A		Aleah O'Brady	0	San O Basin	7	
ched pg.) NIST			062724				062724			,	
7											

RW#

Number

Conc. (µg/mL) (%)

Purity (%) (%)

Weight (g) Weight (g) Conc. (µg/mL) +/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

SRM

~-Z/III	5.0E5	1.0E6	m/z->	5000	1.0€4	1.0E6	2.OE6	
N			-1				El opegrum No.	
210			10		ö		3	
220			120		N O			
							4 0	
230			130		<b>9</b>		[ ]4.044 sec]:57081.D# [Count] [Linear]	
240			<u> </u>		4		57081.	
ō			140		40		<u> </u>	
250			<b>1</b>		OI.			
N			160		60			
			4		70			
			170		0			
			180		80			100
			190		90			or any
			200		100			
			ŏ		ŏ			See all see al
								0

Part # 57081



https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

		₩	Id	: !	H.	52	į	As	30	2	2				
		40.02	20.02	5 8	200	20.02	e i	<u>۵</u>	20.02	3	40.02				
	ŀ	5	S	, (	,	C	, {	3	Ç	>	5				
		4000	40.02	20.02	3	<0.02	0.02	3	2.0	>	<0.02				
		A	ද	Ç,	?	Gd	į	ŗ	돡	,	ρ		l		
	20,02	3	<b>♦</b> 0.02	20.02	3	0.02	20.02	3	40.02		<b>∆</b> 0.02	Towns of the last			
		ğ	L <sub>a</sub>	7	1	=	Е	- - -	Но	!	Hf		l.		
	70.02	3	<b>∆</b> .02	7.05	5	<b>∆</b> 0.02	20.02	3	A).02		40.02			race M	
		ź.	Mo	9H		š	1V192		Į,	ı	1.5	S Works		S	
(T) = Target analyte	20.02	3	A 0.02	40.2	,	<b>∆</b> 0.02	10.02	2	&.02 20.02	40.04	4000	450 E 3 00 W	200	<b>Serifics</b>	
et anal	F	4 ;	<b>P</b>	70	· ¦	2	ç	,	Z	142	Z			₹. 2	
yte	2.05	0.01	3	<0.02	1000	<0.02	<0.02		<b>∆</b> 0.02	20.00	4		200	200	
	Sc	E	3	R	,	子	25	1	R.	2	P		4	このと	
	A0.02	20.02	3	<0.02	40.04	<n 02<="" td=""><td>40.02</td><td>10101</td><td>2000</td><td>20.02</td><td>2000</td><td></td><td>/HI /Br</td><td></td><td></td></n>	40.02	10101	2000	20.02	2000		/HI /Br		
	Ta	ū	n	Ş	744	Z	Ag	5	2	Ö					
	40,02	20.02	3	∆.02	7.07	3	A).02	40.04	3	46	,				
	11	DC	?	ď	110	7	Ħ	č	ş-1	10					ı
	40.02	20.02	3	40.02	70.02	4	H	70.02	3	<b>∆</b> 0.02					
	Zr	120	1	×	ID	ş	<	0	1	\$					
	40.02	<b>40.02</b>		A).02	20,02	8	A) (2)	20.02	3	<u>&amp;</u>					

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.

\* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

### 800-368-1131 Absolute Standards, Inc.

www.absolutestandards.com



## Certified Reference Material CRM

M6021

ANAB ISO 17034 Accredited AR-1539 Certificate Number https://Absolutestandards.com

CERTIFIED WEIGHT REPORT: Part Number: Lot Number: 57023 062424 Solvent:

24002546 Nitric Acid

**Expiration Date:** Description: 062427 Vanadium (V) 2.0% (III) 40.0

Nitric Acid

Formulated By:

Aleah O'Brady

062424

062424

AND CORDA

Recommended Storage: **6UTB** 1000 Ambient (20 °C) 5E-05 **Balance Uncertainty** 

Nominal Concentration (µg/mL): Volume shown below was diluted to (mL): **NIST Test Number:** 2000.3 0.06 Flask Uncertainty Reviewed By: Expanded Pedro L. Rentas **SDS Information** 

orl-rat 58.1mg/kg 3165	2.2 7803-55-6 0.05 mg/m3	7803-55-6	2.2	1000.0	1 11	1000	0.084	0.1000 200.0	1 1	58123 021224	58123	Ammonium metavanadate (V)
	# OSHA PEL (TWA)	CAS#	+/- (ua/mL)	Conc. (ua/mL) +/- (ua/mL)	Conc. (ua/mL)	Vol. (mL) Pipette (mL) Conc. (ua/mL)	Pipette (mL)	Vol. (mL)	Factor	Number	Number	Compound
Attac	(Solvent Safety Info. On Attached pg.)	(Solver	Uncertainty	Final	Initial	Nominal	Uncertainty	Initial	Dilution	Lot	Part	

m/z->	2,5E8	m/z->- 5.0E8	1.0E7	m/z-> 2.0∈7	1.006	2.0€6
0 10		110		ō		
220		ที่		N.		
230		100		<b>3</b>		
240		140		<u>\$</u> .		
250		150		51		
260		160		60		
		170		70		
		180		90		
		190		90		
		200		100		

Part # 57023



### https://Absolutestandards.com ANAB ISO 17034 Accredited AR-1539 Certificate Number

# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

	r		_	-	_	-	-	-	-		T	۰
		<b>3</b>	B!	Ве	152	2	5	<i>?</i>	≥		ı	
		A 8	40.00	<u> 0</u> ,01	20.02	2 6	4 6 5	3	<0.02			
		<b>3</b> 8	3	유	S.	<u>ج</u>	2 5	?	8			
	2000	3 8	3	40.02	40.02	20.02	3 6	3	A),02	THE REAL PROPERTY.		
		<u> </u>		<u>ئ</u>	2	Ę	1 12	7	ΔÅ			
	20.02	3 6	9 9	S	∆0.02	20.02	20.02	3	40.02	AND DESIGNATION		
	70	3 2	7 6	ş)	5	d	, но	1	HF			
	20.02	868	3 6	7	∆ .02	40.02	40.02	0.00	co oz		Irace M	1
	Z	MIO	1 0	5	M <sub>D</sub>	Mg	Ē	. [			etals	
(T) = Targ	8,02	20.02	200	3	<b>∆</b> 002	10.0	40.02	10.02	2000		Verifica	
Target analyte	Ě	1 3	, ,	,	2	õ	Z	2			tion	
yte	40,2	40.02	20.02	3	& 83 83	40.02	40,02	20.02	3		by ICP-N	
	Sc	Sm	20	,		2	Re	7		ŀ	E S	
	40.02	40.02	40.02		4	∆.02	<0.02	20.02		ľ	g/mL)	
	Ta	s	Sr		Z,	Ag	δi	8				ı
	<0.02	<b>40.02</b>	40.02		3	<b>∆</b> 0.02	6.02	<0.2				
	н	Sh	Tm	Ě	,	=	Te	16				
	<0.02	40.02	<0.02	10.02	3	40.02	40.02	40.02	The second second second			
	Zr	Zn	×	10	\$	V	Ϥ	₹	NAME AND ADDRESS OF			
	<0.02	<b>∆</b> 0.02	40,02	20.02	3	-)	A).02	0.02	The Part of the Pa			

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated. \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certifed (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.

  \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST

  \* Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).