

## Prep Standard - Chemical Standard Summary

**Order ID :** P3657

**Test :** VOCMS Group6

**Prepbatch ID :**

**Sequence ID/Qc Batch ID:** vn081924,

**Standard ID :**

VP126666,VP128290,VP128298,VP128762,VP128766,VP129228,VP129517,VP129832,VP129834,VP129836,

**Chemical ID :**

V12794,V12798,V13390,V13444,V13462,V13463,V13708,V13800,V13801,V13952,V13953,V14016,V14017,V14103,V14104,V14141,V14143,V14147,V14148,V14169,V14170,V14202,V14207,V14219,V14288,V 14411,V14412,V14413,V14414,W3112,

## VOC STANDARD PREPARATION LOG

| <u>Recipe ID</u> | <u>NAME</u>            | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>  | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|------------------------|--------------------------|------------------|------------------------|---------------------|----------------|------------------|----------------------|
| 617              | 8260 Surrogate, 400PPM | <a href="#">VP126666</a> | 03/19/2024       | 09/19/2024             | Semsettin Yesilyurt | None           | None             | Maresh Dadoda        |
|                  |                        |                          |                  |                        |                     |                |                  | 03/28/2024           |

**FROM** 0.80000ml of V13708 + 49.20000ml of V14141 = Final Quantity: 50.000 ml

| <u>Recipe ID</u> | <u>NAME</u> | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>  | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|-------------|--------------------------|------------------|------------------------|---------------------|----------------|------------------|----------------------|
| 218              | BFB, 25PPM  | <a href="#">VP128290</a> | 06/10/2024       | 11/23/2024             | Semsettin Yesilyurt | None           | None             | Maresh Dadoda        |
|                  |             |                          |                  |                        |                     |                |                  | 06/12/2024           |

**FROM** 0.25000ml of V13390 + 24.75000ml of V14148 = Final Quantity: 25.000 ml

## VOC STANDARD PREPARATION LOG

| <u>Recipe ID</u> | <u>NAME</u>                    | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>  | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|--------------------------------|--------------------------|------------------|------------------------|---------------------|----------------|------------------|----------------------|
| 247              | 8260 Internal Standard, 250PPM | <a href="#">VP128298</a> | 06/10/2024       | 11/23/2024             | Semsettin Yesilyurt | None           | None             | Maresh Dadoda        |
|                  |                                |                          |                  |                        |                     |                |                  | 06/12/2024           |

**FROM** 0.10000ml of V14288 + 9.90000ml of V14148 = Final Quantity: 10.000 ml

| <u>Recipe ID</u> | <u>NAME</u>                    | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>  | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|--------------------------------|--------------------------|------------------|------------------------|---------------------|----------------|------------------|----------------------|
| 1810             | 8260 Working Std(2-CVE)-800ppm | <a href="#">VP128762</a> | 07/01/2024       | 12/11/2024             | Semsettin Yesilyurt | None           | None             | Maresh Dadoda        |
|                  |                                |                          |                  |                        |                     |                |                  | 07/02/2024           |

**FROM** 0.50000ml of V12798 + 1.50000ml of V12794 + 23.00000ml of V14147 = Final Quantity: 25.000 ml

## VOC STANDARD PREPARATION LOG

| <u>Recipe ID</u> | <u>NAME</u>                                 | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>  | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|---|--------------------------|------------------|------------------------|---------------------|----------------|------------------|----------------------|
| 719              | 8260 Working STD (BCM)-First source, 400PPM | <a href="#">VP128766</a> | 07/01/2024       | 12/11/2024             | Semsettin Yesilyurt | None           | None             | Maresh Dadoda        |
|                  |   |                          |                  |                        |                     |                |                  | 07/02/2024           |

**FROM** 1.50000ml of V13462 + 1.50000ml of V13463 + 12.00000ml of V14147 = Final Quantity: 15.000 ml

| <u>Recipe ID</u> | <u>NAME</u>                                       | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>  | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|---|--------------------------|------------------|------------------------|---------------------|----------------|------------------|----------------------|
| 51               | 8260 Working STD (Acrolein) -first source, 800PPM | <a href="#">VP129228</a> | 07/25/2024       | 08/24/2024             | Semsettin Yesilyurt | None           | None             | Maresh Dadoda        |
|                  |   |                          |                  |                        |                     |                |                  | 07/30/2024           |

**FROM** 1.00000ml of V14411 + 1.00000ml of V14412 + 1.00000ml of V14413 + 1.00000ml of V14414 + 21.00000ml of V14143 =  
Final Quantity: 25.000 ml

## VOC STANDARD PREPARATION LOG

| <u>Recipe ID</u> | <u>NAME</u>  | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u>     | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u>            |
|------------------|--|--------------------------|------------------|------------------------|------------------------|----------------|------------------|---------------------------------|
| 257              | 8260 Calibration Working STD<br>Mix-First source, 160PPM | <a href="#">VP129517</a> | 08/05/2024       | 09/14/2024             | Semsettin<br>Yesilyurt | None           | None             | Maresh Dadoda<br><br>08/08/2024 |

**FROM** 0.40000ml of V13444 + 1.00000ml of V13800 + 1.00000ml of V13801 + 1.00000ml of V13952 + 1.00000ml of V13953 + 1.00000ml of V14016 + 1.00000ml of V14017 + 1.00000ml of V14103 + 1.00000ml of V14104 + 1.00000ml of V14169 + 1.00000ml of V14170 + 1.00000ml of V14219 + 1.50000ml of V14202 + 1.50000ml of V14207 + 10.60000ml of V14143 =  
Final Quantity: 25.000 ml

| <u>Recipe ID</u> | <u>NAME</u>            | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u>            |
|------------------|------------------------|--------------------------|------------------|------------------------|--------------------|----------------|------------------|---------------------------------|
| 620              | 50 PPB CCC, 8260-Water | <a href="#">VP129832</a> | 08/19/2024       | 08/20/2024             | Amit Patel         | None           | None             | Maresh Dadoda<br><br>08/21/2024 |

**FROM** 39.94450ml of W3112 + 0.00500ml of VP126666 + 0.00500ml of VP128766 + 0.00800ml of VP128298 + 0.01250ml of VP128762 + 0.01250ml of VP129228 + 0.01250ml of VP129517 = Final Quantity: 40.000 ml



| <u>Recipe ID</u>  | <u>NAME</u>            | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|---|------------------------|--------------------------|------------------|------------------------|--------------------|----------------|------------------|----------------------|
| 620   | 50 PPB CCC, 8260-Water | <a href="#">VP129834</a> | 08/19/2024       | 08/20/2024             | Amit Patel         | None           | None             | Mahesh Dadoda        |
| <p><b><u>FROM</u></b> 39.94450ml of W3112 + 0.00500ml of VP126666 + 0.00500ml of VP128766 + 0.00800ml of VP128298 + 0.01250ml of VP128762 + 0.01250ml of VP129228 + 0.01250ml of VP129517 = Final Quantity: 40.000 ml</p> |                        |                          |                  |                        |                    |                |                  |                      |

| <u>Recipe ID</u> | <u>NAME</u>   | <u>NO.</u>               | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|---|--------------------------|------------------|------------------------|--------------------|----------------|------------------|----------------------|
| 589              | BFB TUNE CHECK  | <a href="#">VP129836</a> | 08/19/2024       | 08/20/2024             | Amit Patel         | None           | None             | Mahesh Dadoda        |
| 08/21/2024       |   |                          |                  |                        |                    |                |                  |                      |
| <u>FROM</u>      | 39.98400ml of W3112 + 0.01600ml of VP128290 = Final Quantity: 40.000 ml |                          |                  |                        |                    |                |                  |                      |

## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName                         | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|---|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 95318 / 2-Chloroethyl Vinyl Ether (Min = 5) | 121321 | 12/13/2024      | 06/25/2024 / SAM        | 03/30/2022 / SAM            | V12794         |

| Supplier                 | ItemCode / ItemName                         | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|---|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 95318 / 2-Chloroethyl Vinyl Ether (Min = 5) | 121321 | 12/13/2024      | 06/25/2024 / SAM        | 03/30/2022 / SAM            | V12798         |

| Supplier | ItemCode / ItemName          | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|------------------------------|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30067 / BFB tuneing solution | A0191805 | 12/08/2024      | 12/08/2023 / SAM        | 01/13/2023 / SAM            | V13390         |

| Supplier | ItemCode / ItemName                                     | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|---|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30470 / VOA Stock Solution, tert-butanol std, 1mL, P&TM | A0181905 | 12/14/2024      | 06/14/2024 / SAM        | 01/23/2023 / SAM            | V13444         |

| Supplier | ItemCode / ItemName   | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|---|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul | A0193071 | 01/01/2025      | 07/01/2024 / SAM        | 01/27/2023 / SAM            | V13462         |

| Supplier | ItemCode / ItemName   | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|---|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30225 / VOA Mix, bromochloromethane, 2000ug/mL, P&TM, 1mL/ampul | A0193071 | 01/01/2025      | 07/01/2024 / SAM        | 01/27/2023 / SAM            | V13463         |

## CHEMICAL RECEIPT LOG BOOK

| Supplier | ItemCode / ItemName   | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|---|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 555582 / Custom Mixture, 8260 A/B Surrogate Mix [CS 5179-2] | A0196865 | 09/19/2024      | 03/19/2024 / SAM        | 04/12/2023 / SAM            | V13708         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30042 / VOA Mix, 500 series method 502.2 Calibration Std #1 gases, 2000ug/ml, PTM, 1ml | A0194279 | 01/30/2025      | 07/30/2024 / SAM        | 05/31/2023 / SAM            | V13800         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30042 / VOA Mix, 500 series method 502.2 Calibration Std #1 gases, 2000ug/ml, PTM, 1ml | A0194279 | 12/28/2024      | 06/28/2024 / SAM        | 05/31/2023 / SAM            | V13801         |

| Supplier | ItemCode / ItemName                            | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30489 / VOA Mix, 8260B Acetates Mix, P&TM, 1mL | A0196115 | 09/30/2024      | 06/14/2024 / SAM        | 09/25/2023 / SAM            | V13952         |

| Supplier | ItemCode / ItemName                            | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30489 / VOA Mix, 8260B Acetates Mix, P&TM, 1mL | A0196115 | 09/30/2024      | 06/14/2024 / SAM        | 09/25/2023 / SAM            | V13953         |

| Supplier                 | ItemCode / ItemName                     | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|---|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 95319 / Revised Additions Mix (Min = 5) | 032922 | 12/14/2024      | 06/14/2024 / SAM        | 11/22/2023 / SAM            | V14016         |



## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName                     | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|---|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 95319 / Revised Additions Mix (Min = 5) | 032922 | 12/14/2024      | 06/14/2024 / SAM        | 11/22/2023 / SAM            | V14017         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 555408 / Custom Standard, Vinyl Acetate Standard w/ Grav [CS 5066-6] TWO SEPARATE LOTS | A0205179 | 12/14/2024      | 06/14/2024 / SAM        | 12/22/2023 / SAM            | V14103         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 555408 / Custom Standard, Vinyl Acetate Standard w/ Grav [CS 5066-6] TWO SEPARATE LOTS | A0205179 | 12/14/2024      | 06/14/2024 / SAM        | 12/22/2023 / SAM            | V14104         |

| Supplier         | ItemCode / ItemName                        | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|--|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA9077-02 / Methanol, Purge/Trap (cs=6x1L) | 22L0562016 | 09/19/2024      | 03/19/2024 / SAM        | 02/06/2024 / SAM            | V14141         |

| Supplier         | ItemCode / ItemName                        | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|--|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA9077-02 / Methanol, Purge/Trap (cs=6x1L) | 22L0562016 | 01/22/2025      | 07/22/2024 / SAM        | 02/06/2024 / SAM            | V14143         |

| Supplier         | ItemCode / ItemName                        | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|--|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA9077-02 / Methanol, Purge/Trap (cs=6x1L) | 22L0562016 | 12/11/2024      | 06/11/2024 / pedro      | 02/06/2024 / SAM            | V14147         |

## CHEMICAL RECEIPT LOG BOOK

| Supplier         | ItemCode / ItemName                        | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|--|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA9077-02 / Methanol, Purge/Trap (cs=6x1L) | 22L0562016 | 11/23/2024      | 05/23/2024 / pedro      | 02/06/2024 / SAM            | V14148         |

| Supplier                 | ItemCode / ItemName                            | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|--|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 95317 / Universal VOA Mega Mix (Min order = 5) | 021624 | 12/14/2024      | 06/14/2024 / SAM        | 02/20/2024 / SAM            | V14169         |

| Supplier                 | ItemCode / ItemName                            | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|--|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 95317 / Universal VOA Mega Mix (Min order = 5) | 021624 | 12/14/2024      | 06/14/2024 / SAM        | 02/20/2024 / SAM            | V14170         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30006 / VOA Mix, CLP method Calibration Std #1 ketones 5000uq/ml, PTM, 1ml | A0200785 | 12/25/2024      | 06/25/2024 / SAM        | 02/28/2024 / SAM            | V14202         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30006 / VOA Mix, CLP method Calibration Std #1 ketones 5000uq/ml, PTM, 1ml | A0200785 | 12/25/2024      | 06/25/2024 / SAM        | 02/28/2024 / SAM            | V14207         |

| Supplier | ItemCode / ItemName  | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 30006 / VOA Mix, CLP method Calibration Std #1 ketones 5000uq/ml, PTM, 1ml | A0200785 | 12/25/2024      | 06/25/2024 / SAM        | 02/28/2024 / SAM            | V14219         |

## CHEMICAL RECEIPT LOG BOOK

| Supplier | ItemCode / ItemName                                     | Lot #    | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|---|----------|-----------------|-------------------------|-----------------------------|----------------|
| Restek   | 555581 / Custom Standard, 8260 Internal Std [CS 5179-1] | A0210184 | 06/10/2025      | 06/10/2024 / SAM        | 04/15/2024 / SAM            | V14288         |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 91980 / Acrolin Std (Min = 5) | 072424 | 08/24/2024      | 07/25/2024 / SAM        | 07/25/2024 / SAM            | V14411         |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 91980 / Acrolin Std (Min = 5) | 072424 | 08/24/2024      | 07/25/2024 / SAM        | 07/25/2024 / SAM            | V14412         |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 91980 / Acrolin Std (Min = 5) | 072424 | 08/24/2024      | 07/25/2024 / SAM        | 07/25/2024 / SAM            | V14413         |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 91980 / Acrolin Std (Min = 5) | 072424 | 08/24/2024      | 07/25/2024 / SAM        | 07/25/2024 / SAM            | V14414         |

| Supplier         | ItemCode / ItemName | Lot #               | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|---------------------|---------------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | DIW / DI Water      | Daily Lab-Certified | 07/03/2029      | 07/03/2024 / lwona      | 07/03/2024 / lwona          | W3112          |



**CERTIFIED WEIGHT REPORT**

Part Number: **95317**  
Lot Number: **021624**  
Description: **Universal VOA Megamix**  
69 components  
Expiration Date: 021627  
Recommended Storage: Freezer (0 °C)  
Nominal Concentration (µg/mL): 2000  
NIST Test ID#: 8UTB

Solvent(s): **Methanol**  
Lot#: **EG359-USQ12**

Weight(s) shown below were combined and diluted to (mL): **100.0** **0.021** Balance Uncertainty: **5E-05** Flask Uncertainty: **0.021**

|                |                  |        |
|----------------|------------------|--------|
|                |                  | 021624 |
| Formulated By: | Prashant Chauhan | DATE   |
|                |                  | 021624 |
| Reviewed By:   | Pedro L. Rentas  | DATE   |

| Compound                            | (RM#)       | Lot         | Di.    | Initial   | Initial       | Nominal       | Purity | Purity      | Uncertainty  | Target    | Actual    | Actual       | Expanded      | SDS Information |                              |                   |
|-------------------------------------|-------------|-------------|--------|-----------|---------------|---------------|--------|-------------|--------------|-----------|-----------|--------------|---------------|-----------------|------------------------------|-------------------|
|                                     | Part Number | Number      | Factor | Vol. (mL) | Conc. (µg/mL) | Conc. (µg/mL) | (%)    | Uncertainty | Pipette (mL) | Weight(g) | Weight(g) | Conc (µg/mL) | (+/-) (µg/mL) | CAS#            | OSHA PEL (TWA)               | LD50              |
| 1. Acetonitrile                     | (0324)      | 021644      | NA     | NA        | NA            | 2000          | 99.99  | 0.2         | NA           | 0.20007   | 0.20020   | 2001.3       | 8.1           | 75-05-8         | 40 ppm (70mg/m3/8H)          | or-rat 2400mg/kg  |
| 2. Allyl chloride (3-Chloropropene) | (0325)      | 102395      | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20221   | 2001.4       | 8.2           | 107-05-1        | 1 ppm (3mg/m3/8H)            | or-rat 700mg/kg   |
| 3. Carbon disulfide                 | (0060)      | MKCR8561    | NA     | NA        | NA            | 2000          | 99.99  | 0.2         | NA           | 0.20007   | 0.20023   | 2001.6       | 8.1           | 75-15-0         | 4 ppm (12mg/m3) (skin)       | or-rat 1200mg/kg  |
| 4. cis-1,4-Dichloro-2-butene        | (1196)      | 14718EF     | NA     | NA        | NA            | 2000          | 95     | 0.2         | NA           | 0.21058   | 0.21069   | 2001.1       | 6.5           | 1476-11-5       | N/A                          | N/A               |
| 5. trans-1,4-Dichloro-2-butene      | (0486)      | MKBP6041V   | NA     | NA        | NA            | 2000          | 96.5   | 0.2         | NA           | 0.20731   | 0.20748   | 2001.7       | 8.4           | 110-57-6        | N/A                          | N/A               |
| 6. Diethyl ether                    | (0153)      | IK18CA5000K | NA     | NA        | NA            | 2000          | 99.9   | 0.2         | NA           | 0.20025   | 0.20040   | 2001.5       | 8.1           | 60-29-7         | N/A                          | N/A               |
| 7. Ethyl methacrylate               | (0381)      | 06126PK     | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20230   | 2002.3       | 8.2           | 97-63-2         | N/A                          | or-rat 14800mg/kg |
| 8. Iodomethane                      | (0489)      | 5HBF8718V   | NA     | NA        | NA            | 2000          | 99.5   | 0.2         | NA           | 0.20106   | 0.20121   | 2001.5       | 8.2           | 74-88-4         | 5 ppm (28mg/m3/8H) (skin)    | or-rat 70mg/kg    |
| 9. 2-Methyl-1-propanol              | (0445)      | 15241EB     | NA     | NA        | NA            | 2000          | 99.5   | 0.2         | NA           | 0.20106   | 0.20120   | 2001.4       | 8.1           | 78-83-1         | 50 ppm (150mg/m3/8H)         | or-rat 2400mg/kg  |
| 10. Methacrylonitrile               | (0442)      | 00427ET     | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20221   | 2001.4       | 8.2           | 126-98-7        | 1 ppm (3mg/m3/8H) (skin)     | or-rat 1200mg/kg  |
| 11. Methyl acrylate                 | (1075)      | SHBK0679    | NA     | NA        | NA            | 2000          | 99.9   | 0.2         | NA           | 0.20025   | 0.20040   | 2001.5       | 8.1           | 96-33-3         | 10 ppm (35mg/m3/8H) (skin)   | or-rat 277mg/kg   |
| 12. Methyl methacrylate             | (0404)      | MKBW5137V   | NA     | NA        | NA            | 2000          | 99.9   | 0.2         | NA           | 0.20025   | 0.20041   | 2001.6       | 8.1           | 80-62-6         | 100 ppm (410mg/m3/8H)        | or-rat 7872mg/kg  |
| 13. Nitrobenzene                    | (0228)      | 01213TV     | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20220   | 2001.3       | 8.2           | 98-95-3         | 1 ppm (5mg/m3/8H) (skin)     | or-rat 700mg/kg   |
| 14. 2-Nitropropane                  | (0461)      | 14002JX     | NA     | NA        | NA            | 2000          | 97.3   | 0.2         | NA           | 0.20560   | 0.20577   | 2001.6       | 8.3           | 79-46-9         | 10 ppm (35mg/m3/8H)          | or-rat 720mg/kg   |
| 15. Perfluorooctane                 | (0450)      | HGA01       | NA     | NA        | NA            | 2000          | 98     | 0.2         | NA           | 0.20413   | 0.20430   | 2001.6       | 8.3           | 76-01-7         | N/A                          | N/A               |
| 16. 1,1,2-Trichlorotrifluoroethane  | (0474)      | 18930       | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20225   | 2001.8       | 8.2           | 76-13-1         | 1000 ppm (7800mg/m3/8H)      | or-rat 43g/kg     |
| 17. Bromodichloromethane            | 35171       | 101623      | 0.05   | 5.00      | 40001.7       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 75-27-4         | N/A                          | or-rat 916mg/kg   |
| 18. Dibromochloromethane            | 35171       | 101623      | 0.05   | 5.00      | 40002.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 23.0          | 124-48-1        | N/A                          | or-rat 840mg/kg   |
| 19. cis-1,2-Dichloroethane          | 35171       | 101623      | 0.05   | 5.00      | 40003.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 156-59-2        | N/A                          | N/A               |
| 20. trans-1,2-Dichloroethane        | 35171       | 101623      | 0.05   | 5.00      | 40002.4       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 23.0          | 156-60-5        | N/A                          | or-rat 1235mg/kg  |
| 21. Methylene chloride              | 35171       | 101623      | 0.05   | 5.00      | 40002.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 75-09-2         | 500 ppm                      | or-rat 820mg/kg   |
| 22. 1,1-Dichloroethene              | 32251       | 102023      | 0.10   | 10.00     | 20001.6       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.6       | 22.9          | 75-35-4         | 1 ppm (4mg/m3/8H)            | or-rat 200mg/kg   |
| 23. Bromoform                       | 95321       | 020724      | 0.10   | 10.00     | 20003.2       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.5          | 75-25-2         | 0.5 ppm (5mg/m3) (skin)      | or-rat 930mg/kg   |
| 24. Carbon tetrachloride            | 95321       | 020724      | 0.10   | 10.00     | 20003.4       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.4          | 56-23-5         | 2 ppm (12.6mg/m3/8H)         | or-rat 2350mg/kg  |
| 25. Chloroform                      | 95321       | 020724      | 0.10   | 10.00     | 20024.0       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 2001.9       | 20.5          | 67-66-3         | 50 ppm (240mg/m3) (CL)       | or-rat 900mg/kg   |
| 26. Dibromomethane                  | 95321       | 020724      | 0.10   | 10.00     | 20002.9       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.5          | 74-85-3         | N/A                          | or-rat 105mg/kg   |
| 27. 1,1-Dichloroethane              | 95321       | 020724      | 0.10   | 10.00     | 20003.4       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.5          | 75-34-3         | N/A                          | or-rat 108mg/kg   |
| 28. 2,2-Dichloropropane             | 95321       | 020724      | 0.10   | 10.00     | 20003.4       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.4          | 594-20-7        | 100 ppm                      | or-rat 725mg/kg   |
| 29. Tetrachloroethane               | 95321       | 020724      | 0.10   | 10.00     | 20201.1       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.4          | 584-20-7        | N/A                          | N/A               |
| 30. 1,1,1-Trichloroethane           | 95321       | 020724      | 0.10   | 10.00     | 20003.0       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 2019.6       | 20.8          | 127-18-4        | 25 ppm (170mg/m3/8H) (linal) | or-rat 2629mg/kg  |
| 31. 1,2-Dibromo-3-chloropropane     | 35161       | 112322      | 0.05   | 5.00      | 40016.5       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 20.5          | 71-55-6         | 350 ppm (1900mg/m3/8H)       | or-rat 10300mg/kg |
| 32. 1,2-Dibromomethane              | 35161       | 112322      | 0.05   | 5.00      | 40024.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.3       | 22.9          | 96-12-6         | 0.001 ppm                    | or-rat 170mg/kg   |
| 33. 1,2-Dichloroethane              | 35161       | 112322      | 0.05   | 5.00      | 40018.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.4       | 22.9          | 106-93-4        | 20 ppm (8H)                  | or-rat 108mg/kg   |
| 34. 1,2-Dichloropropane             | 35161       | 112322      | 0.05   | 5.00      | 40051.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.2       | 22.9          | 107-08-2        | 50 ppm (8H)                  | or-rat 870mg/kg   |
| 35. 1,3-Dichloropropane             | 35161       | 112322      | 0.05   | 5.00      | 40005.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.2       | 22.9          | 78-57-5         | 75 ppm (350mg/m3/8H)         | or-rat 1947mg/kg  |
| 36. 1,1-Dichloropropane             | 35161       | 112322      | 0.05   | 5.00      | 40005.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 142-28-9        | N/A                          | un-rat 3600mg/kg  |
| 37. cis-1,3-Dichloropropene         | 35161       | 112322      | 0.05   | 5.00      | 40012.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.1       | 29.7          | 563-56-6        | N/A                          | N/A               |
| 38. trans-1,3-Dichloropropene       | 35161       | 112322      | 0.05   | 5.00      | 40010.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.0       | 23.0          | 10061-01-5      | N/A                          | N/A               |
| 39. Hexachloro-1,3-butadiene        | 35161       | 112322      | 0.05   | 5.00      | 40021.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.6       | 29.7          | 87-68-3         | 0.02 ppm (0.24mg/m3/8H)      | or-rat 82mg/kg    |
| 40. 1,1,1,2-Tetrachloroethane       | 35161       | 112322      | 0.05   | 5.00      | 40011.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.1       | 22.9          | 630-20-6        | N/A                          | or-rat 670mg/kg   |
| 41. 1,1,2,2-Tetrachloroethane       | 35161       | 112322      | 0.05   | 5.00      | 40007.5       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.9       | 22.9          | 79-34-5         | 5 ppm (35mg/m3/8H) (skin)    | or-rat 800mg/kg   |
| 42. 1,1,2-Trichloroethane           | 35161       | 112322      | 0.05   | 5.00      | 40006.6       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 23.0          | 79-00-5         | 10 ppm (46mg/m3/8H) (skin)   | or-rat 636mg/kg   |
| 43. Trichloroethene                 | 35161       | 112322      | 0.05   | 5.00      | 40029.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.9       | 22.9          | 79-01-6         | 50 ppm (270mg/m3/8H)         | or-rat 2400mg/kg  |
| 44. 1,2,3-Trichloropropane          | 35161       | 112322      | 0.05   | 5.00      | 40007.5       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.9       | 22.9          | 96-18-4         | 10 ppm (50mg/m3/8H)          | or-rat 149.6mg/kg |
| 45. Benzene                         | 35162       | 050823      | 0.05   | 5.00      | 40005.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 71-43-2         | 1 ppm                        | or-rat 4694mg/kg  |
| 46. Bromobenzene                    | 35162       | 050823      | 0.05   | 5.00      | 40006.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 104-51-8        | N/A                          | N/A               |
| 47. n-Butyl benzene                 | 35162       | 050823      | 0.05   | 5.00      | 40003.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 100-41-4        | 100 ppm (435mg/m3/8H)        | or-rat >2000mg/kg |
| 48. Ethyl benzene                   | 35162       | 050823      | 0.05   | 5.00      | 40004.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 99-87-6         | N/A                          | or-rat 4750mg/kg  |
| 49. p-Isopropyl toluene             | 35162       | 050823      | 0.05   | 5.00      | 40005.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 91-20-3         | 10 ppm (50mg/m3/8H)          | or-rat 490mg/kg   |
| 50. Naphthalene                     | 35162       | 050823      | 0.05   | 5.00      | 40006.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 100-42-5        | 100 ppm                      | or-rat 5000mg/kg  |
| 51. Styrene                         | 35162       | 050823      | 0.05   | 5.00      | 40006.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 108-98-3        | 200 ppm                      | or-rat 5000mg/kg  |
| 52. Toluene                         | 35162       | 050823      | 0.05   | 5.00      | 40006.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 87-61-6         | N/A                          | or-rat 1390mg/kg  |
| 53. 1,2,3-Trichlorobenzene          | 35162       | 050823      | 0.05   | 5.00      | 40003.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 120-82-1        | 5 ppm (CL) (40mg/m3)         | or-rat 750mg/kg   |
| 54. 1,2,4-Trichlorobenzene          | 35162       | 050823      | 0.05   | 5.00      | 40006.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 23.0          | 95-63-6         | N/A                          | or-rat 5g/kg      |
| 55. 1,2,4-Trimethylbenzene          | 35162       | 050823      | 0.05   | 5.00      | 40001.6       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 106-67-8        | N/A                          | or-rat 5000mg/kg  |
| 56. 1,3,5-Trimethylbenzene          | 35162       | 050823      | 0.05   | 5.00      | 40006.7       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 108-38-3        | 100 ppm (435mg/m3/8H)        | or-rat 5g/kg      |
| 57. m-Xylene                        | 35162       | 050823      | 0.05   | 5.00      | 40005.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 98-06-6         | N/A                          | N/A               |
| 58. tert-Butyl benzene              | 35163       | 101923      | 0.05   | 5.00      | 40001.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 135-98-8        | N/A                          | or-rat 2240mg/kg  |
| 59. sec-Butyl benzene               | 35163       | 101923      | 0.05   | 5.00      | 40002.4       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 108-90-7        | 75 ppm (350mg/m3/8H)         | or-rat 2290mg/kg  |
| 60. Chlorobenzene                   | 35163       | 101923      | 0.05   | 5.00      | 40003.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.5       | 22.9          | 95-49-8         | 50 ppm (250mg/m3/8H)         | or-rat 3900mg/kg  |
| 61. 2-Chlorotoluene                 | 35163       | 101923      | 0.05   | 5.00      | 40003.3       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 106-43-4        | N/A                          | or-rat 2100mg/kg  |
| 62. 4-Chlorotoluene                 | 35163       | 101923      | 0.05   | 5.00      | 40003.3       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 541-73-1        | 50 ppm (300mg/m3) (CL)       | or-rat 500mg/kg   |
| 63. 1,2-Dichlorobenzene             | 35163       | 101923      | 0.05   | 5.00      | 40003.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 96-50-1         | 60 ppm (300mg/m3) (CL)       | or-rat 500mg/kg   |
| 64. 1,3-Dichlorobenzene             | 35163       | 101923      | 0.05   | 5.00      | 40001.7       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 23.0          |                 |                              |                   |

Run 16, "P95317 L021624 [2000µg/mL in MeOH]"

Run Length: 60.00 min, 35998 points at 10 points/second.  
Created: Sat, Feb 17, 2024 at 8:56:46 AM.  
Sampled: Sequence "021624-GC5M1", Method "GC5-M1".  
Analyzed using Method "GC5-M1".

**Comments**  
GC5-M1 Analysis by Candice Warren  
Column ID SPB-Vocol 105 meter X 0.53mm X 3.0µm film thickness  
Flow rates: Total flow=290mL/min., Helium (carrier)=10mL/min.,  
Helium(make-up)=10mL/min., Hydrogen(make-up)=40mL/min., Air(make-up)=230mL/min.  
Oven Profile: Temp. 1=35°C (Time 1=10 min.), Temp 2=200°C (Time 2=8.75 min.),  
Rate = 4°C/min., Total run time=60 min. Injector temp.=200°C, FID Temp.=200°C.  
FID Signal = Edaq Channel 1  
Standard injection = 0.5µL, Range=3



| Peak # | Name   | FID RT (min.) |
|--------|--|---------------|
| 1      | Ether  | 9.97          |
| 2      | 1,1,2-Trichloro-1,2,2-trifluoroethane        | 10.33         |
| 3      | 1,1-Dichloroethane                           | 11.10         |
| 4      | Acetonitrile                                 | 12.00         |
| 5      | Iodomethane                                  | 12.31         |
| 6      | Allyl chloride                               | 12.56         |
| 7      | Carbon disulfide/Methylene chloride          | 13.04         |
| 8      | trans-1,2-Dichloroethane                     | 14.07         |
| 9      | 1,1-Dichloroethane                           | 15.74         |
| 10     | 2,2-Dichloropropane                          | 17.24         |
| 11     | cis-1,2-Dichloroethane                       | 18.00         |
| 12     | Methacrylonitrile/methyl acrylate/Chloroform | 18.46         |
| 13     | Isobutane/1,1,1-Trichloroethane              | 19.01         |
| 14     | 1,1-Dichloropropane                          | 20.46         |
| 15     | Carbon tetrachloride                         | 20.79         |
| 16     | Benzene/1,2-Dichloroethane                   | 21.49         |
| 17     | Trichloroethane                              | 23.58         |
| 18     | 1,2-Dichloropropane                          | 24.38         |
| 19     | Methyl methacrylate                          | 24.52         |
| 20     | Bromochloromethane                           | 25.13         |
| 21     | Dibromomethane/2-Hitroprene                  | 25.46         |
| 22     | cis-1,3-Dichloropropane                      | 27.02         |
| 23     | Toluene                                      | 28.05         |
| 24     | Ethyl methacrylate/trans-1,3-Dichloropropane | 28.73         |
| 25     | 1,1,2-Trichloroethane                        | 29.34         |
| 26     | Tetrachloroethene/1,3-Dichloropropane        | 30.24         |
| 27     | Dibromochloromethane                         | 31.16         |
| 28     | 1,2-Dibromomethane                           | 31.84         |
| 29     | Chlorobenzene                                | 33.26         |
| 30     | Ethylbenzene/1,1,1,2-Tetrachloroethane       | 33.40         |
| 31     | m-Xylene/p-Xylene                            | 33.66         |
| 32     | o-Xylene                                     | 35.22         |
| 33     | Styrene                                      | 35.39         |
| 34     | Isopropylbenzene/Bromoforn                   | 36.18         |
| 35     | cis-1,4-Dichloro-3-butene                    | 36.48         |
| 36     | 1,1,2,2-Tetrachloroethane                    | 37.23         |
| 37     | 1,2,3-Trichloropropane                       | 37.77         |
| 38     | n-Propylbenzene                              | 37.93         |
| 39     | trans-1,4-Dichloro-3-butene                  | 38.05         |
| 40     | Bromobenzene                                 | 38.14         |
| 41     | 1,3,5-Trimethylbenzene                       | 38.80         |
| 42     | 2-Chlorotoluene                              | 38.82         |
| 43     | 4-Chlorotoluene                              | 38.77         |
| 44     | tert-Butylbenzene                            | 39.74         |
| 45     | 1,2,4-Trimethylbenzene                       | 39.91         |
| 46     | Pentachloroethane                            | 40.17         |
| 47     | sec-Butylbenzene                             | 40.52         |
| 48     | p-Isopropyltoluene                           | 41.02         |
| 49     | 1,3-Dichlorobenzene                          | 41.42         |
| 50     | 1,4-Dichlorobenzene                          | 41.83         |
| 51     | n-Butylbenzene                               | 42.53         |
| 52     | 1,2-Dichlorobenzene                          | 43.18         |
| 53     | 1,2-Dibromo-3-chloropropane                  | 46.12         |
| 54     | Nitrobenzene                                 | 46.46         |
| 55     | 1,2,4-Trichlorobenzene                       | 49.26         |
| 56     | Hexachlorobutadiene                          | 49.72         |
| 57     | Naphthalene                                  | 50.26         |
| 58     | 1,2,3-Trichlorobenzene                       | 51.16         |

## Safety Data Sheet (SDS)

GHS/OSHA Compliant

## Section I Product and Company Identification

## IDENTITY ANALYTICAL STANDARD DISSOLVED IN METHANOL

|                     |                                     |                                   |                 |
|---------------------|-------------------------------------|-----------------------------------|-----------------|
| Manufacturer's Name | ABSOLUTE STANDARDS INC              | Emergency Telephone USA & CANADA  | 1-800-535-5053  |
| Address             | 44 Rossotto Dr.<br>Hamden CT, 06514 | Emergency Telephone International | 1-352-323-3500  |
|                     |                                     | Date Prepared/Revised             | January 1, 2023 |

## Section II - Hazards Identification

## GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

|          |                                      |                |   |
|----------|--------------------------------------|----------------|---|
| H225     | Highly Flammable Liquid and Vapor    | H301, 311, 331 | Toxic if swallowed, skin contact, inhaled     |
| H370     | Cause damage to organs               | H351           | Suspected of causing cancer                   |
| P271     | Use in ventilated area               | P280           | Use gloves, eye protection/face shield        |
| P302,332 | If on skin, wash with soap and water | P305,351,338   | If in eyes, remove contacts, rinse with water |



Signal Word: DANGER

## Section III - Composition

|   |                |               |              |
|---|----------------|---------------|--------------|
| Components (Specific Chemical Identity; Common Name(s)) |                |               | % (optional) |
| Methanol  | METHYL ALCOHOL | CAS#: 67-56-1 | > 97         |

See Certified Weight Report For Other Analytes Present At Trace Quantities.

INTENDED USE: REFERENCE MATERIAL

## Section IV. FIRST AID MEASURES

|                         |   |
|-------------------------|---|
| General advice          | Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.            |
| If inhaled              | If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician. |
| In case of skin contact | Wash with soap and water. Consult a physician.  |
| In case of eye contact  | Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.                      |
| If swallowed            | Do NOT induce vomiting. Rinse mouth with water. Consult a physician.  |

## Section V. FIREFIGHTING MEASURES

|                               |   |
|-------------------------------|---|
| Flammability                  | Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking. |
| Suitable extinguishing media  | Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  |
| Protective equipment for fire | Wear self contained breathing apparatus for fire fighting if necessary.   |

## Section VI. ACCIDENTAL RELEASE MEASURES

|                           |   |
|---------------------------|---|
| Personal precautions      | Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations. |
| Environmental precautions | Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  |
| Clean up                  | Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).   |

## Section VII. HANDLING AND STORAGE

|                               |  |
|-------------------------------|--|
| Precautions for safe handling | Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  |
| Storage Conditions            | Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. |

## Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

|   |  |
|---|--|
| Methanol  | 67-56-1 TWA 200 ppm  |
| Skin notation   | TWA 200 ppm  |
| Potential for skin absorption, ingestion and inhalation.                                      |  |
| Personal protective equipment   | Respiratory protection. Handle with gloves. Gloves must be inspected prior to use. Eye protection. |
| Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product. |  |

## Section IX - Physical/Chemical Characteristics

|                         |   |   |       |
|-------------------------|---|---|-------|
| Boiling Point           | 65°C  | Specific Gravity (H <sub>2</sub> O = 1) | 0.79  |
| Vapor Pressure (mm Hg)  | 96  | Melting Point                           | -98°C |
| Vapor Density (AIR = 1) | 1.11  | Evaporation rate<br>(Butyl Acetate = 1) | 4.6   |
| Solubility in Water     | COMPLETE  |   |       |
| Appearance and Odor     | CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR. |   |       |

**Section X. STABILITY AND REACTIVITY**

|  |  |
|--|--|
| Chemical stability   | Stable under recommended storage conditions.   |
| Possibility of hazardous reactions                             | Vapours may form explosive mixture with air.   |
| Conditions to avoid  | Heat, flames, sparks, extreme temperature and sunlight.                                  |
| Materials to avoid   | Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids |
| Hazardous decomposition products formed under fire conditions. | - Carbon oxides  |

**Section XI. TOXICOLOGICAL INFORMATION**

LD50 Oral - rat - 5,628 mg/kg  
LC50 Inhalation - rat - 4 h - 64000 ppm  
LD50 Dermal - rabbit - 15,800 mg/kg  
Toxic if absorbed through skin. Causes skin irritation.  
Eye damage/eye irritation  
Toxic if inhaled. Causes respiratory tract irritation.  
Toxic if swallowed.

**Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.**

LC50 15,400 mg/l - 96 h  
EC50 24,500.00 mg/l - 48 h  
EC100 10,000.00 mg/l - 24 h

**Section XIII. DISPOSAL CONSIDERATIONS**

Dispose with normal Laboratory Solvent Waste.

**Section XIV. TRANSPORT INFORMATION**

|  |  |
|--|--|
| DOT (US)                                   | IATA                                       |
| UN number: 1230 Class: 3 Packing group: II | UN number: 1230 Class: 3 Packing group: II |
| Proper shipping name: Methanol             | Proper shipping name: Methanol             |

**Section XV. REGULATORY INFORMATION**

OSHA Hazards Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant  
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**Section XVI. Misc. INFORMATION**

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.





**CERTIFIED WEIGHT REPORT**

Part Number: **95317**  
Lot Number: **021624**  
Description: **Universal VOA Megamix**  
69 components  
Expiration Date: 021627  
Recommended Storage: Freezer (0 °C)  
Nominal Concentration (µg/mL): 2000  
NIST Test ID#: 8UTB

Solvent(s): **Methanol**  
Lot#: **EG359-USQ12**

Weight(s) shown below were combined and diluted to (mL): **100.0** **0.021** Balance Uncertainty: **5E-05** Flask Uncertainty: **0.021**

|                |                  |        |
|----------------|------------------|--------|
|                |                  | 021624 |
| Formulated By: | Prashant Chauhan | DATE   |
|                |                  | 021624 |
| Reviewed By:   | Pedro L. Rentes  | DATE   |

| Compound                            | (RM#)                                  | Lot         | Di.    | Initial   | Initial       | Nominal       | Purity | Purity      | Uncertainty  | Target    | Actual    | Actual       | Expanded      | SDS Information |                              |                   |
|-------------------------------------|--|-------------|--------|-----------|---------------|---------------|--------|-------------|--------------|-----------|-----------|--------------|---------------|-----------------|------------------------------|-------------------|
|                                     | Part Number                            | Number      | Factor | Vol. (mL) | Conc. (µg/mL) | Conc. (µg/mL) | (%)    | Uncertainty | Pipette (mL) | Weight(g) | Weight(g) | Conc (µg/mL) | (+/-) (µg/mL) | CAS#            | OSHA PEL (TWA)               | LD50              |
|                                     | (Solvent Safety Info. On Attached pg.) |             |        |           |               |               |        |             |              |           |           |              |               |                 |                              |                   |
| 1. Acetonitrile                     | (0324)                                 | 021644      | NA     | NA        | NA            | 2000          | 99.99  | 0.2         | NA           | 0.20007   | 0.20020   | 2001.3       | 8.1           | 75-05-8         | 40 ppm (70mg/m3/8H)          | or-rat 2400mg/kg  |
| 2. Allyl chloride (3-Chloropropene) | (0325)                                 | 102395      | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20221   | 2001.4       | 8.2           | 107-05-1        | 1 ppm (3mg/m3/8H)            | or-rat 700mg/kg   |
| 3. Carbon disulfide                 | (0060)                                 | MKCR8561    | NA     | NA        | NA            | 2000          | 99.99  | 0.2         | NA           | 0.20007   | 0.20023   | 2001.6       | 8.1           | 75-15-0         | 4 ppm (12mg/m3) (skin)       | or-rat 1200mg/kg  |
| 4. cis-1,4-Dichloro-2-butene        | (1196)                                 | 14718EF     | NA     | NA        | NA            | 2000          | 95     | 0.2         | NA           | 0.21058   | 0.21069   | 2001.1       | 6.5           | 1476-11-5       | N/A                          | N/A               |
| 5. trans-1,4-Dichloro-2-butene      | (0486)                                 | MKBP6041V   | NA     | NA        | NA            | 2000          | 96.5   | 0.2         | NA           | 0.20731   | 0.20748   | 2001.7       | 8.4           | 110-57-6        | N/A                          | N/A               |
| 6. Diethyl ether                    | (0153)                                 | IK18CA5000K | NA     | NA        | NA            | 2000          | 99.9   | 0.2         | NA           | 0.20025   | 0.20040   | 2001.5       | 8.1           | 60-29-7         | N/A                          | N/A               |
| 7. Ethyl methacrylate               | (0381)                                 | 06126PK     | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20230   | 2002.3       | 8.2           | 97-63-2         | N/A                          | or-rat 14800mg/kg |
| 8. Iodomethane                      | (0489)                                 | 5HBF8718V   | NA     | NA        | NA            | 2000          | 99.5   | 0.2         | NA           | 0.20106   | 0.20121   | 2001.5       | 8.2           | 74-88-4         | 5 ppm (28mg/m3/8H) (skin)    | or-rat 70mg/kg    |
| 9. 2-Methyl-1-propanol              | (0445)                                 | 15241EB     | NA     | NA        | NA            | 2000          | 99.5   | 0.2         | NA           | 0.20106   | 0.20120   | 2001.4       | 8.1           | 78-83-1         | 50 ppm (150mg/m3/8H)         | or-rat 240mg/kg   |
| 10. Methacrylonitrile               | (0442)                                 | 00427ET     | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20221   | 2001.4       | 8.2           | 126-98-7        | 1 ppm (3mg/m3/8H) (skin)     | or-rat 1200mg/kg  |
| 11. Methyl acrylate                 | (1075)                                 | SHBK0679    | NA     | NA        | NA            | 2000          | 99.9   | 0.2         | NA           | 0.20025   | 0.20040   | 2001.5       | 8.1           | 96-33-3         | 10 ppm (35mg/m3/8H) (skin)   | or-rat 277mg/kg   |
| 12. Methyl methacrylate             | (0404)                                 | MKBW5137V   | NA     | NA        | NA            | 2000          | 99.9   | 0.2         | NA           | 0.20025   | 0.20041   | 2001.6       | 8.1           | 80-62-6         | 100 ppm (410mg/m3/8H)        | or-rat 7872mg/kg  |
| 13. Nitrobenzene                    | (0228)                                 | 01213TV     | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20220   | 2001.3       | 8.2           | 98-95-3         | 1 ppm (5mg/m3/8H) (skin)     | or-rat 700mg/kg   |
| 14. 2-Nitropropane                  | (0461)                                 | 14002JX     | NA     | NA        | NA            | 2000          | 97.3   | 0.2         | NA           | 0.20560   | 0.20577   | 2001.6       | 8.3           | 79-46-9         | 10 ppm (35mg/m3/8H)          | or-rat 720mg/kg   |
| 15. Perfluorooctane                 | (0450)                                 | HGA01       | NA     | NA        | NA            | 2000          | 98     | 0.2         | NA           | 0.20413   | 0.20430   | 2001.6       | 8.3           | 76-01-7         | N/A                          | N/A               |
| 16. 1,1,2-Trichlorotrifluoroethane  | (0474)                                 | 18930       | NA     | NA        | NA            | 2000          | 99     | 0.2         | NA           | 0.20207   | 0.20225   | 2001.8       | 8.2           | 76-13-1         | 1000 ppm (7800mg/m3/8H)      | or-rat 43mg/kg    |
| 17. Bromodichloromethane            | 35171                                  | 101623      | 0.05   | 5.00      | 40001.7       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 75-27-4         | N/A                          | or-rat 916mg/kg   |
| 18. Dibromochloromethane            | 35171                                  | 101623      | 0.05   | 5.00      | 40002.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 23.0          | 124-48-1        | N/A                          | or-rat 840mg/kg   |
| 19. cis-1,2-Dichloroethane          | 35171                                  | 101623      | 0.05   | 5.00      | 40003.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 156-59-2        | N/A                          | N/A               |
| 20. trans-1,2-Dichloroethane        | 35171                                  | 101623      | 0.05   | 5.00      | 40002.4       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 23.0          | 156-60-5        | N/A                          | or-rat 1235mg/kg  |
| 21. Methylene chloride              | 35171                                  | 101623      | 0.05   | 5.00      | 40002.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 75-09-2         | 500 ppm                      | or-rat 820mg/kg   |
| 22. 1,1-Dichloroethene              | 32251                                  | 102023      | 0.10   | 10.00     | 20001.6       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.6       | 22.9          | 75-35-4         | 1 ppm (4mg/m3/8H)            | or-rat 200mg/kg   |
| 23. Bromoform                       | 95321                                  | 020724      | 0.10   | 10.00     | 20003.2       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.5          | 75-25-2         | 0.5 ppm (5mg/m3) (skin)      | or-rat 930mg/kg   |
| 24. Carbon tetrachloride            | 95321                                  | 020724      | 0.10   | 10.00     | 20003.4       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.4          | 56-23-5         | 2 ppm (12.6mg/m3/8H)         | or-rat 2350mg/kg  |
| 25. Chloroform                      | 95321                                  | 020724      | 0.10   | 10.00     | 20024.0       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 2001.9       | 20.5          | 67-66-3         | 50 ppm (240mg/m3) (CL)       | or-rat 900mg/kg   |
| 26. Dibromomethane                  | 95321                                  | 020724      | 0.10   | 10.00     | 20002.9       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.5          | 74-85-3         | N/A                          | or-rat 105mg/kg   |
| 27. 1,1-Dichloroethane              | 95321                                  | 020724      | 0.10   | 10.00     | 20003.4       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.5          | 75-34-3         | N/A                          | or-rat 108mg/kg   |
| 28. 2,2-Dichloropropane             | 95321                                  | 020724      | 0.10   | 10.00     | 20003.4       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.4          | 594-20-7        | 100 ppm                      | or-rat 725mg/kg   |
| 29. Tetrachloroethane               | 95321                                  | 020724      | 0.10   | 10.00     | 20201.1       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 1999.8       | 20.4          | 584-20-7        | N/A                          | N/A               |
| 30. 1,1,1-Trichloroethane           | 95321                                  | 020724      | 0.10   | 10.00     | 20003.0       | 2000          | NA     | NA          | 0.042        | NA        | NA        | 2019.6       | 20.8          | 127-18-4        | 25 ppm (170mg/m3/8H) (final) | or-rat 2629mg/kg  |
| 31. 1,2-Dibromo-3-chloropropane     | 35161                                  | 112322      | 0.05   | 5.00      | 40016.5       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 20.5          | 71-55-6         | 350 ppm (1900mg/m3/8H)       | or-rat 10300mg/kg |
| 32. 1,2-Dibromomethane              | 35161                                  | 112322      | 0.05   | 5.00      | 40024.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.3       | 22.9          | 96-12-6         | 0.001 ppm                    | or-rat 170mg/kg   |
| 33. 1,2-Dichloroethane              | 35161                                  | 112322      | 0.05   | 5.00      | 40018.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.4       | 22.9          | 106-93-4        | 20 ppm (8H)                  | or-rat 108mg/kg   |
| 34. 1,2-Dichloropropane             | 35161                                  | 112322      | 0.05   | 5.00      | 40051.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.2       | 22.9          | 107-08-2        | 50 ppm (8H)                  | or-rat 870mg/kg   |
| 35. 1,3-Dichloropropane             | 35161                                  | 112322      | 0.05   | 5.00      | 40005.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.2       | 22.9          | 78-57-5         | 75 ppm (350mg/m3/8H)         | or-rat 1947mg/kg  |
| 36. 1,1-Dichloropropane             | 35161                                  | 112322      | 0.05   | 5.00      | 40012.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 142-28-9        | N/A                          | un-rat 3600mg/kg  |
| 37. cis-1,3-Dichloropropene         | 35161                                  | 112322      | 0.05   | 5.00      | 40010.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.1       | 29.7          | 563-56-6        | N/A                          | N/A               |
| 38. trans-1,3-Dichloropropene       | 35161                                  | 112322      | 0.05   | 5.00      | 40017.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.0       | 23.0          | 10061-01-5      | N/A                          | N/A               |
| 39. Hexachloro-1,3-butadiene        | 35161                                  | 112322      | 0.05   | 5.00      | 40021.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.6       | 29.7          | 87-68-3         | 0.02 ppm (0.24mg/m3/8H)      | or-rat 82mg/kg    |
| 40. 1,1,1,2-Tetrachloroethane       | 35161                                  | 112322      | 0.05   | 5.00      | 40011.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.1       | 22.9          | 630-20-6        | N/A                          | or-rat 670mg/kg   |
| 41. 1,1,2,2-Tetrachloroethane       | 35161                                  | 112322      | 0.05   | 5.00      | 40007.5       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.9       | 22.9          | 79-34-5         | 5 ppm (35mg/m3/8H) (skin)    | or-rat 800mg/kg   |
| 42. 1,1,2-Trichloroethane           | 35161                                  | 112322      | 0.05   | 5.00      | 40006.6       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 23.0          | 79-00-5         | 10 ppm (46mg/m3/8H) (skin)   | or-rat 636mg/kg   |
| 43. Trichloroethene                 | 35161                                  | 112322      | 0.05   | 5.00      | 40029.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 2000.9       | 22.9          | 79-01-6         | 50 ppm (270mg/m3/8H)         | or-rat 2400mg/kg  |
| 44. 1,2,3-Trichloropropane          | 35161                                  | 112322      | 0.05   | 5.00      | 40007.5       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.9       | 22.9          | 96-18-4         | 10 ppm (50mg/m3/8H)          | or-rat 149.6mg/kg |
| 45. Benzene                         | 35162                                  | 050823      | 0.05   | 5.00      | 40005.0       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 71-43-2         | 1 ppm                        | or-rat 4694mg/kg  |
| 46. Bromobenzene                    | 35162                                  | 050823      | 0.05   | 5.00      | 40006.9       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 104-51-8        | N/A                          | or-rat 2699mg/kg  |
| 47. n-Butyl benzene                 | 35162                                  | 050823      | 0.05   | 5.00      | 40003.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 100-41-4        | 100 ppm (435mg/m3/8H)        | or-rat >2000mg/kg |
| 48. Ethyl benzene                   | 35162                                  | 050823      | 0.05   | 5.00      | 40004.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 99-87-6         | N/A                          | or-rat 4750mg/kg  |
| 49. p-Isopropyl toluene             | 35162                                  | 050823      | 0.05   | 5.00      | 40005.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 91-20-3         | 10 ppm (50mg/m3/8H)          | or-rat 490mg/kg   |
| 50. Naphthalene                     | 35162                                  | 050823      | 0.05   | 5.00      | 40006.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 100-42-5        | 100 ppm                      | or-rat 5000mg/kg  |
| 51. Styrene                         | 35162                                  | 050823      | 0.05   | 5.00      | 40006.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 108-98-3        | 200 ppm                      | or-rat 5000mg/kg  |
| 52. Toluene                         | 35162                                  | 050823      | 0.05   | 5.00      | 40003.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 87-61-6         | N/A                          | or-rat 1390mg/kg  |
| 53. 1,2,3-Trichlorobenzene          | 35162                                  | 050823      | 0.05   | 5.00      | 40003.1       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 120-82-1        | 5 ppm (CL) (40mg/m3)         | or-rat 750mg/kg   |
| 54. 1,2,4-Trichlorobenzene          | 35162                                  | 050823      | 0.05   | 5.00      | 40006.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 23.0          | 95-63-6         | N/A                          | or-rat 5g/kg      |
| 55. 1,2,4-Trimethylbenzene          | 35162                                  | 050823      | 0.05   | 5.00      | 40001.6       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 106-57-8        | N/A                          | or-rat 5000mg/kg  |
| 56. 1,3,5-Trimethylbenzene          | 35162                                  | 050823      | 0.05   | 5.00      | 40006.7       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 108-38-3        | 100 ppm (435mg/m3/8H)        | or-rat 5g/kg      |
| 57. m-Xylene                        | 35162                                  | 050823      | 0.05   | 5.00      | 40005.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.8       | 22.9          | 98-06-6         | N/A                          | N/A               |
| 58. tert-Butyl benzene              | 35163                                  | 101923      | 0.05   | 5.00      | 40001.2       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 135-98-8        | N/A                          | or-rat 2240mg/kg  |
| 59. sec-Butyl benzene               | 35163                                  | 101923      | 0.05   | 5.00      | 40002.4       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 22.9          | 108-90-7        | 75 ppm (350mg/m3/8H)         | or-rat 2290mg/kg  |
| 60. Chlorobenzene                   | 35163                                  | 101923      | 0.05   | 5.00      | 40003.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.5       | 22.9          | 95-49-8         | 50 ppm (250mg/m3/8H)         | or-rat 3900mg/kg  |
| 61. 2-Chlorotoluene                 | 35163                                  | 101923      | 0.05   | 5.00      | 40003.3       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 106-43-4        | N/A                          | or-rat 2100mg/kg  |
| 62. 4-Chlorotoluene                 | 35163                                  | 101923      | 0.05   | 5.00      | 40003.3       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.7       | 22.9          | 541-73-1        | 50 ppm (300mg/m3) (CL)       | or-rat 500mg/kg   |
| 63. 1,2-Dichlorobenzene             | 35163                                  | 101923      | 0.05   | 5.00      | 40003.8       | 2000          | NA     | NA          | 0.017        | NA        | NA        | 1999.6       | 23.0          | 96-46-7         | 75 ppm (450mg/m3/8H)         | or-rat 900mg/kg   |
| 64. 1,3-Dichlorobenzene             | 35163                                  | 101923      | 0.05   | 5.00      | 40001.7       | 2000          | NA     | NA          | 0.017        | NA        |           |              |               |                 |                              |                   |



Run 16, "P95317 L021624 [2000µg/mL in MeOH]"

Run Length: 60.00 min, 35998 points at 10 points/second.  
Created: Sat, Feb 17, 2024 at 8:56:46 AM.  
Sampled: Sequence "021624-GC5M1", Method "GC5-M1".  
Analyzed using Method "GC5-M1".

**Comments**  
GC5-M1 Analysis by Candice Warren  
Column ID SPB-Vocol 105 meter X 0.53mm X 3.0µm film thickness  
Flow rates: Total flow=290mL/min., Helium (carrier)=10mL/min.,  
Helium(make-up)=10mL/min., Hydrogen(make-up)=40mL/min., Air(make-up)=230mL/min.  
Oven Profile: Temp. 1=35°C (Time 1=10 min.), Temp 2=200°C (Time 2=8.75 min.),  
Rate = 4°C/min., Total run time=60 min. Injector temp.=200°C, FID Temp.=200°C.  
FID Signal = Edaq Channel 1  
Standard injection = 0.5µL, Range=3



| Peak # | Name   | FID RT (min.) |
|--------|--|---------------|
| 1      | Ether  | 9.97          |
| 2      | 1,1,2-Trichloro-1,2,2-trifluoroethane        | 10.33         |
| 3      | 1,1-Dichloroethane                           | 11.10         |
| 4      | Acetonitrile                                 | 12.00         |
| 5      | Iodomethane                                  | 12.31         |
| 6      | Allyl chloride                               | 12.56         |
| 7      | Carbon disulfide/Methylene chloride          | 13.04         |
| 8      | trans-1,2-Dichloroethane                     | 14.07         |
| 9      | 1,1-Dichloroethane                           | 15.74         |
| 10     | 2,2-Dichloropropane                          | 17.24         |
| 11     | cis-1,2-Dichloroethane                       | 18.00         |
| 12     | Methacrylonitrile/methyl acrylate/Chloroform | 18.46         |
| 13     | Isobutane/1,1,1-Trichloroethane              | 19.01         |
| 14     | 1,1-Dichloropropane                          | 20.46         |
| 15     | Carbon tetrachloride                         | 20.79         |
| 16     | Benzene/1,2-Dichloroethane                   | 21.49         |
| 17     | Trichloroethane                              | 23.58         |
| 18     | 1,2-Dichloropropane                          | 24.38         |
| 19     | Methyl methacrylate                          | 24.52         |
| 20     | Bromochloromethane                           | 25.13         |
| 21     | Dibromomethane/2-Hitropropane                | 25.46         |
| 22     | cis-1,3-Dichloropropane                      | 27.02         |
| 23     | Toluene                                      | 28.05         |
| 24     | Ethyl methacrylate/trans-1,3-Dichloropropane | 28.73         |
| 25     | 1,1,2-Trichloroethane                        | 29.34         |
| 26     | Tetrachloroethene/1,3-Dichloropropane        | 30.24         |
| 27     | Dibromochloromethane                         | 31.16         |
| 28     | 1,2-Dibromomethane                           | 31.84         |
| 29     | Chlorobenzene                                | 33.26         |
| 30     | Ethylbenzene/1,1,1,2-Tetrachloroethane       | 33.40         |
| 31     | m-Xylene/p-Xylene                            | 33.66         |
| 32     | o-Xylene                                     | 35.22         |
| 33     | Styrene                                      | 35.39         |
| 34     | Isopropylbenzene/Bromoforn                   | 36.18         |
| 35     | cis-1,4-Dichloro-3-butene                    | 36.48         |
| 36     | 1,1,2,2-Tetrachloroethane                    | 37.23         |
| 37     | 1,2,3-Trichloropropane                       | 37.77         |
| 38     | n-Propylbenzene                              | 37.93         |
| 39     | trans-1,4-Dichloro-3-butene                  | 38.05         |
| 40     | Bromobenzene                                 | 38.14         |
| 41     | 1,3,5-Trimethylbenzene                       | 38.80         |
| 42     | 2-Chlorotoluene                              | 38.82         |
| 43     | 4-Chlorotoluene                              | 38.77         |
| 44     | tert-Butylbenzene                            | 39.74         |
| 45     | 1,2,4-Trimethylbenzene                       | 39.91         |
| 46     | Pentachloroethane                            | 40.17         |
| 47     | sec-Butylbenzene                             | 40.52         |
| 48     | p-Isopropyltoluene                           | 41.02         |
| 49     | 1,3-Dichlorobenzene                          | 41.42         |
| 50     | 1,4-Dichlorobenzene                          | 41.83         |
| 51     | n-Butylbenzene                               | 42.53         |
| 52     | 1,2-Dichlorobenzene                          | 43.18         |
| 53     | 1,2-Dibromo-3-chloropropane                  | 46.12         |
| 54     | Nitrobenzene                                 | 46.46         |
| 55     | 1,2,4-Trichlorobenzene                       | 49.26         |
| 56     | Hexachlorobutadiene                          | 49.72         |
| 57     | Naphthalene                                  | 50.26         |
| 58     | 1,2,3-Trichlorobenzene                       | 51.16         |

## Safety Data Sheet (SDS)

GHS/OSHA Compliant

## Section I Product and Company Identification

## IDENTITY ANALYTICAL STANDARD DISSOLVED IN METHANOL

|                     |                                     |                                   |                 |
|---------------------|-------------------------------------|-----------------------------------|-----------------|
| Manufacturer's Name | ABSOLUTE STANDARDS INC              | Emergency Telephone USA & CANADA  | 1-800-535-5053  |
| Address             | 44 Rossotto Dr.<br>Hamden CT, 06514 | Emergency Telephone International | 1-352-323-3500  |
|                     |                                     | Date Prepared/Revised             | January 1, 2023 |

## Section II - Hazards Identification

## GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

|          |                                      |                |   |
|----------|--------------------------------------|----------------|---|
| H225     | Highly Flammable Liquid and Vapor    | H301, 311, 331 | Toxic if swallowed, skin contact, inhaled     |
| H370     | Cause damage to organs               | H351           | Suspected of causing cancer                   |
| P271     | Use in ventilated area               | P280           | Use gloves, eye protection/face shield        |
| P302,332 | If on skin, wash with soap and water | P305,351,338   | If in eyes, remove contacts, rinse with water |



Signal Word: DANGER

## Section III - Composition

|   |                |               |              |
|---|----------------|---------------|--------------|
| Components (Specific Chemical Identity; Common Name(s)) |                |               | % (optional) |
| Methanol  | METHYL ALCOHOL | CAS#: 67-56-1 | > 97         |

See Certified Weight Report For Other Analytes Present At Trace Quantities.

INTENDED USE: REFERENCE MATERIAL

## Section IV. FIRST AID MEASURES

|                         |   |
|-------------------------|---|
| General advice          | Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.            |
| If inhaled              | If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician. |
| In case of skin contact | Wash with soap and water. Consult a physician.  |
| In case of eye contact  | Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.                      |
| If swallowed            | Do NOT induce vomiting. Rinse mouth with water. Consult a physician.  |

## Section V. FIREFIGHTING MEASURES

|                               |   |
|-------------------------------|---|
| Flammability                  | Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking. |
| Suitable extinguishing media  | Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  |
| Protective equipment for fire | Wear self contained breathing apparatus for fire fighting if necessary.   |

## Section VI. ACCIDENTAL RELEASE MEASURES

|                           |   |
|---------------------------|---|
| Personal precautions      | Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations. |
| Environmental precautions | Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  |
| Clean up                  | Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).   |

## Section VII. HANDLING AND STORAGE

|                               |  |
|-------------------------------|--|
| Precautions for safe handling | Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  |
| Storage Conditions            | Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge. Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage. |

## Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

|   |  |
|---|--|
| Methanol  | 67-56-1 TWA 200 ppm  |
| Skin notation   | TWA 200 ppm  |
| Potential for skin absorption, ingestion and inhalation.                                      |  |
| Personal protective equipment   | Respiratory protection. Handle with gloves. Gloves must be inspected prior to use. Eye protection. |
| Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product. |  |

## Section IX - Physical/Chemical Characteristics

|                         |   |   |       |
|-------------------------|---|---|-------|
| Boiling Point           | 65°C  | Specific Gravity (H <sub>2</sub> O = 1) | 0.79  |
| Vapor Pressure (mm Hg)  | 96  | Melting Point                           | -98°C |
| Vapor Density (AIR = 1) | 1.11  | Evaporation rate<br>(Butyl Acetate = 1) | 4.6   |
| Solubility in Water     | COMPLETE  |   |       |
| Appearance and Odor     | CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR. |   |       |

**Section X. STABILITY AND REACTIVITY**

|  |  |
|--|--|
| Chemical stability   | Stable under recommended storage conditions.   |
| Possibility of hazardous reactions                             | Vapours may form explosive mixture with air.   |
| Conditions to avoid  | Heat, flames, sparks, extreme temperature and sunlight.                                  |
| Materials to avoid   | Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids |
| Hazardous decomposition products formed under fire conditions. | - Carbon oxides  |

**Section XI. TOXICOLOGICAL INFORMATION**

LD50 Oral - rat - 5,628 mg/kg  
LC50 Inhalation - rat - 4 h - 64000 ppm  
LD50 Dermal - rabbit - 15,800 mg/kg  
Toxic if absorbed through skin. Causes skin irritation.  
Eye damage/eye irritation  
Toxic if inhaled. Causes respiratory tract irritation.  
Toxic if swallowed.

**Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.**

LC50 15,400 mg/l - 96 h  
EC50 24,500.00 mg/l - 48 h  
EC100 10,000.00 mg/l - 24 h

**Section XIII. DISPOSAL CONSIDERATIONS**

Dispose with normal Laboratory Solvent Waste.

**Section XIV. TRANSPORT INFORMATION**

|  |  |
|--|--|
| DOT (US)                                   | IATA                                       |
| UN number: 1230 Class: 3 Packing group: II | UN number: 1230 Class: 3 Packing group: II |
| Proper shipping name: Methanol             | Proper shipping name: Methanol             |

**Section XV. REGULATORY INFORMATION**

OSHA Hazards Flammable liquid, Target Organ Effect, Toxic by inhalation., Toxic by ingestion, Toxic by skin absorption, Irritant  
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

**Section XVI. Misc. INFORMATION**

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.



CERTIFIED WEIGHT REPORT

Part Number:  
Lot Number:  
Description:

95319  
032922  
Revised Additions Mix  
11 components

Solvent(s):  
Methanol  
Lot#  
EC592-US

Expiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test ID#:

032925  
Refrigerate (4 °C)  
Varied  
6UTB


Weight(s) shown below were combined and diluted to (mL):

5E-05 Balance Uncertainty  
0.012 Flask Uncertainty

|                |                  |
|----------------|------------------|
|                |                  |
| Formulated By: | Prashant Chauhan |
| DATE 032922    |                  |
|                |                  |
| Reviewed By:   | Pedro L. Rentas  |
| DATE 032922    |                  |

| Compound                          | RM#  | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty | Target Weight (µg) | Actual Weight (g) | Actual Conc (µg/mL) | Expanded Uncertainty (+/-) (µg/mL) | SDS Information                        |   |
|-----------------------------------|------|------------|----------------------|------------|-------------|--------------------|-------------------|---------------------|------------------------------------|--|---|
|                                   |      |            |                      |            |             |                    |                   |                     |                                    | (Solvent Safety Info. On Attached pg.) | OSHA PEL (TWA) LD50                         |
| 1. Acrylonitrile                  | 7    | 4718CK     | 10000                | 99         | 0.2         | 1.01015            | 1.01030           | 10001.5             | 40.5                               | 107-13-1                               | N/A orl-rat 78 mg/kg                        |
| 2. 1-Chlorobutane                 | 1072 | MKCM5711   | 2000                 | 99.99      | 0.2         | 0.20003            | 0.20020           | 2001.7              | 8.1                                | 109-69-3                               | N/A orl-rat 2870mg/kg                       |
| 3. Cyclohexane                    | 1023 | 28930      | 2000                 | 99         | 0.2         | 0.20203            | 0.20215           | 2001.2              | 8.2                                | 110-82-7                               | 300 ppm (1050mg/m3/8H) orl-rat 12705mg/kg   |
| 4. Di-Isopropyl ether (DIPE)      | 987  | 00412MX    | 2000                 | 99         | 0.2         | 0.20203            | 0.20215           | 2001.2              | 8.2                                | 109-20-3                               | 500 ppm (2100mg/m3/8H) orl-rat 8470mg/kg    |
| 5. 1,4-Dioxane                    | 373  | 03853KE    | 40000                | 99         | 0.2         | 4.04060            | 4.04100           | 40004.0             | 161.9                              | 123-91-1                               | 25 ppm (90mg/m3/8H)(skin) orl-mus 5700mg/kg |
| 6. Hexachloroethane               | 199  | 12604HBV   | 2000                 | 99         | 0.2         | 0.20203            | 0.20213           | 2001.0              | 8.2                                | 67-72-1                                | 1 ppm (10mg/m3/8H)(skin) orl-gpg 4970mg/kg  |
| 7. Methylcyclohexane              | 1627 | 08046KN    | 2000                 | 99         | 0.2         | 0.20203            | 0.20215           | 2001.2              | 8.2                                | 108-87-2                               | N/A   |
| 8. Methyl tert-butyl ether (MTBE) | 209  | 02197LJ    | 2000                 | 99.8       | 0.2         | 0.20041            | 0.20055           | 2001.4              | 8.1                                | 1634-04-4                              | N/A orl-rat 4g/kg                           |
| 9. Propionitrile                  | 349  | 1395468    | 20000                | 99         | 0.2         | 2.02030            | 2.02045           | 20001.5             | 81.0                               | 107-12-0                               | N/A orl-rat 38mg/kg                         |
| 10. Tetrahydrofuran               | 380  | SHBH8330   | 10000                | 99.9       | 0.2         | 1.00105            | 1.00120           | 10001.5             | 40.1                               | 109-99-9                               | 20 ppm (590mg/m3/8H) orl-rat 1650mg/kg      |
| 11. 1,2,3,4-Tetramethylbenzene    | 491  | AP01       | 2000                 | 93         | 0.2         | 0.21506            | 0.21520           | 2001.3              | 8.7                                | 488-23-3                               | N/A orl-rat 6408mg/kg                       |

TIC: 95319.D

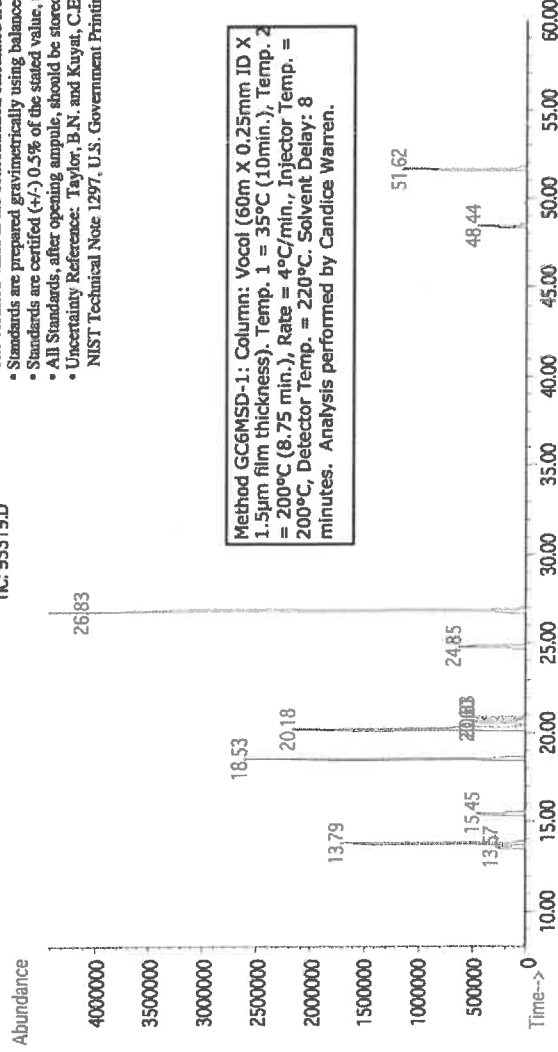

| Name                           | MSD RT (min.) |
|--------------------------------|---------------|
| Methyl tert-butyl ether (MTBE) | 13.56         |
| Acrylonitrile                  | 13.79         |
| Di-isopropyl ether             | 15.44         |
| Propionitrile                  | 18.53         |
| Tetrahydrofuran                | 20.17         |
| Cyclohexane                    | 20.58         |
| 1-Chlorobutane                 | 20.83         |
| Methylcyclohexane              | 24.84         |
| 1,4-Dioxane                    | 26.84         |
| Hexachloroethane               | 48.44         |
| 1,2,3,4-Tetramethylbenzene     | 51.62         |

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.  
\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).  
\* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.  
\* All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.  
\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



Safety Data Sheet (SDS)  
GHS/OSHA Compliant

## Section I Product and Company Identification

## IDENTITY ANALYTICAL STANDARD DISSOLVED IN METHANOL

|                     |                                     |                                   |                 |
|---------------------|-------------------------------------|-----------------------------------|-----------------|
| Manufacturer's Name | ABSOLUTE STANDARDS INC              | Emergency Telephone USA & CANADA  | 1-800-535-5053  |
| Address             | 44 Rossotto Dr.<br>Hamden CT, 06514 | Emergency Telephone International | 1-352-323-3500  |
|                     |                                     | Date Prepared/Revised             | January 1, 2023 |

## Section II - Hazards Identification

## GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

|          |                                      |                |   |
|----------|--------------------------------------|----------------|---|
| H225     | Highly Flammable Liquid and Vapor    | H301, 311, 331 | Toxic if swallowed, skin contact, inhaled     |
| H370     | Cause damage to organs               | H351           | Suspected of causing cancer                   |
| P271     | Use in ventilated area               | P280           | Use gloves, eye protection/face shield        |
| P302,332 | If on skin, wash with soap and water | P305,351,338   | If in eyes, remove contacts, rinse with water |

Signal Word: DANGER

## Section III - Composition

|             |         |                 |          |              |
|-------------|---------|-----------------|----------|--------------|
| Components: | CAS#:   | LD50 Oral - Rat | OSHA PEL | % (optional) |
| Methanol    | 67-56-1 | 2,769 mg/kg     | 200 ppm  | > 99         |

See Certified Weight Report For Other Analytes Present At Trace Quantities.  
INTENDED USE: REFERENCE MATERIAL

## Section IV. FIRST AID MEASURES

**General advice**  
If inhaled  
If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.  
Wash with soap and water. Consult a physician.  
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.  
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

## Section V. FIREFIGHTING MEASURES

**Flammability**  
Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  
Wear self contained breathing apparatus for fire fighting if necessary.

## Section VI. ACCIDENTAL RELEASE MEASURES

**Personal precautions**  
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.  
**Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).  
Clean up

## Section VII. HANDLING AND STORAGE

**Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.  
**Storage Conditions**  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

## Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

**Methanol**  
67-56-1 TWA 200 ppm  
TWA 200 ppm  
Skin notation  
Potential for skin absorption, ingestion and inhalation.  
Personal protective equipment Respiratory protection Handle with gloves. Gloves must be inspected prior to use. Eye protection.  
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

## Section IX - Physical/Chemical Characteristics

| Section X. STABILITY AND REACTIVITY                       |      |   |       |
|---|------|---|-------|
| Appearance and Odor                                       |      |   |       |
| CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR. |      |   |       |
| Solubility in Water                                       |      |   |       |
| COMPLETE  |      |   |       |
| Vapor Density (AIR = 1)                                   | 1.11 | Evaporation rate<br>(Butyl Acetate = 1) | 4.6   |
| Vapor Pressure (mm Hg)                                    | 96   | Melting Point                           | -98°C |
| Boiling Point   | 65°C | Specific Gravity (H <sub>2</sub> O = 1) | 0.79  |

Chemical stability  
Stable under recommended storage conditions.  
Possibility of hazardous reactions  
Vapours may form explosive mixture with air.  
Conditions to avoid  
Heat, flames, sparks, extreme temperature and sunlight.  
Materials to avoid  
Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids  
Hazardous decomposition products formed under fire conditions. - Carbon oxides

#### Section XI. TOXICOLOGICAL INFORMATION

LD50 Oral - rat - 5,628 mg/kg  
LC50 Inhalation - rat - 4 h - 6400 ppm  
LD50 Dermal - rabbit - 15,800 mg/kg  
Toxic if absorbed through skin. Causes skin irritation.  
Eye damage/eye irritation  
Toxic if inhaled. Causes respiratory tract irritation.  
Toxic if swallowed.

#### Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.

LC50 15,400 mg/l - 96 h  
EC50 24,500.00 mg/l - 48 h  
EC100 10,000.00 mg/l - 24 h

#### Section XIII. DISPOSAL CONSIDERATIONS

Dispose with normal Laboratory Solvent Waste.

#### Section XIV. TRANSPORT INFORMATION

DOT (US)  
UN number: 1280 Class: 3 Packing group: II  
Proper shipping name: Methanol  
ATA  
UN number: 1280 Class: 3 Packing group: II  
Proper shipping name: Methanol

#### Section XV. REGULATORY INFORMATION

OSHA Hazards  
Flammable liquid, Target Organ Effect, Toxic by inhalation, Toxic by ingestion, Toxic by skin absorption, Irritant  
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

#### Section XVI. Misc. INFORMATION

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other chemicals or substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.



CERTIFIED WEIGHT REPORT

Part Number:  
Lot Number:  
Description:

95319  
032922  
Revised Additions Mix  
11 components

Solvent(s):  
Methanol  
Lot#  
EC592-US

Expiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test ID#:

032925  
Refrigerate (4 °C)  
Varied  
6UTB


Weight(s) shown below were combined and diluted to (mL):

5E-05 Balance Uncertainty  
0.012 Flask Uncertainty

|                                 |  |        |
|---------------------------------|--|--------|
| Formulated By: Prashant Chauhan |  | 032922 |
| Reviewed By: Pedro L. Rentas    |  | 032922 |

| Compound                          | RM#  | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty | Target Weight (g) | Actual Weight (g) | Actual Conc (µg/mL) | Expanded Uncertainty (+/-) (µg/mL) | SDS Information                        |   |
|-----------------------------------|------|------------|----------------------|------------|-------------|-------------------|-------------------|---------------------|------------------------------------|--|---|
|                                   |      |            |                      |            |             |                   |                   |                     |                                    | (Solvent Safety Info. On Attached pg.) | OSHA PEL (TWA) LD50                         |
| 1. Acrylonitrile                  | 7    | 4718CK     | 10000                | 99         | 0.2         | 1.01015           | 1.01030           | 10001.5             | 40.5                               | 107-13-1                               | N/A orl-rat 78 mg/kg                        |
| 2. 1-Chlorobutane                 | 1072 | MKCM5711   | 2000                 | 99.99      | 0.2         | 0.20003           | 0.20020           | 2001.7              | 8.1                                | 109-69-3                               | N/A orl-rat 2870mg/kg                       |
| 3. Cyclohexane                    | 1023 | 28930      | 2000                 | 99         | 0.2         | 0.20203           | 0.20215           | 2001.2              | 8.2                                | 110-82-7                               | 300 ppm (1050mg/m3/8H) orl-rat 12705mg/kg   |
| 4. Di-Isopropyl ether (DIPE)      | 987  | 00412MX    | 2000                 | 99         | 0.2         | 0.20203           | 0.20215           | 2001.2              | 8.2                                | 109-20-3                               | 500 ppm (2100mg/m3/8H) orl-rat 8470mg/kg    |
| 5. 1,4-Dioxane                    | 373  | 03853KE    | 40000                | 99         | 0.2         | 4.04060           | 4.04100           | 40004.0             | 161.9                              | 123-91-1                               | 25 ppm (90mg/m3/8H)(skin) orl-mus 5700mg/kg |
| 6. Hexachloroethane               | 199  | 12604HBV   | 2000                 | 99         | 0.2         | 0.20203           | 0.20213           | 2001.0              | 8.2                                | 67-72-1                                | 1 ppm (10mg/m3/8H)(skin) orl-gpg 4970mg/kg  |
| 7. Methylcyclohexane              | 1627 | 08046KN    | 2000                 | 99         | 0.2         | 0.20203           | 0.20215           | 2001.2              | 8.2                                | 108-87-2                               | N/A   |
| 8. Methyl tert-butyl ether (MTBE) | 209  | 02197LJ    | 2000                 | 99.8       | 0.2         | 0.20041           | 0.20055           | 2001.4              | 8.1                                | 1634-04-4                              | N/A orl-rat 4g/kg                           |
| 9. Propionitrile                  | 349  | 1395468    | 20000                | 99         | 0.2         | 2.02030           | 2.02045           | 20001.5             | 81.0                               | 107-12-0                               | N/A orl-rat 38mg/kg                         |
| 10. Tetrahydrofuran               | 380  | SHBH8330   | 10000                | 99.9       | 0.2         | 1.00105           | 1.00120           | 10001.5             | 40.1                               | 109-99-9                               | 20 ppm (590mg/m3/8H) orl-rat 1650mg/kg      |
| 11. 1,2,3,4-Tetramethylbenzene    | 491  | AP01       | 2000                 | 93         | 0.2         | 0.21506           | 0.21520           | 2001.3              | 8.7                                | 488-23-3                               | N/A orl-rat 6408mg/kg                       |

TIC: 95319.D

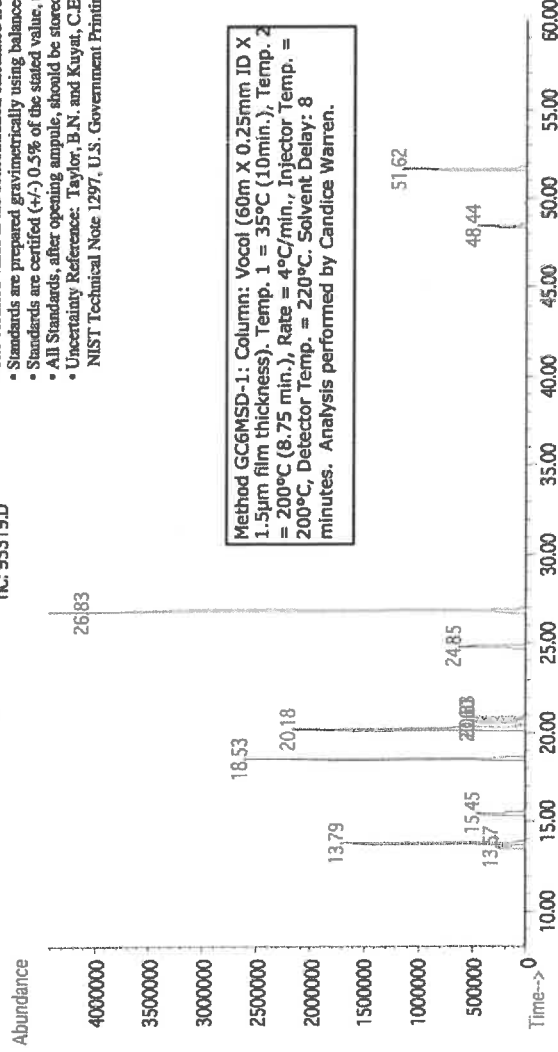

| Name                           | MSD RT (min.) |
|--------------------------------|---------------|
| Methyl tert-butyl ether (MTBE) | 13.56         |
| Acrylonitrile                  | 13.79         |
| Di-isopropyl ether             | 15.44         |
| Propionitrile                  | 18.53         |
| Tetrahydrofuran                | 20.17         |
| Cyclohexane                    | 20.58         |
| 1-Chlorobutane                 | 20.83         |
| Methylcyclohexane              | 24.84         |
| 1,4-Dioxane                    | 26.84         |
| Hexachloroethane               | 48.44         |
| 1,2,3,4-Tetramethylbenzene     | 51.62         |





Safety Data Sheet (SDS)  
GHS/OSHA Compliant

## Section I Product and Company Identification

## IDENTITY ANALYTICAL STANDARD DISSOLVED IN METHANOL

|                     |                                     |                                   |                 |
|---------------------|-------------------------------------|-----------------------------------|-----------------|
| Manufacturer's Name | ABSOLUTE STANDARDS INC              | Emergency Telephone USA & CANADA  | 1-800-535-5053  |
| Address             | 44 Rossotto Dr.<br>Hamden CT, 06514 | Emergency Telephone International | 1-352-323-3500  |
|                     |                                     | Date Prepared/Revised             | January 1, 2023 |

## Section II - Hazards Identification

## GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

|          |                                      |                |   |
|----------|--------------------------------------|----------------|---|
| H225     | Highly Flammable Liquid and Vapor    | H301, 311, 331 | Toxic if swallowed, skin contact, inhaled     |
| H370     | Cause damage to organs               | H351           | Suspected of causing cancer                   |
| P271     | Use in ventilated area               | P280           | Use gloves, eye protection/face shield        |
| P302,332 | If on skin, wash with soap and water | P305,351,338   | If in eyes, remove contacts, rinse with water |

Signal Word: DANGER

## Section III - Composition

|             |         |                 |          |              |
|-------------|---------|-----------------|----------|--------------|
| Components: | CAS#:   | LD50 Oral - Rat | OSHA PEL | % (optional) |
| Methanol    | 67-56-1 | 2,769 mg/kg     | 200 ppm  | > 99         |

See Certified Weight Report For Other Analytes Present At Trace Quantities.  
INTENDED USE: REFERENCE MATERIAL

## Section IV. FIRST AID MEASURES

**General advice**  
If inhaled  
If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.  
Wash with soap and water. Consult a physician.  
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.  
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

## Section V. FIREFIGHTING MEASURES

**Flammability**  
Suitable extinguishing media  
Protective equipment for fire  
Flammable in the presence of a source of ignition when the temperature is above the flash point. Keep away from heat/sparks/open flame/hot surface. No smoking.  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  
Wear self contained breathing apparatus for fire fighting if necessary.

## Section VI. ACCIDENTAL RELEASE MEASURES

**Personal precautions**  
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.  
**Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).  
Clean up

## Section VII. HANDLING AND STORAGE

**Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
**Storage Conditions**

## Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

**Methanol**  
67-56-1 TWA 200 ppm  
Skin notation  
TWA 200 ppm  
Potential for skin absorption, ingestion and inhalation.  
Personal protective equipment  
Respiratory protection  
Handle with gloves. Gloves must be inspected prior to use. Eye protection.  
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

## Section IX - Physical/Chemical Characteristics

| Section X. STABILITY AND REACTIVITY                       |      |   |       |
|---|------|---|-------|
| Appearance and Odor                                       |      |   |       |
| CLEAR, COLORLESS LIQUID WITH CHARACTERISTIC PUNGENT ODOR. |      |   |       |
| Solubility in Water                                       |      |   |       |
| COMPLETE  |      |   |       |
| Vapor Density (AIR = 1)                                   | 1.11 | Evaporation rate (Butyl Acetate = 1)    | 4.6   |
| Vapor Pressure (mm Hg)                                    | 96   | Melting Point                           | -98°C |
| Boiling Point   | 65°C | Specific Gravity (H <sub>2</sub> O = 1) | 0.79  |

Chemical stability  
Stable under recommended storage conditions.  
Possibility of hazardous reactions  
Vapours may form explosive mixture with air.  
Conditions to avoid  
Heat, flames, sparks, extreme temperature and sunlight.  
Materials to avoid  
Acid chlorides, Acid anhydrides, Oxidizing agents, Alkali metals, Reducing agents, Acids  
Hazardous decomposition products formed under fire conditions. - Carbon oxides

#### Section XI. TOXICOLOGICAL INFORMATION

LD50 Oral - rat - 5,628 mg/kg  
LC50 Inhalation - rat - 4 h - 6400 ppm  
LD50 Dermal - rabbit - 15,800 mg/kg  
Toxic if absorbed through skin. Causes skin irritation.  
Eye damage/eye irritation  
Toxic if inhaled. Causes respiratory tract irritation.  
Toxic if swallowed.

#### Section XII. ECOLOGICAL INFORMATION FOR REPORTABLE QUANTITY OF 5000 lbs.

LC50 15,400 mg/l - 96 h  
EC50 24,500.00 mg/l - 48 h  
EC100 10,000.00 mg/l - 24 h

#### Section XIII. DISPOSAL CONSIDERATIONS

Dispose with normal Laboratory Solvent Waste.

#### Section XIV. TRANSPORT INFORMATION

DOT (US)  
UN number: 1280 Class: 3 Packing group: II  
Proper shipping name: Methanol  
ATA  
UN number: 1280 Class: 3 Packing group: II  
Proper shipping name: Methanol

#### Section XV. REGULATORY INFORMATION

OSHA Hazards  
Flammable liquid, Target Organ Effect, Toxic by inhalation, Toxic by ingestion, Toxic by skin absorption, Irritant  
SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

#### Section XVI. Misc. INFORMATION

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other chemicals or substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.



## Certified Reference Material CRM



## CERTIFIED WEIGHT REPORT

Part Number:  
Lot Number:  
Description:91980  
072423  
AcroleinSolvent(s):  
WaterLot#  
102422QExpiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test ID#:082423  
Refrigerate (4 °C)  
5000  
6UTB

Weight(s) shown below were combined and diluted to (mL):

5E-05 Balance Uncertainty  
0.001 Flask Uncertainty

|                |                 |        |      |
|----------------|-----------------|--------|------|
| Formulated By: | Gabriel Helland | 072423 | DATE |
| Reviewed By:   | Pedro L. Rentas | 072423 | DATE |

| Compound    | RM# | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty | Target Weight(g) | Actual Weight(g) | Actual Conc (µg/mL) | Expanded Uncertainty (+/-) (µg/mL) | SDS Information                        |         |
|-------------|-----|------------|----------------------|------------|-------------|------------------|------------------|---------------------|------------------------------------|--|---------|
|             |     |            |                      |            |             |                  |                  |                     |                                    | (Solvent Safety Info. On Attached pg.) | LD50    |
| 1. Acrolein | 5   | 103755R09M | 5000                 | 97.1       | 0.5         | 0.05160          | 0.05170          | 5009.2              | 52.5                               | 107-02-8                               | 0.1 ppm |

Method: GC6MSD-1, Detector: Mass Selective Detector (Scan mode). Column: Vocol (60m X 0.25mm ID X 1.5µm film thickness). Oven Profile: Temp. 1 = 35°C (Time 1 = 10min.), Temp. 2 = 200°C (Time 2 = 8.75 min.), Rate = 4°C/min., Injector Temp. = 250°C, Detector Temp. = 250°C. Analyst: Pedro Rentas. NOTE: Due to the instability of acrolein in solution, all solutions of acrolein, and any dilutions thereof, should be used immediately. Long term storage is not recommended. Please contact our technical department if further information is required.

TIC: [BSB2]79005.D

Abundance

Scan 232 (8.927 min): [BSB2]79005.D

Abundance  
27250000  
8.93

60000

200000

56

150000

40000

30000

100000

20000

50000

10000

Time--&gt;

10.00 15.00 20.00 25.00 30.00 35.00 40.00 45.00 50.00 55.00 60.00

m/z--&gt;

20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



**Safety Data Sheet (SDS)**

GHS/OSHA Compliant

**Section I Product and Company Identification**

**IDENTITY ANALYTICAL STANDARD DISSOLVED IN WATER**

Manufacturer's Name ABSOLUTE STANDARDS INC  
Address 44 Rossetto Dr.  
Hamden CT, 06514  
Emergency Telephone USA & CANADA  
Emergency Telephone International  
Date Prepared/Revised  
May 1, 2022  
1-800-535-5053  
1-352-323-3500

**Section II - Hazards Identification**

**P271**  
**P302,332**  
**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
**H315**  
**P280**  
**P305,351,338**  
**Signal Word: DANGER**  
**Use in ventilated area**  
**If on skin, wash with soap and water**  
**Causes skin and eye irritation.**  
**Use gloves, eye protection/face shield**  
**If in eyes, remove contacts, rinse with water**



**See Certified Weight Report For Other Analytes Present At Trace Quantities.**  
**INTENDED USE: REFERENCE MATERIAL**

**Section IV. FIRST AID MEASURES**

**General advice**  
**If inhaled**  
Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.  
**If case of skin contact**  
Wash with soap and water. Consult a physician.  
**In case of eye contact**  
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.  
**If swallowed**  
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

**Section V. FIREFIGHTING MEASURES**

**Subtle extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  
**Protective equipment for fire**  
Wear self contained breathing apparatus for fire fighting if necessary.  
**Hazardous Decomposition products**  
Carbon oxides

**Section VI. ACCIDENTAL RELEASE MEASURES**

**Personal precautions**  
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.  
**Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  
**Clean up**  
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

**Section VII. HANDLING AND STORAGE**

**Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
**Storage Conditions**  
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

**Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**Water**  
CAS#: 7732-18-5  
TWA: 500 ppm  
**Personal protective equipment**  
Respiratory protection  
Handle with gloves. Gloves must be inspected prior to use.  
Eye protection.  
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

**Section IX - PHYSICAL/CHEMICAL CHARACTERISTICS**

|                        |       |   |   |
|------------------------|-------|---|---|
| Boiling Point          | 100°C | Specific Gravity (H <sub>2</sub> O = 1) | 1 |
| Vapor Pressure (mm Hg) |       | Melting Point                           |   |

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects on chemicals or substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.

Section XVI. Misc. INFORMATION

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XV. REGULATORY INFORMATION

DOT (US)  
Not dangerous goods  
Proper shipping name: Water  
ATA  
Not dangerous goods  
Proper shipping name: Water

Section XIV. TRANSPORT INFORMATION

Dispose with normal Laboratory Solvent Waste.

Section XIII. DISPOSAL CONSIDERATIONS

LC50 NA  
EC50 NA

Section XII. ECOLOGICAL INFORMATION

LD50 Oral - Rat NA  
LC50 Inhalation - Rat NA  
LD50 Dermal - Guinea pig NA  
Causes skin irritation.  
Eye irritation

Section XI. TOXICOLOGICAL INFORMATION

Chemical stability  
Stable under recommended storage conditions.  
Possibility of hazardous reactions NA  
Conditions to avoid NA  
Materials to avoid NA  
Hazardous decomposition products - No data available

Section X. STABILITY AND REACTIVITY

Appearance and Odor  
CLEAR, COLORLESS LIQUID WITH SLIGHT CHEMICAL ODOR.

|                         |  |                     |                     |
|-------------------------|--|---------------------|---------------------|
| Solubility in Water     |  | Completely miscible |                     |
| Vapor Density (AIR = 1) |  | NA                  | (Butyl Acetate = 1) |
|                         |  | NA                  | Evaporation rate    |
|                         |  | 0°C                 | NA                  |



## Certified Reference Material CRM



## CERTIFIED WEIGHT REPORT

Part Number:  
Lot Number:  
Description:91980  
072423  
AcroleinSolvent(s):  
WaterLot#  
102422QExpiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test ID#:082423  
Refrigerate (4 °C)  
5000  
6UTB

S Sm

Weight(s) shown below were combined and diluted to (mL):

5E-05 Balance Uncertainty  
0.001 Flask Uncertainty

10.0

| Compound    | RM# | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty | Target Weight(g) | Actual Weight(g) | Actual Conc (µg/mL) | Expanded Uncertainty (±) (µg/mL) | CAS#     | OSHA PEL (TWA) | LD50            |
|-------------|-----|------------|----------------------|------------|-------------|------------------|------------------|---------------------|----------------------------------|----------|----------------|-----------------|
| 1. Acrolein | 5   | 103755R09M | 5000                 | 97.1       | 0.5         | 0.05160          | 0.05170          | 5009.2              | 52.5                             | 107-02-8 | 0.1 ppm        | orl-rat 46mg/kg |

Method: GC6MSD-1, Detector: Mass Selective Detector (Scan mode). Column: Vocol (60m X 0.25mm ID X 1.5µm film thickness). Oven Profile: Temp. 1 = 35°C (Time 1 = 10min.), Temp. 2 = 200°C (Time 2 = 8.75 min.), Rate = 4°C/min., Injector Temp. = 250°C, Detector Temp. = 220°C. Analyst: Pedro Rentas. NOTE: Due to the instability of acrolein in solution, all solutions of acrolein, and any dilutions thereof, should be used immediately. Long term storage is not recommended. Please contact our technical department if further information is required.

TIC: [BSB2]79005.D

Abundance

Scan 232 (8.927 min): [BSB2]79005.D

Abundance 27

250000 8.93



200000

56

150000

40000

30000

100000

20000

50000

10000

37

Time--&gt;

10.00 15.00 20.00 25.00 30.00 35.00 40.00 45.00 50.00 55.00 60.00

m/z--&gt;

20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

44 65 75 85 119 158 169

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (±) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).





**Safety Data Sheet (SDS)**

GHS/OSHA Compliant

**Section I Product and Company Identification**

**IDENTITY ANALYTICAL STANDARD DISSOLVED IN WATER**

Manufacturer's Name ABSOLUTE STANDARDS INC  
Address 44 Rossetto Dr.  
Hamden CT, 06514  
Emergency Telephone USA & CANADA  
Emergency Telephone International  
Date Prepared/Revised  
May 1, 2022  
1-800-535-5053  
1-352-323-3500

**Section II - Hazards Identification**

**P271**  
**P302,332**  
**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
**H315**  
**P280**  
**P305,351,338**  
**Causes skin and eye irritation.**  
**Use gloves, eye protection/face shield**  
**If in eyes, remove contacts, rinse with water**  
**Signal Word: DANGER**



**See Certified Weight Report For Other Analytes Present At Trace Quantities.**  
**INTENDED USE: REFERENCE MATERIAL**

**Section IV. FIRST AID MEASURES**

**General advice**  
**If inhaled**  
Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.  
**If case of skin contact**  
Wash with soap and water. Consult a physician.  
**In case of eye contact**  
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.  
**If swallowed**  
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

**Section V. FIREFIGHTING MEASURES**

**Subtle extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  
**Protective equipment for fire**  
Wear self contained breathing apparatus for fire fighting if necessary.  
**Hazardous Decomposition products**  
Carbon oxides

**Section VI. ACCIDENTAL RELEASE MEASURES**

**Personal precautions**  
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.  
**Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  
**Clean up**  
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

**Section VII. HANDLING AND STORAGE**

**Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
**Storage Conditions**  
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

**Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**Water**  
CAS#: 7732-18-5  
TWA: 500 ppm  
**Personal protective equipment**  
Respiratory protection  
Handle with gloves. Gloves must be inspected prior to use.  
Eye protection.  
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

**Section IX - PHYSICAL/CHEMICAL CHARACTERISTICS**

|                               |       |  |                      |
|-------------------------------|-------|--|----------------------|
| <b>Boiling Point</b>          |       | <b>Specific Gravity (H<sub>2</sub>O = 1)</b> | <b>Melting Point</b> |
|                               | 100°C |  | 1                    |
| <b>Vapor Pressure (mm Hg)</b> |       |  |                      |

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects on chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.

Section XVI. Misc. INFORMATION

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XV. REGULATORY INFORMATION

DOT (US)  
Not dangerous goods  
Proper shipping name: Water  
ATA  
Not dangerous goods  
Proper shipping name: Water

Section XIV. TRANSPORT INFORMATION

Dispose with normal Laboratory Solvent Waste.

Section XIII. DISPOSAL CONSIDERATIONS

LC50 NA  
EC50 NA

Section XII. ECOLOGICAL INFORMATION

LD50 Oral - Rat NA  
LC50 Inhalation - Rat NA  
LD50 Dermal - Guinea pig NA  
Causes skin irritation.  
Eye irritation

Section XI. TOXICOLOGICAL INFORMATION

Chemical stability  
Stable under recommended storage conditions.  
Possibility of hazardous reactions NA  
Conditions to avoid NA  
Materials to avoid NA  
Hazardous decomposition products - No data available

Section X. STABILITY AND REACTIVITY

Appearance and Odor  
CLEAR, COLORLESS LIQUID WITH SLIGHT CHEMICAL ODOR.

|                         |  |                     |                     |
|-------------------------|--|---------------------|---------------------|
| Solubility in Water     |  | Completely miscible |                     |
| Vapor Density (AIR = 1) |  | NA                  | (Butyl Acetate = 1) |
|                         |  | NA                  | Evaporation rate    |
|                         |  |                     | 0°C                 |
|                         |  |                     | NA                  |



## Certified Reference Material CRM



## CERTIFIED WEIGHT REPORT

Part Number:  
Lot Number:  
Description:91980  
072423  
AcroleinSolvent(s):  
WaterLot#  
102422QExpiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test ID#:082423  
Refrigerate (4 °C)  
5000  
6UTB

Sunny

Weight(s) shown below were combined and diluted to (mL):

5E-05 Balance Uncertainty  
0.001 Flask Uncertainty

10.0

| Compound    | RM# | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty | Target Weight(g) | Actual Weight(g) | Actual Conc (µg/mL) | Expanded Uncertainty (±) (µg/mL) | CAS#     | OSHA PEL (TWA) | LD50            |
|-------------|-----|------------|----------------------|------------|-------------|------------------|------------------|---------------------|----------------------------------|----------|----------------|-----------------|
| 1. Acrolein | 5   | 103755R09M | 5000                 | 97.1       | 0.5         | 0.05160          | 0.05170          | 5009.2              | 52.5                             | 107-02-8 | 0.1 ppm        | orl-rat 46mg/kg |

Method: GC6MSD-1, Detector: Mass Selective Detector (Scan mode). Column: Vocol (60m X 0.25mm ID X 1.5µm film thickness). Oven Profile: Temp. 1 = 35°C (Time 1 = 10min.), Temp. 2 = 200°C (Time 2 = 8.75 min.), Rate = 4°C/min., Injector Temp. = 250°C, Detector Temp. = 220°C. Analyst: Pedro Rentas. NOTE: Due to the instability of acrolein in solution, all solutions of acrolein, and any dilutions thereof, should be used immediately. Long term storage is not recommended. Please contact our technical department if further information is required.

TIC: [BSB2]79005.D

Abundance

Scan 232 (8.927 min): [BSB2]79005.D

Abundance

27

250000

8.93

200000

56

150000

40000

30000

100000

20000

50000

10000

37

Time--&gt;

m/z--&gt;

10.00 15.00 20.00 25.00 30.00 35.00 40.00 45.00 50.00 55.00 60.00

20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

119

158 169

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



**Safety Data Sheet (SDS)**

GHS/OSHA Compliant

**Section I Product and Company Identification**

**IDENTITY ANALYTICAL STANDARD DISSOLVED IN WATER**

Manufacturer's Name ABSOLUTE STANDARDS INC  
Address 44 Rossetto Dr.  
Hamden CT, 06514  
Emergency Telephone USA & CANADA  
Emergency Telephone International  
Date Prepared/Revised  
May 1, 2022  
1-800-535-5053  
1-352-323-3500

**Section II - Hazards Identification**

**P271**  
**P302,332**  
**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
**H315**  
**P280**  
**P305,351,338**  
**Signal Word: DANGER**  
**Use in ventilated area**  
**If on skin, wash with soap and water**  
**Causes skin and eye irritation.**  
**Use gloves, eye protection/face shield**  
**If in eyes, remove contacts, rinse with water**



**See Certified Weight Report For Other Analytes Present At Trace Quantities.**  
**INTENDED USE: REFERENCE MATERIAL**

**Section IV. FIRST AID MEASURES**

**General advice**  
**If inhaled**  
Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.  
**If case of skin contact**  
Wash with soap and water. Consult a physician.  
**In case of eye contact**  
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.  
**If swallowed**  
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

**Section V. FIREFIGHTING MEASURES**

**Subtle extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  
**Protective equipment for fire**  
Wear self contained breathing apparatus for fire fighting if necessary.  
**Hazardous Decomposition products**  
Carbon oxides

**Section VI. ACCIDENTAL RELEASE MEASURES**

**Personal precautions**  
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.  
**Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  
**Clean up**  
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

**Section VII. HANDLING AND STORAGE**

**Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
**Storage Conditions**  
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

**Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**Water**  
CAS#: 7732-18-5  
TWA: 500 ppm  
**Personal protective equipment**  
Respiratory protection  
Handle with gloves. Gloves must be inspected prior to use.  
Eye protection.  
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

**Section IX - PHYSICAL/CHEMICAL CHARACTERISTICS**

|                               |       |  |                      |
|-------------------------------|-------|--|----------------------|
| <b>Boiling Point</b>          |       | <b>Specific Gravity (H<sub>2</sub>O = 1)</b> | <b>Melting Point</b> |
|                               | 100°C |  | 1                    |
| <b>Vapor Pressure (mm Hg)</b> |       |  |                      |

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.

Section XVI. Misc. INFORMATION

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XV. REGULATORY INFORMATION

DOT (US)  
Not dangerous goods  
Proper shipping name: Water  
ATA  
Not dangerous goods  
Proper shipping name: Water

Section XIV. TRANSPORT INFORMATION

Dispose with normal Laboratory Solvent Waste.

Section XIII. DISPOSAL CONSIDERATIONS

LC50 NA  
EC50 NA

Section XII. ECOLOGICAL INFORMATION

LD50 Oral - Rat NA  
LC50 Inhalation - Rat NA  
LD50 Dermal - Guinea pig NA  
Causes skin irritation.  
Eye irritation

Section XI. TOXICOLOGICAL INFORMATION

Chemical stability  
Stable under recommended storage conditions.  
Possibility of hazardous reactions NA  
Conditions to avoid NA  
Materials to avoid NA  
Hazardous decomposition products - No data available

Section X. STABILITY AND REACTIVITY

Appearance and Odor  
CLEAR, COLORLESS LIQUID WITH SLIGHT CHEMICAL ODOR.

|                         |  |                     |                     |
|-------------------------|--|---------------------|---------------------|
| Solubility in Water     |  | Completely miscible |                     |
| Vapor Density (AIR = 1) |  | NA                  | (Butyl Acetate = 1) |
|                         |  | NA                  | Evaporation rate    |
|                         |  | 0°C                 | NA                  |



## Certified Reference Material CRM



## CERTIFIED WEIGHT REPORT

Part Number:  
Lot Number:  
Description:91980  
072423  
AcroleinSolvent(s):  
WaterLot#  
102422QExpiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test ID#:082423  
Refrigerate (4 °C)  
5000  
6UTB

Weight(s) shown below were combined and diluted to (mL):

5E-05 Balance Uncertainty  
0.001 Flask Uncertainty

|                |                 |        |      |
|----------------|-----------------|--------|------|
| Formulated By: | Gabriel Helland | 072423 | DATE |
| Reviewed By:   | Pedro L. Rentas | 072423 | DATE |

| Compound    | RM# | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty | Target Weight(g) | Actual Weight(g) | Actual Conc (µg/mL) | Expanded Uncertainty (+/-) (µg/mL) | SDS Information                        |         |
|-------------|-----|------------|----------------------|------------|-------------|------------------|------------------|---------------------|------------------------------------|--|---------|
|             |     |            |                      |            |             |                  |                  |                     |                                    | (Solvent Safety Info. On Attached pg.) | LD50    |
| 1. Acrolein | 5   | 103755R09M | 5000                 | 97.1       | 0.5         | 0.05160          | 0.05170          | 5009.2              | 52.5                               | 107-02-8                               | 0.1 ppm |

Method: GC6MSD-1, Detector: Mass Selective Detector (Scan mode). Column: Vocol (60m X 0.25mm ID X 1.5µm film thickness). Oven Profile: Temp. 1 = 35°C (Time 1 = 10min.), Temp. 2 = 200°C (Time 2 = 8.75 min.), Rate = 4°C/min., Injector Temp. = 250°C, Detector Temp. = 220°C. Analyst: Pedro Rentas. NOTE: Due to the instability of acrolein in solution, all solutions of acrolein, and any dilutions thereof, should be used immediately. Long term storage is not recommended. Please contact our technical department if further information is required.

TIC: [BSB2]79005.D

Abundance

Scan 232 (8.927 min): [BSB2]79005.D

Abundance  
27250000  
8.93

200000

50000  
56

150000

40000

30000

100000

20000

50000

10000

37

Time--&gt;

10.00 15.00 20.00 25.00 30.00 35.00 40.00 45.00 50.00 55.00 60.00

m/z--&gt;

20 30 40 50 60 70 80 90 100 110 120 130 140 150 160 170

44 65 75 85 119 158 169

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).





**Safety Data Sheet (SDS)**

GHS/OSHA Compliant

**Section I Product and Company Identification**

**IDENTITY ANALYTICAL STANDARD DISSOLVED IN WATER**

Manufacturer's Name ABSOLUTE STANDARDS INC  
Address 44 Rossetto Dr.  
Hamden CT, 06514  
Emergency Telephone USA & CANADA  
Emergency Telephone International  
Date Prepared/Revised  
May 1, 2022  
1-800-535-5053  
1-352-323-3500

**Section II - Hazards Identification**

**P271**  
**P302,332**  
**GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)**  
**H315**  
**P280**  
**P305,351,338**  
**Causes skin and eye irritation.**  
**Use gloves, eye protection/face shield**  
**If in eyes, remove contacts, rinse with water**  
**Signal Word: DANGER**



**See Certified Weight Report For Other Analytes Present At Trace Quantities.**  
**INTENDED USE: REFERENCE MATERIAL**

**Section IV. FIRST AID MEASURES**

**General advice**  
**If inhaled**  
Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.  
**If case of skin contact**  
Wash with soap and water. Consult a physician.  
**In case of eye contact**  
Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.  
**If swallowed**  
Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

**Section V. FIREFIGHTING MEASURES**

**Subtle extinguishing media**  
Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.  
**Protective equipment for fire**  
Wear self contained breathing apparatus for fire fighting if necessary.  
**Hazardous Decomposition products**  
Carbon oxides

**Section VI. ACCIDENTAL RELEASE MEASURES**

**Personal precautions**  
Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.  
**Environmental precautions**  
Prevent further leakage or spillage if safe to do so. Do not let product enter drains.  
**Clean up**  
Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

**Section VII. HANDLING AND STORAGE**

**Precautions for safe handling**  
Avoid contact with skin and eyes. Avoid inhalation of vapour or mist.  
**Storage Conditions**  
Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.  
Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

**Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION**

**Water**  
CAS#: 7732-18-5  
TWA: 500 ppm  
**Personal protective equipment**  
Respiratory protection  
Handle with gloves. Gloves must be inspected prior to use. Eye protection.  
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.

**Section IX - PHYSICAL/CHEMICAL CHARACTERISTICS**

|                               |       |  |                      |
|-------------------------------|-------|--|----------------------|
| <b>Boiling Point</b>          |       | <b>Specific Gravity (H<sub>2</sub>O = 1)</b> | <b>Melting Point</b> |
|                               | 100°C |  | 1                    |
| <b>Vapor Pressure (mm Hg)</b> |       |  |                      |

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects on chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.

Section XVI. Misc. INFORMATION

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XV. REGULATORY INFORMATION

DOT (US)  
Not dangerous goods  
Proper shipping name: Water  
ATA  
Not dangerous goods  
Proper shipping name: Water

Section XIV. TRANSPORT INFORMATION

Dispose with normal Laboratory Solvent Waste.

Section XIII. DISPOSAL CONSIDERATIONS

LC50 NA  
EC50 NA

Section XII. ECOLOGICAL INFORMATION

LD50 Oral - Rat NA  
LC50 Inhalation - Rat NA  
LD50 Dermal - Guinea pig NA  
Causes skin irritation.  
Eye irritation

Section XI. TOXICOLOGICAL INFORMATION

Chemical stability  
Stable under recommended storage conditions.  
Possibility of hazardous reactions NA  
Conditions to avoid NA  
Materials to avoid NA  
Hazardous decomposition products - No data available

Section X. STABILITY AND REACTIVITY

Appearance and Odor  
CLEAR, COLORLESS LIQUID WITH SLIGHT CHEMICAL ODOR.

|                         |  |                     |                     |
|-------------------------|--|---------------------|---------------------|
| Solubility in Water     |  | Completely miscible |                     |
| Vapor Density (AIR = 1) |  | NA                  | (Butyl Acetate = 1) |
|                         |  | NA                  | Evaporation rate    |
|                         |  | 0°C                 | NA                  |



**CERTIFIED WEIGHT REPORT**

**Part Number:** 95318  
**Lot Number:** 121321  
**Description:** 2-Chloroethyl vinyl ether

**Solvent(s):** Methanol  
**Lot#** EA899-US


**Expiration Date:** 121324  
**Recommended Storage:** Refrigerate (4 °C)  
**Nominal Concentration (µg/mL):** 10000  
**NIST Test ID#:** 6UTB  
**Weight(s) shown below were combined and diluted to (mL):** 30.0  
**5E-05 Balance Uncertainty**  
**0.0003 Flask Uncertainty**

|                |                 |        |
|----------------|-----------------|--------|
| Formulated By: | Benson Chan     | 121321 |
| Reviewed By:   | Pedro L. Rentes | 121321 |
|                |                 | DATE   |

| Compound | RM# | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty Purity | Target Weight (g) | Actual Weight (g) | Actual Conc (µg/mL) | Expanded Uncertainty (µg/mL) | (Solvent Safety Info. On Attached pg.) | CAS# | OSHA PEL (TWA) | LD50 |
|----------|-----|------------|----------------------|------------|--------------------|-------------------|-------------------|---------------------|------------------------------|--|------|----------------|------|
|----------|-----|------------|----------------------|------------|--------------------|-------------------|-------------------|---------------------|------------------------------|--|------|----------------|------|

|                              |    |          |       |    |     |         |         |         |      |          |     |  |                 |
|------------------------------|----|----------|-------|----|-----|---------|---------|---------|------|----------|-----|--|-----------------|
| 1. 2-Chloroethyl vinyl ether | 74 | MKCD0033 | 10000 | 99 | 0.2 | 0.30320 | 0.30411 | 10030.2 | 40.7 | 110-75-8 | N/A |  | or rat 250mg/kg |
|------------------------------|----|----------|-------|----|-----|---------|---------|---------|------|----------|-----|--|-----------------|

**Method:** GC/MSD-1.M. **Detector:** MSD. **Column:** (60m X 0.25mm X 1.5 µm). **Oven Profile:** Temp 1 = 35°C (Time 1=10min.), Temp 2 = 200°C (Time 2=8.75 min.), Rate = 4°C/min.,  
**Injector B Temp= 200°C, Detector B Temp. = 220°C. Analyst:** Candice Warren.

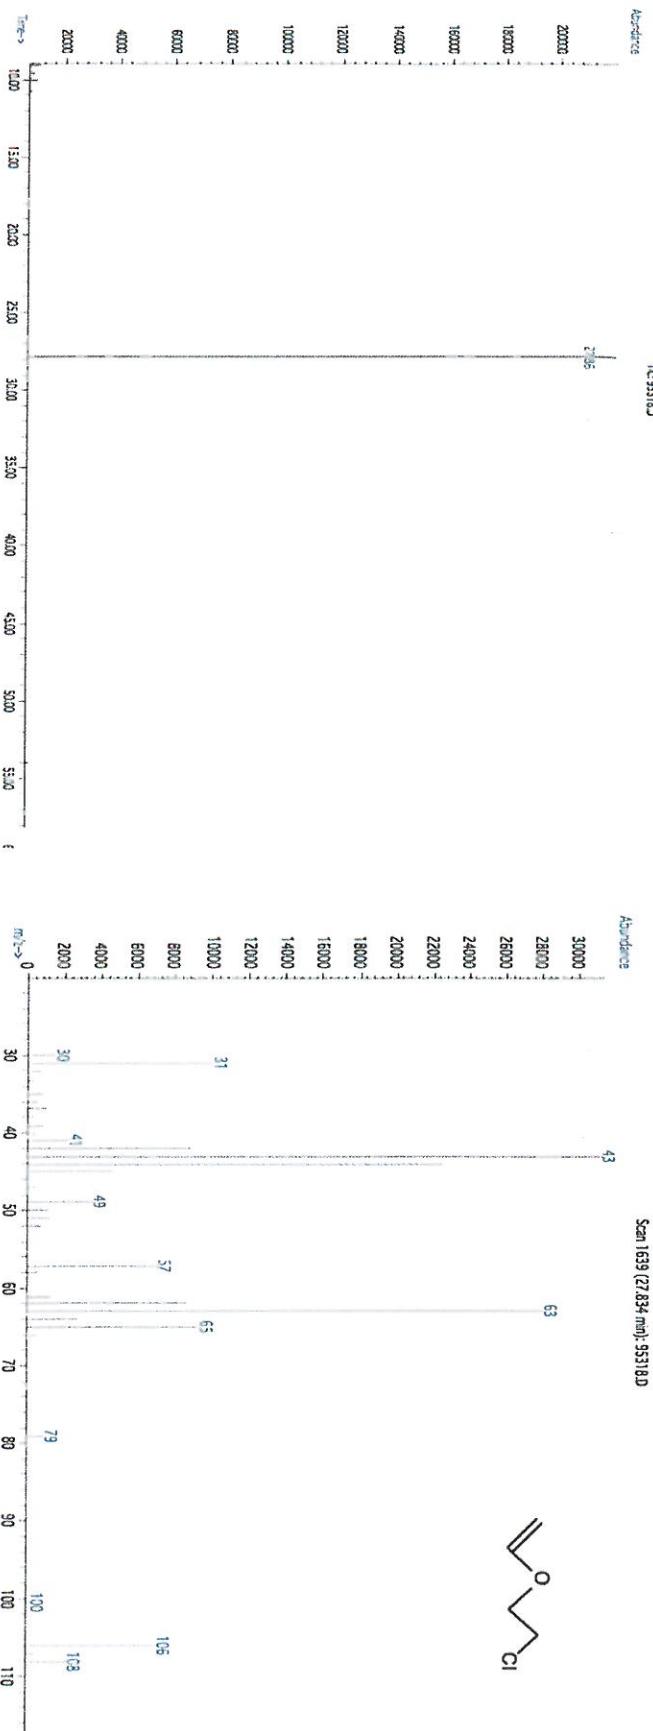

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



**CERTIFIED WEIGHT REPORT**

**Part Number:** 95318  
**Lot Number:** 121321  
**Description:** 2-Chloroethyl vinyl ether

**Solvent(s):** Methanol  
**Lot#** EA899-US


**Expiration Date:** 121324  
**Recommended Storage:** Refrigerate (4 °C)  
**Nominal Concentration (µg/mL):** 10000  
**NIST Test ID#:** 6UTB  
**Weight(s) shown below were combined and diluted to (mL):** 30.0  
**5E-05 Balance Uncertainty**  
**0.0003 Flask Uncertainty**

|                |                 |        |
|----------------|-----------------|--------|
| Formulated By: | Benson Chan     | 121321 |
| Reviewed By:   | Pedro L. Rentes | 121321 |
|                |                 | DATE   |

| Compound | RM# | Lot Number | Nominal Conc (µg/mL) | Purity (%) | Uncertainty Purity | Target Weight (g) | Actual Weight (g) | Actual Conc (µg/mL) | Expanded Uncertainty (µg/mL) | (Solvent Safety Info. On Attached pg.) | CAS# | OSHA PEL (TWA) | LD50 |
|----------|-----|------------|----------------------|------------|--------------------|-------------------|-------------------|---------------------|------------------------------|--|------|----------------|------|
|----------|-----|------------|----------------------|------------|--------------------|-------------------|-------------------|---------------------|------------------------------|--|------|----------------|------|

|                              |    |          |       |    |     |         |         |         |      |          |     |  |                 |
|------------------------------|----|----------|-------|----|-----|---------|---------|---------|------|----------|-----|--|-----------------|
| 1. 2-Chloroethyl vinyl ether | 74 | MKCD0033 | 10000 | 99 | 0.2 | 0.30320 | 0.30411 | 10030.2 | 40.7 | 110-75-8 | N/A |  | or rat 250mg/kg |
|------------------------------|----|----------|-------|----|-----|---------|---------|---------|------|----------|-----|--|-----------------|

**Method:** GC/MSD-1.M. **Detector:** MSD. **Column:** (60m X 0.25mm X 1.5 µm). **Oven Profile:** Temp 1 = 35°C (Time 1=10min.), Temp 2 = 200°C (Time 2=8.75 min.), Rate = 4°C/min.,  
**Injector B Temp= 200°C, Detector B Temp. = 220°C. Analyst:** Candice Warren.

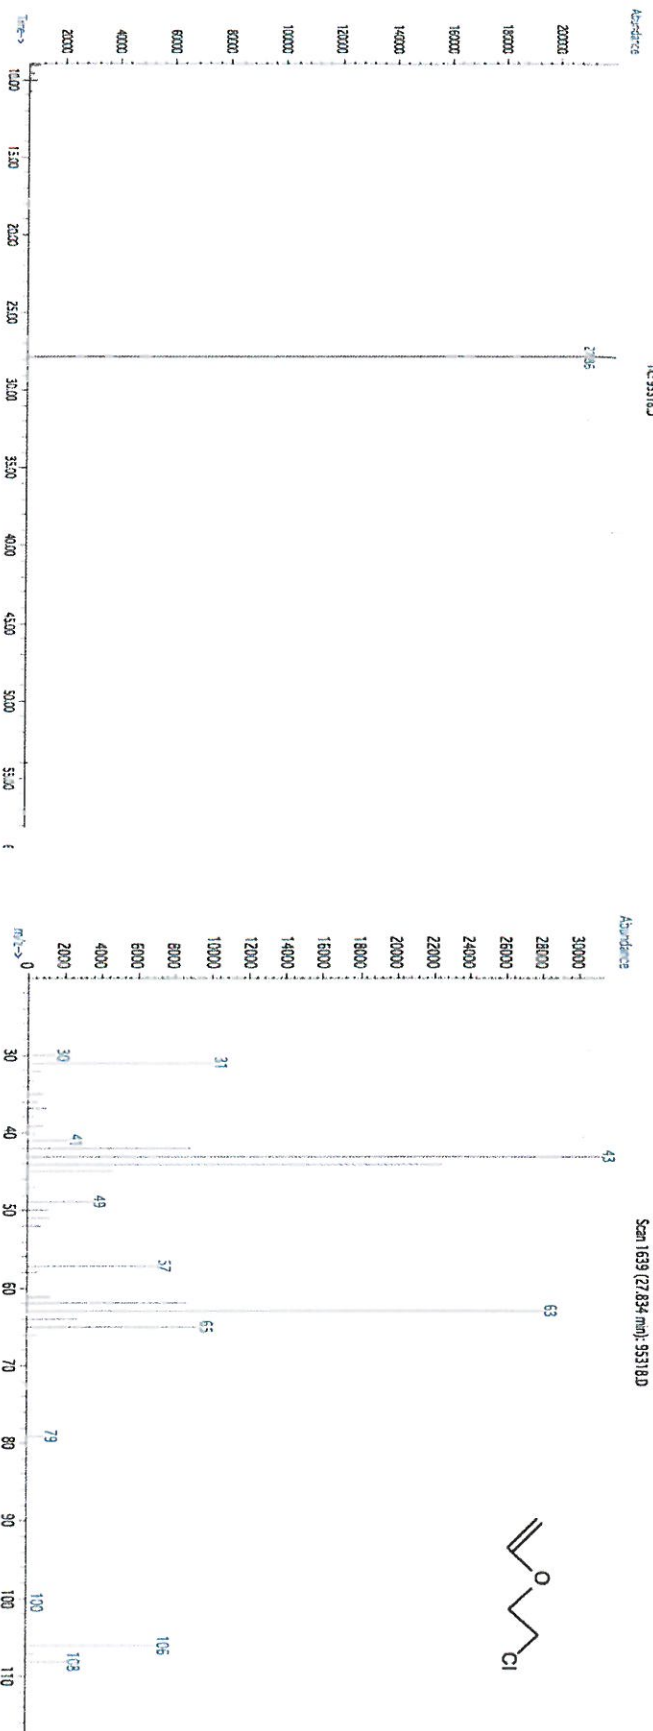

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyal, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: (800)356-1688  
Fax: (814)353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No. : 30470 Lot No.: A0181905  
Description : tert-Butanol Standard  
tert-Butanol Std 50,000µg/mL, P&T Methanol, 1mL/ampul  
Container Size : 2 mL Pkg Amt: > 1 mL  
Expiration Date : February 28, 2025 Storage: 0°C or colder  
Ship: Ambient

### CERTIFIED VALUES

| Elution Order | Compound  | Grav. Conc.<br>(weight/volume) | Expanded Uncertainty<br>(95% C.L.; K=2)   |     |          |       |             |     |            |       |            |     |            |       |          |
|---------------|---|--------------------------------|---|-----|----------|-------|-------------|-----|------------|-------|------------|-----|------------|-------|----------|
| 1             | tert-Butanol (TBA)<br>CAS # 75-65-0<br>Purity 99%<br>(Lot SHBM7694) | 50,126.0 µg/mL                 | <table><tr><td>+/-</td><td>293.4988</td><td>µg/mL</td><td>Gravimetric</td></tr><tr><td>+/-</td><td>1,073.7654</td><td>µg/mL</td><td>Unstressed</td></tr><tr><td>+/-</td><td>1,104.9494</td><td>µg/mL</td><td>Stressed</td></tr></table> | +/- | 293.4988 | µg/mL | Gravimetric | +/- | 1,073.7654 | µg/mL | Unstressed | +/- | 1,104.9494 | µg/mL | Stressed |
| +/-           | 293.4988  | µg/mL                          | Gravimetric   |     |          |       |             |     |            |       |            |     |            |       |          |
| +/-           | 1,073.7654  | µg/mL                          | Unstressed  |     |          |       |             |     |            |       |            |     |            |       |          |
| +/-           | 1,104.9494  | µg/mL                          | Stressed  |     |          |       |             |     |            |       |            |     |            |       |          |

Solvent: P&T Methanol  
CAS # 67-56-1  
Purity 99%

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**


200°C

**Det. Temp:**

250°C

**Det. Type:**

FID

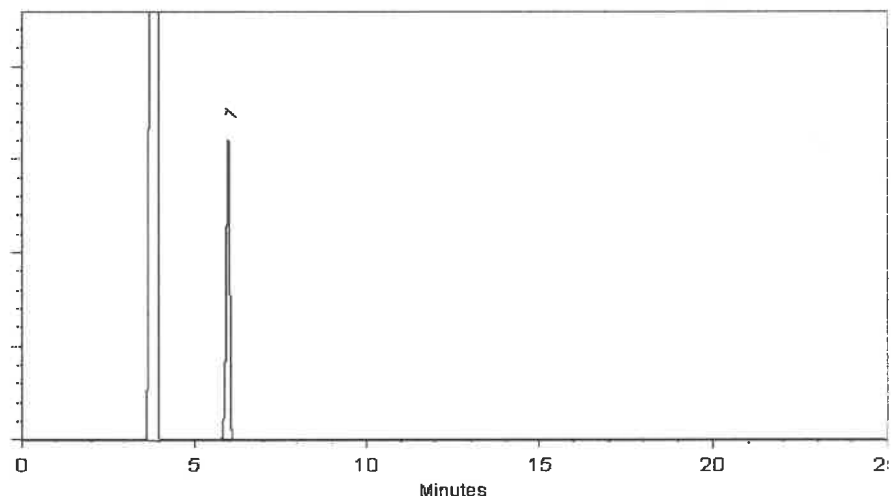

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

John Friedline - Operations Technician I

Date Mixed: 16-Feb-2022

Balance: B442140311

Marlene Cowan - Operations Tech I

Date Passed: 21-Feb-2022

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397



## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value ( includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at [www.restek.com/Contact-Us](http://www.restek.com/Contact-Us) for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

| Label Conditions  | Standard Conditions | Non-Standard Conditions |
|---|---------------------|-------------------------|
| 25°C Nominal (Room Temperature)                           | < 60°C              | ≥ 60°C up to 7 days     |
| 10°C or colder (Refrigerate)                              | < 40°C              | ≥ 40°C up to 7 days     |
| 0°C or colder (Freezer)<br>-20°C or colder (Deep Freezer) | < 25°C              | ≥ 25°C up to 7 days     |

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at [www.restek.com/Contact-Us](http://www.restek.com/Contact-Us).
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.







110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

*chromatographic plus*



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30067 **Lot No.:** A0191805

**Description :** 4-Bromofluorobenzene Standard

4-Bromofluorobenzene Standard 2,500µg/mL, P&T Methanol, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** November 30, 2027 **Storage:** 0°C or colder

**Ship:** Ambient

### CERTIFIED VALUES

| Elution Order | Compound                      | CAS #    | Lot #  | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|-------------------------------|----------|--------|--------|-----------------------------|--|
| 1             | 1-Bromo-4-fluorobenzene (BFB) | 460-00-4 | 184975 | 99%    | 2,483.9 µg/mL               | +/- 139.5488                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**

FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Alicia Leathers - Operation Technician I

Date Mixed: 17-Nov-2022

Balance Serial # B251644995

  
Jennifer Pollino - Operations Tech III - ARM QC

Date Passed: 21-Nov-2022

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ $\mu$ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

## Certificate of Analysis

*chromatographic plus*



**FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.**

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30225 **Lot No.:** A0193071  
**Description :** Bromochloromethane Standard  
Bromochloromethane 2000µg/mL, P&T Methanol, 1mL/ampul  
**Container Size :** 2 mL **Pkg Amt:** > 1 mL  
**Expiration Date :** December 31, 2027 **Storage:** 0°C or colder  
**Ship:** Ambient

CERTIFIED VALUES

| Elution Order | Compound           | CAS #   | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|--------------------|---------|----------|--------|-----------------------------|--|
| 1             | Bromochloromethane | 74-97-5 | 00008541 | 99%    | 2,018.0 µg/mL               | +/- 113.3890                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**

FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl



This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Tom Suckar - Mix Technician

Date Mixed: 29-Dec-2022

Balance Serial # B707717271

  
Christie Mills - Operations Tech II - ARM QC

Date Passed: 03-Jan-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.







110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

## Certificate of Analysis

chromatographic plus



**FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.**

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30225 **Lot No.:** A0193071

**Description :** Bromochloromethane Standard  
Bromochloromethane 2000µg/mL, P&T Methanol, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** December 31, 2027 **Storage:** 0°C or colder

**Ship:** Ambient

CERTIFIED VALUES

| Elution Order | Compound           | CAS #   | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|--------------------|---------|----------|--------|-----------------------------|--|
| 1             | Bromochloromethane | 74-97-5 | 00008541 | 99%    | 2,018.0 µg/mL               | +/- 113.3890                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

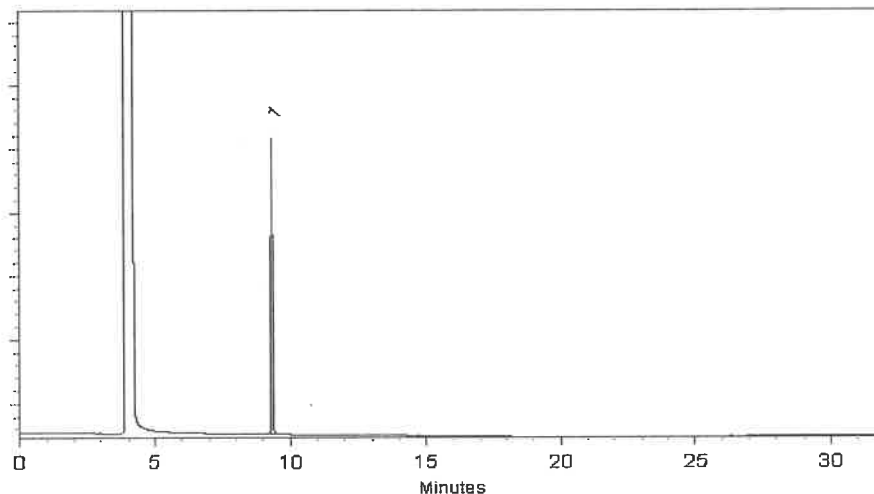

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Tom Suckar - Mix Technician

Date Mixed: 29-Dec-2022

Balance Serial # B707717271

  
Christie Mills - Operations Tech II - ARM QC

Date Passed: 03-Jan-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30042 **Lot No.:** A0194279

**Description :** 502.2 Calibration Mix #1  
502.2 Calibration Mix #1 2,000µg/mL, P&T Methanol, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** October 31, 2029 **Storage:** 0°C or colder

**Ship:** Ambient

### CERTIFIED VALUES

| Elution Order | Compound                         | CAS #   | Lot #           | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|----------------------------------|---------|-----------------|--------|-----------------------------|--|
| 1             | Dichlorodifluoromethane (CFC-12) | 75-71-8 | 00012554        | 99%    | 2,001.5 µg/mL               | +/- 112.7231                           |
| 2             | Chloromethane (methyl chloride)  | 74-87-3 | SHBK6571        | 99%    | 2,001.2 µg/mL               | +/- 112.5863                           |
| 3             | Vinyl chloride                   | 75-01-4 | 00015559        | 99%    | 2,001.4 µg/mL               | +/- 112.6561                           |
| 4             | Bromomethane (methyl bromide)    | 74-83-9 | 101604          | 99%    | 2,006.4 µg/mL               | +/- 112.8262                           |
| 5             | Chloroethane (ethyl chloride)    | 75-00-3 | 107-401039114-1 | 99%    | 2,001.9 µg/mL               | +/- 112.5897                           |
| 6             | Trichlorofluoromethane (CFC-11)  | 75-69-4 | MKCL8411        | 99%    | 2,000.8 µg/mL               | +/- 112.6473                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

## Quality Confirmation Test

**Column:**

60m x 0.25mm x 1.4µm  
Rtx-502.2 (cat.#10916)

**Carrier Gas:**

helium-constant flow 2.0 mL/min.

**Temp. Program:**

40°C (hold 6 min.) to 100°C  
@ 6°C/min.

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


MSD

**Split Vent:**

Split ratio 10:1

**Inj. Vol**

1µl

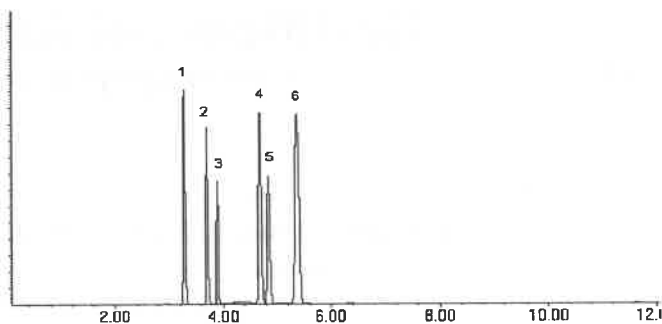

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Tom Suckar - Mix Technician

Date Mixed: 03-Feb-2023

Balance Serial # B707717271

  
Christie Mills - Operations Tech II - ARM QC

Date Passed: 07-Feb-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ $\mu$ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.







110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30042 **Lot No.:** A0194279

**Description :** 502.2 Calibration Mix #1  
502.2 Calibration Mix #1 2,000µg/mL, P&T Methanol, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** October 31, 2029 **Storage:** 0°C or colder

**Ship:** Ambient

### CERTIFIED VALUES

| Elution Order | Compound                         | CAS #   | Lot #           | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|----------------------------------|---------|-----------------|--------|-----------------------------|--|
| 1             | Dichlorodifluoromethane (CFC-12) | 75-71-8 | 00012554        | 99%    | 2,001.5 µg/mL               | +/- 112.7231                           |
| 2             | Chloromethane (methyl chloride)  | 74-87-3 | SHBK6571        | 99%    | 2,001.2 µg/mL               | +/- 112.5863                           |
| 3             | Vinyl chloride                   | 75-01-4 | 00015559        | 99%    | 2,001.4 µg/mL               | +/- 112.6561                           |
| 4             | Bromomethane (methyl bromide)    | 74-83-9 | 101604          | 99%    | 2,006.4 µg/mL               | +/- 112.8262                           |
| 5             | Chloroethane (ethyl chloride)    | 75-00-3 | 107-401039114-1 | 99%    | 2,001.9 µg/mL               | +/- 112.5897                           |
| 6             | Trichlorofluoromethane (CFC-11)  | 75-69-4 | MKCL8411        | 99%    | 2,000.8 µg/mL               | +/- 112.6473                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

## Quality Confirmation Test

**Column:**

60m x 0.25mm x 1.4µm  
Rtx-502.2 (cat.#10916)

**Carrier Gas:**

helium-constant flow 2.0 mL/min.

**Temp. Program:**

40°C (hold 6 min.) to 100°C  
@ 6°C/min.

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


MSD

**Split Vent:**

Split ratio 10:1

**Inj. Vol**

1µl

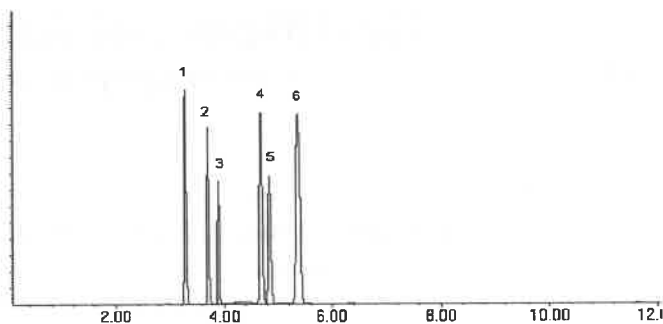

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Tom Suckar - Mix Technician

Date Mixed: 03-Feb-2023

Balance Serial # B707717271

  
Christie Mills - Operations Tech II - ARM QC

Date Passed: 07-Feb-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30489 **Lot No.:** A0196115

**Description :** 8260B Acetates Mix

8260B Acetates Mix 2,000 µg/mL, P&T Methanol, 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** September 30, 2024 **Storage:** -20°C or colder

**Handling:** This product is photosensitive. **Ship:** On Ice

### CERTIFIED VALUES

| Elution Order | Compound          | CAS #    | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|-------------------|----------|----------|--------|-----------------------------|--|
| 1             | Methyl acetate    | 79-20-9  | SHBP3100 | 99%    | 2,013.7 µg/mL               | +/- 69.6015                            |
| 2             | Vinyl acetate     | 108-05-4 | RD220630 | 99%    | 2,020.0 µg/mL               | +/- 69.8205                            |
| 3             | Ethyl acetate     | 141-78-6 | SHBP9289 | 99%    | 2,019.3 µg/mL               | +/- 69.7974                            |
| 4             | Isopropyl acetate | 108-21-4 | BCCG7069 | 99%    | 2,014.0 µg/mL               | +/- 69.6131                            |
| 5             | Propyl acetate    | 109-60-4 | TFFKL    | 99%    | 2,014.7 µg/mL               | +/- 69.6361                            |
| 6             | Butyl acetate     | 123-86-4 | SHBP6314 | 99%    | 2,014.0 µg/mL               | +/- 69.6131                            |
| 7             | Amyl acetate      | 628-63-7 | 41325/1  | 97%    | 2,016.3 µg/mL               | +/- 69.6928                            |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

### Tech Tips:

Vinyl acetate is a volatile organic ester included in the target lists of several US EPA and other methods. Under acidic conditions, esters react with alcohols to form new esters (transesterification). Methanol-based mixes containing halogenated compounds are slightly acidic, so it is important to minimize exposure of vinyl acetate to mixes of halogenated compounds in methanol. For this

reason, we offer vinyl acetate in individual solution, and suggest that it be introduced into the working level calibration solution immediately before use. This will minimize problems and ensure more consistent results.

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

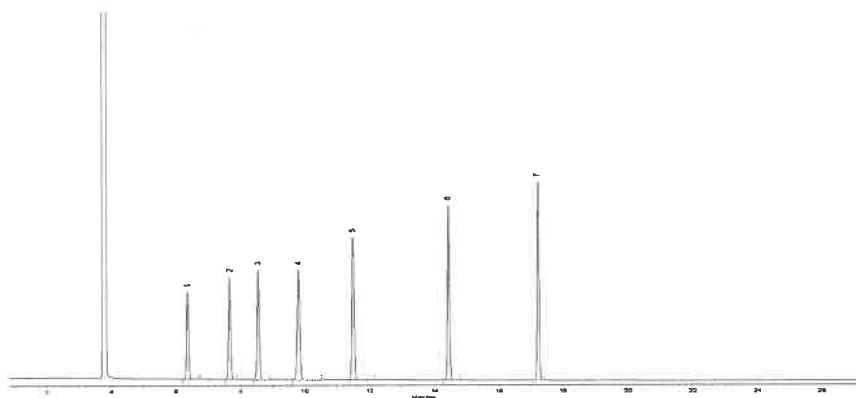

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Bethany Lowery - Operations Tech I

Date Mixed: 21-Mar-2023

Balance Serial # B251644995

  
John Lidgett - AD Chemist

Date Passed: 29-Mar-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.







110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30489 **Lot No.:** A0196115  
**Description :** 8260B Acetates Mix  
8260B Acetates Mix 2,000 µg/mL, P&T Methanol, 1mL/ampul  
**Container Size :** 2 mL **Pkg Amt:** > 1 mL  
**Expiration Date :** September 30, 2024 **Storage:** -20°C or colder  
**Handling:** This product is photosensitive. **Ship:** On Ice

### CERTIFIED VALUES

| Elution Order | Compound          | CAS #    | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|-------------------|----------|----------|--------|-----------------------------|--|
| 1             | Methyl acetate    | 79-20-9  | SHBP3100 | 99%    | 2,013.7 µg/mL               | +/- 69.6015                            |
| 2             | Vinyl acetate     | 108-05-4 | RD220630 | 99%    | 2,020.0 µg/mL               | +/- 69.8205                            |
| 3             | Ethyl acetate     | 141-78-6 | SHBP9289 | 99%    | 2,019.3 µg/mL               | +/- 69.7974                            |
| 4             | Isopropyl acetate | 108-21-4 | BCCG7069 | 99%    | 2,014.0 µg/mL               | +/- 69.6131                            |
| 5             | Propyl acetate    | 109-60-4 | TFFKL    | 99%    | 2,014.7 µg/mL               | +/- 69.6361                            |
| 6             | Butyl acetate     | 123-86-4 | SHBP6314 | 99%    | 2,014.0 µg/mL               | +/- 69.6131                            |
| 7             | Amyl acetate      | 628-63-7 | 41325/1  | 97%    | 2,016.3 µg/mL               | +/- 69.6928                            |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

#### Tech Tips:

Vinyl acetate is a volatile organic ester included in the target lists of several US EPA and other methods. Under acidic conditions, esters react with alcohols to form new esters (transesterification). Methanol-based mixes containing halogenated compounds are slightly acidic, so it is important to minimize exposure of vinyl acetate to mixes of halogenated compounds in methanol. For this

reason, we offer vinyl acetate in individual solution, and suggest that it be introduced into the working level calibration solution immediately before use. This will minimize problems and ensure more consistent results.

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

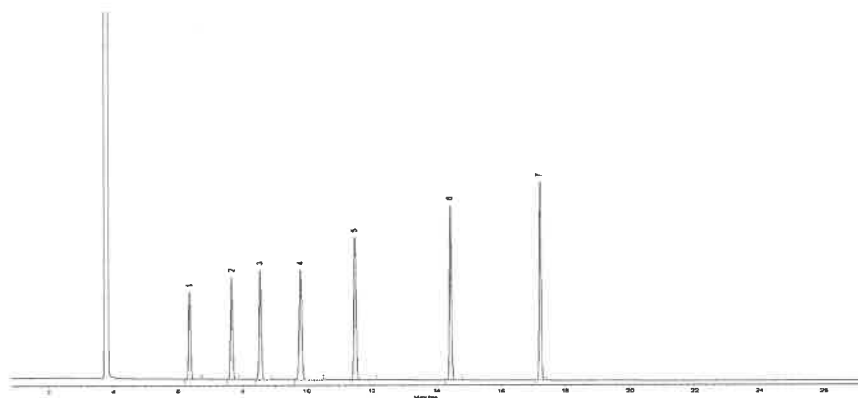

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Bethany Lowery - Operations Tech I

Date Mixed: 21-Mar-2023

Balance Serial # B251644995

  
John Lidgett - AD Chemist

Date Passed: 29-Mar-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

gravimetric



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 555582 **Lot No.:** A0196865

**Description :** Custom 8260A/B Surrogate Mix  
Custom 8260A/B Surrogate Mix 25,000µg/mL, P&T Methanol,  
1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** April 30, 2026 **Storage:** 10°C or colder

**Ship:** Ambient

### CERTIFIED VALUES

| Component # | Compound                      | CAS #      | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|-------------|-------------------------------|------------|----------|--------|-----------------------------|--|
| 1           | 1,2-Dichloroethane-d4         | 17060-07-0 | PR-32845 | 99%    | 25,036.0 µg/mL              | +/- 1,417.9179                         |
| 2           | 1-Bromo-4-fluorobenzene (BFB) | 460-00-4   | 184975   | 99%    | 25,132.0 µg/mL              | +/- 1,423.3549                         |
| 3           | Dibromofluoromethane          | 1868-53-7  | 022013   | 99%    | 25,040.0 µg/mL              | +/- 1,418.1445                         |
| 4           | Toluene-d8                    | 2037-26-5  | PR-33397 | 99%    | 25,028.0 µg/mL              | +/- 1,417.4648                         |

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

Russ Bookhamer - Operations Technician I

**Date Mixed:** 11-Apr-2023

**Balance:** 1127510105

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

*k* is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



## FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30006 **Lot No.:** A0200785

**Description :** VOA Calibration Mix #1

VOA Calibration Mix #1 5,000µg/mL, P&T Methanol/Water(90:10), 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** November 30, 2026 **Storage:** 0°C or colder

**Ship:** Ambient

## CERTIFIED VALUES

| Elution Order | Compound                    | CAS #    | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|-----------------------------|----------|----------|--------|-----------------------------|--|
| 1             | Acetone                     | 67-64-1  | SHBP8774 | 99%    | 5,018.5 µg/mL               | +/- 173.4162                           |
| 2             | 2-Butanone (MEK)            | 78-93-3  | SHBL5543 | 99%    | 5,016.0 µg/mL               | +/- 173.3298                           |
| 3             | 4-Methyl-2-pentanone (MIBK) | 108-10-1 | SHBP4724 | 99%    | 5,010.7 µg/mL               | +/- 173.1455                           |
| 4             | 2-Hexanone                  | 591-78-6 | MKCQ6663 | 99%    | 5,015.0 µg/mL               | +/- 173.2952                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol/Water (90:10)  
**CAS #** 67-56-1/7732-18-5  
**Purity** 99%



## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

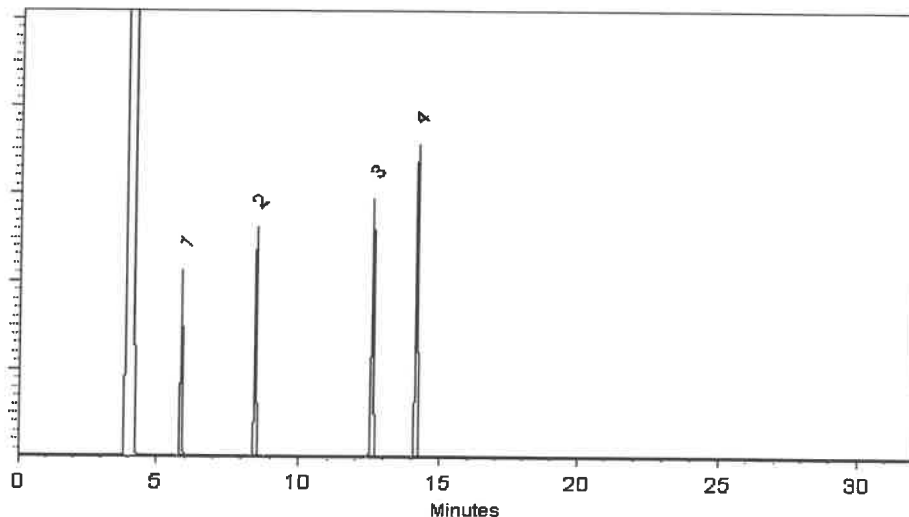

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

Date Mixed: 09-Aug-2023

Balance Serial # B707717271

  
Marlina Cowan - Operations Tech II ARM QC

Date Passed: 16-Aug-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



## FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30006 **Lot No.:** A0200785

**Description :** VOA Calibration Mix #1

VOA Calibration Mix #1 5,000µg/mL, P&T Methanol/Water(90:10), 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** November 30, 2026 **Storage:** 0°C or colder

**Ship:** Ambient

## CERTIFIED VALUES

| Elution Order | Compound                    | CAS #    | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|-----------------------------|----------|----------|--------|-----------------------------|--|
| 1             | Acetone                     | 67-64-1  | SHBP8774 | 99%    | 5,018.5 µg/mL               | +/- 173.4162                           |
| 2             | 2-Butanone (MEK)            | 78-93-3  | SHBL5543 | 99%    | 5,016.0 µg/mL               | +/- 173.3298                           |
| 3             | 4-Methyl-2-pentanone (MIBK) | 108-10-1 | SHBP4724 | 99%    | 5,010.7 µg/mL               | +/- 173.1455                           |
| 4             | 2-Hexanone                  | 591-78-6 | MKCQ6663 | 99%    | 5,015.0 µg/mL               | +/- 173.2952                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol/Water (90:10)

**CAS #** 67-56-1/7732-18-5

**Purity** 99%

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

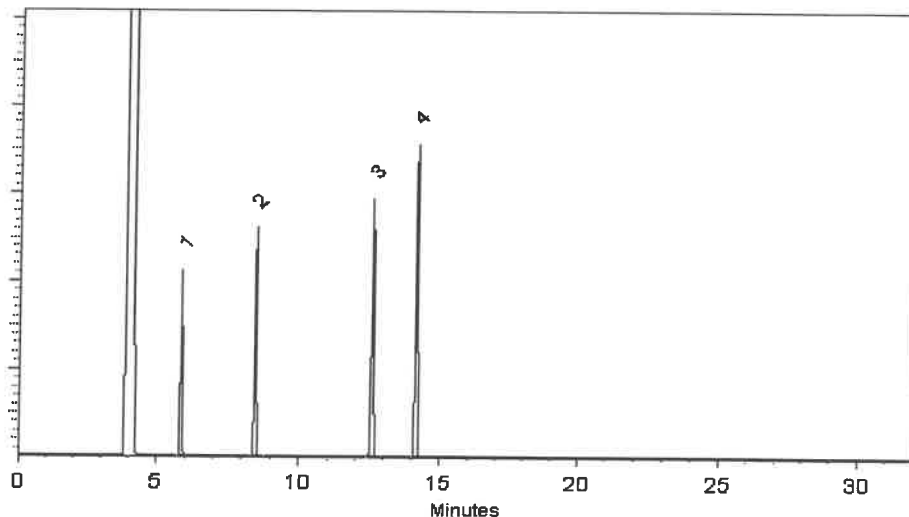

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

Date Mixed: 09-Aug-2023

Balance Serial # B707717271

  
Marlina Cowan - Operations Tech II ARM QC

Date Passed: 16-Aug-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

chromatographic plus



## FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 30006 **Lot No.:** A0200785

**Description :** VOA Calibration Mix #1

VOA Calibration Mix #1 5,000µg/mL, P&T Methanol/Water(90:10), 1mL/ampul

**Container Size :** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date :** November 30, 2026 **Storage:** 0°C or colder

**Ship:** Ambient

## CERTIFIED VALUES

| Elution Order | Compound                    | CAS #    | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|-----------------------------|----------|----------|--------|-----------------------------|--|
| 1             | Acetone                     | 67-64-1  | SHBP8774 | 99%    | 5,018.5 µg/mL               | +/- 173.4162                           |
| 2             | 2-Butanone (MEK)            | 78-93-3  | SHBL5543 | 99%    | 5,016.0 µg/mL               | +/- 173.3298                           |
| 3             | 4-Methyl-2-pentanone (MIBK) | 108-10-1 | SHBP4724 | 99%    | 5,010.7 µg/mL               | +/- 173.1455                           |
| 4             | 2-Hexanone                  | 591-78-6 | MKCQ6663 | 99%    | 5,015.0 µg/mL               | +/- 173.2952                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol/Water (90:10)  
**CAS #** 67-56-1/7732-18-5  
**Purity** 99%

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

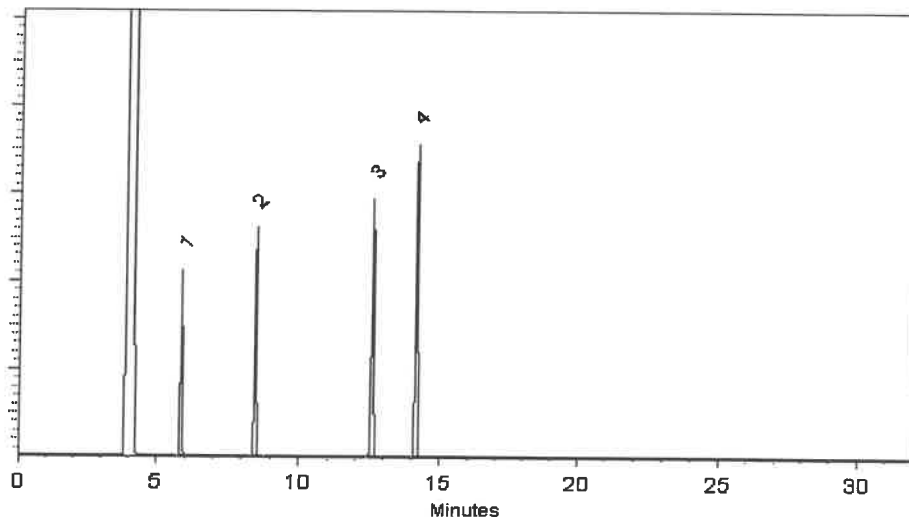

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Laith Clemente - Operations Technician I

Date Mixed: 09-Aug-2023

Balance Serial # B707717271

  
Marlina Cowan - Operations Tech II ARM QC

Date Passed: 16-Aug-2023

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

12  
CERTIFIED REFERENCE MATERIAL

## Certificate of Analysis

chromatographic



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No. :** 555408-SL **Lot No.:** A0205179  
**Description :** Custom Vinyl Acetate Standard  
Custom Vinyl Acetate Standard 8,000µg/mL, P&T Methanol, 1mL/ampul  
**Container Size :** 2 mL **Pkg Amt:** > 1 mL  
**Expiration Date :** June 30, 2025 **Storage:** -20°C or colder  
**Handling:** This product is photosensitive. **Ship:** On Ice

### CERTIFIED VALUES

| Elution Order | Compound      | CAS #    | Lot #       | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|---------------|----------|-------------|--------|-----------------------------|--|
| 1             | Vinyl acetate | 108-05-4 | RP231030CTH | 98%    | 8,075.2 µg/mL               | +/- 279.1159                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

### Tech Tips:

Vinyl acetate is a volatile organic ester included in the target lists of several US EPA and other methods. Under acidic conditions, esters react with alcohols to form new esters (transesterification). Methanol-based mixes containing halogenated compounds are slightly acidic, so it is important to minimize exposure of vinyl acetate to mixes of halogenated compounds in methanol. For this reason, we offer vinyl acetate in individual solution, and suggest that it be introduced into the working level calibration solution immediately before use. This will minimize problems and ensure more consistent results.

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

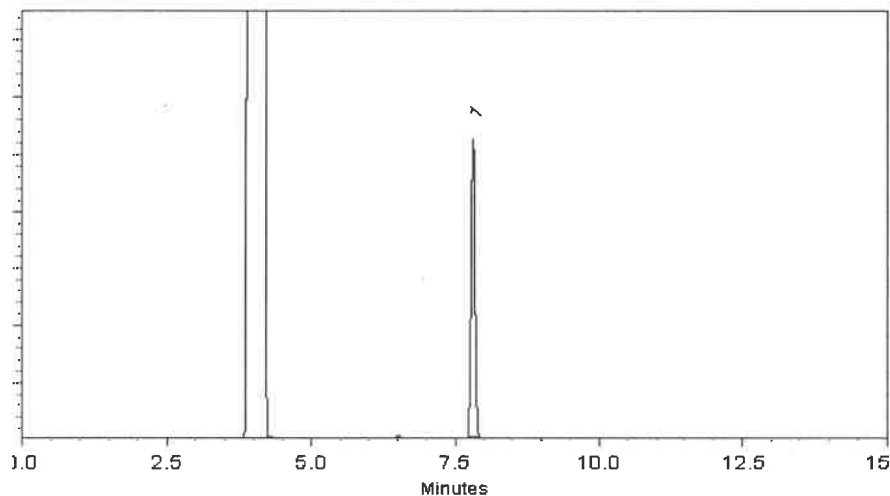

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

  
Daniel Wasson - Operations Tech I

Date Mixed: 06-Dec-2023

Balance Serial # 1127510105

  
Jennifer Pollino - Operations Tech III - ARM QC

Date Passed: 11-Dec-2023

APPROVED  
By: Jennifer Pollino (Date: 11-Dec-2023)

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ $\mu$ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.





110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis  
chromatographic



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

Catalog No. : 555408-SL Lot No.: A0205179  
Description : Custom Vinyl Acetate Standard  
Custom Vinyl Acetate Standard 8,000µg/mL, P&T Methanol, 1mL/ampul  
Container Size : 2 mL Pkg Amt: > 1 mL  
Expiration Date : June 30, 2025 Storage: -20°C or colder  
Handling: This product is photosensitive. Ship: On Ice

CERTIFIED VALUES

| Elution Order | Compound      | CAS #    | Lot #       | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|---------------|---------------|----------|-------------|--------|-----------------------------|--|
| 1             | Vinyl acetate | 108-05-4 | RP231030CTH | 98%    | 8,075.2 µg/mL               | +/- 279.1159                           |

\* Expanded Uncertainty displayed in same units as Grav. Conc.

Solvent: P&T Methanol  
CAS # 67-56-1  
Purity 99%

Tech Tips:

Vinyl acetate is a volatile organic ester included in the target lists of several US EPA and other methods. Under acidic conditions, esters react with alcohols to form new esters (transesterification). Methanol-based mixes containing halogenated compounds are slightly acidic, so it is important to minimize exposure of vinyl acetate to mixes of halogenated compounds in methanol. For this reason, we offer vinyl acetate in individual solution, and suggest that it be introduced into the working level calibration solution immediately before use. This will minimize problems and ensure more consistent results.

## Quality Confirmation Test

**Column:**

105m x 0.53mm x 3.0µm  
Rtx-502.2 (cat.#10910)

**Carrier Gas:**

hydrogen-constant pressure 11.0 psi.

**Temp. Program:**

40°C (hold 2 min.) to 240°C  
@ 8°C/min. (hold 5 min.)

**Inj. Temp:**

200°C

**Det. Temp:**

250°C

**Det. Type:**


FID

**Split Vent:**

40 ml/min

**Inj. Vol**

1µl

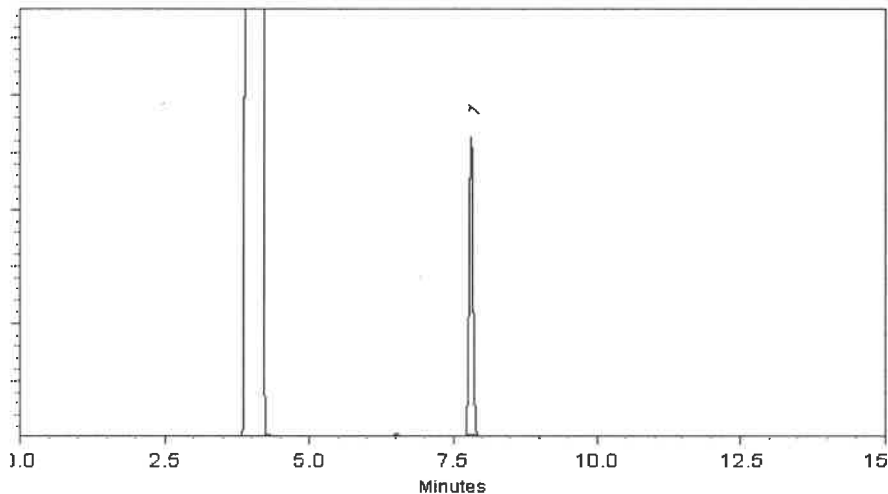

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Daniel Wasson - Operations Tech I

Date Mixed: 06-Dec-2023

Balance Serial # 1127510105

Jennifer Pollino - Operations Tech III - ARM QC

Date Passed: 11-Dec-2023

APPROVED  
By: Jennifer Pollino (Date: 11-Dec-2023)

Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.







110 Benner Circle  
Bellefonte, PA 16823-8812  
Tel: 1-814-353-1300  
Fax: 1-814-353-1309

www.restek.com

## CERTIFIED REFERENCE MATERIAL

# Certificate of Analysis

gravimetric



### FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

*This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.*

**Catalog No.:** 555581 **Lot No.:** A0210184

**Description:** Custom 8260 Internal Standard Mix

Custom 8260 Internal Standard Mix 25,000µg/mL, P&T Methanol, 1mL/ampul

**Container Size:** 2 mL **Pkg Amt:** > 1 mL

**Expiration Date:** April 30, 2027 **Storage:** 10°C or colder

**Ship:** Ambient

### CERTIFIED VALUES

| Component # | Compound               | CAS #     | Lot #    | Purity | Grav. Conc. (weight/volume) | Expanded Uncertainty * (95% C.L.; K=2) |
|-------------|------------------------|-----------|----------|--------|-----------------------------|--|
| 1           | 1,4-Dichlorobenzene-d4 | 3855-82-1 | PR-30447 | 99%    | 25,212.0 µg/mL              | +/- 1,427.8857                         |
| 2           | 1,4-Difluorobenzene    | 540-36-3  | MKCS8657 | 99%    | 25,220.0 µg/mL              | +/- 1,428.3388                         |
| 3           | Chlorobenzene-d5       | 3114-55-4 | PR-31132 | 99%    | 25,116.0 µg/mL              | +/- 1,422.4487                         |
| 4           | Pentafluorobenzene     | 363-72-4  | MKCR9383 | 99%    | 25,180.0 µg/mL              | +/- 1,426.0734                         |

**Solvent:** P&T Methanol  
**CAS #** 67-56-1  
**Purity** 99%

John Friedline - Operations Technician I

**Date Mixed:** 11-Apr-2024 **Balance:** 11275.10105



Manufactured under Restek's ISO 9001:2015  
Registered Quality System  
Certificate #FM 80397

## General Certified Reference Material Notes

### Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

### Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

### Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

$k$  is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

### Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

### Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.

Methanol  
ULTRA RESI-ANALYZED  
For Purge and Trap Analysis



Material No.: 9077-02  
Batch No.: 22L0562016  
Manufactured Date: 2022-10-26  
Expiration Date: 2025-10-25  
Revision No.: 0

## Certificate of Analysis

| Test  | Specification | Result   |
|---|---------------|----------|
| Assay (CH <sub>3</sub> OH) (by GC, corrected for water) | ≥ 99.9 %      | 100.0 %  |
| Residue after Evaporation                               | ≤ 1.0 ppm     | 0.2 ppm  |
| Titration Acid (μeq/g)                                  | ≤ 0.3         | 0.2      |
| Titration Base (μeq/g)                                  | ≤ 0.10        | 0.03     |
| Water (by KF, coulometric)                              | ≤ 0.08 %      | < 0.01 % |
| Volatile Organic Trace Analysis - Below EPA 8260B CRQL  | Conforms      | Conforms |

For Laboratory, Research, or Manufacturing Use  
Performance Tested for Use in EPA Methods  
500 Series for Drinking Water  
600 Series for Wastewater  
846 for Solid Waste

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Ethier  
Vice President Global Quality

Methanol  
ULTRA RESI-ANALYZED  
For Purge and Trap Analysis



Material No.: 9077-02  
Batch No.: 22L0562016  
Manufactured Date: 2022-10-26  
Expiration Date: 2025-10-25  
Revision No.: 0

## Certificate of Analysis

| Test  | Specification | Result   |
|---|---------------|----------|
| Assay (CH <sub>3</sub> OH) (by GC, corrected for water) | ≥ 99.9 %      | 100.0 %  |
| Residue after Evaporation                               | ≤ 1.0 ppm     | 0.2 ppm  |
| Titration Acid (μeq/g)                                  | ≤ 0.3         | 0.2      |
| Titration Base (μeq/g)                                  | ≤ 0.10        | 0.03     |
| Water (by KF, coulometric)                              | ≤ 0.08 %      | < 0.01 % |
| Volatile Organic Trace Analysis - Below EPA 8260B CRQL  | Conforms      | Conforms |

For Laboratory, Research, or Manufacturing Use  
Performance Tested for Use in EPA Methods  
500 Series for Drinking Water  
600 Series for Wastewater  
846 for Solid Waste

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Ethier  
Vice President Global Quality

Methanol  
ULTRA RESI-ANALYZED  
For Purge and Trap Analysis



Material No.: 9077-02  
Batch No.: 22L0562016  
Manufactured Date: 2022-10-26  
Expiration Date: 2025-10-25  
Revision No.: 0

## Certificate of Analysis

| Test  | Specification | Result   |
|---|---------------|----------|
| Assay (CH <sub>3</sub> OH) (by GC, corrected for water) | ≥ 99.9 %      | 100.0 %  |
| Residue after Evaporation                               | ≤ 1.0 ppm     | 0.2 ppm  |
| Titration Acid (μeq/g)                                  | ≤ 0.3         | 0.2      |
| Titration Base (μeq/g)                                  | ≤ 0.10        | 0.03     |
| Water (by KF, coulometric)                              | ≤ 0.08 %      | < 0.01 % |
| Volatile Organic Trace Analysis - Below EPA 8260B CRQL  | Conforms      | Conforms |

For Laboratory, Research, or Manufacturing Use  
Performance Tested for Use in EPA Methods  
500 Series for Drinking Water  
600 Series for Wastewater  
846 for Solid Waste

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Ethier  
Vice President Global Quality

Methanol  
ULTRA RESI-ANALYZED  
For Purge and Trap Analysis



Material No.: 9077-02  
Batch No.: 22L0562016  
Manufactured Date: 2022-10-26  
Expiration Date: 2025-10-25  
Revision No.: 0

## Certificate of Analysis

| Test  | Specification | Result   |
|---|---------------|----------|
| Assay (CH <sub>3</sub> OH) (by GC, corrected for water) | ≥ 99.9 %      | 100.0 %  |
| Residue after Evaporation                               | ≤ 1.0 ppm     | 0.2 ppm  |
| Titration Acid (μeq/g)                                  | ≤ 0.3         | 0.2      |
| Titration Base (μeq/g)                                  | ≤ 0.10        | 0.03     |
| Water (by KF, coulometric)                              | ≤ 0.08 %      | < 0.01 % |
| Volatile Organic Trace Analysis - Below EPA 8260B CRQL  | Conforms      | Conforms |

For Laboratory, Research, or Manufacturing Use  
Performance Tested for Use in EPA Methods  
500 Series for Drinking Water  
600 Series for Wastewater  
846 for Solid Waste

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

Jamie Ethier  
Vice President Global Quality