

## Prep Standard - Chemical Standard Summary

**Order ID :** Q2316

**Test :** Metals Group4

**Prepbatch ID :** PB168475,

**Sequence ID/Qc Batch ID:** LB136187, LB136187,

**Standard ID :**

MP85156, MP85867, MP85868, MP85869, MP85870, MP85871, MP85872, MP85873, MP85874, MP85875, MP85876, MP85877, MP85896, MP85897,

**Chemical ID :**

M5466, M5467, M5471, M5658, M5697, M5747, M5748, M5798, M5799, M5800, M5801, M5811, M5814, M5820, M5942, M5962, M5969, M5970, M5984, M5985, M5996, M5997, M6007, M6016, M6021, M6023, M6028, M6030, M6032, M6077, M6127, M6128, M6137, M6138, M6142, M6144, M6145, M6146, M6150, M6151, M6152, M6155, M6158, M6159, M6162, W3112,

## Metals STANDARD PREPARATION LOG

| <u>Recipe ID</u> | <u>NAME</u> | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u> | <u>PipetteID</u> | <u>Supervised By</u> |
|------------------|-------------|-------------------------|------------------|------------------------|--------------------|----------------|------------------|----------------------|
| 170              | 1:1HCL      | <a href="#">MP85156</a> | 04/07/2025       | 08/18/2025             | Kareem Khairalla   | None           | None             | Sarabjit Jaswal      |
|                  |             |                         |                  |                        |                    |                |                  | 04/07/2025           |

**FROM** 1250.00000ml of M6151 + 1250.00000ml of W3112 = Final Quantity: 2500.000 ml

| <u>Recipe ID</u> | <u>NAME</u>                   | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>         | <u>Supervised By</u> |
|------------------|-------------------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|--------------------------|----------------------|
| 902              | ICP AES CAL BLK ( SO/ICB/CCB) | <a href="#">MP85867</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP A) | Sarabjit Jaswal      |
|                  |                               |                         |                  |                        |                    |                         |                          | 06/14/2025           |

**FROM** 125.00000ml of M6151 + 2350.00000ml of W3112 + 25.00000ml of M6162 = Final Quantity: 2500.000 ml



| <u>Recipe ID</u>  | <u>NAME</u>          | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|---|----------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 907   | ICP AES STD S ( S5 ) | <a href="#">MP85868</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 5.00000ml of M5467 + 5.00000ml of M5471 + 5.00000ml of M5820 + 5.00000ml of M5969 + 5.00000ml of M5970 + 5.00000ml of M5996 + 5.00000ml of M5997 + 5.00000ml of M6077 + 5.00000ml of M6146 + 455.00000ml of MP85867 = Final Quantity: 500.000 ml</p> |                      |                         |                  |                        |                    |                         |                        |                      |

| <u>Recipe ID</u>  | <u>NAME</u>    | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|---|----------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 910   | ICP AES STD S4 | <a href="#">MP85869</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 50.00000ml of MP85867 + 50.00000ml of MP85868 = Final Quantity: 100.000 ml</p> |                |                         |                  |                        |                    |                         |                        |                      |



| <u>Recipe ID</u>  | <u>NAME</u>    | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u>          |
|---|----------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|-------------------------------|
| 909   | ICP AES STD S3 | <a href="#">MP85870</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal<br>06/14/2025 |
| <b><u>FROM</u></b> 25.00000ml of MP85868 + 75.00000ml of MP85867 = Final Quantity: 100.000 ml |                |                         |                  |                        |                    |                         |                        |                               |

| <u>Recipe ID</u>   | <u>NAME</u>                      | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|--|----------------------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 908  | ICP AES S2/CRI MINERALS ONLY STD | <a href="#">MP85871</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 8.00000ml of MP85868 + 92.00000ml of MP85867 = Final Quantity: 100.000 ml</p> |                                  |                         |                  |                        |                    |                         |                        |                      |



| <u>Recipe ID</u>  | <u>NAME</u>      | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|---|------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 912   | ICP AES ICV SOLN | <a href="#">MP85872</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 10.00000ml of M6150 + 90.00000ml of MP85867 = Final Quantity: 100.000 ml</p> |                  |                         |                  |                        |                    |                         |                        |                      |

| <u>Recipe ID</u> | <u>NAME</u>   | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>         | <u>Supervised By</u>          |
|------------------|---|-------------------------|------------------|------------------------|--------------------|-------------------------|--------------------------|-------------------------------|
| 904              | ICP AES ICSA SOLN   | <a href="#">MP85873</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP A) | Sarabjit Jaswal<br>06/14/2025 |
| <u>FROM</u>      | 25.00000ml of M6152 + 225.00000ml of MP85867 = Final Quantity: 250.000 ml |                         |                  |                        |                    |                         |                          |                               |



| <u>Recipe ID</u>   | <u>NAME</u>          | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u>          |
|--|----------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|-------------------------------|
| 3494   | ICP AES ICSAB SOLN-1 | <a href="#">MP85874</a> | 06/02/2025       | 06/20/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal<br>06/14/2025 |
| <b>FROM</b> 10.00000ml of M6152 + 10.00000ml of M6155 + 80.00000ml of MP85867 = Final Quantity: 100.000 ml |                      |                         |                  |                        |                    |                         |                        |                               |

| <u>Recipe ID</u>  | <u>NAME</u>      | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|---|------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 911   | ICP AES CCV SOLN | <a href="#">MP85875</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 50.00000ml of MP85867 + 50.00000ml of MP85868 = Final Quantity: 100.000 ml</p> |                  |                         |                  |                        |                    |                         |                        |                      |



| <u>Recipe ID</u>   | <u>NAME</u>          | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|--|----------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 919  | ICP AES INTERNAL STD | <a href="#">MP85876</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p style="text-align: right;">A)</p> <p><b>FROM</b> 1.00000ml of M5984 + 10.00000ml of M5985 + 1969.00000ml of W3112 + 20.00000ml of M6162 = Final Quantity: 2000.000 ml</p> |                      |                         |                  |                        |                    |                         |                        |                      |

| <u>Recipe ID</u>   | <u>NAME</u>        | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|--|--------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 903  | ICP AES RINSE SOLN | <a href="#">MP85877</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 200.00000ml of M6162 + 9800.00000ml of W3112 = Final Quantity: 10000.000 ml</p> |                    |                         |                  |                        |                    |                         |                        |                      |

[illegible]

| <u>Recipe ID</u>   | <u>NAME</u>             | <u>NO.</u>              | <u>Prep Date</u> | <u>Expiration Date</u> | <u>Prepared By</u> | <u>ScaleID</u>          | <u>PipetteID</u>       | <u>Supervised By</u> |
|--|-------------------------|-------------------------|------------------|------------------------|--------------------|-------------------------|------------------------|----------------------|
| 2951   | ICP AES S1/CRI WORK STD | <a href="#">MP85897</a> | 06/02/2025       | 06/23/2025             | Janvi Patel        | METALS_SCALE_3 (M SC-3) | METALS_PIPETTE_1 (ICP) | Sarabjit Jaswal      |
| <p><b>FROM</b> 2.00000ml of MP85896 + 90.03000ml of MP85867 = Final Quantity: 100.000 ml</p> |                         |                         |                  |                        |                    |                         |                        |                      |



## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName            | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|--------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57058 / Cerium, 1000PPM, 100ML | 061322 | 06/13/2025      | 03/06/2023 / bin        | 03/01/2023 / bin            | M5466          |

| Supplier                 | ItemCode / ItemName            | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|--------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57058 / Cerium, 1000PPM, 100ML | 020623 | 02/06/2026      | 03/06/2023 / bin        | 03/01/2023 / bin            | M5467          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57038 / Sr, 1000 PPM, 125 ml | 082922 | 08/29/2025      | 04/14/2025 / jaswal     | 03/16/2023 / jaswal         | M5471          |

| Supplier                 | ItemCode / ItemName                    | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|--|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58024 / Chromium, Cr, 500 ml, 1000 PPM | 060523 | 06/05/2026      | 08/28/2023 / jaswal     | 08/25/2023 / jaswal         | M5658          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58029 / Cu, 1000 PPM, 500 ml | 102523 | 10/25/2026      | 04/03/2024 / jaswal     | 10/27/2023 / jaswal         | M5697          |

| Supplier                 | ItemCode / ItemName | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|---------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | / Lead (Pb) 1000PPM | 100923 | 10/09/2026      | 05/20/2024 / Jaswal     | 12/20/2023 / jaswal         | M5747          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName   | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-----------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | / Nickel (Ni) 1000PPM | 091223 | 09/12/2026      | 01/02/2024 / bin        | 12/20/2023 / jaswal         | M5748          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57004 / Be, 1000 PPM, 125 ml | 102523 | 10/25/2026      | 02/09/2024 / bin        | 02/09/2024 / bin            | M5798          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57050 / Sn, 1000 PPM, 125 ml | 071123 | 07/11/2026      | 02/09/2024 / bin        | 02/09/2024 / bin            | M5799          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57027 / CO, 1000 PPM, 125 ml | 091923 | 09/19/2026      | 05/31/2024 / bin        | 02/09/2024 / bin            | M5800          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57033 / As, 1000 PPM, 125 ml | 111323 | 11/13/2026      | 02/09/2024 / bin        | 02/09/2024 / bin            | M5801          |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58126 / Fe, 10000 PPM, 500 ml | 051523 | 05/15/2026      | 02/06/2025 / kareem     | 01/03/2024 / jaswal         | M5811          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName         | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-----------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57005 / B, 1000 PPM, 125 ml | 071123 | 07/11/2026      | 03/26/2024 / Sohil      | 01/03/2024 / jaswal         | M5814          |

| Supplier                 | ItemCode / ItemName         | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-----------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57015 / P, 1000 PPM, 125 ml | 091123 | 09/11/2026      | 05/01/2024 / jaswal     | 02/09/2024 / jaswal         | M5820          |

| Supplier           | ItemCode / ItemName                | Lot #       | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|------------------------------------|-------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | CGTI1-1 / TITANIUM 125mL 1000ug/mL | T2-TI719972 | 06/17/2027      | 06/18/2024 / Jaswal     | 02/22/2024 / Jaswal         | M5942          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57034 / Se, 1000 PPM, 125 ml | 060624 | 06/06/2027      | 07/02/2024 / Jaswal     | 06/14/2024 / Jaswal         | M5962          |

| Supplier                 | ItemCode / ItemName         | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-----------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57016 / S, 1000 PPM, 125 ml | 122923 | 03/31/2026      | 03/31/2025 / kareem     | 06/11/2024 / Jaswal         | M5969          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57003 / Li, 1000 PPM, 125 ml | 061224 | 06/21/2027      | 07/01/2024 / Jaswal     | 07/01/2024 / Jaswal         | M5970          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier           | ItemCode / ItemName                    | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|--|------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | CGY10-1 / YTTRIUM<br>125mL 10,000ug/mL | V2-Y740548 | 02/20/2029      | 08/05/2024 /<br>kareem  | 06/14/2024 /<br>Jaswal      | M5984          |

| Supplier           | ItemCode / ItemName             | Lot #       | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|---------------------------------|-------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | CGIN10-5 / INDIUM 1 x<br>500 ml | U2-IN729349 | 02/21/2028      | 10/08/2024 /<br>Jaswal  | 06/14/2024 /<br>Jaswal      | M5985          |

| Supplier           | ItemCode / ItemName                        | Lot #        | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|--|--------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | CLPP-CAL-1 / CLP CAL<br>SOLUTION #1, 125mL | T2-MEB714417 | 01/27/2027      | 05/07/2024 /<br>JANVI   | 02/22/2024 /<br>kareem      | M5996          |

| Supplier           | ItemCode / ItemName                        | Lot #        | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|--|--------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | CLPP-CAL-3 / CLP CAL<br>SOLUTION #3, 125mL | T2-MEB727800 | 12/21/2027      | 02/03/2025 /<br>JANVI   | 02/22/2024 /<br>kareem      | M5997          |

| Supplier           | ItemCode / ItemName  | Lot #        | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|--|--------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | WW-LFS-1 / Laboratory<br>Fortified Stock Solution 1,<br>125 ml | T2-MEB723367 | 05/27/2026      | 05/27/2025 /<br>Janvi   | 05/14/2024 /<br>Jaswal      | M6007          |

| Supplier           | ItemCode / ItemName  | Lot #        | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|--|--------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | WW-LFS-2 / Laboratory<br>Fortified Stock Solution 2,<br>125 ml | U2-MEB731108 | 10/30/2025      | 04/30/2025 /<br>mohan   | 05/14/2024 /<br>Jaswal      | M6016          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName         | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-----------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57023 / V, 1000 PPM, 125 ml | 062424 | 06/24/2027      | 09/28/2024 / jaswal     | 08/05/2024 / Jaswal         | M6021          |

| Supplier                 | ItemCode / ItemName          | Lot #   | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|---------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57081 / TI, 1000 PPM, 125 ml | 0624724 | 06/27/2027      | 08/05/2024 / kareem     | 08/05/2024 / Jaswal         | M6023          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57048 / Cd, 1000 PPM, 125 ml | 070124 | 07/01/2027      | 08/05/2024 / kareem     | 08/05/2024 / Jaswal         | M6028          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57047 / Ag, 1000 PPM, 125 ml | 122823 | 12/28/2026      | 08/05/2024 / kareem     | 08/05/2024 / Jaswal         | M6030          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57056 / Ba, 1000 PPM, 125 ml | 010924 | 01/09/2027      | 01/14/2025 / Jaswal     | 08/05/2024 / Jaswal         | M6032          |

| Supplier           | ItemCode / ItemName      | Lot #        | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|--------------------------|--------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | Z9651Q / CHEM-CLP-4/.25L | V2-MEB746762 | 09/06/2029      | 01/23/2025 / kareem     | 09/19/2024 / kareem         | M6077          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58112 / Mg, 10000 PPM, 500 ml | 112124 | 11/21/2027      | 01/13/2025 / kareem     | 01/13/2025 / kareem         | M6127          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58025 / Mn, 1000 PPM, 500 ml | 101124 | 10/11/2027      | 01/13/2025 / kareem     | 01/13/2025 / kareem         | M6128          |

| Supplier           | ItemCode / ItemName               | Lot #       | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------|-----------------------------------|-------------|-----------------|-------------------------|-----------------------------|----------------|
| Inorganic Ventures | CGSI1-1 / SILICON 125mL 1000ug/mL | V2-SI744713 | 07/10/2029      | 01/14/2025 / Jaswal     | 10/03/2024 / Jaswal         | M6137          |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58120 / Ca, 10000 PPM, 500 ml | 121824 | 12/18/2027      | 04/17/2025 / Janvi      | 01/13/2025 / Jaswal         | M6138          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58119 / K, 10000 PPM, 500 ml | 103024 | 10/30/2027      | 05/06/2025 / JANVI      | 01/13/2025 / Jaswal         | M6142          |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58111 / Na, 10000 PPM, 500 ml | 072424 | 07/24/2027      | 01/23/2025 / kareem     | 01/13/2025 / Jaswal         | M6144          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier                 | ItemCode / ItemName                | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58030 / Zinc, Zn, 500 ml, 1000 PPM | 121724 | 12/17/2027      | 02/04/2025 / Jaswal     | 01/13/2025 / Jaswal         | M6145          |

| Supplier                 | ItemCode / ItemName          | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 57051 / Sb, 1000 PPM, 125 ml | 071724 | 07/17/2027      | 01/31/2025 / kareem     | 10/18/2024 / kareem         | M6146          |

| Supplier | ItemCode / ItemName                  | Lot #     | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|--------------------------------------|-----------|-----------------|-------------------------|-----------------------------|----------------|
| EPA      | ICV-1 / ICV ( ICP/ICPMS ) STOCK SOLN | ICV1-1014 | 07/07/2025      | 02/07/2025 / JANVI      | 04/20/2021 / JANVI          | M6150          |

| Supplier         | ItemCode / ItemName   | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|---|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA-9530-33 / Hydrochloric Acid, Instra-Analyzed (cs/6x2.5L) | 22G2862015 | 08/18/2025      | 02/18/2025 / Sagar      | 01/15/2025 / Sagar          | M6151          |

| Supplier | ItemCode / ItemName              | Lot #     | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|----------------------------------|-----------|-----------------|-------------------------|-----------------------------|----------------|
| EPA      | PART A / ICSA ( ICP ) STOCK SOLN | ICSA-1211 | 08/24/2025      | 02/24/2025 / kareem     | 04/20/2021 / kareem         | M6152          |

| Supplier | ItemCode / ItemName               | Lot #     | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|----------|-----------------------------------|-----------|-----------------|-------------------------|-----------------------------|----------------|
| EPA      | PART B / ICSAB ( ICP ) STOCK SOLN | ICSB-0710 | 06/20/2025      | 02/10/2025 / kareem     | 02/09/2024 / kareem         | M6155          |

## CHEMICAL RECEIPT LOG BOOK

| Supplier         | ItemCode / ItemName                                   | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|---|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L) | 24D1062002 | 03/25/2029      | 03/10/2025 / Eman       | 02/02/2025 / Sagar          | M6158          |

| Supplier                 | ItemCode / ItemName           | Lot #  | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|--------------------------|-------------------------------|--------|-----------------|-------------------------|-----------------------------|----------------|
| Absolute Standards, Inc. | 58113 / Al, 10000 PPM, 500 ml | 011325 | 03/18/2026      | 03/18/2025 / kareem     | 02/09/2025 / kareem         | M6159          |

| Supplier         | ItemCode / ItemName                                   | Lot #      | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|---|------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | BA-9598-34 / Nitric Acid, Instra-Analyzed (cs/4x2.5L) | 24H0162012 | 11/27/2025      | 05/27/2025 / Sagar      | 04/27/2025 / Sagar          | M6162          |

| Supplier         | ItemCode / ItemName | Lot #               | Expiration Date | Date Opened / Opened By | Received Date / Received By | Chemtech Lot # |
|------------------|---------------------|---------------------|-----------------|-------------------------|-----------------------------|----------------|
| Seidler Chemical | DIW / DI Water      | Daily Lab-Certified | 07/03/2029      | 07/03/2024 / lwona      | 07/03/2024 / lwona          | W3112          |





**CERTIFIED WEIGHT REPORT:**

**Part Number:**  
**Lot Number:**  
**Description:**

**57056**  
**010924**  
**Barium (Ba)**

**Lot #**  
**Solvent:** 24002546 Nitric Acid

**Expiration Date:**

010927

2% 40.0 (mL) Nitric Acid

**Recommended Storage:**

Ambient (20 °C)

**Nominal Concentration (µg/mL):**

1000

**NIST Test Number:**

6UTB

5E-05 Balance Uncertainty

Weight shown below was diluted to (mL): 2000.02 0.058 Flask Uncertainty


|                   |                   |
|-------------------|-------------------|
| Giovanni Caporaso |                   |
| Formulated By:    | Giovanni Esposito |
|                   | 010924            |
| Reviewed By:      | Pedro L. Renteria |
|                   | 010924            |

**Compound**

| Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Barium nitrate (Ba) IN023 BA0022019A1 1000 99.999 0.10 52.3 3.82417 3.82441 1000.1 2.0 10022-31-8 0.5 mg/m3 or-hat 355 mg/kg 3104a

[1] Spectrum No.1 [ 12.514 sec]:58156.D# [Count] [Linear]

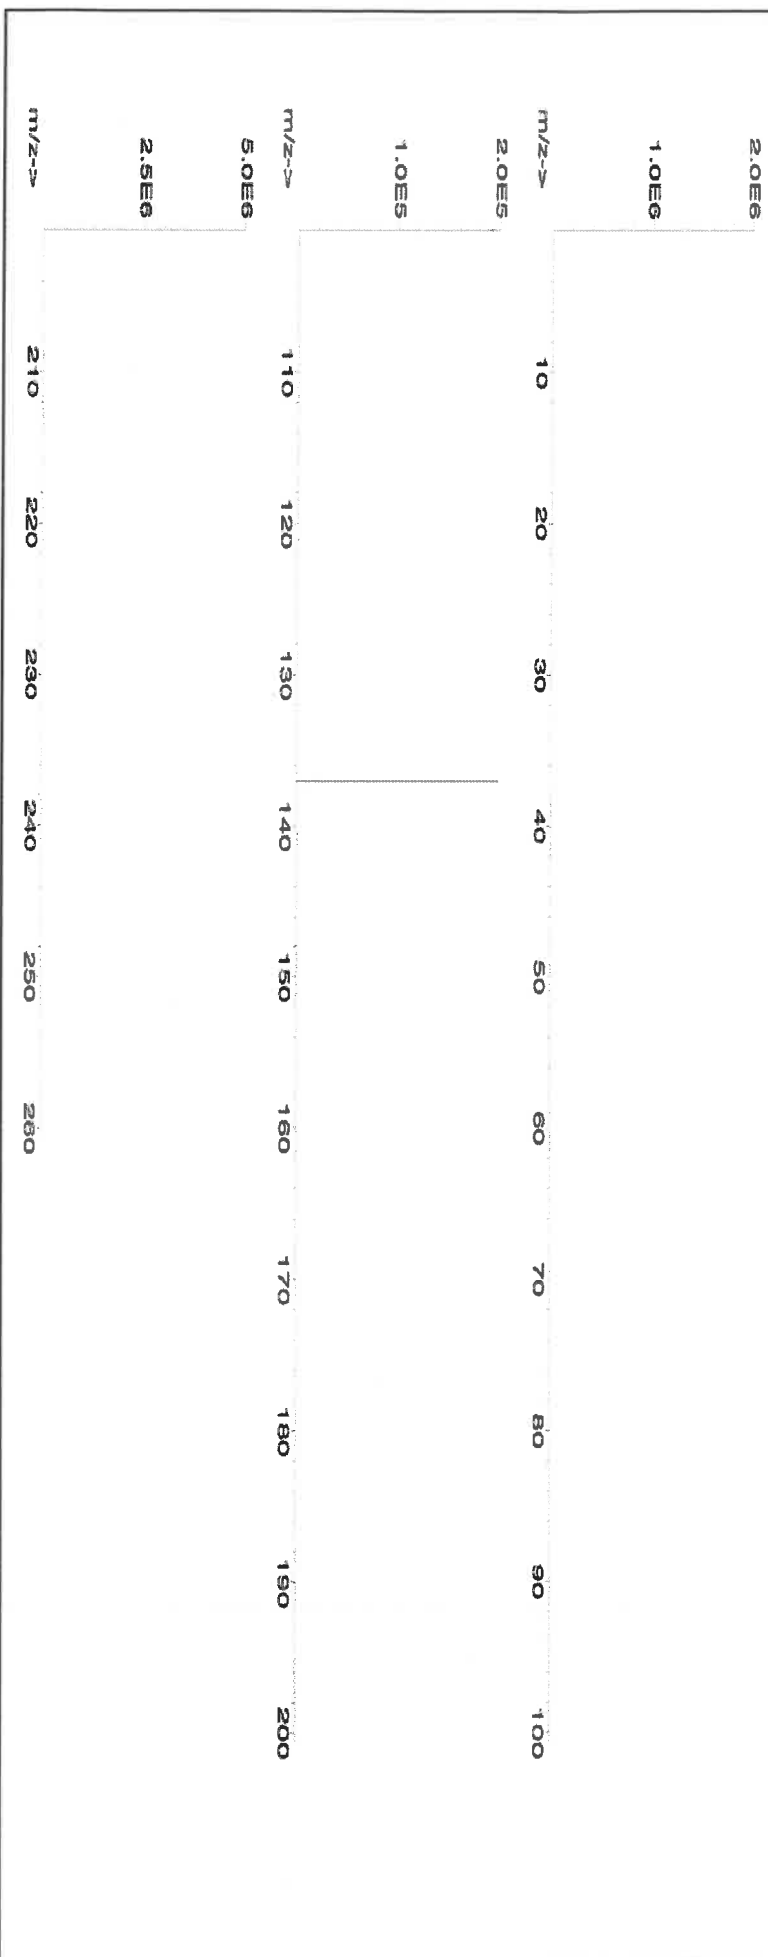



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | T     | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:**  
**Lot Number:**  
**Description:**

57048  
070124  
Cadmium (Cd)

**Lot #**  
**Solvent:** 24002546 Nitric Acid

2% 40.0 (mL) Nitric Acid

**Expiration Date:** 070127

**Recommended Storage:** Ambient (20 °C)

**Nominal Concentration (µg/mL):** 1000

**NIST Test Number:** 6UTB

**Weight shown below was diluted to (mL):** 2000.07 5E-05 Balance Uncertainty 0.100 Flask Uncertainty


|                        |                 |
|------------------------|-----------------|
| <i>Aleah O'Brady</i>   |                 |
| Formulated By:         | Aleah O'Brady   |
|                        | 070124          |
| <i>Pedro L. Rentas</i> |                 |
| Reviewed By:           | Pedro L. Rentas |
|                        | 070124          |

**Compound**

| Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

|                                      |                  |      |        |      |      |        |        |        |     |            |            |                  |      |
|--------------------------------------|------------------|------|--------|------|------|--------|--------|--------|-----|------------|------------|------------------|------|
| 1. Cadmium nitrate tetrahydrate (Cd) | INO24 CDM09221A1 | 1000 | 99.999 | 0.10 | 36.5 | 5.4797 | 5.4804 | 1000.1 | 2.0 | 10022-68-1 | 0.01 mg/m3 | or-rat 60.2mg/kg | 3108 |
|--------------------------------------|------------------|------|--------|------|------|--------|--------|--------|-----|------------|------------|------------------|------|

[1] Spectrum No.1 [12.514 sec]:\$8148.D# [Count] [Linear]

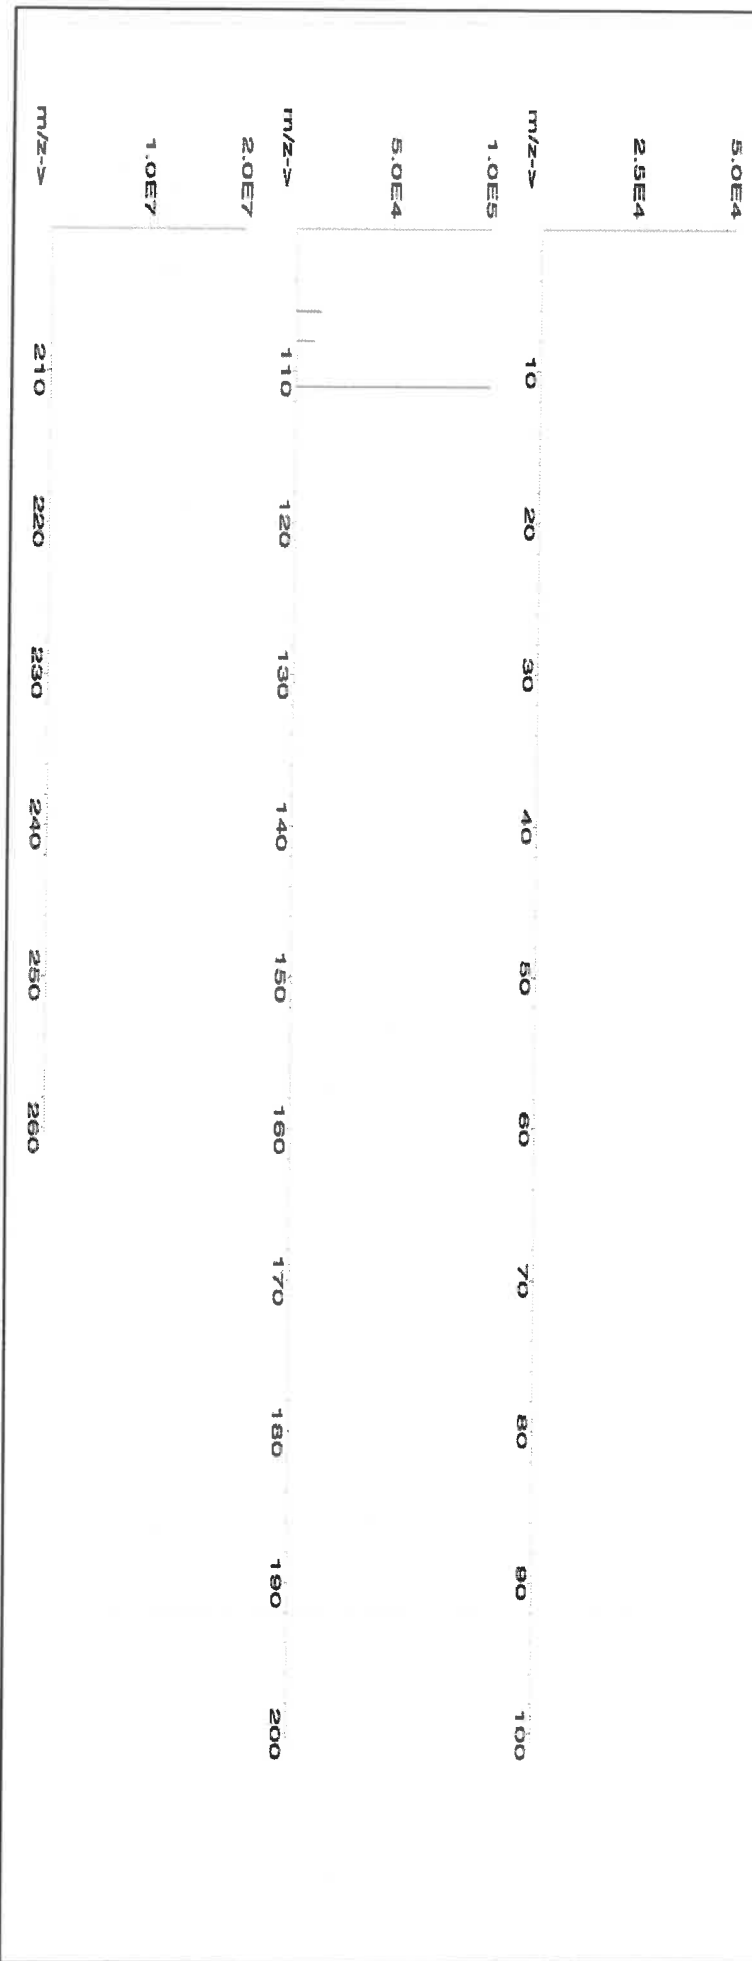



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.2  | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Ba | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Cd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pr | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 58126  
**Lot Number:** 051523  
**Description:** Iron (Fe)

**Solvent:** 21110221 Nitric Acid

**Lot #**

**Expiration Date:** 051526

**5.0%** 250.0 Nitric Acid (mL)

**Recommended Storage:** Ambient (20 °C)

**Nominal Concentration (µg/mL):** 10000

**NIST Test Number:** 6UTB

**5E-05** Balance Uncertainty

**Weight shown below was diluted to (mL):** 5000.1 0.12 Flask Uncertainty

*Giovanni Esposito*

**Formulated By:** Giovanni Esposito 051523

*Pedro L. Renias*


**Reviewed By:** Pedro L. Renias 051523

**SDS Information**

| Compound | Lot    | Nominal       | Purity | Uncertainty | Assay | Target     | Actual     | Actual        | Uncertainty | (Solvent Safety Info. On Attached pg.) |                |      | NIST |
|----------|--------|---------------|--------|-------------|-------|------------|------------|---------------|-------------|--|----------------|------|------|
|          | Number | Conc. (µg/mL) | (%)    | Purity (%)  | (%)   | Weight (g) | Weight (g) | Conc. (µg/mL) | +/- (µg/mL) | CAS#                                   | OSHA PEL (TWA) | LD50 | SRM  |

1. Iron (Fe) IN346 2302010-500 10000 99.995 0.10 100.0 50.0034 50.0111 10001.5 20.0 7439-89-6 5 mg/m3 or-rel 7500mg/kg 3126a

[1] Spectrum No.1 [ 30.763 sec]:58126.D# [Count] [Linear]

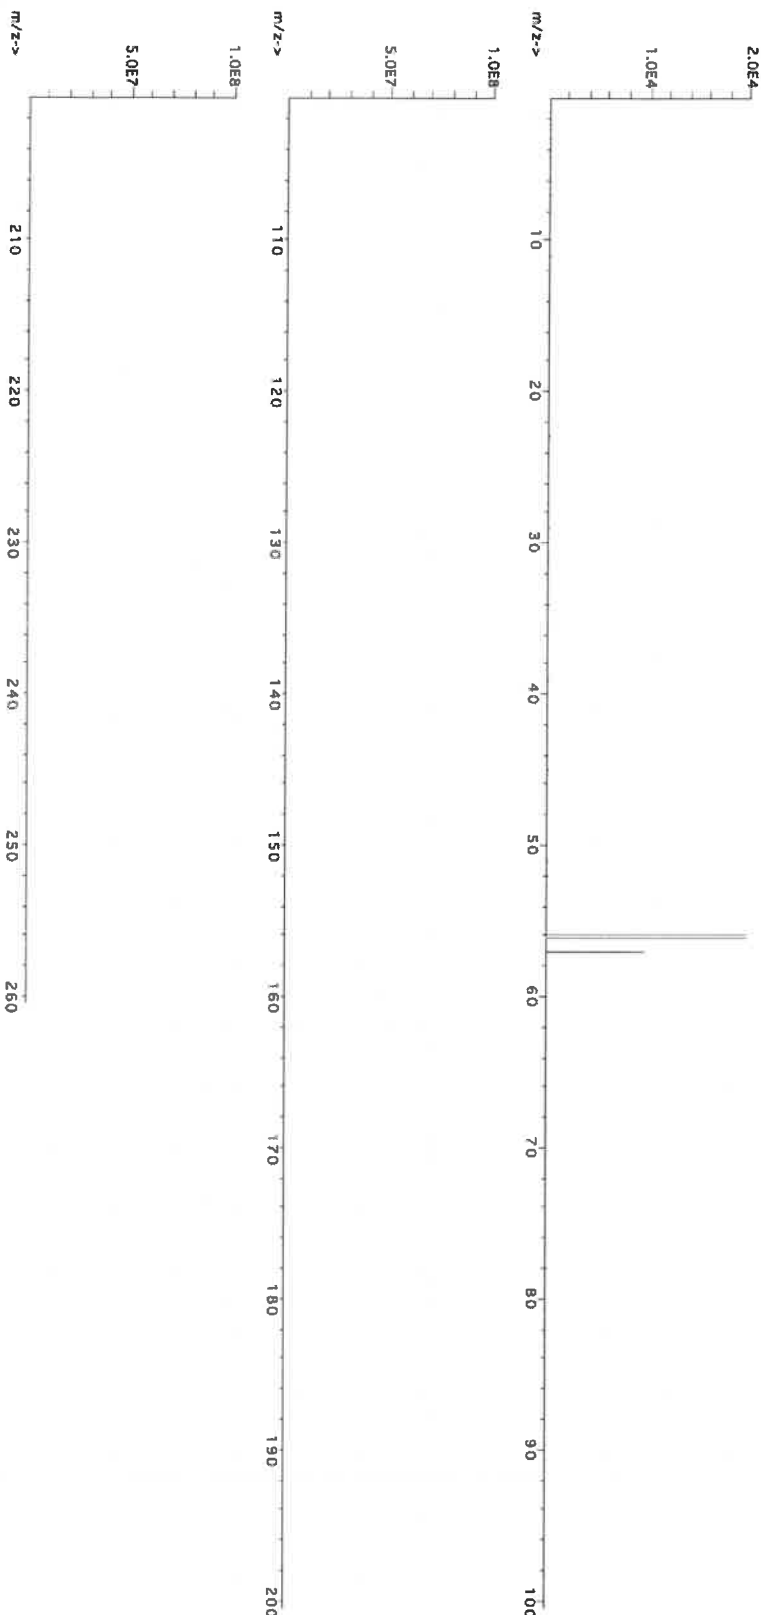



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.10 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rb | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.10 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.05 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.10 | Ge | <0.10 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.10 |
| B  | <0.02 | Cu | <0.10 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Tl | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Refine your results. Redefine your industry.

RD:05/14/2024

# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030

F: 540-585-3012

info@inorganicventures.com

## 1.0 ACCREDITATION / REGISTRATION

**INORGANIC VENTURES** is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

|                 |                                     |
|-----------------|-------------------------------------|
| Product Code:   | Multi Analyte Custom Grade Solution |
| Catalog Number: | WW-LFS-1                            |
| Lot Number:     | T2-MEB723367                        |
| Matrix:         | 5% (v/v) HNO <sub>3</sub>           |

|                     |                 |            |
|---------------------|-----------------|------------|
| Value / Analyte(s): | 1 000 µg/mL ea: |            |
|                     | Potassium,      |            |
|                     | 600 µg/mL ea:   |            |
|                     | Phosphorus,     |            |
|                     | 300 µg/mL ea:   |            |
|                     | Sodium,         | Iron,      |
|                     | 200 µg/mL ea:   |            |
|                     | Magnesium,      | Aluminum,  |
|                     | Cerium,         | Selenium,  |
|                     | Thallium,       |            |
|                     | 100 µg/mL ea:   |            |
|                     | Lead,           | Calcium,   |
|                     | 80 µg/mL ea:    |            |
|                     | Arsenic,        |            |
|                     | 70 µg/mL ea:    |            |
|                     | Mercury,        |            |
|                     | 50 µg/mL ea:    |            |
|                     | Nickel,         |            |
|                     | 40 µg/mL ea:    |            |
|                     | Chromium,       |            |
|                     | 30 µg/mL ea:    |            |
|                     | Copper,         | Boron,     |
|                     | Vanadium,       |            |
|                     | 20 µg/mL ea:    |            |
|                     | Zinc,           | Strontium, |
|                     | Barium,         | Beryllium, |
|                     | Cadmium,        | Cobalt,    |
|                     | Manganese,      | Lithium,   |
|                     | 7.5 µg/mL ea:   |            |
|                     | Silver          |            |

### 3.0 CERTIFIED VALUES AND UNCERTAINTIES



| <b>ANALYTE</b> | <b>CERTIFIED VALUE</b> | <b>ANALYTE</b> | <b>CERTIFIED VALUE</b> |
|----------------|------------------------|----------------|------------------------|
| Aluminum, Al   | 200.0 ± 0.7 µg/mL      | Arsenic, As    | 80.0 ± 0.7 µg/mL       |
| Barium, Ba     | 20.00 ± 0.09 µg/mL     | Beryllium, Be  | 20.00 ± 0.13 µg/mL     |
| Boron, B       | 30.00 ± 0.18 µg/mL     | Cadmium, Cd    | 20.00 ± 0.09 µg/mL     |
| Calcium, Ca    | 100.0 ± 0.4 µg/mL      | Cerium, Ce     | 200.0 ± 0.8 µg/mL      |
| Chromium, Cr   | 40.00 ± 0.30 µg/mL     | Cobalt, Co     | 20.00 ± 0.10 µg/mL     |
| Copper, Cu     | 30.00 ± 0.13 µg/mL     | Iron, Fe       | 300.0 ± 1.3 µg/mL      |
| Lead, Pb       | 100.0 ± 0.4 µg/mL      | Lithium, Li    | 20.00 ± 0.08 µg/mL     |
| Magnesium, Mg  | 200.0 ± 0.8 µg/mL      | Manganese, Mn  | 20.00 ± 0.08 µg/mL     |
| Mercury, Hg    | 70.0 ± 0.3 µg/mL       | Nickel, Ni     | 50.00 ± 0.22 µg/mL     |
| Phosphorus, P  | 600.0 ± 2.7 µg/mL      | Potassium, K   | 1 000 ± 4 µg/mL        |
| Selenium, Se   | 200.0 ± 1.3 µg/mL      | Silver, Ag     | 7.50 ± 0.03 µg/mL      |
| Sodium, Na     | 300.0 ± 1.4 µg/mL      | Strontium, Sr  | 20.01 ± 0.08 µg/mL     |
| Thallium, Tl   | 200.0 ± 1.4 µg/mL      | Vanadium, V    | 30.00 ± 0.13 µg/mL     |
| Zinc, Zn       | 20.00 ± 0.09 µg/mL     |                |                        |

**Density:** 1.034 g/mL (measured at 20 ± 4 °C)

**Assay Information:**

| <b>ANALYTE</b> | <b>METHOD</b> | <b>NIST SRM#</b>   | <b>SRM LOT#</b> |
|----------------|---------------|--------------------|-----------------|
| Ag             | ICP Assay     | 3151               | 160729          |
| Ag             | Volhard       | 999c               | 999c            |
| Ag             | Calculated    |                    | See Sec. 4.2    |
| Al             | ICP Assay     | 3101a              | 140903          |
| Al             | EDTA          | 928                | 928             |
| As             | ICP Assay     | 3103a              | 100818          |
| B              | ICP Assay     | 3107               | 190605          |
| Ba             | ICP Assay     | 3104a              | 140909          |
| Ba             | Gravimetric   |                    | See Sec. 4.2    |
| Be             | ICP Assay     | 3105a              | 090514          |
| Ca             | ICP Assay     | 3109a              | 130213          |
| Ca             | EDTA          | 928                | 928             |
| Cd             | ICP Assay     | 3108               | 130116          |
| Cd             | EDTA          | 928                | 928             |
| Ce             | ICP Assay     | 3110               | 090504          |
| Ce             | EDTA          | 928                | 928             |
| Co             | ICP Assay     | 3113               | 190630          |
| Co             | EDTA          | 928                | 928             |
| Cr             | ICP Assay     | 3112a              | 170630          |
| Cu             | ICP Assay     | 3114               | 121207          |
| Cu             | EDTA          | 928                | 928             |
| Fe             | ICP Assay     | 3126a              | 140812          |
| Fe             | EDTA          | 928                | 928             |
| Hg             | ICP Assay     | 3133               | 160921          |
| Hg             | EDTA          | 928                | 928             |
| K              | ICP Assay     | 3141a              | 140813          |
| K              | Gravimetric   |                    | See Sec. 4.2    |
| Li             | ICP Assay     | 3129a              | 100714          |
| Li             | Gravimetric   |                    | See Sec. 4.2    |
| Mg             | ICP Assay     | 3131a              | 140110          |
| Mg             | EDTA          | 928                | 928             |
| Mn             | ICP Assay     | 3132               | 050429          |
| Mn             | EDTA          | 928                | 928             |
| Na             | ICP Assay     | Traceable to 3152A | S2-NA700842     |
| Na             | Gravimetric   |                    | See Sec. 4.2    |
| Ni             | ICP Assay     | 3136               | 120619          |
| Ni             | EDTA          | 928                | 928             |
| P              | ICP Assay     | 3139a              | 060717          |
| P              | Acidimetric   | 84L                | 84L             |
| Pb             | ICP Assay     | 3128               | 101026          |
| Pb             | EDTA          | 928                | 928             |
| Se             | ICP Assay     | 3149               | 100901          |
| Sr             | EDTA          | 928                | 928             |
| Sr             | ICP Assay     | Traceable to 3153a | K2-SR650985     |
| Tl             | ICP Assay     | 3158               | 151215          |
| V              | IC Assay      | 3165               | 160906          |
| V              | EDTA          | 928                | 928             |
| Zn             | ICP Assay     | 3168a              | 120629          |
| Zn             | EDTA          | 928                | 928             |

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

#### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{\text{CRM/RM}} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{\text{char } i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\text{char } i}^2) / (\sum (1/u_{\text{char } i}^2))$$

$$\text{CRM/RM Expanded Uncertainty (z)} = U_{\text{CRM/RM}} = k (u_{\text{char}}^2 + u_{\text{bb}}^2 + u_{\text{ts}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char}} = [\sum ((w_i)^2 (u_{\text{char } i})^2)]^{1/2}$  where  $u_{\text{char } i}$  are the errors from each characterization method

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ts}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

#### Characterization of CRM/RM by One Method

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

$$X_{\text{CRM/RM}} = (X_a) (u_{\text{char } a})$$

$X_a$  = mean of Assay Method A with

$u_{\text{char } a}$  = the standard uncertainty of characterization Method A

$$\text{CRM/RM Expanded Uncertainty (z)} = U_{\text{CRM/RM}} = k (u_{\text{char } a}^2 + u_{\text{bb}}^2 + u_{\text{ts}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char } a}$  = the errors from characterization

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ts}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

## 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Low Silver Note:** This solution contains "LOW" levels of Silver. Please store this entire bottle inside a sealed glass jar.

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [info@inorganicventures.com](mailto:info@inorganicventures.com); [inorganicventures.com](http://inorganicventures.com)

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

August 30, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- August 30, 2026

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director





Refine your results. Redefine your industry.

RD:05/14/2024

# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030  
F: 540-585-3012  
info@inorganicventures.com

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution  
Catalog Number: WW-LFS-2  
Lot Number: U2-MEB731108  
Matrix: 5% (v/v) HNO<sub>3</sub>  
tr. HF  
Value / Analyte(s):  
200 µg/mL ea:  
Silica,  
80 µg/mL ea:  
Antimony,  
70 µg/mL ea:  
Tin,  
40 µg/mL ea:  
Molybdenum,  
20 µg/mL ea:  
Titanium

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

| ANALYTE                  | CERTIFIED VALUE    | ANALYTE        | CERTIFIED VALUE    |
|--------------------------|--------------------|----------------|--------------------|
| Antimony, Sb             | 80.1 ± 0.6 µg/mL   | Molybdenum, Mo | 40.03 ± 0.18 µg/mL |
| Silica, SiO <sub>2</sub> | 200.2 ± 1.3 µg/mL  | Tin, Sn        | 70.0 ± 0.4 µg/mL   |
| Titanium, Ti             | 20.01 ± 0.13 µg/mL |                |                    |

Density: 1.025 g/mL (measured at 20 ± 4 °C)

### Assay Information:

| ANALYTE          | METHOD     | NIST SRM# | SRM LOT#     |
|------------------|------------|-----------|--------------|
| Mo               | ICP Assay  | 3134      | 130418       |
| Mo               | Calculated |           | See Sec. 4.2 |
| Sb               | ICP Assay  | 3102a     | 140911       |
| SiO <sub>2</sub> | ICP Assay  | 3150      | 130912       |
| Sn               | ICP Assay  | 3161a     | 140917       |
| Ti               | ICP Assay  | 3162a     | 130925       |
| Ti               | Calculated |           | See Sec. 4.2 |

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

#### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{\text{CRM/RM}} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{\text{char } i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\text{char } i})^2 / (\sum (1/u_{\text{char } i})^2)$$

$$\text{CRM/RM Expanded Uncertainty } (z) = U_{\text{CRM/RM}} = k (u_{\text{char}}^2 + u_{\text{bb}}^2 + u_{\text{ITS}}^2 + u_{\text{TS}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char}} = [\sum (w_i)^2 (u_{\text{char } i})^2]^{1/2}$  where  $u_{\text{char } i}$  are the errors from each characterization method

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ITS}}$  = long term stability standard uncertainty (storage)

$u_{\text{TS}}$  = transport stability standard uncertainty

#### Characterization of CRM/RM by One Method

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

$$X_{\text{CRM/RM}} = (X_a) (u_{\text{char } a})$$

$X_a$  = mean of Assay Method A with

$u_{\text{char } a}$  = the standard uncertainty of characterization Method A

$$\text{CRM/RM Expanded Uncertainty } (z) = U_{\text{CRM/RM}} = k (u_{\text{char } a}^2 + u_{\text{bb}}^2 + u_{\text{ITS}}^2 + u_{\text{TS}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char } a}$  = the errors from characterization

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ITS}}$  = long term stability standard uncertainty (storage)

$u_{\text{TS}}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

## 6.0 INTENDED USE

**6.1** This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

**6.2** For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale, <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**HF Note:** This standard should not be prepared or stored in glass.

## **8.0 HAZARDOUS INFORMATION**

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## **9.0 HOMOGENEITY**

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## **10.0 QUALITY STANDARD DOCUMENTATION**

### **10.1 ISO 9001 Quality Management System Registration**

- QSR Certificate Number QSR-1034

### **10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"**

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### **10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"**

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [info@inorganicventures.com](mailto:info@inorganicventures.com);

## **11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY**

### **11.1 Certification Issue Date**

March 17, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### **11.2 Lot Expiration Date**

- **March 17, 2028**

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

#### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



#### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director







AN 5466

**Certified Reference Material CRM**



ANAB ISO 17034 Accredited  
AFR-1539 Certificate Number  
https://Absolutestandards.com

**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57058  
**Lot Number:** 061322  
**Description:** Cerium (Ce)

**Solvent:** 20510011 Nitric Acid

**Lot #**

**Expiration Date:** 061325

**2% 20.0 Nitric Acid (mL)**

**Recommended Storage:** Ambient (20 °C)

**Nominal Concentration (µg/mL):** 1000

**6UTB**

**5E-05 Balance Uncertainty**

**Weight shown below was diluted to (mL):** 1000.12 0.058 Flask Uncertainty


|                          |                   |
|--------------------------|-------------------|
| <i>Lawrence Barry</i>    |                   |
| Formulated By:           | Lawrence Barry    |
|                          | 061322            |
| <i>Pedro L. Renteria</i> |                   |
| Reviewed By:             | Pedro L. Renteria |
|                          | 061322            |

**Compound**

| Lot    | Nominal       | Purity | Uncertainty | Assay | Target     | Actual     | Actual        | Expanded    | SDS Information                        | NIST |
|--------|---------------|--------|-------------|-------|------------|------------|---------------|-------------|--|------|
| Number | Conc. (µg/mL) | (%)    | Purity (%)  | (%)   | Weight (g) | Weight (g) | Conc. (µg/mL) | +/- (µg/mL) | (Solvent Safety Info. On Attached pg.) | SRM  |

|                                    |       |          |      |        |      |      |         |         |        |     |            |    |    |    |
|------------------------------------|-------|----------|------|--------|------|------|---------|---------|--------|-----|------------|----|----|----|
| 1. Cerium nitrate hexahydrate (Ce) | IN146 | Z512CEB1 | 1000 | 99.999 | 0.10 | 32.8 | 3.04919 | 3.04923 | 1000.0 | 2.0 | 10294-41-4 | NA | NA | NA |
|------------------------------------|-------|----------|------|--------|------|------|---------|---------|--------|-----|------------|----|----|----|

[1] Spectrum No.1 [ 43.472 sec:158.00e [Count] [linear]

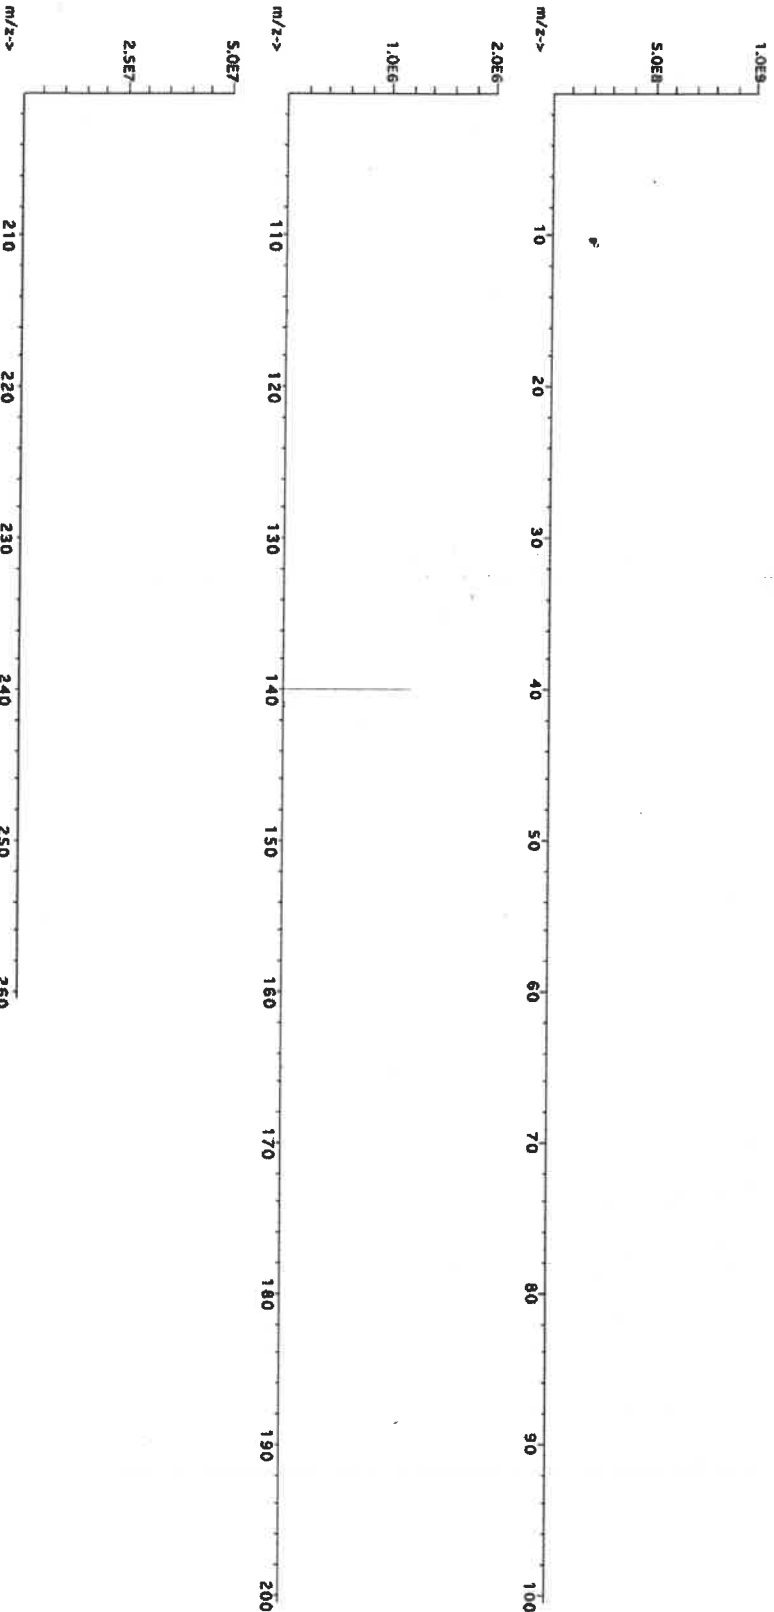



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):

## Trace Metals Verification by ICP-MS (µg/mL)

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Er | <0.02 | Ho | <0.02 | Li | <0.02 | Lu | <0.02 | Nb | <0.02 | Pb | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Mg | <0.02 | Os | <0.02 | Rh | <0.02 | Rc | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | T     | Gd | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Ru | <0.02 | Ag | <0.02 | Ti | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Ga | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ge | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Au | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ta | <0.02 | Tl | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       | Zr | <0.02 |

(T)= Target analyte

## Physical Characterization:

Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:**  
**Lot Number:**  
**Description:**

**57058**  
**020623**  
**Cerium (Ce)**

**Expiration Date:**  
**Recommended Storage:**  
**Nominal Concentration (µg/mL):**  
**NIST Test Number:**

**020626**  
**Ambient (20 °C)**  
**1000**  
**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Lot #**

**21110221**

**Nitric Acid**

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**Solvent:**

**Nitric Acid**

**2%**  
**20.0**  
**(mL)**

**Nitric Acid**

**5E-05** Balance Uncertainty  
**0.058** Flask Uncertainty

**57058**

**020623**

**Cerium (Ce)**

**020626**

**Ambient (20 °C)**

**1000**

**6UTB**

**Weight shown below was diluted to (mL):**

**1000.12**

**5E-05** Balance Uncertainty  
**0.058** Flask



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Tc | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | T     | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.02 | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 58024  
**Lot Number:** 060523  
**Description:** Chromium (Cr)

**Lot #** 2110221 **Solvent:** Nitric Acid


|                |                 |        |
|----------------|-----------------|--------|
| Formulated By: | Lawrence Barry  | 060523 |
| Reviewed By:   | Pedro L. Ruelas | 060523 |

**Expiration Date:** 060526  
**Recommended Storage:** Ambient (20 °C)  
**Nominal Concentration (µg/mL):** 1000  
**NIST Test Number:** 6UTB  
**Volume shown below was diluted to (mL):** 2000.02 0.058 **Flask Uncertainty**

| Compound | Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-------------|------------|-----------------|-------------------|------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|
|----------|-------------|------------|-----------------|-------------------|------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|

1. Chromium(III) nitrate nonahydrate (Cr) 58124 071122 0.1000 200.0 0.084 1000 10000.1 1000.0 2.2 7789-02-8 0.5 mg(Cr)/m3 or rat 3250 mg/kg 3112a

[1] Spectrum No.1 [31.393 sec]:57024.D# [Count] [Linear]

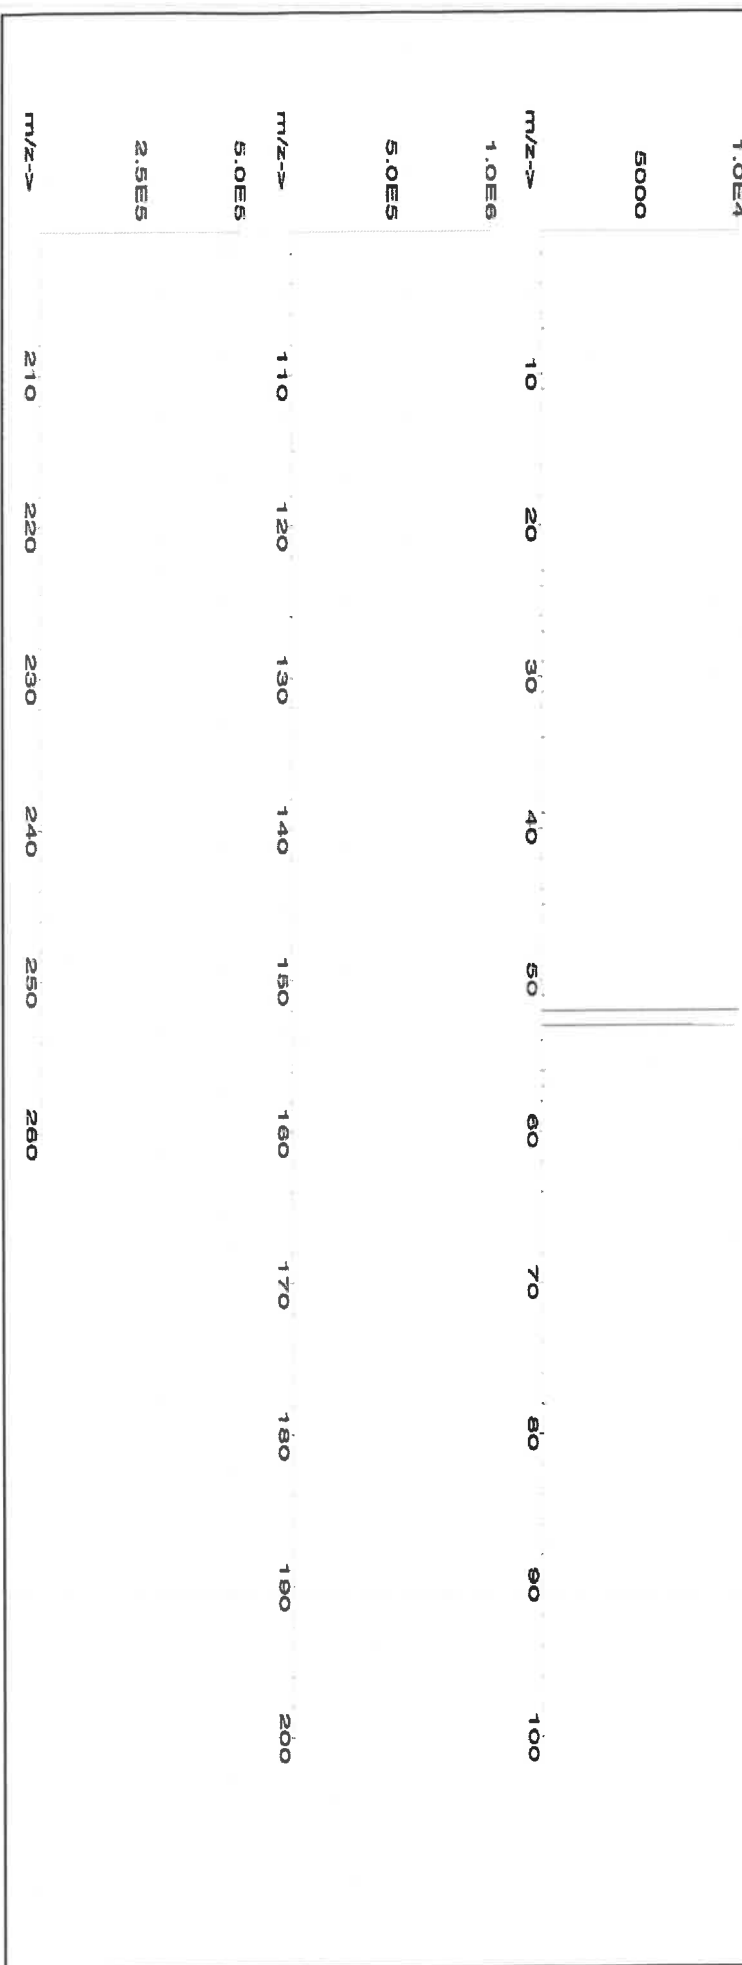



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | T     | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:**  
**Lot Number:**  
**Description:**

**58029**  
**102523**  
**Copper (Cu)**

**Lot #**  
**24002546**  
**Solvent:**  
**Nitric Acid**

**Expiration Date:**

102526

**Recommended Storage:**

Ambient (20 °C)

**Nominal Concentration (µg/mL):**

1000

**NIST Test Number:**

6UTB

**Volume shown below was diluted to (mL):**

2000.02

5E-05 Balance Uncertainty  
0.058 Flask Uncertainty

2.0%  
40.0 (mL)  
Nitric Acid

**Formulated By:**  
**Benson Chan**  
102523


**Reviewed By:**  
**Pedro L. Rentas**  
102523

**SDS Information**

| Compound | Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty Pipette (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|

1. Copper(II) nitrate trihydrate (Cu) 58129 100223 0.1000 200.0 0.084 1000 10000.1 1000.0 2.2 10031-43-3 1 mg/m3 or-rat 794 mg/kg 3114

[1] Spectrum No.1 [33.422 sec]:58029.D# [Count] [Linear]

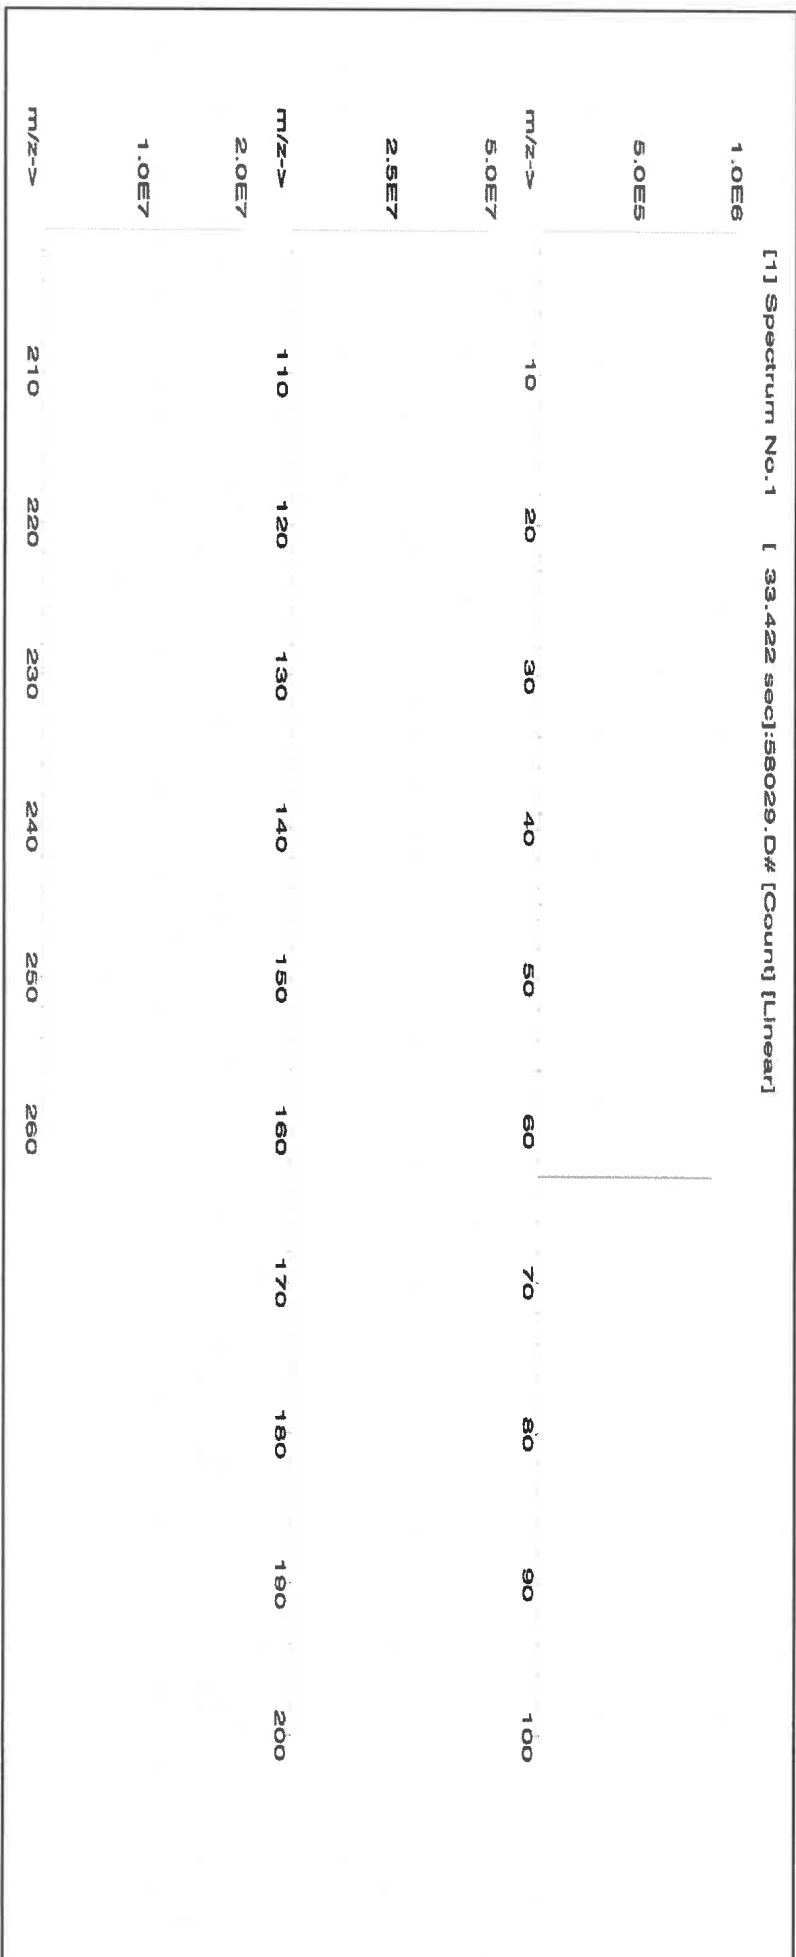



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

## Trace Metals Verification by ICP-MS (µg/mL)

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | T     | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

## Physical Characterization:

Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).





**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57082  
**Lot Number:** 100923  
**Description:** Lead (Pb)

**Solvent:** 24002546 Nitric Acid

**Lot #**

R: 12/20/23 MS747

|                |                 |
|----------------|-----------------|
|                |                 |
| Formulated By: | Lawrence Barry  |
|                | 100923          |
|                |                 |
| Reviewed By:   | Pedro L. Rentas |
|                | 100923          |

**Expiration Date:** 100926  
**Recommended Storage:** Ambient (20 °C)  
**Nominal Concentration (µg/mL):** 1000  
**NIST Test Number:** 6UTB


**2% 60.0 (mL) Nitric Acid**

**Weight shown below was diluted to (mL):** 3000.41  
**5E-05 Balance Uncertainty**  
**0.06 Flask Uncertainty**

| Compound | RM# | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty Purity (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Lead(II) nitrate (Pb) IN029 PB0122016A1 1000 99.999 0.10 62.5 4.80071 4.80077 1000.0 2.0 10099-74-8 0.05 mg/m3 Intvms-ret 89 mg/kg 3128

[1] Spectrum No. 1 [ 14.144 sec]:58082.D# [Count] [Linear]

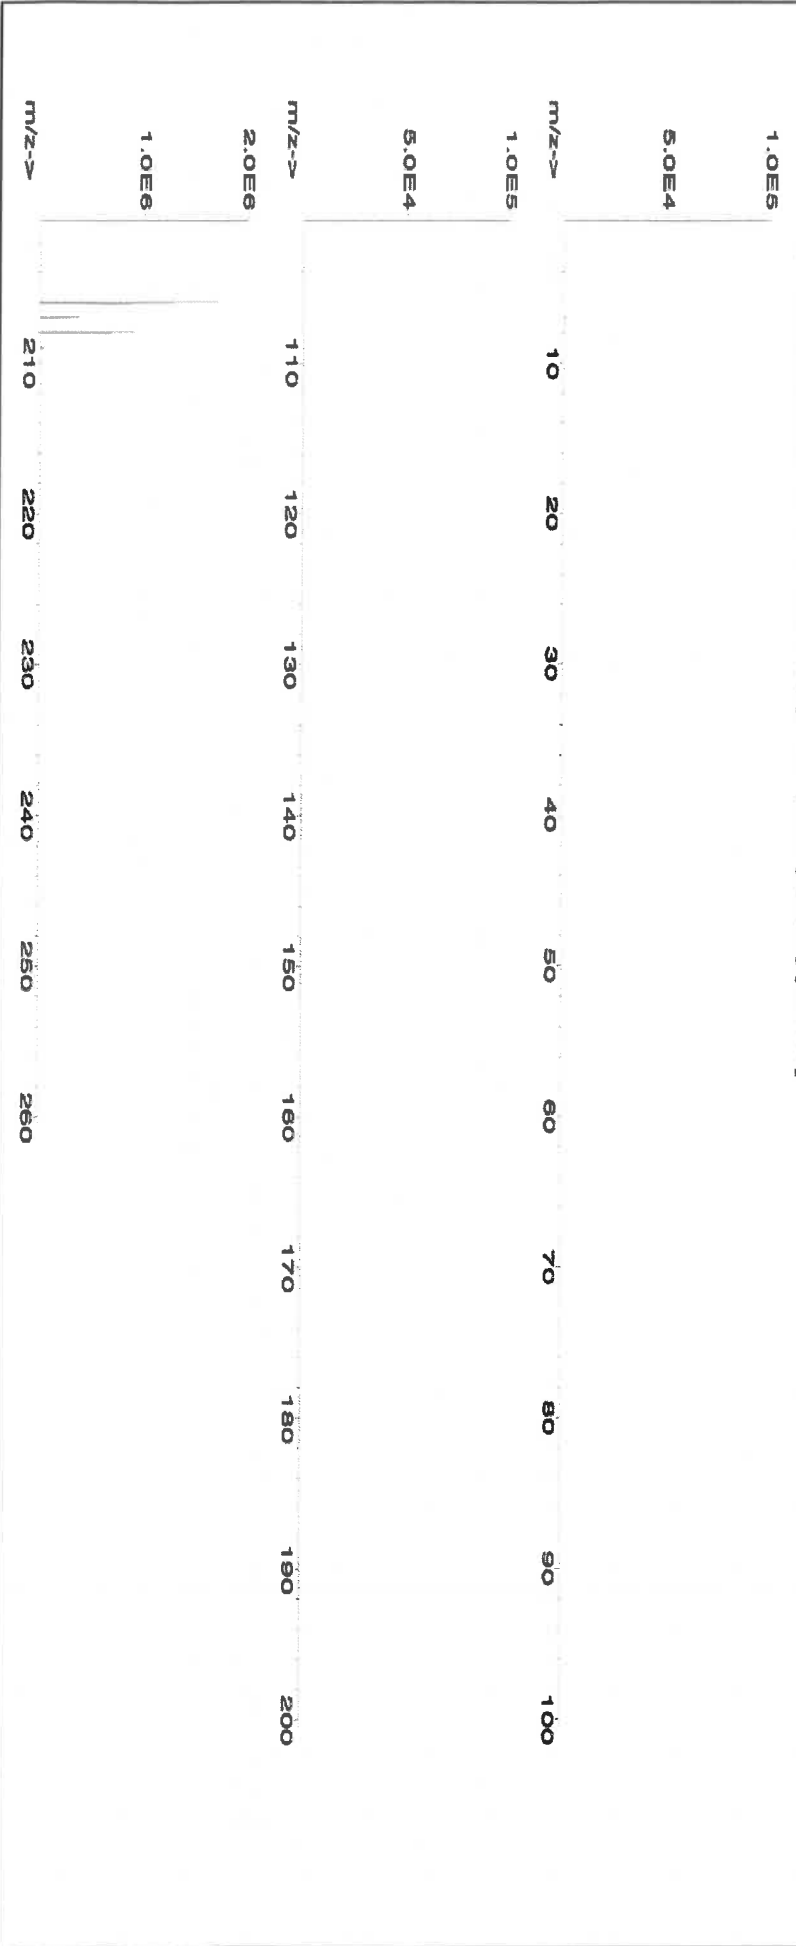



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Trace Metals Verification by ICP-MS ( $\mu\text{g/mL}$ )

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Ba | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

Part Number: **57028**  
Lot Number: **091223**  
Description: **Nickel (NI)**

Lot # **24002546**  
Solvent: **Nitric Acid**

Expiration Date: **091226**

Recommended Storage: **Ambient (20 °C)**

Nominal Concentration (µg/mL): **1000**

NIST Test Number: **6U7B**

Volume shown below was diluted to (mL): **2000.02**

2.0% **40.0** **(mL)**


**Nitric Acid**

|                |                          |               |
|----------------|--------------------------|---------------|
| Formulated By: | <i>Lawrence Barry</i>    | <b>091223</b> |
| Reviewed By:   | <i>Pedro L. Renteria</i> | <b>091223</b> |

| Compound | Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty Pipette (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|

1. Nickel(II) nitrate hexahydrate (NI) 58128 062023 0.1000 200.0 0.084 1000 10000.4 1000.0 2.2 13478-00-7 1 mg/m3 or-rel 1620 mg/kg 3136

[1] Spectrum No.1 [ 9.135 sec]:56028.D# [Count] [Linear]

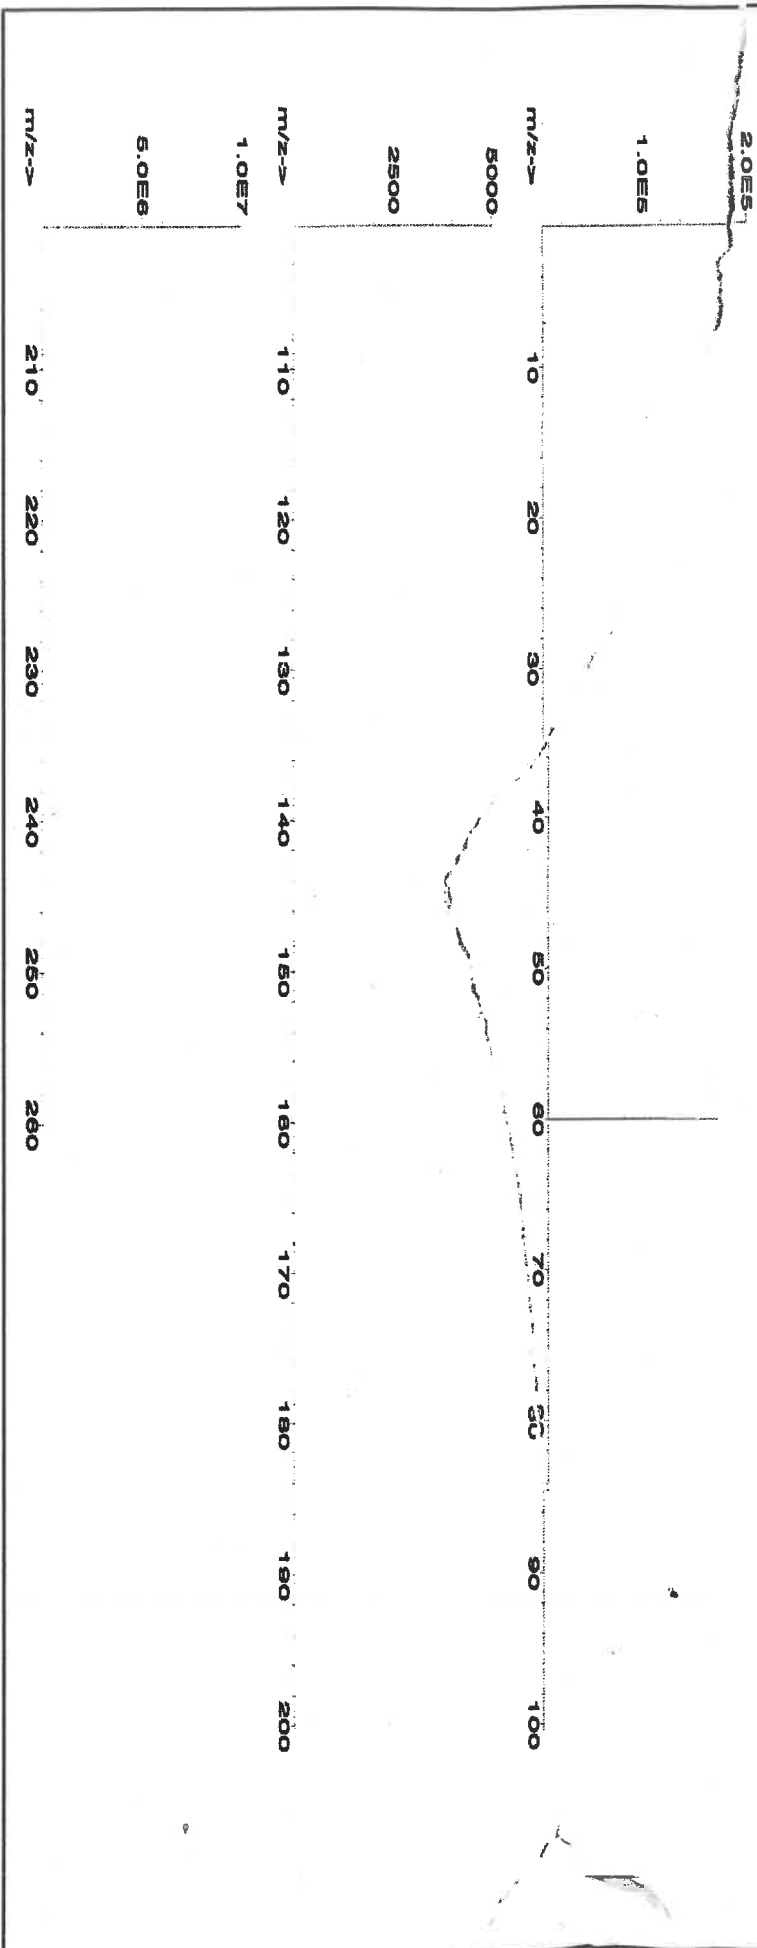



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | T     | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Tb | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57004  
**Lot Number:** 102523  
**Description:** Beryllium (Be)

**Lot #** 24002546  
**Solvent:** Nitric Acid

**Expiration Date:**

102526

2.0%

40.0 (mL)

Nitric Acid

**Recommended Storage:**

Ambient (20 °C)

**Nominal Concentration (µg/mL):**

1000

**NIST Test Number:**

6UTB

**Volume shown below was diluted to (mL):** 2000.02

5E-05 Balance Uncertainty


0.058 Flask Uncertainty

|                |                 |        |
|----------------|-----------------|--------|
| Formulated By: | Benson Chan     | 102523 |
| Reviewed By:   | Pedro L. Rentas | 102523 |

**SDS Information**

| Compound | Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty Pipette (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|

|                           |       |        |        |       |       |      |         |        |     |            |          |                        |    |
|---------------------------|-------|--------|--------|-------|-------|------|---------|--------|-----|------------|----------|------------------------|----|
| 1. Beryllium nitrate (Be) | 58104 | 091423 | 0.1000 | 200.0 | 0.084 | 1000 | 10001.5 | 1000.0 | 2.2 | 13597-99-4 | 0.2µg/m3 | intrinsc-rat 3.16mg/kg | NA |
|---------------------------|-------|--------|--------|-------|-------|------|---------|--------|-----|------------|----------|------------------------|----|

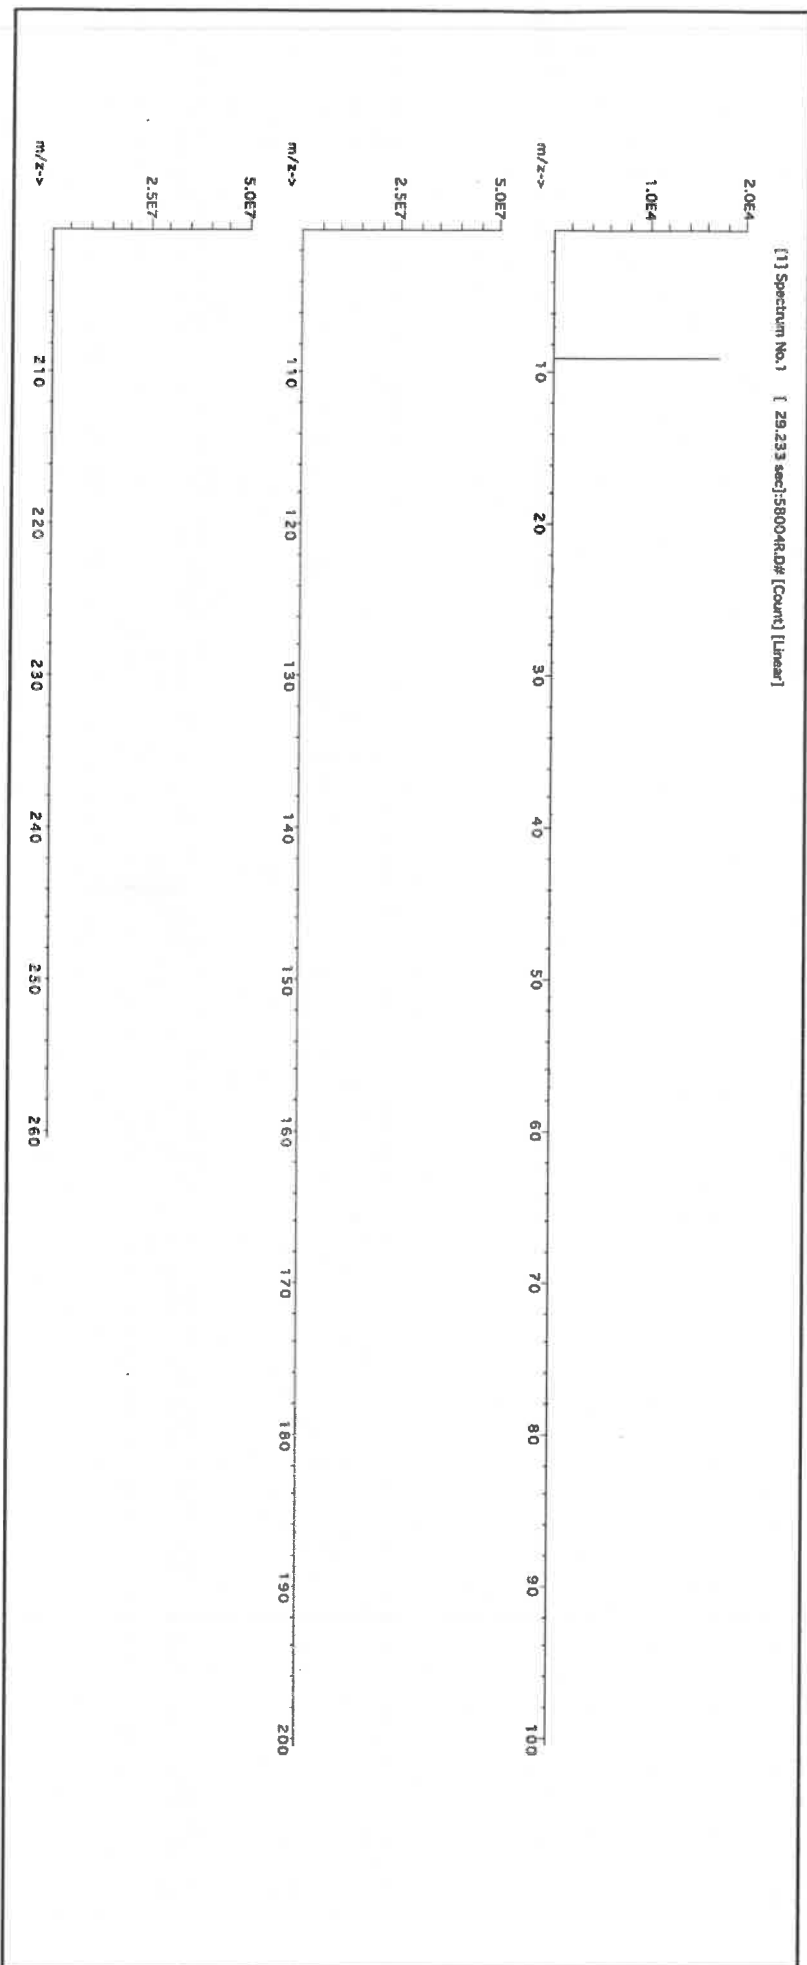



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Trace Metals Verification by ICP-MS ( $\mu\text{g/mL}$ )

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Tc | <0.02 | U  | <0.02 |
| As | <0.02 | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Ti | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | T     | Cr | <0.02 | Ga | <0.02 | Fe | <0.02 | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.02 | Sc | <0.02 | Ta | <0.02 | Tl | <0.02 | Zr | <0.02 |

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

\* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.  
 \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.

\* All standard containers are meticulously cleaned prior to use.

\* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).

\* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.

\* All Standards should be stored with caps tight and under appropriate laboratory conditions.

\* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**Certified Reference Material CRM**



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57050  
**Lot Number:** 071123  
**Description:** Tin (Sn)

**Solvents:** 21110221 Nitric Acid  
22D0562008 Hydrochloric acid

**Lot #** R-02509124 M599

**Expiration Date:** 071126  
**Recommended Storage:** Ambient (20 °C)  
**Nominal Concentration (µg/mL):** 1000  
**NIST Test Number:** 6UTB


**Weight shown below was diluted to (mL):** 499.93  
5E-05 Balance Uncertainty  
0.058 Flask Uncertainty

|                       |                 |
|-----------------------|-----------------|
|                       |                 |
| <b>Formulated By:</b> | Benson Chan     |
|                       | 071123          |
|                       |                 |
| <b>Reviewed By:</b>   | Pedro L. Rentas |
|                       | 071123          |

| Compound | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty |         | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------|---------|------|----------------|------|----------|
|          |            |                       |            |                 |           |                   |                   |                      | +/- (µg/mL)          | (µg/mL) |      |                |      |          |

1. Ammonium hexafluoroantimonate(V) (Sn) INO10 SMD042023A1 1000 99.999 0.10 44.2 1.13107 1.13286 1001.6 2.0 16919-24-7 7 mg/m3 NA 3161a

[1] Spectrum No. 1 [ 15.034 sec]:56150.D# [Count] [Linear]

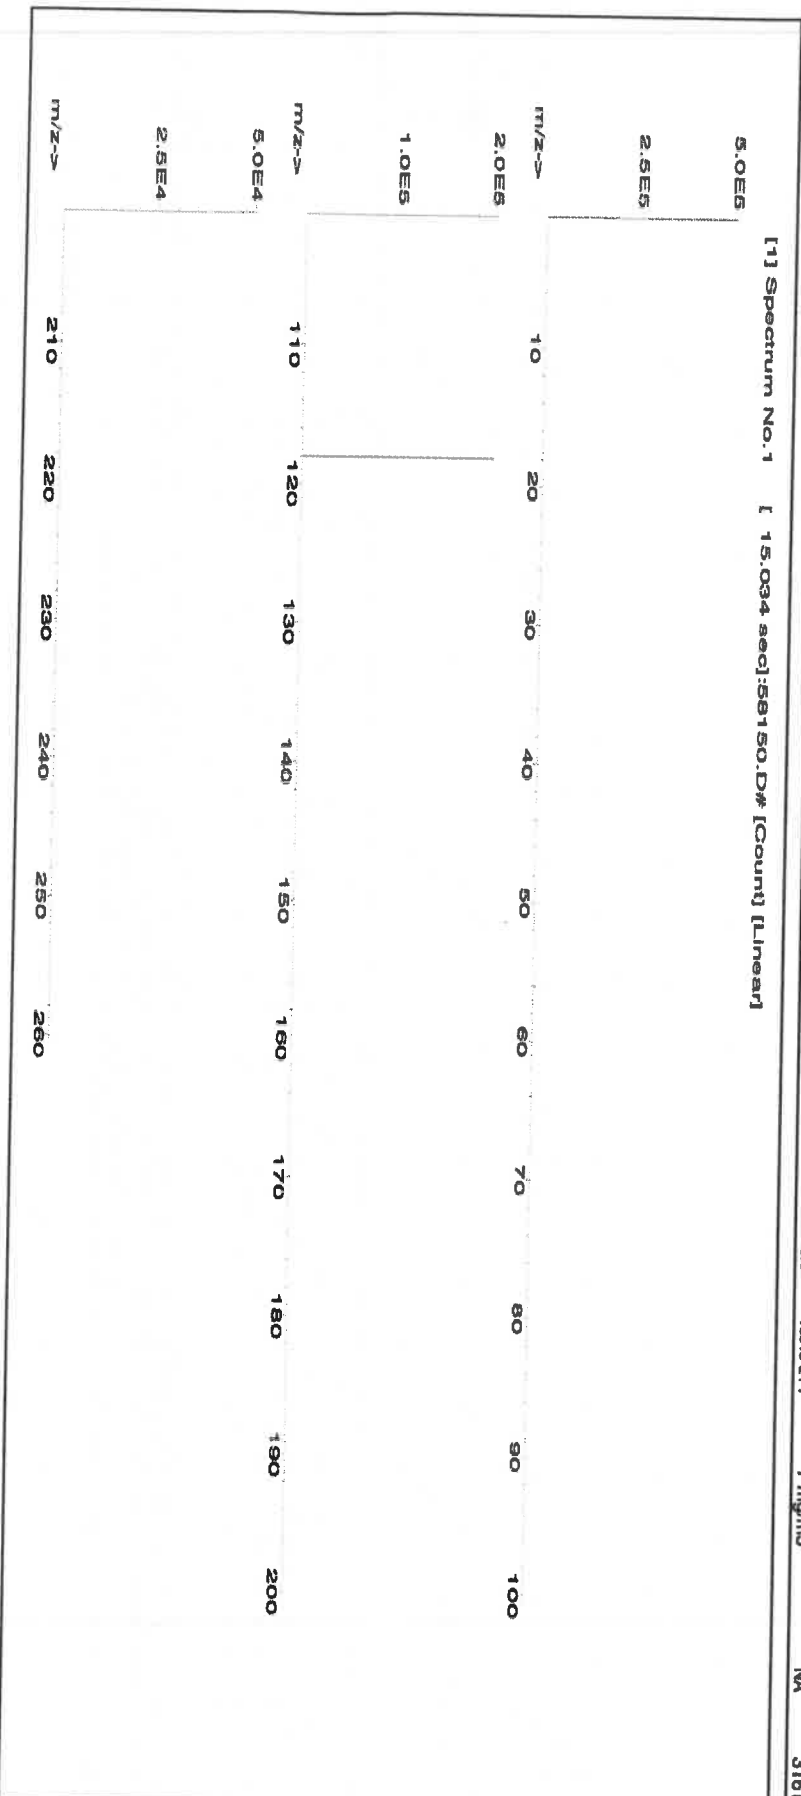



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Ti | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <500  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Ta | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).





R: 02/09/24 115800 (54)

CERTIFIED WEIGHT REPORT:

Part Number: 57027  
Lot Number: 091923  
Description: Cobalt (Co)

Expiration Date: 091926  
Recommended Storage: Ambient (20 °C)  
Nominal Concentration (µg/mL): 1000  
NIST Test Number: 6UTB

Volume shown below was diluted to (mL): 2000.02

5E-05 Balance Uncertainty  
0.058 Flask Uncertainty

Lot # 24002546  
Solvent: Nitric Acid


2.0% Nitric Acid  
40.0 (mL)

|                |                 |
|----------------|-----------------|
|                |                 |
| Formulated By: | Lawrence Barry  |
|                |                 |
| Reviewed By:   | Pedro L. Rentas |

SDS Information

Expanded Uncertainty +/- (µg/mL)  
(Solvent Safety Info. On Attached pg.)  
NIST SRM  
CAS# OSHA PEL (TWA) LD50

1. Cobalt(II) nitrate hexahydrate (Co) 58127 050923 0.1000 200.0 0.084 1000 10000.0 1000.0 2.2 10026-22-9 0.02 mg/m3 orl-rat 691 mg/kg 3113

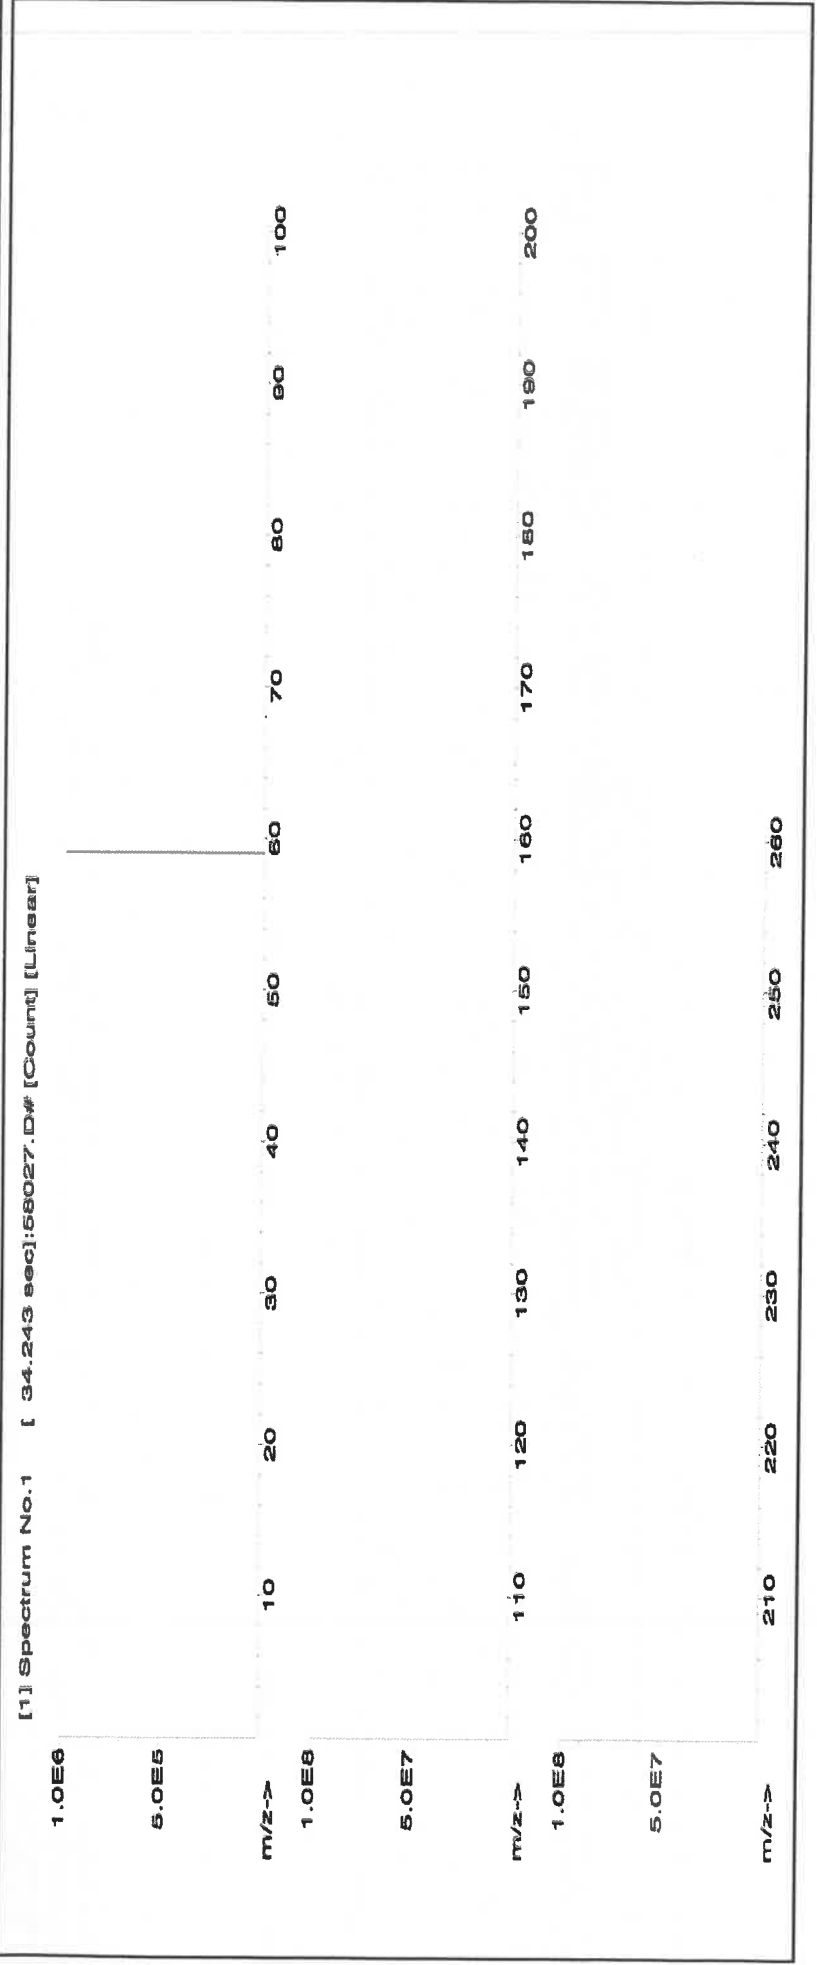



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.02 | Os | <0.01 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.2  | Na | <0.02 | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | T     | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.2  | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T)= Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:**  
**Lot Number:**  
**Description:**

**57033**  
**111323**  
**Arsenic (As)**

**Lot #**  
**Solvent:**

**24002546**  
**Nitric Acid**

**2.0%**  
**80.0 (mL)**

**Nitric Acid**

**Expiration Date:**  
**Recommended Storage:**  
**Nominal Concentration (µg/mL):**

**111326**  
**Ambient (20 °C)**  
**1000**

**NIST Test Number:**  
**Volume shown below was diluted to (mL):**

**6UTB**  
**4000.0**

**5E-05**  
**Balance Uncertainty**  
**0.06**  
**Flask Uncertainty**


|                |                 |
|----------------|-----------------|
|                |                 |
| Formulated By: | Lawrence Barry  |
| Reviewed By:   | Pedro L. Rendas |
|                | 111323          |

**Compound**

| Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty Pipette (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|
|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|

|                 |       |        |        |       |       |      |         |        |     |           |           |                  |       |
|-----------------|-------|--------|--------|-------|-------|------|---------|--------|-----|-----------|-----------|------------------|-------|
| 1. Arsenic (As) | 58133 | 020522 | 0.1000 | 400.0 | 0.084 | 1000 | 10001.0 | 1000.0 | 2.0 | 7440-38-2 | 0.5 mg/m3 | or-rat 500 mg/kg | 3103a |
|-----------------|-------|--------|--------|-------|-------|------|---------|--------|-----|-----------|-----------|------------------|-------|

[1] Spectrum No.1 [34.433 sec]:57033.D# [Count] [Linear]

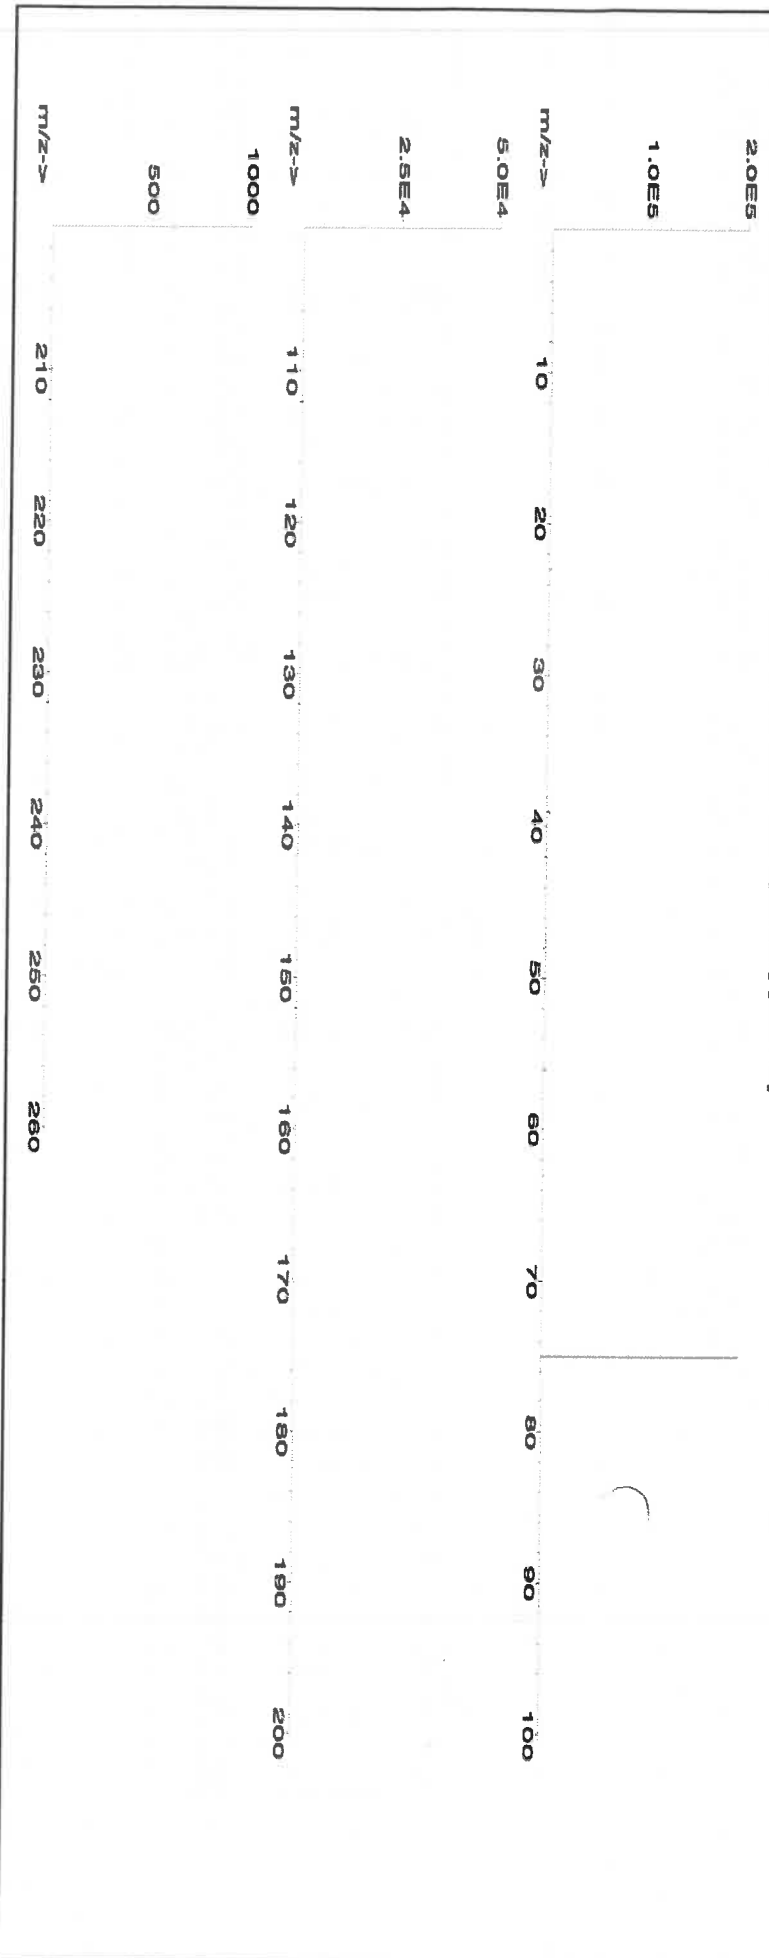



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |     |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|-----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy  | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er  | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Tc | <0.02 | U  | <0.02 |
| As | T     | Ce | <0.02 | Eu  | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Ti | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd  | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga  | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge* | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sa | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au  | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Tl | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

Part Number: **57005**  
Lot Number: **071123**  
Description: **Boron (B)**

Solvent: MKB0857V Ammonium hydroxide

Lot #

AI: 021009124 M5814

|                |                  |
|----------------|------------------|
|                |                  |
| Formulated By: | Benson Chan      |
| Reviewed By:   | Pedro L. Rientas |
| 071123         |                  |


Expiration Date: 071126  
Recommended Storage: Ambient (20 °C)  
Nominal Concentration (µg/mL): 1000  
NIST Test Number: 6UTB  
Weight shown below was diluted to (mL): 1999.48  
5E-05 Balance Uncertainty  
0.058 Flask Uncertainty  
2.0% 40.0 Ammonium hydroxide (mL)

**SDS Information**

| Compound | RM# | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty Purity (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Boric acid (B) IN018 BV082018A1 1000 99.999 0.10 17.3 11.55772 11.56201 1000.4 2.0 10043-35-3 2 mg/m3 or-nat 2660 mg/kg 3107

[1] Spectrum No. 1 [ 12.275 sec]:56105.D# [Count] [Linear]

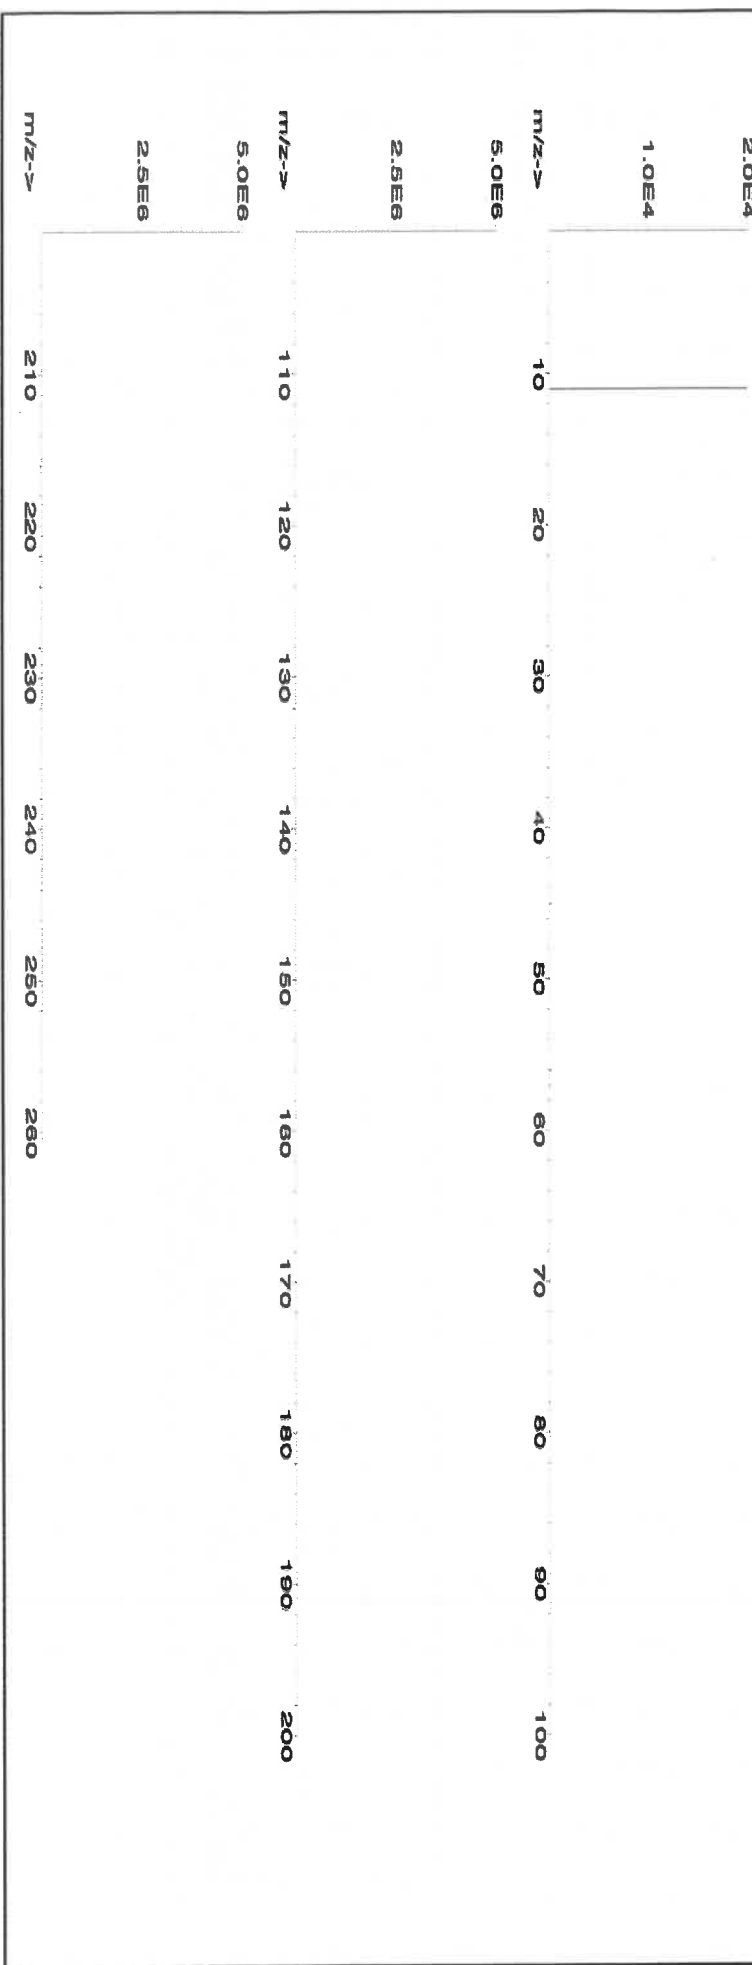



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectroscopy (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | T     | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57015  
**Lot Number:** 091123  
**Description:** Phosphorous (P)

**Solvent:** 24002546 Nitric Acid

**Lot #**

R: 02109124 M5820

Formulated By: Lawrence Barry 091123

Reviewed By: Pedro L. Rentas 091123

2% 40.0 (mL) Nitric Acid

**Expiration Date:** 091126

**Recommended Storage:** Ambient (20 °C)

**Nominal Concentration (µg/mL):** 1000

**NIST Test Number:** 6LJB

5E-05 Balance Uncertainty


**Weight shown below was diluted to (mL):** 2000.02 0.058 Flask Uncertainty

**SDS Information**

| Compound | RM# | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty Purity (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Ammonium dihydrogen phosphate (P) IN008 PVO62019A1 1000 99.999 0.10 27.5 7.2729 7.2730 1000.0 2.0 7722-76-1 5 mg/m3 xH-rat >2000mg/kg 3186

[1] Spectrum No.1 [ 12.074 sec]:58115.D# [Count] [Linear]

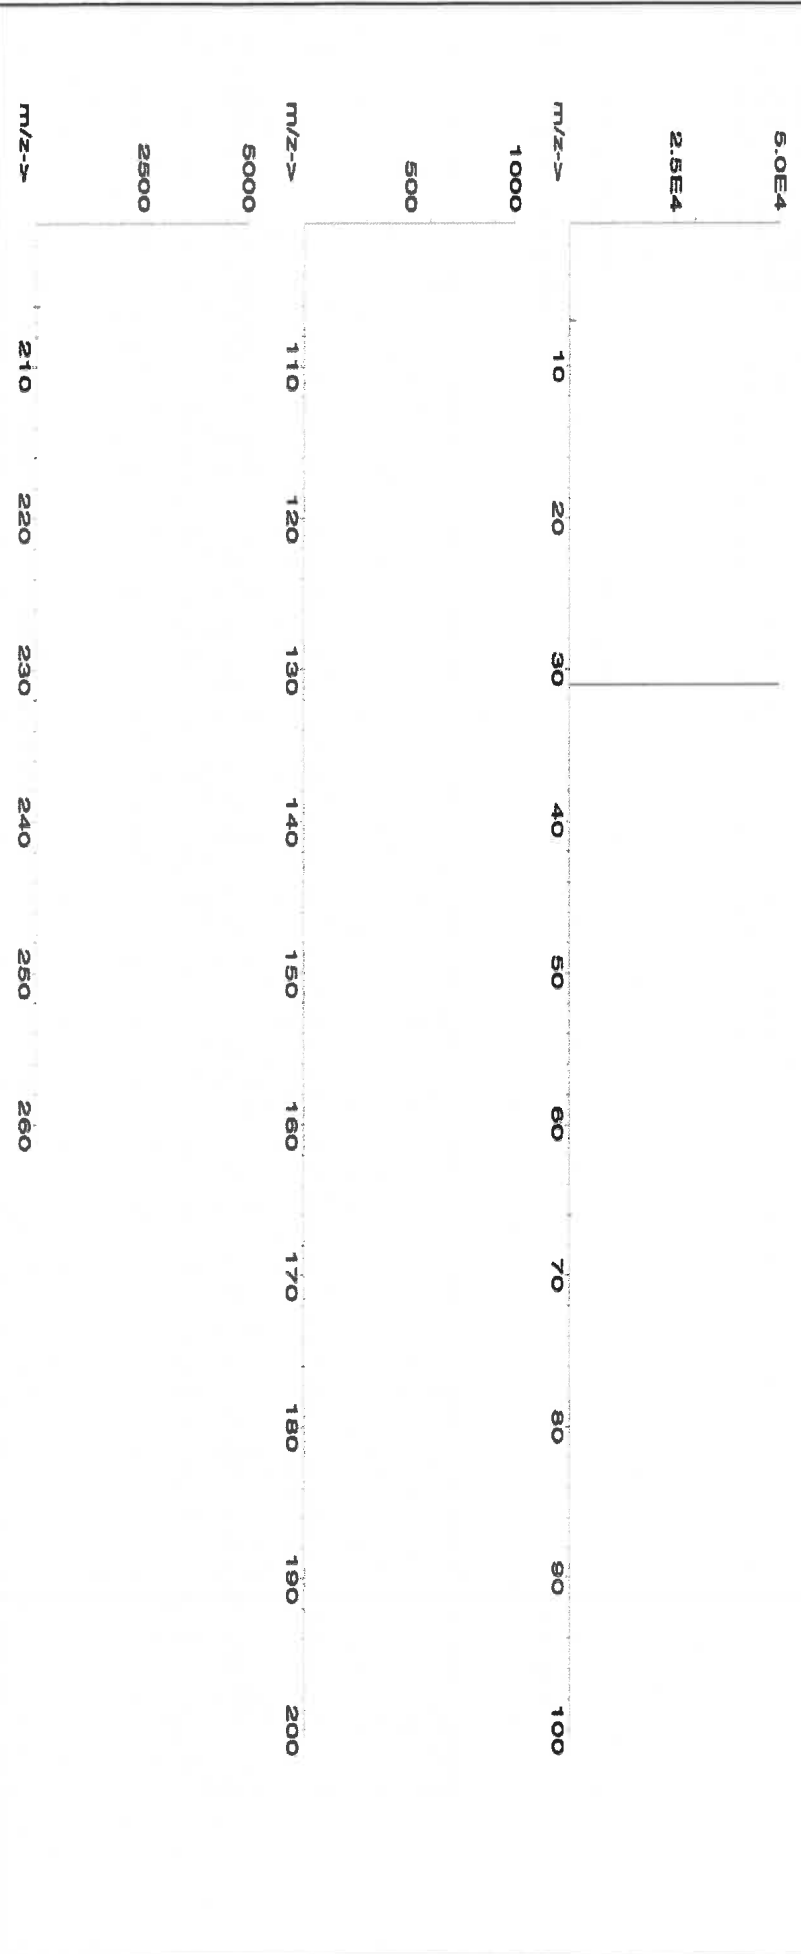



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

Trace Metals Verification by ICP-MS ( $\mu\text{g/mL}$ )

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Tc | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | T     | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sa | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030  
F: 540-585-3012  
info@inorganicventures.com

R: 02/22/24 M.5942

## 1.0 ACCREDITATION / REGISTRATION

**INORGANIC VENTURES** is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Single Analyte Custom Grade Solution  
Catalog Number: CGT11  
Lot Number: T2-TI719972  
Matrix: 2% (v/v) HNO<sub>3</sub>  
tr. HF  
Value / Analyte(s): 1 000 µg/mL ea:  
Titanium  
Starting Material: Ti Metal  
Starting Material Lot#: 2094  
Starting Material Purity: 99.9975%

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value: 1002 ± 5 µg/mL  
Density: 1.012 g/mL (measured at 20 ± 4 °C)

### Assay Information:

Assay Method #1 1002 ± 4 µg/mL  
ICP Assay NIST SRM 3162a Lot Number: 130925

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{CRM/RM}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{CRM/RM} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method i with standard uncertainty  $u_{char i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{char i}^2) / (\sum (1/u_{char i}^2))$$

$$CRM/RM \text{ Expanded Uncertainty } (z) = U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$$

k = coverage factor = 2

$u_{char} = [\sum (w_i)^2 (u_{char i}^2)]^{1/2}$  where  $u_{char i}$  are the errors from each characterization method

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{lts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

### Characterization of CRM/RM by One Method

Certified Value,  $X_{CRM/RM}$ , where one method of characterization is used is the mean of individual results:

$$X_{CRM/RM} = (X_a) (u_{char a})$$

$X_a$  = mean of Assay Method A with

$u_{char a}$  = the standard uncertainty of characterization Method A

$$CRM/RM \text{ Expanded Uncertainty } (z) = U_{CRM/RM} = k (u_{char a}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$$

k = coverage factor = 2

$u_{char a}$  = the errors from characterization

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{lts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI ) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

|   |    |   |          |   |    |   |          |   |    |   |          |   |    |   |          |   |    |   |          |
|---|----|---|----------|---|----|---|----------|---|----|---|----------|---|----|---|----------|---|----|---|----------|
| M | Ag | < | 0.000536 | M | Eu | < | 0.000268 | O | Na | < | 0.032670 | M | Se |   | 0.001204 | O | Zn | < | 0.003267 |
| O | Al |   | 0.000872 | O | Fe |   | 0.003225 | O | Nb | < | 0.043560 | O | Si |   | 0.004735 | O | Zr | < | 0.043560 |
| M | As | < | 0.008586 | M | Ga | < | 0.000268 | M | Nd | < | 0.000268 | M | Sm | < | 0.000268 |   |    |   |          |
| M | Au | < | 0.004577 | M | Gd | < | 0.000268 | O | Ni | < | 0.010890 | M | Sn |   | 0.000096 |   |    |   |          |
| O | B  | < | 0.008929 | M | Ge | < | 0.002146 | M | Os | < | 0.000269 | O | Sr |   | 0.000096 |   |    |   |          |
| M | Ba | < | 0.002683 | M | Hf |   | 0.002161 | O | P  | < | 0.054450 | M | Ta |   | 0.010560 |   |    |   |          |
| M | Be | < | 0.005366 | M | Hg | < | 0.003231 | M | Pb | < | 0.001073 | M | Tb | < | 0.000268 |   |    |   |          |
| M | Bi | < | 0.001609 | M | Ho | < | 0.000268 | M | Pd | < | 0.000268 | M | Te | < | 0.001341 |   |    |   |          |
| O | Ca |   | 0.000676 | M | In | < | 0.002683 | M | Pr | < | 0.000268 | M | Th | < | 0.053663 |   |    |   |          |
| M | Cd | < | 0.000268 | M | Ir | < | 0.000269 | M | Pt | < | 0.000536 | s | Ti | < |          |   |    |   |          |
| M | Ce | < | 0.000268 | M | K  |   | 0.001172 | M | Rb | < | 0.000268 | M | Tl | < | 0.000268 |   |    |   |          |
| M | Co | < | 0.004293 | M | La | < | 0.000268 | M | Re | < | 0.000268 | M | Tm | < | 0.000268 |   |    |   |          |
| M | Cr |   | 0.000752 | O | Li | < | 0.027225 | M | Rh | < | 0.000268 | M | U  | < | 0.000268 |   |    |   |          |
| M | Cs | < | 0.000268 | M | Lu | < | 0.000268 | M | Ru | < | 0.000269 | M | V  | < | 0.019855 |   |    |   |          |
| O | Cu | < | 0.010890 | O | Mg | < | 0.005445 | i | S  | < |          | M | W  |   | 0.000473 |   |    |   |          |
| M | Dy | < | 0.000268 | O | Mn | < | 0.003267 | M | Sb | < | 0.006976 | M | Y  | < | 0.002146 |   |    |   |          |
| M | Er | < | 0.000268 | M | Mo |   | 0.000774 | O | Sc | < | 0.004900 | M | Yb | < | 0.000536 |   |    |   |          |

M - Checked by ICP-MS      O - Checked by ICP-OES      i - Spectral Interference  
n - Not Checked For      s - Solution Standard Element

## 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Atomic Weight; Valence; Coordination Number; Chemical Form in Solution** - 47.87 +4 6 Ti(F)6-2

**Chemical Compatibility** - Soluble in concentrated HCl, HF, H3PO4 H2SO4 and HNO3. Avoid neutral to basic media. Unstable at ppm levels with metals that would pull F- away (i.e. Do not mix with Alkaline or Rare Earths or high levels of transition elements unless they are fluorinated). Stable with most inorganic anions with a tendency to hydrolyze forming the hydrated oxide in all dilute acids except HF.

**Stability** - 2-100 ppb levels stable (Alone or mixed with all other metals) as the Ti(F)6-2 for months in 1% HNO3 / LDPE container. 1-10,000 ppm single element solutions as the Ti(F)6-2 chemically stable for years in 2-5% HNO3 / trace HF in an LDPE container.

**Ti Containing Samples (Preparation and Solution)** - Metal (Soluble in H2O / HF caution -powder reacts violently); Oxide - low temperature history anatase or rutile (Dissolved by heating in 1:1:1 H2O / HF / H2SO4); Oxide - high temperature history (~800EC) brookite (fuse in Pt0 with K2S2O7); Ores ( fuse in Pt0 with KF + K2S2O7 - no KF if silica not present); Organic Matrices (Dry ash at 450EC in Pt0 and dissolve by heating with 1:1:1 H2O / HF / H2SO4 or fuse ash with pyrosulfate if oxide is as plastic pigment and likely in brookite crystalline form).

**Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):**

| Technique/Line     | Estimated D.L.          | Order | Interferences (underlined indicates severe)  |
|--------------------|-------------------------|-------|--|
| ICP-MS 48 amu      | 14 ppt                  | N/A   | 32S16O, 32S14N,<br>14N16O18O,<br>14N17N2, 36Ar12C,<br>48Ca, [96X=2<br>(where X = Zr, Mo,<br>Ru)] |
| ICP-OES 323.452 nm | 0.0054 / 0.00092 µg/mL  | 1     | Ce, Ar, Ni   |
| ICP-OES 334.941 nm | 0.0038 / 0.000028 µg/mL | 1     | Nb, Ta, Cr, U  |
| ICP-OES 336.121 nm | 0.0053 / 0.000034 µg/mL | 1     | W, Mo, Co  |

**HF Note:** This standard should not be prepared or stored in glass.

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

June 17, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- June 17, 2027

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director





**M5962** **R10614124**



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57034  
**Lot Number:** 060624  
**Description:** Selenium (Se)

**Lot #** 24002546  
**Solvent:** Nitric Acid

2.0%

40.0 (mL)

Nitric Acid

**Expiration Date:** 060627  
**Recommended Storage:** Ambient (20 °C)  
**Nominal Concentration (µg/mL):** 1000

**NIST Test Number:** 6LUTB

**SE-05** Balance Uncertainty

**Volume shown below was diluted to (mL):** 2000.07

**0.100** Flask Uncertainty


**Expanded**

**SDS Information**

| Compound | Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty Pipette (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | (Solvent Safety Info. On Attached pg.) | CAS# | OSHA PEL (TWA) | LDSO | NIST SRM |
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|--|------|----------------|------|----------|
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|--|------|----------------|------|----------|

|                  |       |        |        |       |       |      |         |        |     |           |           |                    |      |
|------------------|-------|--------|--------|-------|-------|------|---------|--------|-----|-----------|-----------|--------------------|------|
| 1. Selenium (Se) | 58134 | 071223 | 0.1000 | 200.0 | 0.084 | 1000 | 10002.5 | 1000.0 | 2.2 | 7782-49-2 | 0.2 mg/m3 | or-tral 6700 mg/kg | 3149 |
|------------------|-------|--------|--------|-------|-------|------|---------|--------|-----|-----------|-----------|--------------------|------|

[1] Spectrum No.1 [ 33.702 sec]:58034.D# [Count] [Linear]

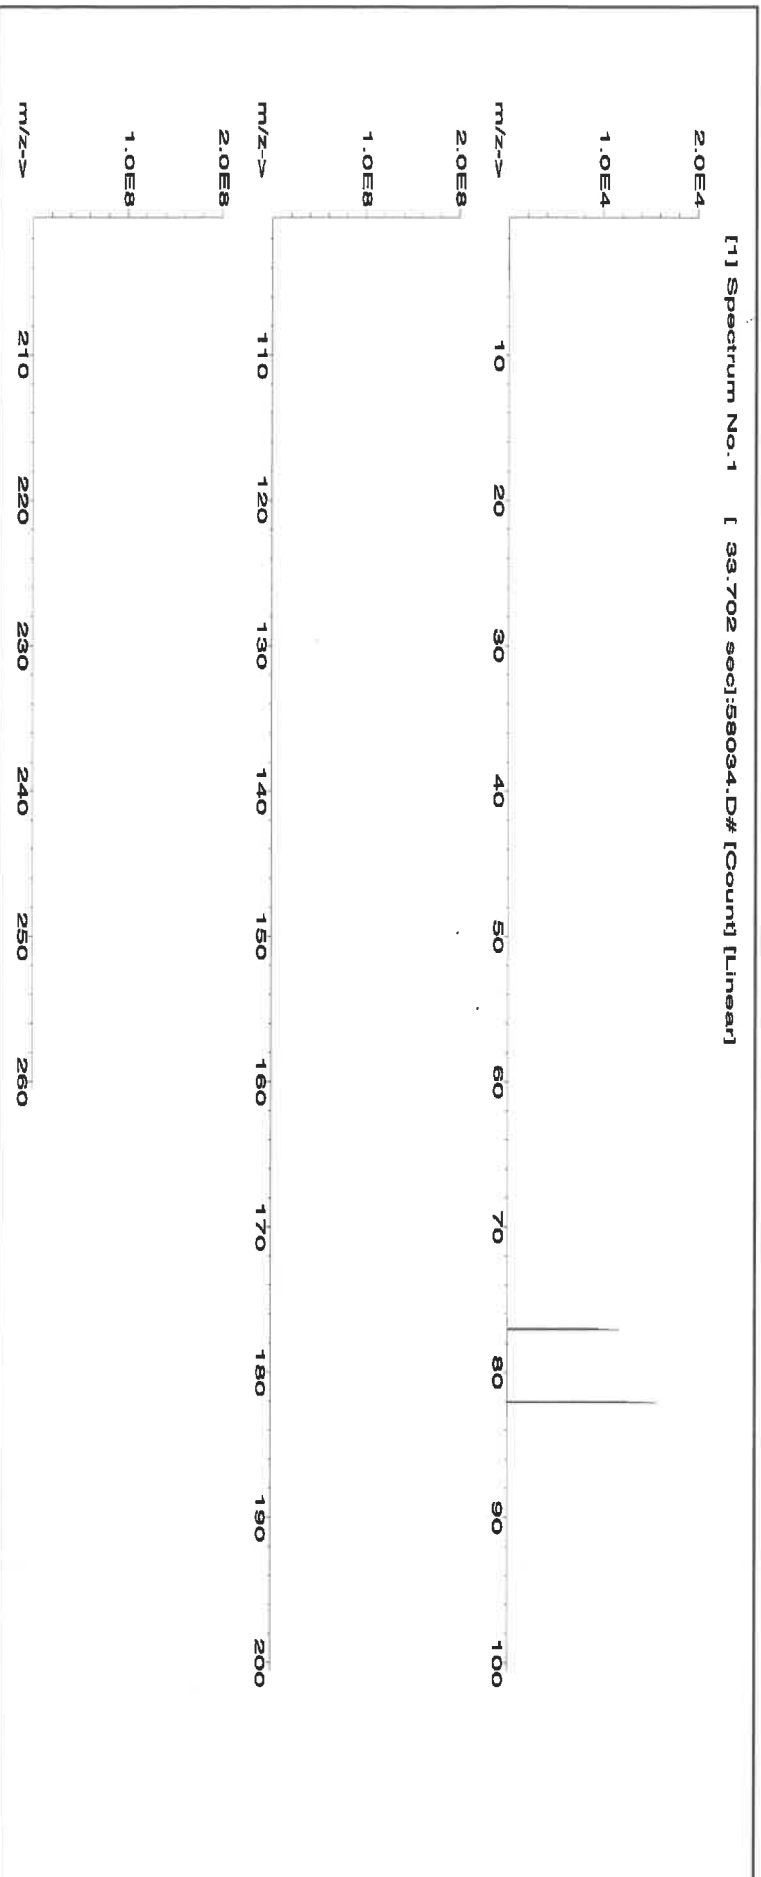



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | T     | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Ru | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Sr | <0.02 | S  | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | Ta | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 |    | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

Part Number: **57016**  
Lot Number: **122923**  
Description: **Sulfur (S)**


Lot #  
Solvent: **122923** ASTM Type 1 Water

|                |                 |
|----------------|-----------------|
|                |                 |
| Formulated By: | Benson Chan     |
| 122923         |                 |
|                |                 |
| Reviewed By:   | Pedro L. Rentas |
| 122923         |                 |

Expiration Date: **122926**  
Recommended Storage: **Ambient (20 °C)**  
Nominal Concentration (µg/mL): **1000**  
NIST Test Number: **6UTB**  
Weight shown below was diluted to (mL): **4000.0**  
**5E-05** Balance Uncertainty  
**0.06** Flask Uncertainty

| Compound | SDS information |                       |            |                        |           |                   |                   |                      |  |      | NIST SRM       |      |
|----------|-----------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|--|------|----------------|------|
|          | Lot Number      | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty Purity (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty                   |      |                |      |
|          |                 |                       |            |                        |           |                   |                   |                      | (Solvent Safety Info. On Attached pg.) |      |                |      |
|          | RM#             |                       |            |                        |           |                   |                   |                      | +/- (µg/mL)                            | CAS# | OSHA PEL (TWA) | LD50 |

1. Ammonium sulfate (S) IN117 SLBR725V 1000 99.9 0.10 24.3 16.4979 16.4980 1000.0 2.0 7783-20-2 NA or-rel 4250mg/kg 3181

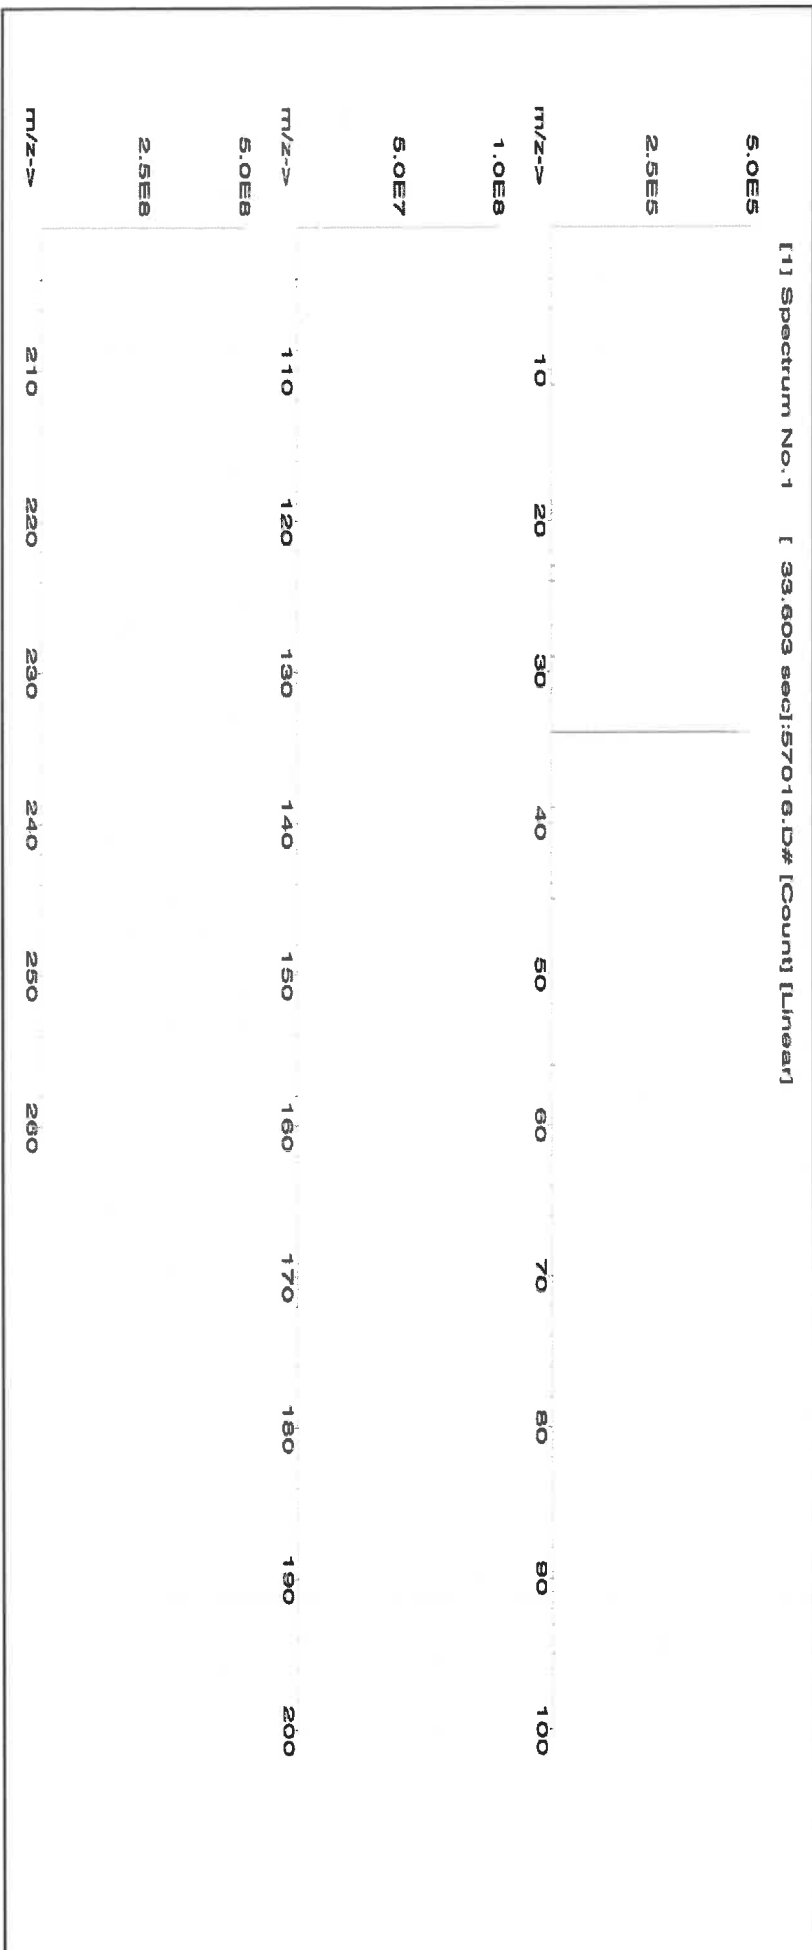

**Absolute Standards, Inc.**  
800-368-1131  
www.absolutestandards.com



**Certified Reference Material CRM**

M5970 M5971

R. 710124



ANAB ISO 17034 Accredited  
AR-1539 Certificate Number  
https://AbsoluteStandards.com

**CERTIFIED WEIGHT REPORT:**

Part Number: 57003  
Lot Number: 062124  
Description: Lithium (Li)  
Expiration Date: 06/127  
Recommended Storage: Ambient (20 °C)  
Nominal Concentration (µg/mL): 1000  
NIST Test Number: 6UTB  
Volume shown below was diluted to (mL): 250.11  
SE-05 Balance Uncertainty  
0.016 Flask Uncertainty

Lot # 24002546  
Solvent: Nitric Acid


2.0% 5.0 (mL) Nitric Acid

|                   |                   |
|-------------------|-------------------|
| Microvial Capable |                   |
| Formulated By:    | Giovanni Esposito |
|                   | 062124            |
| Reviewed By:      | Pedro L. Parias   |
|                   | 062124            |

| Compound |        | Part   |        | Lot    |        | Dilution  |              | Initial       |               | Uncertainty |              | Nominal       |               | Initial   |              | Final         |               | Expanded    |           | SDS Information |                | NIST |    |
|----------|--------|--------|--------|--------|--------|-----------|--------------|---------------|---------------|-------------|--------------|---------------|---------------|-----------|--------------|---------------|---------------|-------------|-----------|-----------------|----------------|------|----|
| Number   | Factor | Number | Factor | Number | Factor | Vol. (mL) | Pipette (mL) | Conc. (µg/mL) | Conc. (µg/mL) | Vol. (mL)   | Pipette (mL) | Conc. (µg/mL) | Conc. (µg/mL) | Vol. (mL) | Pipette (mL) | Conc. (µg/mL) | Conc. (µg/mL) | Uncertainty | ± (µg/mL) | CAS#            | OSHA PEL (TWA) | LD50 | SM |

1. Lithium nitrate (Li) 58103 070622 0.1000 25.0 0.004 1000 10000.4 1000.0 2.0 7790-68-4 5 mg/m3 or-hal 1428 mg/kg NA

[1] Spectrum No. 1 [ 32.093 sec; 15000.0Hz Count [Lines]

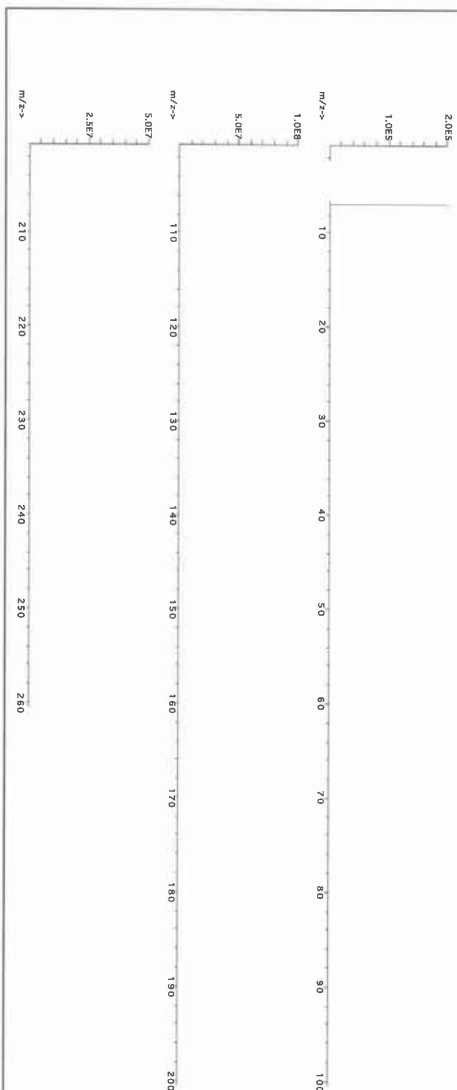





Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

| Trace Metals Verification by ICP-MS (µg/mL) |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|---|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al  | <0.02 | Ca | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pb | <0.02 | Se | <0.02 |
| Sb  | <0.02 | Ce | <0.2  | Er | <0.02 | In | <0.02 | Mg | <0.02 | Nb | <0.02 | Rb | <0.02 | Si | <0.02 |
| As  | <0.2  | Ce | <0.02 | Eu | <0.02 | Ir | <0.02 | Mn | <0.02 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 |
| Ba  | <0.02 | Cr | <0.02 | Gd | <0.02 | Te | <0.2  | Hg | <0.2  | Pd | <0.02 | Ru | <0.02 | Nd | <0.2  |
| Be  | <0.01 | Cr | <0.02 | Ga | <0.02 | Ta | <0.02 | K  | <0.02 | P  | <0.02 | Sn | <0.02 | Sr | <0.02 |
| Bi  | <0.02 | Co | <0.02 | Ge | <0.02 | Tb | <0.02 | Mo | <0.02 | Pr | <0.2  | So | <0.02 | Sc | <0.02 |
| B   | <0.02 | Co | <0.02 | Au | <0.02 | Ti | <0.02 | Nd | <0.02 | K  | <0.2  | So | <0.02 | Ta | <0.02 |
| (T) = Target analyte                        |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
| Al  | <0.02 | Ca | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pb | <0.02 | Se | <0.02 |
| Sb  | <0.02 | Ce | <0.2  | Er | <0.02 | In | <0.02 | Mg | <0.02 | Nb | <0.02 | Rb | <0.02 | Si | <0.2  |
| As  | <0.2  | Ce | <0.02 | Eu | <0.02 | Ir | <0.02 | Mn | <0.02 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 |
| Ba  | <0.02 | Cr | <0.02 | Gd | <0.02 | Te | <0.2  | Hg | <0.2  | Pd | <0.02 | Ru | <0.02 | Nd | <0.2  |
| Be  | <0.01 | Cr | <0.02 | Ga | <0.02 | Ta | <0.02 | K  | <0.02 | P  | <0.02 | Sn | <0.02 | Sr | <0.02 |
| Bi  | <0.02 | Co | <0.02 | Ge | <0.02 | Tb | <0.02 | Mo | <0.02 | Pr | <0.2  | So | <0.02 | Sc | <0.02 |
| B   | <0.02 | Co | <0.02 | Au | <0.02 | Ti | <0.02 | Nd | <0.02 | K  | <0.2  | So | <0.02 | Ta | <0.02 |
| Al  | <0.02 | Ca | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pb | <0.02 | Se | <0.2  |
| Sb  | <0.02 | Ce | <0.2  | Er | <0.02 | In | <0.02 | Mg | <0.02 | Nb | <0.02 | Rb | <0.02 | Si | <0.02 |
| As  | <0.2  | Ce | <0.02 | Eu | <0.02 | Ir | <0.02 | Mn | <0.02 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 |
| Ba  | <0.02 | Cr | <0.02 | Gd | <0.02 | Te | <0.2  | Hg | <0.2  | Pd | <0.02 | Ru | <0.02 | Nd | <0.2  |
| Be  | <0.01 | Cr | <0.02 | Ga | <0.02 | Ta | <0.02 | K  | <0.02 | P  | <0.02 | Sn | <0.02 | Sr | <0.02 |
| Bi  | <0.02 | Co | <0.02 | Ge | <0.02 | Tb | <0.02 | Mo | <0.02 | Pr | <0.2  | So | <0.02 | Sc | <0.02 |
| B   | <0.02 | Co | <0.02 | Au | <0.02 | Ti | <0.02 | Nd | <0.02 | K  | <0.2  | So | <0.02 | Ta | <0.02 |
| Al  | <0.02 | Ca | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pb | <0.02 | Se | <0.2  |
| Sb  | <0.02 | Ce | <0.2  | Er | <0.02 | In | <0.02 | Mg | <0.02 | Nb | <0.02 | Rb | <0.02 | Si | <0.02 |
| As  | <0.2  | Ce | <0.02 | Eu | <0.02 | Ir | <0.02 | Mn | <0.02 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 |
| Ba  | <0.02 | Cr | <0.02 | Gd | <0.02 | Te | <0.2  | Hg | <0.2  | Pd | <0.02 | Ru | <0.02 | Nd | <0.2  |
| Be  | <0.01 | Cr | <0.02 | Ga | <0.02 | Ta | <0.02 | K  | <0.02 | P  | <0.02 | Sn | <0.02 | Sr | <0.02 |
| Bi  | <0.02 | Co | <0.02 | Ge | <0.02 | Tb | <0.02 | Mo | <0.02 | Pr | <0.2  | So | <0.02 | Sc | <0.02 |
| B   | <0.02 | Co | <0.02 | Au | <0.02 | Ti | <0.02 | Nd | <0.02 | K  | <0.2  | So | <0.02 | Ta | <0.02 |
| Al  | <0.02 | Ca | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pb | <0.02 | Se | <0.2  |
| Sb  | <0.02 | Ce | <0.2  | Er | <0.02 | In | <0.02 | Mg | <0.02 | Nb | <0.02 | Rb | <0.02 | Si | <0.02 |
| As  | <0.2  | Ce | <0.02 | Eu | <0.02 | Ir | <0.02 | Mn | <0.02 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 |
| Ba  | <0.02 | Cr | <0.02 | Gd | <0.02 | Te | <0.2  | Hg | <0.2  | Pd | <0.02 | Ru | <0.02 | Nd | <0.2  |
| Be  | <0.01 | Cr | <0.02 | Ga | <0.02 | Ta | <0.02 | K  | <0.02 | P  | <0.02 | Sn | <0.02 | Sr | <0.02 |
| Bi  | <0.02 | Co | <0.02 | Ge | <0.02 | Tb | <0.02 | Mo | <0.02 | Pr | <0.2  | So | <0.02 | Sc | <0.02 |
| B   | <0.02 | Co | <0.02 | Au | <0.02 | Ti | <0.02 | Nd | <0.02 | K  | <0.2  | So | <0.02 | Ta | <0.02 |

Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

*[Signature]*

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030

F: 540-585-3012

info@inorganicventures.com

M5984  
R: 6/14/24

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Single Analyte Custom Grade Solution  
Catalog Number: CGY10  
Lot Number: V2-Y740548  
Matrix: 2% (v/v) HNO<sub>3</sub>  
Value / Analyte(s): 10 000 µg/mL ea:  
Yttrium  
Starting Material: Yttrium Oxide  
Starting Material Lot#: 2661 and 06230520YL  
Starting Material Purity: 99.9984%

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value: 10000 ± 30 µg/mL  
Density: 1.032 g/mL (measured at 20 ± 4 °C)

### Assay Information:

|                 |   |
|-----------------|---|
| Assay Method #1 | 10011 ± 25 µg/mL<br>EDTA NIST SRM 928 Lot Number: 928           |
| Assay Method #2 | 9997 ± 50 µg/mL<br>ICP Assay NIST SRM 3167a Lot Number: 190730  |
| Assay Method #3 | 9984 ± 31 µg/mL<br>Calculated NIST SRM Lot Number: See Sec. 4.2 |

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

## Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{\text{CRM/RM}} = \sum(w_i)(X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{\text{char } i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\text{char } i}^2) / (\sum(1/u_{\text{char } i}^2))$$

$$\text{CRM/RM Expanded Uncertainty (k)} = U_{\text{CRM/RM}} = k(u_{\text{char}}^2 + u_{\text{bb}}^2 + u_{\text{ts}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char}} = [\sum(w_i)^2(u_{\text{char } i}^2)]^{1/2}$  where  $u_{\text{char } i}$  are the errors from each characterization method

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ts}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

## Characterization of CRM/RM by One Method

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

$$X_{\text{CRM/RM}} = (X_a)(u_{\text{char } a})$$

$X_a$  = mean of Assay Method A with

$u_{\text{char } a}$  = the standard uncertainty of characterization Method A

$$\text{CRM/RM Expanded Uncertainty (k)} = U_{\text{CRM/RM}} = k(u_{\text{char } a}^2 + u_{\text{bb}}^2 + u_{\text{ts}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char } a}$  = the errors from characterization

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ts}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

|   |    |          |          |    |          |          |          |          |          |          |          |          |          |          |          |          |
|---|----|----------|----------|----|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| M | Ag | <        | 0.004600 | M  | Eu       | 0.009037 | M        | Na       | 0.086360 | M        | Se       | <        | 0.005200 | M        | Zn       | 0.030125 |
| M | Al | 0.014862 | O        | Fe | 0.002410 | M        | Nb       | <        | 0.000570 | O        | Si       | 0.024100 | O        | Zr       | <        | 0.002600 |
| M | As | <        | 0.003500 | M  | Ga       | <        | 0.000570 | M        | Nd       | 0.000923 | M        | Sm       | 0.000461 |          |          |          |
| M | Au | <        | 0.001700 | M  | Gd       | <        | 0.003500 | M        | Ni       | <        | 0.005700 | M        | Sn       | <        | 0.002300 |          |
| O | B  | 0.002209 | M        | Ge | <        | 0.005200 | M        | Os       | <        | 0.001200 | M        | Sr       | <        | 0.004600 |          |          |
| O | Ba | <        | 0.002500 | M  | Hf       | <        | 0.000570 | n        | P        | <        |          | M        | Ta       | <        | 0.000570 |          |
| O | Be | <        | 0.001400 | M  | Hg       | <        | 0.000570 | M        | Pb       | 0.005020 | M        | Tb       | 0.001044 |          |          |          |
| M | Bi | <        | 0.003500 | M  | Ho       | 0.009037 | M        | Pd       | <        | 0.005100 | M        | Te       | <        | 0.002300 |          |          |
| O | Ca | 0.009841 | M        | In | <        | 0.002300 | M        | Pr       | <        | 0.002300 | M        | Th       | <        | 0.000570 |          |          |
| M | Cd | <        | 0.000570 | M  | Ir       | <        | 0.000570 | M        | Pt       | <        | 0.000570 | M        | Ti       | <        | 0.003500 |          |
| M | Ce | <        | 0.002300 | O  | K        | 0.018677 | M        | Rb       | <        | 0.000570 | M        | Tl       | <        | 0.000570 |          |          |
| M | Co | <        | 0.000570 | M  | La       | 0.000461 | M        | Re       | <        | 0.000570 | M        | Tm       | <        | 0.003500 |          |          |
| M | Cr | <        | 0.004000 | O  | Li       | <        | 0.009300 | M        | Rh       | <        | 0.008000 | M        | U        | <        | 0.000570 |          |
| M | Cs | <        | 0.000570 | M  | Lu       | 0.000582 | M        | Ru       | <        | 0.000570 | M        | V        | 0.001265 |          |          |          |
| M | Cu | 0.002610 | O        | Mg | 0.001486 | n        | S        | <        |          | M        | W        | <        | 0.002300 |          |          |          |
| M | Dy | 0.003815 | M        | Mn | 0.000582 | M        | Sb       | 0.005422 | s        | Y        | <        |          |          |          |          |          |
| M | Er | 0.003615 | M        | Mo | <        | 0.005700 | M        | Sc       | <        | 0.001200 | M        | Yb       | 0.001827 |          |          |          |

M - Checked by ICP-MS

O - Checked by ICP-OES

i - Spectral Interference

n - Not Checked For

s - Solution Standard Element

## 6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

**6.2** For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale, <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Atomic Weight; Valence; Coordination Number; Chemical Form in Solution** - 88.91 +3 6 Y(OH)(H<sub>2</sub>O)<sub>x+2</sub>

**Chemical Compatibility** -Soluble in HCl, H<sub>2</sub>SO<sub>4</sub> and HNO<sub>3</sub>. Avoid HF, H<sub>3</sub>PO<sub>4</sub> and neutral to basic media.

Stable with most metals and inorganic anions forming an insoluble carbonate, oxide, oxalate, and fluoride.

Avoid mixing with elements / solutions containing moderate amounts of fluoride.

**Stability** - 2-100 ppb levels stable for months in 1% HNO<sub>3</sub> / LDPE container. 1-10,000 ppm solutions

chemically stable for years in 2-5% HNO<sub>3</sub> / LDPE container.

**Y Containing Samples (Preparation and Solution)** - Metal (Soluble in acids); Oxide (Dissolve by heating in H<sub>2</sub>O/ HNO<sub>3</sub>); Ores (Carbonate fusion in PtO followed by HCl dissolution); Organic Matrices (Dry ash and dissolve in 1:1 H<sub>2</sub>O / HCl or HNO<sub>3</sub>).

**Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):**

| Technique/Line     | Estimated D.L.         | Order | Interferences (underlined indicates severe) |
|--------------------|------------------------|-------|---|
| ICP-MS 89 amu      | 0.8 ppt                | N/A   | 73Ge16O, 178Hf+2                            |
| ICP-OES 360.073 nm | 0.005 / 0.000036 µg/mL | 1     | Ce, Th                                      |
| ICP-OES 371.030 nm | 0.004 / 0.00007 µg/mL  | 1     | Ce  |
| ICP-OES 377.433 nm | 0.005 / 0.0009 µg/mL   | 1     | Ta, Th                                      |

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; info@inorganicventures.com

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

February 20, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- February 20, 2029

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Prepared By:

Uyen Truong  
Custom Processing Supervisor



### Certificate Approved By:

Muzzammil Khan  
Stock Laboratory Supervisor



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director



# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030  
F: 540-585-3012  
info@inorganicventures.com

*M5985*  
*R: 6/14/24*

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Single Analyte Custom Grade Solution  
Catalog Number: CGIN10  
Lot Number: U2-IN729349  
Matrix: 5% (v/v) HNO<sub>3</sub>  
Value / Analyte(s): 10 000 µg/mL ea:  
Indium  
Starting Material: Indium Metal  
Starting Material Lot#: 2511  
Starting Material Purity: 99.9995%

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value: 10022 ± 30 µg/mL  
Density: 1.044 g/mL (measured at 20 ± 4 °C)

### Assay Information:

|                 |  |
|-----------------|--|
| Assay Method #1 | 10021 ± 56 µg/mL<br>ICP Assay NIST SRM 3124a Lot Number: 110516  |
| Assay Method #2 | 10035 ± 25 µg/mL<br>EDTA NIST SRM 928 Lot Number: 928            |
| Assay Method #3 | 10001 ± 33 µg/mL<br>Calculated NIST SRM Lot Number: See Sec. 4.2 |

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{CRM/RM}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{CRM/RM} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{char i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{char i}^2) / (\sum (1/u_{char i}^2))$$

$$CRM/RM \text{ Expanded Uncertainty } (k) = U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{char} = [\sum (w_i)^2 (u_{char i}^2)]^{1/2}$  where  $u_{char i}$  are the errors from each characterization method

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{lts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

### Characterization of CRM/RM by One Method

Certified Value,  $X_{CRM/RM}$ , where one method of characterization is used is the mean of individual results:

$$X_{CRM/RM} = (X_a) (u_{char a})$$

$X_a$  = mean of Assay Method A with

$u_{char a}$  = the standard uncertainty of characterization Method A

$$CRM/RM \text{ Expanded Uncertainty } (k) = U_{CRM/RM} = k (u_{char a}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{char a}$  = the errors from characterization

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{lts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

|   |    |          |          |    |          |          |          |    |          |          |          |          |    |          |          |          |   |          |
|---|----|----------|----------|----|----------|----------|----------|----|----------|----------|----------|----------|----|----------|----------|----------|---|----------|
| M | Ag | <        | 0.000760 | M  | Eu       | <        | 0.000760 | O  | Na       | 0.012771 | M        | Se       | <  | 0.023000 | M        | Zn       | < | 0.006100 |
| M | Al | 0.003385 | O        | Fe | 0.004462 | M        | Nb       | <  | 0.000760 | O        | Si       | 0.024619 | M  | Zr       | <        | 0.000760 |   |          |
| M | As | <        | 0.004600 | M  | Ga       | <        | 0.000760 | M  | Nd       | <        | 0.000760 | M        | Sm | <        | 0.000760 |          |   |          |
| M | Au | <        | 0.002300 | M  | Gd       | <        | 0.000760 | O  | Ni       | <        | 0.005100 | M        | Sn | <        | 0.000760 |          |   |          |
| O | B  | 0.003692 | M        | Ge | <        | 0.001600 | M        | Os | <        | 0.000760 | O        | Sr       | <  | 0.000610 |          |          |   |          |
| M | Ba | <        | 0.001600 | M  | Hf       | <        | 0.000760 | n  | P        | <        |          | M        | Ta | <        | 0.000760 |          |   |          |
| O | Be | <        | 0.000130 | M  | Hg       | <        | 0.003100 | M  | Pb       | 0.001400 | M        | Tb       | <  | 0.000760 |          |          |   |          |
| M | Bi | <        | 0.000760 | M  | Ho       | <        | 0.000760 | M  | Pd       | <        | 0.001600 | M        | Te | <        | 0.000760 |          |   |          |
| O | Ca | 0.004616 | s        | In | <        |          |          | M  | Pr       | <        | 0.000760 | M        | Th | <        | 0.000760 |          |   |          |
| M | Cd | <        | 0.000760 | M  | Ir       | <        | 0.000760 | M  | Pt       | <        | 0.000760 | O        | Ti | <        | 0.001100 |          |   |          |
| M | Ce | <        | 0.000760 | O  | K        | 0.007078 | M        | Rb | <        | 0.000760 | M        | Tl       | <  | 0.000760 |          |          |   |          |
| M | Co | <        | 0.000760 | M  | La       | <        | 0.000760 | M  | Re       | <        | 0.000760 | M        | Tm | <        | 0.000760 |          |   |          |
| O | Cr | <        | 0.001300 | O  | Li       | <        | 0.000130 | M  | Rh       | <        | 0.000760 | M        | U  | <        | 0.000760 |          |   |          |
| M | Cs | <        | 0.000760 | M  | Lu       | <        | 0.000760 | M  | Ru       | <        | 0.000760 | M        | V  | <        | 0.001600 |          |   |          |
| M | Cu | <        | 0.003800 | O  | Mg       | 0.000707 | n        | S  | <        |          | M        | W        | <  | 0.001600 |          |          |   |          |
| M | Dy | <        | 0.000760 | O  | Mn       | 0.000149 | M        | Sb | <        | 0.000760 | M        | Y        | <  | 0.000760 |          |          |   |          |
| M | Er | <        | 0.000760 | M  | Mo       | <        | 0.002300 | M  | Sc       | <        | 0.000760 | M        | Yb | <        | 0.000760 |          |   |          |

M - Checked by ICP-MS

O - Checked by ICP-OES

i - Spectral Interference

n - Not Checked For

s - Solution Standard Element

## 6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale. <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Atomic Weight; Valence; Coordination Number; Chemical Form In Solution** - 114.82 +3 6 In(H<sub>2</sub>O)<sub>6</sub>+3

**Chemical Compatibility** -Soluble in HCl, HNO<sub>3</sub>, and H<sub>2</sub>SO<sub>4</sub>. Avoid neutral and basic media. Stable with most metals and inorganic anions. The oxalate, sulfide, carbonate, hydroxide and phosphate are insoluble in water.

**Stability** - 2-100 ppb levels stable for months in 1% HNO<sub>3</sub> / LDPE container. 1-10,000 ppm solutions chemically stable for years in 2-5% HNO<sub>3</sub> / LDPE container.

**In Containing Samples (Preparation and Solution)** -Metal (Best dissolved in HCl / HNO<sub>3</sub>); Oxide (Soluble in mineral acids); Ores (Carbonate fusion in PtO followed by HCl dissolution); Organic Matrices (Sulfuric/peroxide digestion or dry ash and dissolution in dilute HCl).

**Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):**

| Technique/Line     | Estimated D.L.     | Order | Interferences (underlined indicates severe) |
|--------------------|--------------------|-------|---|
| ICP-MS 115 amu     | 1 ppt              | n/a   | 115Sn, 99Ru16O                              |
| ICP-OES 158.583 nm | 0.05 / 0.002 µg/mL | 1     |   |
| ICP-OES 230.606 nm | 0.1 / 0.03 µg/mL   | 1     | Ni, Os                                      |
| ICP-OES 325.609 nm | 0.2 / 0.05 µg/mL   | 1     | Mn, Mo, Th                                  |

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01



### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; inorganicventures.com; Info@inorganicventures.com

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

February 21, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- February 21, 2028

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director



# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

R: 2/22/24  
M 5996

P: 800-669-6799/540-585-3030

F: 540-585-3012

info@inorganicventures.com

## 1.0 ACCREDITATION / REGISTRATION

**INORGANIC VENTURES** is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

|                     |   |                       |
|---------------------|---|-----------------------|
| Product Code:       | Multi Analyte Custom Grade Solution             |                       |
| Catalog Number:     | CLPP-CAL-1                                      |                       |
| Lot Number:         | T2-MEB714417                                    |                       |
| Matrix:             | 5% (v/v) HNO <sub>3</sub>                       |                       |
| Value / Analyte(s): | 5 000 µg/mL ea:<br>Calcium,<br>Magnesium,       | Potassium,<br>Sodium, |
|                     | 2 000 µg/mL ea:<br>Aluminum,                    | Barium,               |
|                     | 1 000 µg/mL ea:<br>Iron,                        |                       |
|                     | 500 µg/mL ea:<br>Nickel,<br>Zinc,<br>Manganese, | Vanadium,<br>Cobalt,  |
|                     | 250 µg/mL ea:<br>Silver,                        | Copper,               |
|                     | 200 µg/mL ea:<br>Chromium,                      |                       |
|                     | 50 µg/mL ea:<br>Beryllium                       |                       |

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

| <b>ANALYTE</b> | <b>CERTIFIED VALUE</b> | <b>ANALYTE</b> | <b>CERTIFIED VALUE</b> |
|----------------|------------------------|----------------|------------------------|
| Aluminum, Al   | 2 000 ± 7 µg/mL        | Barium, Ba     | 2 000 ± 9 µg/mL        |
| Beryllium, Be  | 50.00 ± 0.26 µg/mL     | Calcium, Ca    | 5 000 ± 22 µg/mL       |
| Chromium, Cr   | 200.0 ± 1.0 µg/mL      | Cobalt, Co     | 500.0 ± 2.4 µg/mL      |
| Copper, Cu     | 250.0 ± 1.0 µg/mL      | Iron, Fe       | 1 000 ± 4 µg/mL        |
| Magnesium, Mg  | 5 000 ± 20 µg/mL       | Manganese, Mn  | 500.0 ± 2.0 µg/mL      |
| Nickel, Ni     | 500.0 ± 2.2 µg/mL      | Potassium, K   | 5 000 ± 19 µg/mL       |
| Silver, Ag     | 250.0 ± 1.1 µg/mL      | Sodium, Na     | 5 000 ± 18 µg/mL       |
| Vanadium, V    | 499.7 ± 2.2 µg/mL      | Zinc, Zn       | 500.0 ± 2.2 µg/mL      |

**Density:** 1.118 g/mL (measured at 20 ± 4 °C)

**Assay Information:**

| <b>ANALYTE</b> | <b>METHOD</b> | <b>NIST SRM#</b> | <b>SRM LOT#</b> |
|----------------|---------------|------------------|-----------------|
| Ag             | ICP Assay     | 3151             | 160729          |
| Ag             | Volhard       | 999c             | 999c            |
| Al             | ICP Assay     | 3101a            | 140903          |
| Al             | EDTA          | 928              | 928             |
| Ba             | ICP Assay     | 3104a            | 140909          |
| Ba             | Gravimetric   |                  | See Sec. 4.2    |
| Be             | ICP Assay     | 3105a            | 090514          |
| Be             | Calculated    |                  | See Sec. 4.2    |
| Ca             | ICP Assay     | 3109a            | 130213          |
| Ca             | EDTA          | 928              | 928             |
| Co             | ICP Assay     | 3113             | 190630          |
| Co             | EDTA          | 928              | 928             |
| Cr             | ICP Assay     | 3112a            | 170630          |
| Cr             | Calculated    |                  | See Sec. 4.2    |
| Cu             | ICP Assay     | 3114             | 121207          |
| Cu             | EDTA          | 928              | 928             |
| Fe             | ICP Assay     | 3126a            | 140812          |
| Fe             | EDTA          | 928              | 928             |
| K              | ICP Assay     | 3141a            | 140813          |
| K              | Gravimetric   |                  | See Sec. 4.2    |
| Mg             | ICP Assay     | 3131a            | 140110          |
| Mg             | EDTA          | 928              | 928             |
| Mn             | ICP Assay     | 3132             | 050429          |
| Mn             | EDTA          | 928              | 928             |
| Na             | ICP Assay     | 3152a            | 120715          |
| Na             | Gravimetric   |                  | See Sec. 4.2    |
| Ni             | ICP Assay     | 3136             | 120619          |
| Ni             | EDTA          | 928              | 928             |
| V              | IC Assay      | 3165             | 160906          |
| V              | EDTA          | 928              | 928             |
| Zn             | ICP Assay     | 3168a            | 120629          |
| Zn             | EDTA          | 928              | 928             |

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

#### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{\text{CRM/RM}} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{\text{char } i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\text{char } i}^2) / (\sum (1/u_{\text{char } i}^2))$$

$$\text{CRM/RM Expanded Uncertainty } (\pm) = U_{\text{CRM/RM}} = k (u_{\text{char}}^2 + u_{\text{bb}}^2 + u_{\text{Its}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char}} = (\sum (w_i)^2 (u_{\text{char } i}^2))^{1/2}$  where  $u_{\text{char } i}$  are the errors from each characterization method

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{Its}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

#### Characterization of CRM/RM by One Method

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

$$X_{\text{CRM/RM}} = (X_a) (u_{\text{char } a})$$

$X_a$  = mean of Assay Method A with

$u_{\text{char } a}$  = the standard uncertainty of characterization Method A

$$\text{CRM/RM Expanded Uncertainty } (\pm) = U_{\text{CRM/RM}} = k (u_{\text{char } a}^2 + u_{\text{bb}}^2 + u_{\text{Its}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char } a}$  = the errors from characterization

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{Its}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

## 6.0 INTENDED USE

- For the calibration of analytical instruments and validation of analytical methods as appropriate.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Note:** This solution contains Silver (Ag), please refer to our Sample Preparation Guide for more information.

<https://www.inorganicventures.com/sample-preparation-guide/samples-containing-silver>

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [info@inorganicventures.com](mailto:info@inorganicventures.com); [inorganicventures.com](http://inorganicventures.com)

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

January 27, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- January 27, 2027

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director



# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

R: 2/22/24  
MS-997

P: 800-669-6799/540-585-3030

F: 540-585-3012

info@inorganicventures.com

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories".

Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution  
Catalog Number: CLPP-CAL-3  
Lot Number: T2-MEB727800  
Matrix: 7% (v/v) HNO<sub>3</sub>  
Value / Analyte(s):  
1 000 µg/mL ea:  
Arsenic, Lead,  
Selenium, Thallium,  
500 µg/mL ea:  
Cadmium

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

| ANALYTE      | CERTIFIED VALUE | ANALYTE      | CERTIFIED VALUE   |
|--------------|-----------------|--------------|-------------------|
| Arsenic, As  | 1 000 ± 7 µg/mL | Cadmium, Cd  | 500.0 ± 2.2 µg/mL |
| Lead, Pb     | 1 000 ± 4 µg/mL | Selenium, Se | 1 000 ± 6 µg/mL   |
| Thallium, Tl | 1 000 ± 7 µg/mL |              |                   |

Density: 1.042 g/mL (measured at 20 ± 4 °C)

### Assay Information:

| ANALYTE | METHOD     | NIST SRM# | SRM LOT#     |
|---------|------------|-----------|--------------|
| As      | ICP Assay  | 3103a     | 100818       |
| As      | Calculated |           | See Sec. 4.2 |
| Cd      | ICP Assay  | 3108      | 130116       |
| Cd      | EDTA       | 928       | 928          |
| Pb      | ICP Assay  | 3128      | 101026       |
| Pb      | EDTA       | 928       | 928          |
| Se      | ICP Assay  | 3149      | 100901       |
| Tl      | ICP Assay  | 3158      | 151215       |

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{\text{CRM/RM}} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{\text{char } i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\text{char } i}^2) / (\sum (1/u_{\text{char } i}^2))$$

$$\text{CRM/RM Expanded Uncertainty (k)} = U_{\text{CRM/RM}} = k (u_{\text{char}}^2 + u_{\text{bb}}^2 + u_{\text{ts}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char}} = [\sum (w_i)^2 (u_{\text{char } i}^2)]^{1/2}$  where  $u_{\text{char } i}$  are the errors from each characterization method

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ts}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

### Characterization of CRM/RM by One Method

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

$$X_{\text{CRM/RM}} = (X_a) (u_{\text{char } a})$$

$X_a$  = mean of Assay Method A with

$u_{\text{char } a}$  = the standard uncertainty of characterization Method A

$$\text{CRM/RM Expanded Uncertainty (k)} = U_{\text{CRM/RM}} = k (u_{\text{char } a}^2 + u_{\text{bb}}^2 + u_{\text{ts}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char } a}$  = the errors from characterization

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{ts}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

## 6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale. <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

## **8.0 HAZARDOUS INFORMATION**

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## **9.0 HOMOGENEITY**

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## **10.0 QUALITY STANDARD DOCUMENTATION**

### **10.1 ISO 9001 Quality Management System Registration**

- QSR Certificate Number QSR-1034

### **10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"**

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### **10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"**

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [inorganicventures.com](http://inorganicventures.com); [info@inorganicventures.com](mailto:info@inorganicventures.com)

## **11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY**

### **11.1 Certification Issue Date**

December 21, 2022

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### **11.2 Lot Expiration Date**

- **December 21, 2027**

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.



### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

#### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



#### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director





Refine your results. Redefine your industry.

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

# Certificate of Analysis

M6074  
M6075  
M6076  
M6077

P: 800-669-6799/540-585-3030

F: 540-585-3012

info@inorganicventures.com

EXP: 9/6/2029

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Multi Analyte Custom Grade Solution  
Catalog Number: CHEM-CLP-4  
Lot Number: V2-MEB746762  
Matrix: 3% (v/v) HNO<sub>3</sub>  
3% (v/v) HF  
Value / Analyte(s): 1 000 µg/mL ea:  
Boron, Molybdenum,  
Silicon, Tin,  
Titanium

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

| ANALYTE      | CERTIFIED VALUE | ANALYTE        | CERTIFIED VALUE |
|--------------|-----------------|----------------|-----------------|
| Boron, B     | 1 000 ± 5 µg/mL | Molybdenum, Mo | 1 000 ± 5 µg/mL |
| Silicon, Si  | 1 000 ± 7 µg/mL | Tin, Sn        | 1 000 ± 5 µg/mL |
| Titanium, Ti | 1 000 ± 6 µg/mL |                |                 |

Density: 1.033 g/mL (measured at 20 ± 4 °C)

### Assay Information:

| ANALYTE | METHOD     | NIST SRM#          | SRM LOT#     |
|---------|------------|--------------------|--------------|
| B       | ICP Assay  | 3107               | 190605       |
| B       | Calculated |                    | See Sec. 4.2 |
| Mo      | ICP Assay  | traceable to 3134  | U2-MO739068  |
| Si      | ICP Assay  | Traceable to 3150  | S2-SI702546  |
| Sn      | ICP Assay  | 3161a              | 140917       |
| Ti      | ICP Assay  | traceable to 3162a | T2-TI725816  |

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

#### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{\text{CRM/RM}}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{\text{CRM/RM}} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{\text{char } i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{\text{char } i}^2) / (\sum (1/u_{\text{char } i}^2))$$

$$\text{CRM/RM Expanded Uncertainty } (\pm) = U_{\text{CRM/RM}} = k (u_{\text{char}}^2 + u_{\text{bb}}^2 + u_{\text{Its}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char}} = [\sum (w_i)^2 (u_{\text{char } i}^2)]^{1/2}$  where  $u_{\text{char } i}$  are the errors from each characterization method

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{Its}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

#### Characterization of CRM/RM by One Method

Certified Value,  $X_{\text{CRM/RM}}$ , where one method of characterization is used is the mean of individual results:

$$X_{\text{CRM/RM}} = (X_a) (u_{\text{char } a})$$

$X_a$  = mean of Assay Method A with

$u_{\text{char } a}$  = the standard uncertainty of characterization Method A

$$\text{CRM/RM Expanded Uncertainty } (\pm) = U_{\text{CRM/RM}} = k (u_{\text{char } a}^2 + u_{\text{bb}}^2 + u_{\text{Its}}^2 + u_{\text{ts}}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{\text{char } a}$  = the errors from characterization

$u_{\text{bb}}$  = bottle to bottle homogeneity standard uncertainty

$u_{\text{Its}}$  = long term stability standard uncertainty (storage)

$u_{\text{ts}}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

N/A

## 6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale. <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.

- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.

- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**HF Note:** This standard should not be prepared or stored in glass.

## **8.0 HAZARDOUS INFORMATION**

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## **9.0 HOMOGENEITY**

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## **10.0 QUALITY STANDARD DOCUMENTATION**

### **10.1 ISO 9001 Quality Management System Registration**

- QSR Certificate Number QSR-1034

### **10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"**

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### **10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"**

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [inorganicventures.com](http://inorganicventures.com); [info@inorganicventures.com](mailto:info@inorganicventures.com)

## **11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY**

### **11.1 Certification Issue Date**

September 06, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### **11.2 Lot Expiration Date**

- **September 06, 2029**

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

### 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

#### Certificate Approved By:

Joseph Burns  
Custom VS Manager



#### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director





**CERTIFIED WEIGHT REPORT:**

**Part Number:** 58112  
**Lot #** 112124  
**Description:** Magnesium (Mg)  
**Solvent:** Nitric Acid

**Expiration Date:** 11/21/27  
**Recommended Storage:** Ambient (20 °C)  
**Nitric Acid** 2% (40.0 mL)

**Nominal Concentration (µg/mL):** 10000

**NIST Test Number:** 6LUB

**Weight shown below was diluted to (mL):** 2000.07 0.100 Flask Uncertainty

|                          |                   |
|--------------------------|-------------------|
| <i>Giovanni Esposito</i> |                   |
| Formulated By:           | Giovanni Esposito |
| Reviewed By:             | Pedro L. Rentas   |
|                          | 112124            |

**Compound**

| Lot | Nominal | Purity        | Uncertainty | Assay      | Target | Actual     | Actual     | Expanded      | SDS Information                        | NIST |
|-----|---------|---------------|-------------|------------|--------|------------|------------|---------------|--|------|
| RM# | Number  | Conc. (µg/mL) | (%)         | Purity (%) | (%)    | Weight (g) | Weight (g) | Conc. (µg/mL) | (Solvent Safety Info. On Attached pg.) | SRM  |
|     |         |               |             |            |        |            |            | ± (µg/mL)     | OSHA PEL (TWA)                         | LD50 |

1. Magnesium nitrate hexahydrate (Mg) IN030 MG000023A1 10000 99.999 0.10 8.51 234.9183 234.9459 10001.2 20.0 13446-18-9 NA off-rat 5440 mg/kg 3131a

[1] Spectrum No. 1 [19.823 sec]:58112.D# [Count] [Linear]





# Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

## Trace Metals Verification by ICP-MS (µg/mL)

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Rc | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | T     | Os | <0.02 | Rb | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Ru | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Sm | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sc | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  |    |       | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

## Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

Part Number:  
Lot Number:  
Description:

**58025**  
**101124**  
**Manganese (Mn)**

*R-71113128*

Lot #  
Solvent: 24002546 Nitric Acid

Expiration Date:

101127

2% 80.0 (mL) Nitric Acid

Recommended Storage:  
Nominal Concentration (µg/mL):

Ambient (20 °C)  
**1000**

NIST Test Number:

6UTB

5E-05 Balance Uncertainty

Weight shown below was diluted to (mL):

4000.2 0.10 Flask Uncertainty

|                          |                          |
|--------------------------|--------------------------|
| <i>Giovanni Esposito</i> |                          |
| Formulated By:           | Giovanni Esposito        |
| Reviewed By:             | <i>Pedro L. Renteria</i> |
|                          | 101124                   |

**Compound**

| RM# | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|-----|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|-----|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Manganese(II) nitrate hydrate (Mn) IN031 MMN032020A1 1000 99.999 0.10 20.8 19.2322 19.2344 **1000.1** **2.0** 15710-66-4 5 mg/m3 or-rel >300mg/kg 3132

[1] Spectrum No.1 [ 34.243 sec]:57025.D# [Count] [Linear]

|       |       |     |     |     |     |     |     |     |     |     |     |
|-------|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 5.0E6 | m/z-> | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 | 190 | 200 |
| 2.5E6 | m/z-> | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |
| 1.0E6 | m/z-> | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |
| 5.0E7 | m/z-> | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 | 190 | 200 |
| 5.0E7 | m/z-> | 210 | 220 | 230 | 240 | 250 | 260 |     |     |     |     |





**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | T     | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).

# Certificate of Analysis

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030  
F: 540-585-3012  
info@inorganicventures.com

M6137  
R-71013124

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Single Analyte Custom Grade Solution  
Catalog Number: CGSI1  
Lot Number: V2-SI744713  
Matrix: tr. HNO<sub>3</sub>  
tr. HF  
Value / Analyte(s): 1 000 µg/mL ea:  
Silicon  
Starting Material: Silica  
Starting Material Lot#: 1771  
Starting Material Purity: 99.9981%

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value: 999 ± 6 µg/mL  
Density: 1.003 g/mL (measured at 20 ± 4 °C)

### Assay Information:

|                 |   |
|-----------------|---|
| Assay Method #1 | 999 ± 5 µg/mL<br>ICP Assay NIST SRM Traceable to 3150 Lot Number: S2-SI702546 |
| Assay Method #2 | 1000 ± 7 µg/mL<br>Calculated NIST SRM Lot Number: See Sec. 4.2                |

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

#### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{CRM/RM}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{CRM/RM} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{char i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{char i}^2) / (\sum (1/u_{char i}^2))$$

$$CRM/RM \text{ Expanded Uncertainty } (\pm) = U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{char} = [\sum (w_i)^2 (u_{char i}^2)]^{1/2}$  where  $u_{char i}$  are the errors from each characterization method

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{lts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

#### Characterization of CRM/RM by One Method

Certified Value,  $X_{CRM/RM}$ , where one method of characterization is used is the mean of individual results:

$$X_{CRM/RM} = (X_a) (u_{char a})$$

$X_a$  = mean of Assay Method A with

$u_{char a}$  = the standard uncertainty of characterization Method A

$$CRM/RM \text{ Expanded Uncertainty } (\pm) = U_{CRM/RM} = k (u_{char a}^2 + u_{bb}^2 + u_{lts}^2 + u_{ts}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{char a}$  = the errors from characterization

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{lts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

|   |    |   |          |   |    |   |          |   |    |          |          |    |    |          |          |    |    |          |          |
|---|----|---|----------|---|----|---|----------|---|----|----------|----------|----|----|----------|----------|----|----|----------|----------|
| M | Ag | < | 0.000310 | M | Eu | < | 0.000310 | O | Na | 0.001656 | M        | Se | <  | 0.022000 | M        | Zn | <  | 0.002500 |          |
| M | Al |   | 0.010787 | M | Fe | < | 0.027000 | M | Nb | <        | 0.001300 | s  | Si | <        |          | O  | Zr | <        | 0.001900 |
| M | As | < | 0.001900 | M | Ga | < | 0.001300 | M | Nd | <        | 0.000310 | M  | Sm | <        | 0.000310 |    |    |          |          |
| M | Au | < | 0.000910 | M | Gd | < | 0.000310 | M | Ni | <        | 0.005500 | M  | Sn |          | 0.000096 |    |    |          |          |
| M | B  |   | 0.016180 | M | Ge | < | 0.001900 | M | Os | <        | 0.000610 | O  | Sr |          | 0.000092 |    |    |          |          |
| M | Ba |   | 0.000096 | M | Hf |   | 0.000423 | i | P  | <        |          | M  | Ta |          | 0.002542 |    |    |          |          |
| O | Be | < | 0.000570 | M | Hg | < | 0.000610 | M | Pb | <        | 0.000310 | M  | Tb | <        | 0.000310 |    |    |          |          |
| M | Bi | < | 0.000310 | M | Ho | < | 0.000610 | M | Pd | <        | 0.000610 | M  | Te | <        | 0.000910 |    |    |          |          |
| O | Ca |   | 0.011557 | M | In | < | 0.000310 | M | Pr | <        | 0.000310 | M  | Th | <        | 0.001900 |    |    |          |          |
| M | Cd | < | 0.000310 | M | Ir | < | 0.000310 | M | Pt | <        | 0.000310 | M  | Ti |          | 0.001078 |    |    |          |          |
| M | Ce | < | 0.000610 | O | K  |   | 0.000577 | M | Rb | <        | 0.009100 | M  | Tl | <        | 0.000310 |    |    |          |          |
| M | Co | < | 0.001600 | M | La | < | 0.000310 | M | Re | <        | 0.000310 | M  | Tm | <        | 0.000310 |    |    |          |          |
| M | Cr | < | 0.010000 | O | Li | < | 0.000460 | M | Rh | <        | 0.000310 | M  | U  | <        | 0.000310 |    |    |          |          |
| M | Cs | < | 0.000310 | M | Lu | < | 0.000310 | M | Ru | <        | 0.000310 | O  | V  | <        | 0.001300 |    |    |          |          |
| M | Cu | < | 0.002500 | O | Mg |   | 0.001348 | O | S  | <        | 0.570000 | M  | W  | <        | 0.001900 |    |    |          |          |
| M | Dy | < | 0.000310 | M | Mn | < | 0.002500 | M | Sb | <        | 0.000310 | M  | Y  | <        | 0.000310 |    |    |          |          |
| M | Er | < | 0.000310 | M | Mo | < | 0.000310 | O | Sc | <        | 0.000590 | M  | Yb | <        | 0.000310 |    |    |          |          |

M - Checked by ICP-MS

O - Checked by ICP-OES

i - Spectral Interference

n - Not Checked For

s - Solution Standard Element

## 6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale, <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Atomic Weight; Valence; Coordination Number; Chemical Form in Solution** - 28.09 +4 6 Si(OH)x(F)y2-

**Chemical Compatibility** -Soluble in HCl, HF, H3PO4 H2SO4 and HNO3 as the Si(OH)x(F)y2-. Avoid neutral to basic media. Unstable at ppm levels with metals that would pull F- away ( i.e. Do not mix with Alkaline or Rare Earths, or high levels of transition elements unless they are fluorinated. Stable with most inorganic anions with a tendency to hydrolyze forming silicic acid (silicic acid is soluble up to &sim;100 ppm in water) in all dilute acids except HF.

**Stability** - 2-100 ppb levels - stability unknown - (alone or mixed with all other metals) as the Si(OH)x(F)y2-. 1-10,000 ppm single element solutions as the Si(OH)x(F)y2- chemically stable for years in 2-5 % HNO3 / trace HF in a LDPE container.

**Si Containing Samples (Preparation and Solution)** -Metal (Soluble in 1:1:1 H2O / HF / HNO3); Oxide - SiO2, amorphous (dissolve by heating in 1:1:1 H2O / HF / HNO3); Oxide - quartz (fuse in Pt0 with Na2CO3); Geological Samples(fuse in Pt0with Na2CO3 followed by HCl solution of the fuseate); Organic Matrices containing silicates and non volatile silicon compounds (dry ash at 4500C in Pt0 and dissolve by gently warming with 1:1:1 H2O / HF / H2SO4 or fuse / ash with Na2CO3 and dissolve fuseate with HCl / H2O ); Silicone Oils - dimethyl silicones depolymerize to form volatile monomer units when heated (Measure directly in alcoholic KOH / xylene mixture where sample is treated first with the KOH at 60-1000C to "unzip" the Si- O-Si polymeric structure or digest with conc. H2SO4 / H2O2 followed by cooling and dissolution of the dehydrated silica with HF.) Note that the direct analysis of silicone oils in an organic solvent will result in false high results due to high vapor pressure of volatile monomer units like hexamethylcyclotrisiloxane. The KOH forms the K2+Si(CH3)2O= salt which is not volatile at room temperature.

**Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):**

| Technique/Line     | Estimated D.L.    | Order | Interferences (underlined indicates severe) |
|--------------------|-------------------|-------|---|
| ICP-MS 28 amu      | 4000 - 8000 ppt   | N/A   | N2, 12C16O                                  |
| ICP-OES 212.412 nm | 0.02/0.01 µg/mL   | 1     | Hf, Os, Mo, Ta                              |
| ICP-OES 251.611 nm | 0.012/0.003 µg/mL | 1     | Ta, U, Zn, Th                               |
| ICP-OES 288.158 nm | 0.03/0.004 µg/mL  | 1     | Ta, Ce, Cr, Cd, Th                          |

**HF Note:** This standard should not be prepared or stored in glass.

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [info@inorganicventures.com](mailto:info@inorganicventures.com);

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

July 10, 2024

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- July 10, 2029

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Prepared By:

Uyen Truong  
Custom Processing Supervisor



### Certificate Approved By:

Muzzammil Khan  
Stock Laboratory Supervisor



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director



CERTIFIED WEIGHT REPORT:

Part Number:  
Lot Number:  
Description:

58120  
121824  
Calcium (Ca)

Expiration Date:  
Recommended Storage:  
Nominal Concentration (µg/mL):  
NIST Test Number:

121827  
Ambient (20 °C)  
10000  
6UTB

Weight shown below was diluted to (mL):

4000.1 0.15

5E-05 Balance Uncertainty  
Flask Uncertainty

Solvent: Nitric Acid

2% Nitric Acid  
(mL)

Lot #  
24012496


|                   |                   |
|-------------------|-------------------|
| Giovanni Esposito |                   |
| Formulated By:    | Giovanni Esposito |
| Pedro L. Rentas   |                   |
| Reviewed By:      | Pedro L. Rentas   |

SDS Information

| Compound | RM#    | Lot | Nominal       | Purity | Uncertainty | Assay | Target     | Actual     | Uncertainty | (Solvent Safety Info. On Attached pg.) | NIST |
|----------|--------|-----|---------------|--------|-------------|-------|------------|------------|-------------|--|------|
|          | Number |     | Conc. (µg/mL) | (%)    | Purity (%)  | (%)   | Weight (g) | Weight (g) | +/- (µg/mL) | CAS#                                   | SRM  |
|          |        |     |               |        |             |       |            |            |             | OSHA PEL (TWA)                         | LD50 |

1. Calcium carbonate (Ca) IN014 CAD032028B3 10000 99.999 0.10 39.9 100.2537 100.2677 10001.4 20.0 471-34-1 5 mg/m3 otl-rat >2000mg/kg 3109a

[1] Spectrum No. 1 [ 12.514 sec]:58120.D# [Count] [Linear]

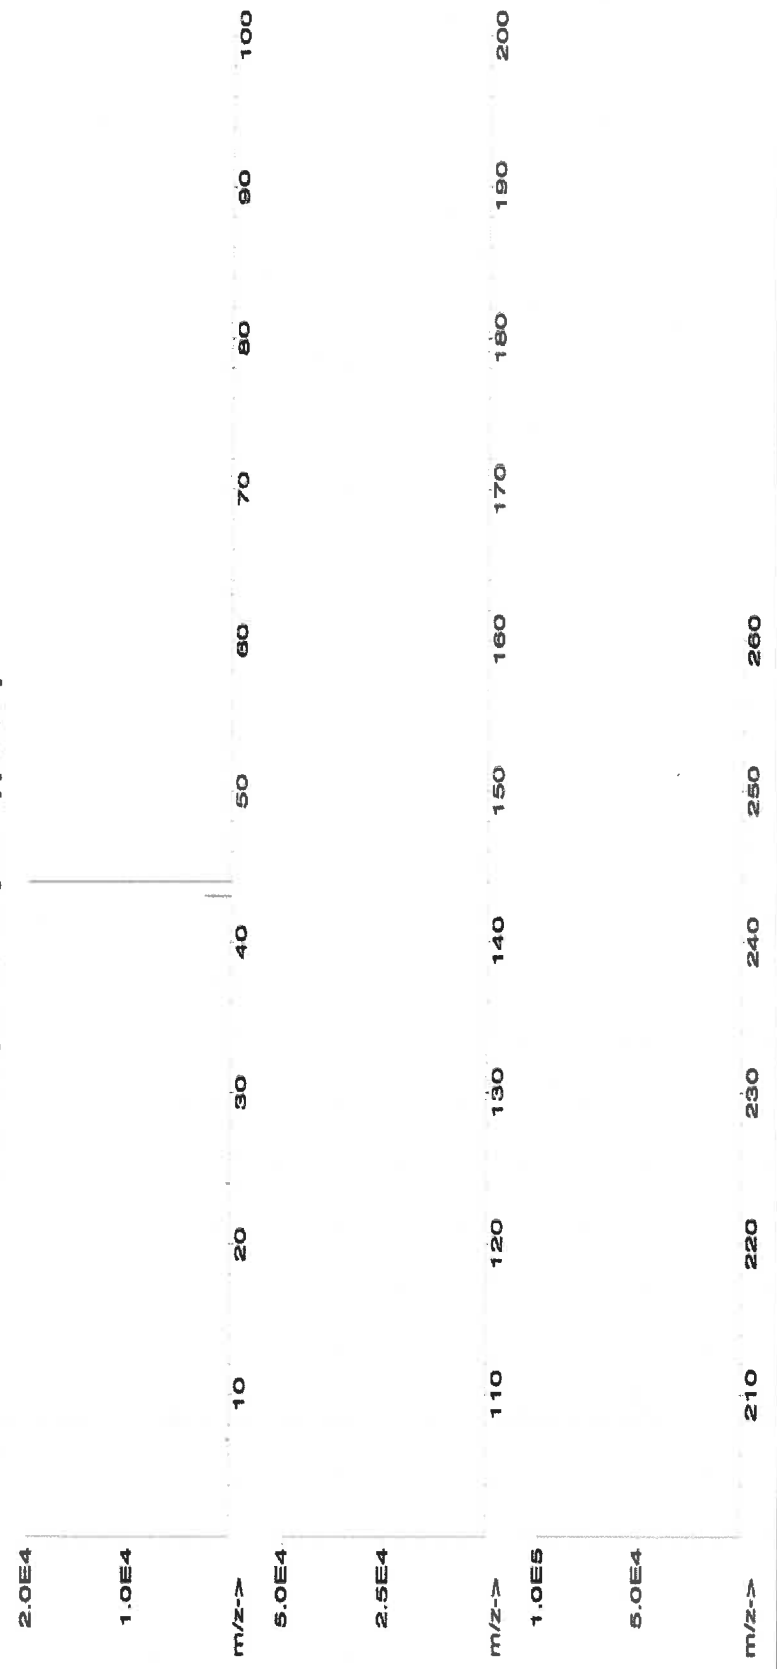



## Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):

### Trace Metals Verification by ICP-MS ( $\mu\text{g/mL}$ )

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pr | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | T     | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | 30    | Fe | <0.02 | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

### Physical Characterization:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57119  
**Lot Number:** 103024  
**Description:** Potassium (K)

R-21113125

**Solvent:** 24002546 Nitric Acid  
**Lot #**

**Expiration Date:** 103027  
**Recommended Storage:** Ambient (20 °C)  
**Nominal Concentration (µg/mL):** 10000  
**NIST Test Number:** 6UTB

M6141  
M6142  
M6143

2% 80.0 (mL) Nitric Acid

**Weight shown below was diluted to (mL):** 4000.1 0.15 Flask Uncertainty


|                          |                   |
|--------------------------|-------------------|
| <i>Giovanni Esposito</i> |                   |
| Formulated By:           | Giovanni Esposito |
| Reviewed By:             | Pedro L. Renteria |
|                          | 103024            |

| Compound | RM# | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty Purity (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-----|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|          |     |            |                       |            |                        |           |                   |                   |                      |                                  |      |                |      |          |

**SDS Information**

1. Potassium nitrate (K) IN034 KD062022A1 10000 99.999 0.10 37.7 106.1040 ##### 10001.1 20.0 7757-79-1 5 mg/m3 orl-rat 3750 mg/kg 3141a

[1] Spectrum No. 1 [ 35.763 sec]:58119.D# [Count] [Linear]

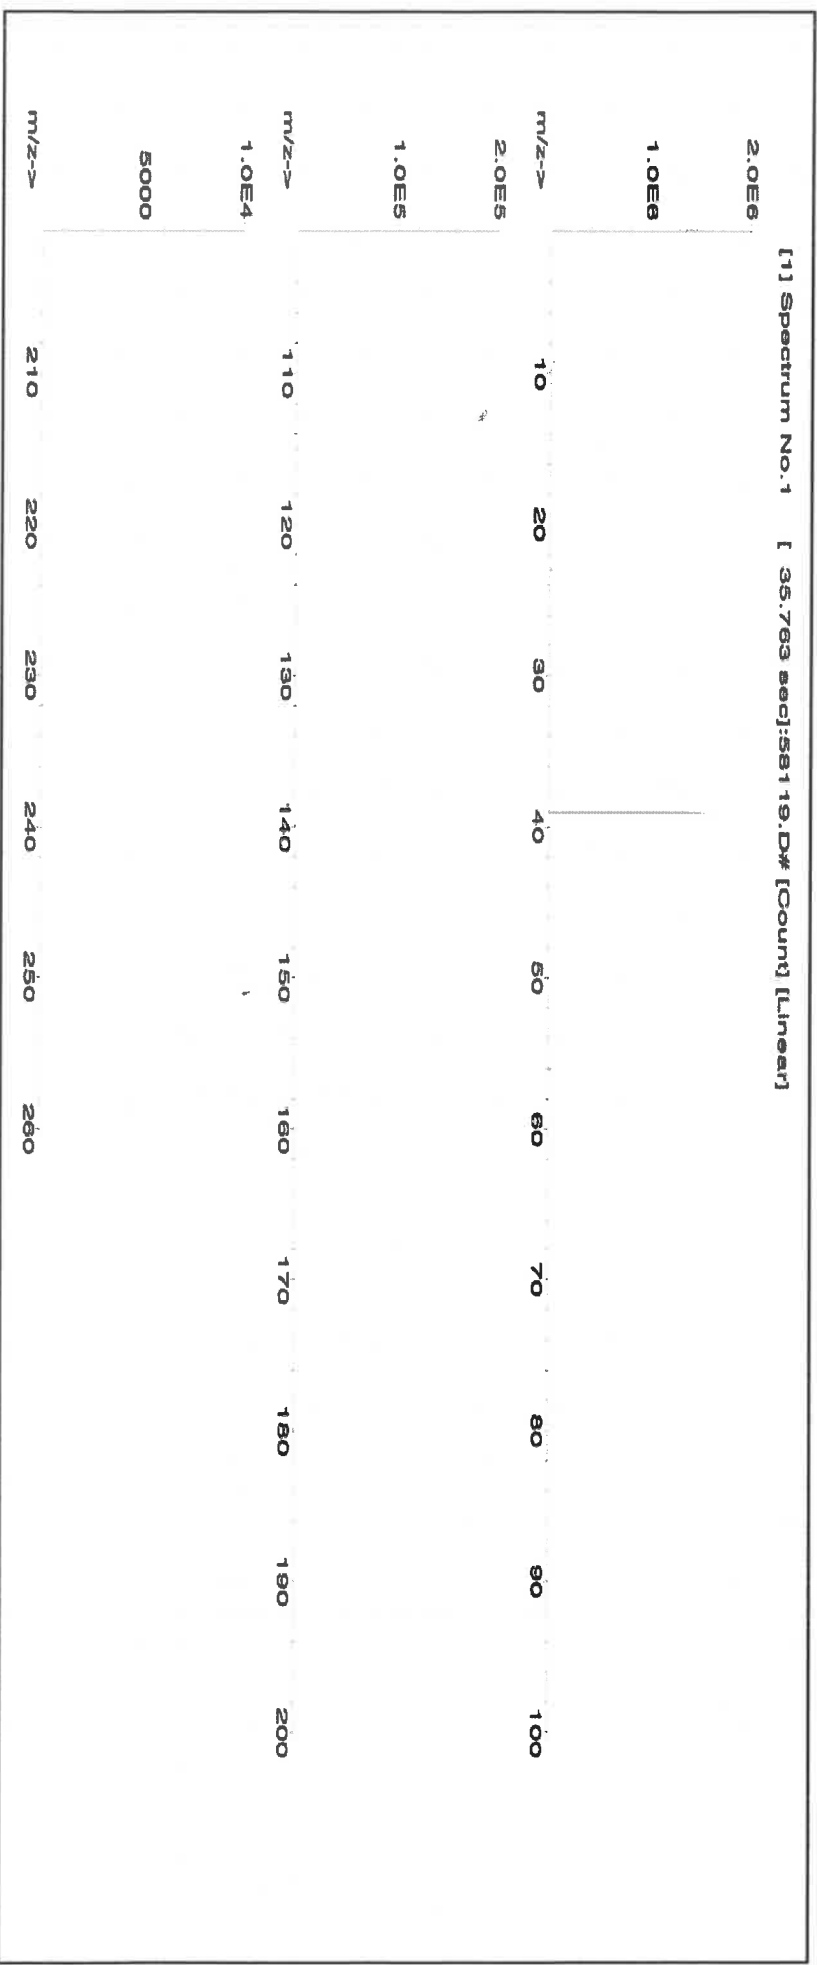





**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | T     | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

Part Number: **58111** Lot # **R-1113125**  
Lot Number: **072424** Solvent: **24002546 Nitric Acid**  
Description: **Sodium (Na)**

Expiration Date: **072427** 2% 80.0 Nitric Acid (mL)

Recommended Storage: **Ambient (20 °C)**

Nominal Concentration (µg/mL): **10000**

NIST Test Number: **6UTB** SE-05 Balance Uncertainty


Weight shown below was diluted to (mL): **4000.2** 0.10 Flask Uncertainty

|                |                   |        |
|----------------|-------------------|--------|
| Formulated By: | Benson Chan       | 072424 |
| Reviewed By:   | Pedro L. Renteria | 072424 |

| Compound | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty Purity (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|----------|------------|-----------------------|------------|------------------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Sodium nitrate (Na) IN036 NAV01201511 10000 99.999 0.10 26.9 148.7096 ##### 10000.0 20.0 7631-99-4 5 mg/m3 orl-rat 3430 mg/kg 3152a

[1] Spectrum No. 1 [ 8.935 sec]: 58111.D# [Count] [Linear]

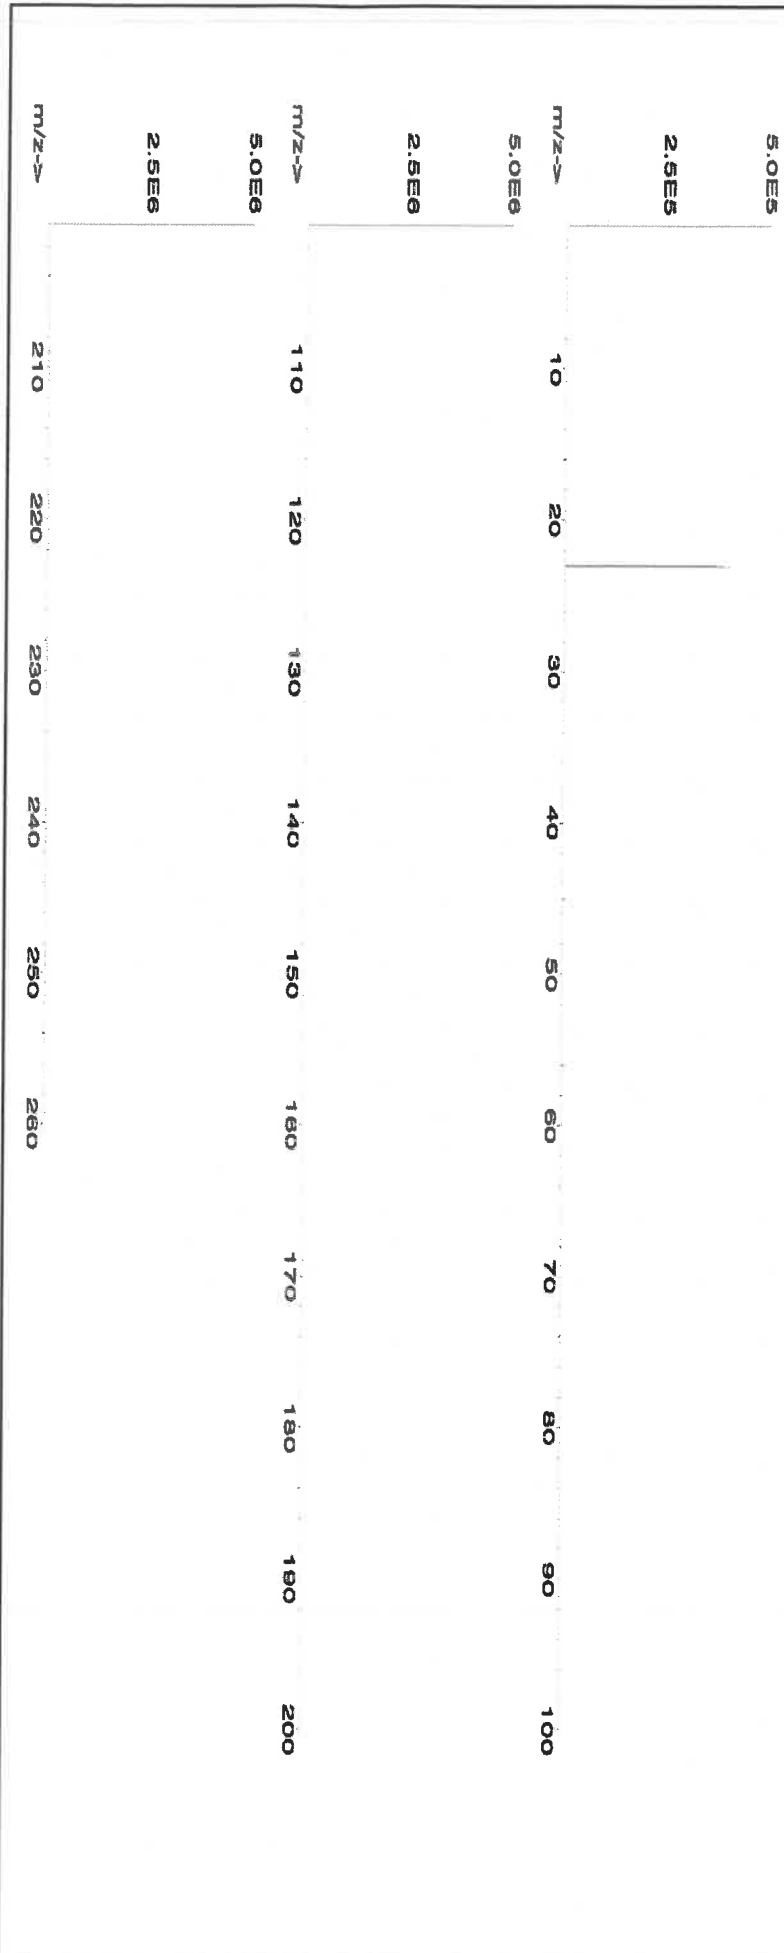



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rb | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | T     | Tb | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



**CERTIFIED WEIGHT REPORT:**

Part Number:  
Lot Number:  
Description:

**58030**  
**121724**  
**Zinc (Zn)**

**R → 11/13/25** Solvent: 24012496 Nitric Acid

Lot #

**121727**

Expiration Date:

**121727**

**M6145**

2%

40.0 (mL)

Nitric Acid

Recommended Storage:

Ambient (20 °C)

Nominal Concentration (µg/mL):

**1000**

NIST Test Number:

**6UTB**

5E-05 Balance Uncertainty

Weight shown below was diluted to (mL):

**2000.1**

0.10 Flask Uncertainty

|                      |                         |
|----------------------|-------------------------|
| <i>Aleah O'Brady</i> |                         |
| Formulated By:       | Aleah O'Brady           |
| Reviewed By:         | <i>Pedro L. Rentias</i> |
|                      | Pedro L. Rentias        |
|                      | 121724                  |

**Compound**

RM#

Lot Number

Nominal Conc. (µg/mL)

Purity (%)

Uncertainty Purity (%)

Assay (%)

Target Weight (g)

Actual Weight (g)

Actual Conc. (µg/mL)

Expanded Uncertainty +/- (µg/mL)

CAS#

OSHA PEL (TWA)

LD50

NIST SRM

**SDS Information**

(Solvent Safety Info. On Attached pg.)

1. Zinc nitrate hexahydrate (Zn)

IN016 ZNE032021A1

1000

99.999

0.10

24.3

8.2308

8.2311

1000.0


2.0

10196-18-6

1 mg/m3

or-rat 1190mg/kg 3168

[1] Spectrum No.1 [ 31.103 sec;58130.D# [Count] [Linear]

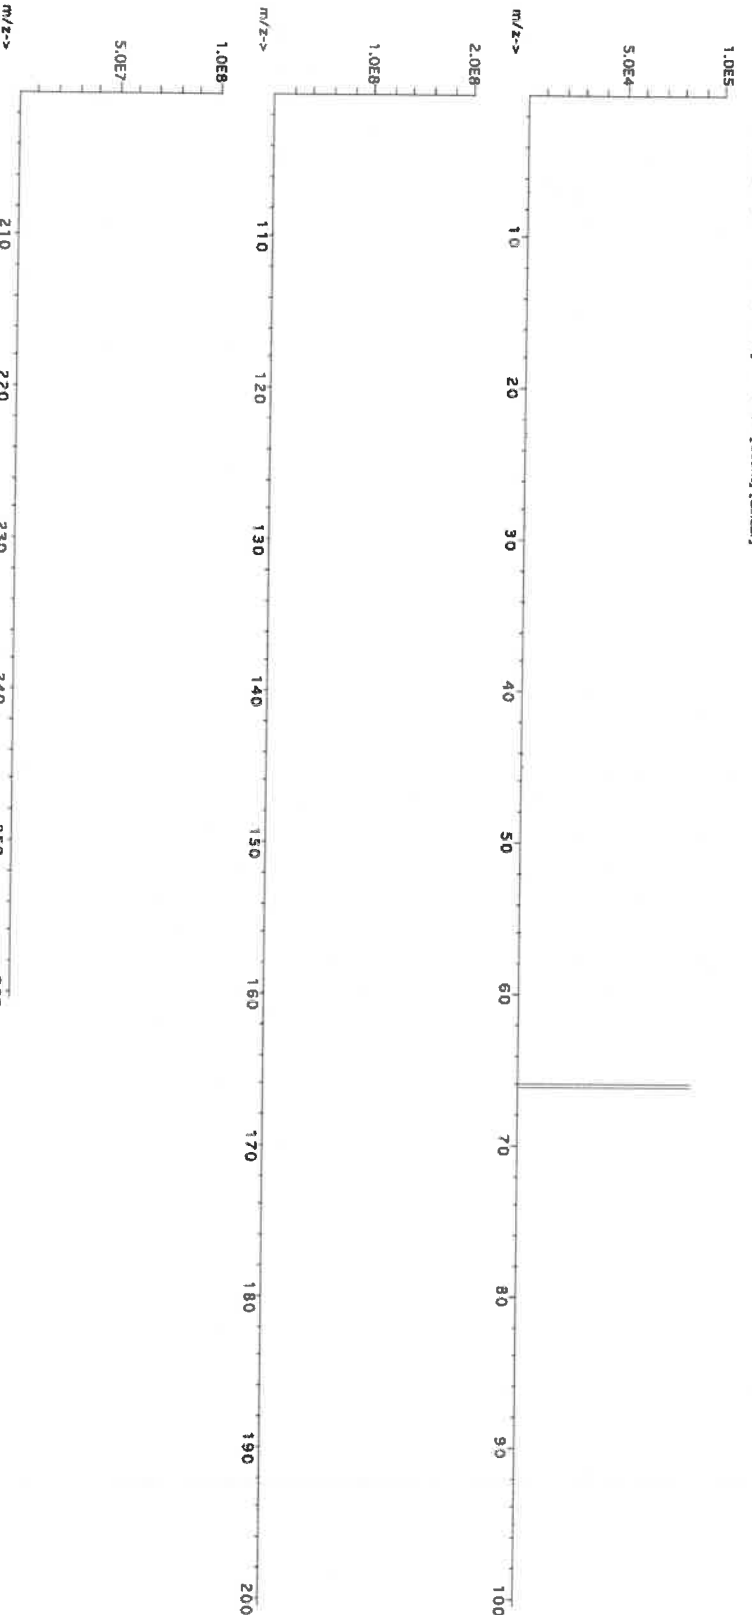



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Bu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Md | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY  
"An ISO 9001:2015 Certified Program"

R: 4/20/21

Instructions for QATS Reference Material: *Inorganic ICV Solutions*

QATS LABORATORY INORGANIC REFERENCE MATERIAL  
INITIAL CALIBRATION VERIFICATION SOLUTIONS  
(ICV1, ICV5, AND ICV6)

MG180

**NOTE:** These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

**APPLICATION:** For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** Read instructions carefully before opening bottle(s) and proceeding with the analyses.

Contains Metals in Dilute Acidic or  
Cyanide in Basic Aqueous Solutions  
**HAZARDOUS MATERIAL**

Safety Data Sheets  
Available Upon Request

**(A) SAMPLE DESCRIPTION**

Enclosed is a set of one (1) or more Aqueous Inorganic Reference Materials containing various analyte concentrations. ICV1 and ICV5 are in a matrix of dilute nitric acid. ICV6 is in a matrix of dilute basic solution. For the reference material source in reporting ICVs use "USEPA". For the reference material lot number for the ICV1, ICV5, and ICV6 solutions use "ICV1-1014", "ICV5-0415", and "ICV6-0400", respectively.

**(B) BREAKAGE OR MISSING ITEMS**

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY  
APTIM Federal Services, LLC  
2700 Chandler Avenue - Building C  
Las Vegas, NV 89120

**(C) ANALYSIS OF SAMPLES**

The Initial Calibration Verification Solutions (ICVs) are to be used to evaluate the accuracy of the initial calibrations of ICP, AA, and Cyanide colorimetric instruments, and are to be used with the CLP SOWs and revisions. The values for each element in the ICVs are listed below in µg/L (ppb) for the resulting solution(s) after the dilution of the concentrate(s) according to the following instructions. Use Class 'A' glassware to prepare the solution(s).

**ICV1-1014** For ICP-AES analysis, use a 10-fold dilution by pipetting 10 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid.





**QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY**  
**"An ISO 9001:2015 Certified Program"**

**Instructions for QATS Reference Material: *Inorganic ICV Solutions***

**ICV1-1014** For ICP-MS analysis, use a 50-fold dilution by pipetting 2 mL of the ICV1 concentrate into a 100 mL volumetric flask and dilute to volume with 1% (v/v) nitric acid.

**ICV5-0415** For the cold vapor analysis of mercury by AA, use a 100-fold dilution by pipetting 1 mL of the ICV5 concentrate into a 100 mL volumetric flask and dilute to volume with 2% (v/v) nitric acid. The ICV5 concentrate is prepared in 0.05% (w/v) K<sub>2</sub>Cr<sub>2</sub>O<sub>7</sub> and 5% (v/v) nitric acid.

**ICV6-0400** For the analysis of cyanide, use a 100-fold dilution by pipetting 1 mL of the ICV6 concentrate into a 100 mL volumetric flask and dilute to volume with Type II water. Distill this solution along with the samples before analysis. The cyanide concentrate is prepared from K<sub>3</sub>Fe(CN)<sub>6</sub>, Type II water, and 0.1 % sodium hydroxide, and will decompose rapidly if exposed to light.

**NOTE: USE TYPE II WATER AND HIGH-PURITY ACIDS FOR ALL DILUTIONS.**

**(D) CERTIFIED CONCENTRATIONS OF QATS ICV1, ICV5, AND ICV6 SOLUTIONS**

| ICV1-1014 |  |  |
|-----------|--|--|
| Element   | Concentration (µg/L)<br>(after 10-fold dilution) | Concentration (µg/L)<br>(after 50-fold dilution) |
| Al        | 2500   | 500  |
| Sb        | 1000   | 200  |
| As        | 1000   | 200  |
| Ba        | 520  | 100  |
| Be        | 510  | 100  |
| Cd        | 510  | 100  |
| Ca        | 10000  | 2000   |
| Cr        | 520  | 100  |
| Co        | 520  | 100  |
| Cu        | 510  | 100  |
| Fe        | 10000  | 2000   |
| Pb        | 1000   | 200  |
| Mg        | 6000   | 1200   |
| Mn        | 520  | 100  |
| Ni        | 530  | 110  |
| K         | 9900   | 2000   |
| Se        | 1000   | 200  |
| Ag        | 250  | 50   |
| Na        | 10000  | 2000   |
| Tl        | 1000   | 210  |
| V         | 500  | 100  |
| Zn        | 1000   | 200  |

| ICV5-0415 |   | ICV6-0400       |   |
|-----------|---|-----------------|---|
| Element   | Concentration (µg/L)<br>(after 100-fold dilution) | Analyte         | Concentration (µg/L)<br>(after 100-fold dilution) |
| Hg        | 4.0   | CN <sup>-</sup> | 99  |

Hydrochloric Acid, 36.5–38.0%  
BAKER INSTRA-ANALYZED® Reagent  
For Trace Metal Analysis

 **avantor™**



M6151

R → 11/15/25

Material No.: 9530-33  
Batch No.: 22G2862015  
Manufactured Date: 2022-06-15  
Retest Date: 2027-06-14  
Revision No.: 0

## Certificate of Analysis

| Test                                      | Specification | Result      |
|---|---------------|-------------|
| ACS – Assay (as HCl) (by acid–base titrn) | 36.5 – 38.0 % | 37.9 %      |
| ACS – Color (APHA)                        | ≤ 10          | 5           |
| ACS – Residue after Ignition              | ≤ 3 ppm       | < 1 ppm     |
| ACS – Specific Gravity at 60°/60°F        | 1.185 – 1.192 | 1.191       |
| ACS – Bromide (Br)                        | ≤ 0.005 %     | < 0.005 %   |
| ACS – Extractable Organic Substances      | ≤ 5 ppm       | < 1 ppm     |
| ACS – Free Chlorine (as Cl <sub>2</sub> ) | ≤ 0.5 ppm     | < 0.5 ppm   |
| Phosphate (PO <sub>4</sub> )              | ≤ 0.05 ppm    | < 0.03 ppm  |
| Sulfate (SO <sub>4</sub> )                | ≤ 0.5 ppm     | < 0.3 ppm   |
| Sulfite (SO <sub>3</sub> )                | ≤ 0.8 ppm     | 0.3 ppm     |
| Ammonium (NH <sub>4</sub> )               | ≤ 3 ppm       | < 1 ppm     |
| Trace Impurities – Arsenic (As)           | ≤ 0.010 ppm   | < 0.003 ppm |
| Trace Impurities – Aluminum (Al)          | ≤ 10.0 ppb    | 1.3 ppb     |
| Arsenic and Antimony (as As)              | ≤ 5.0 ppb     | < 3.0 ppb   |
| Trace Impurities – Barium (Ba)            | ≤ 1.0 ppb     | 0.2 ppb     |
| Trace Impurities – Beryllium (Be)         | ≤ 1.0 ppb     | < 0.2 ppb   |
| Trace Impurities – Bismuth (Bi)           | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Boron (B)              | ≤ 20.0 ppb    | < 5.0 ppb   |
| Trace Impurities – Cadmium (Cd)           | ≤ 1.0 ppb     | < 0.3 ppb   |
| Trace Impurities – Calcium (Ca)           | ≤ 50.0 ppb    | 163.0 ppb   |
| Trace Impurities – Chromium (Cr)          | ≤ 1.0 ppb     | 0.7 ppb     |
| Trace Impurities – Cobalt (Co)            | ≤ 1.0 ppb     | < 0.3 ppb   |
| Trace Impurities – Copper (Cu)            | ≤ 1.0 ppb     | < 0.1 ppb   |
| Trace Impurities – Gallium (Ga)           | ≤ 1.0 ppb     | < 0.2 ppb   |
| Trace Impurities – Germanium (Ge)         | ≤ 3.0 ppb     | < 2.0 ppb   |
| Trace Impurities – Gold (Au)              | ≤ 4.0 ppb     | 0.6 ppb     |
| Heavy Metals (as Pb)                      | ≤ 100 ppb     | < 50 ppb    |
| Trace Impurities – Iron (Fe)              | ≤ 15 ppb      | 6 ppb       |

>>> Continued on page 2 >>>



Hydrochloric Acid, 36.5–38.0%  
BAKER INSTRA-ANALYZED® Reagent  
For Trace Metal Analysis

 **avantorsm**



Material No.: 9530-33  
Batch No.: 22G2862015

| Test   | Specification | Result     |
|--|---------------|------------|
| Trace Impurities – Lead (Pb)                           | ≤ 1.0 ppb     | < 0.5 ppb  |
| Trace Impurities – Lithium (Li)                        | ≤ 1.0 ppb     | < 0.2 ppb  |
| Trace Impurities – Magnesium (Mg)                      | ≤ 10.0 ppb    | 2.9 ppb    |
| Trace Impurities – Manganese (Mn)                      | ≤ 1.0 ppb     | < 0.4 ppb  |
| Trace Impurities – Mercury (Hg)                        | ≤ 0.5 ppb     | 0.1 ppb    |
| Trace Impurities – Molybdenum (Mo)                     | ≤ 10.0 ppb    | < 3.0 ppb  |
| Trace Impurities – Nickel (Ni)                         | ≤ 4.0 ppb     | < 0.3 ppb  |
| Trace Impurities – Niobium (Nb)                        | ≤ 1.0 ppb     | 0.8 ppb    |
| Trace Impurities – Potassium (K)                       | ≤ 9.0 ppb     | < 2.0 ppb  |
| Trace Impurities – Selenium (Se), For Information Only |               | < 1.0 ppb  |
| Trace Impurities – Silicon (Si)                        | ≤ 100.0 ppb   | < 10.0 ppb |
| Trace Impurities – Silver (Ag)                         | ≤ 1.0 ppb     | 0.5 ppb    |
| Trace Impurities – Sodium (Na)                         | ≤ 100.0 ppb   | 2.3 ppb    |
| Trace Impurities – Strontium (Sr)                      | ≤ 1.0 ppb     | < 0.2 ppb  |
| Trace Impurities – Tantalum (Ta)                       | ≤ 1.0 ppb     | 1.6 ppb    |
| Trace Impurities – Thallium (Tl)                       | ≤ 5.0 ppb     | < 2.0 ppb  |
| Trace Impurities – Tin (Sn)                            | ≤ 5.0 ppb     | 4.0 ppb    |
| Trace Impurities – Titanium (Ti)                       | ≤ 1.0 ppb     | 1.5 ppb    |
| Trace Impurities – Vanadium (V)                        | ≤ 1.0 ppb     | < 0.2 ppb  |
| Trace Impurities – Zinc (Zn)                           | ≤ 5.0 ppb     | 0.8 ppb    |
| Trace Impurities – Zirconium (Zr)                      | ≤ 1.0 ppb     | 0.3 ppb    |

>>> Continued on page 3 >>>

Hydrochloric Acid, 36.5–38.0%  
BAKER INSTRA–ANALYZED® Reagent  
For Trace Metal Analysis



Material No.: 9530-33  
Batch No.: 22G2862015

| Test | Specification | Result |
|------|---------------|--------|
|------|---------------|--------|

For Laboratory, Research, or Manufacturing Use  
Product Information (not specifications):  
Appearance (clear, fuming liquid)  
Meets ACS Specifications  
Storage Condition: Store below 25 °C.

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC

A handwritten signature in cursive script that reads 'Jamie Ethier'.  
Jamie Ethier  
Vice President Global Quality

Nitric Acid 69%  
CMOS

avantor™



R-0210212025

m-6158

Material No.: 9606-03  
Batch No.: 24D1062002  
Manufactured Date: 2024-03-26  
Retest Date: 2029-03-25  
Revision No.: 0

## Certificate of Analysis

| Test                              | Specification | Result      |
|-----------------------------------|---------------|-------------|
| Assay (HNO <sub>3</sub> )         | 69.0 – 70.0 % | 69.7 %      |
| Appearance                        | Passes Test   | Passes Test |
| Color (APHA)                      | ≤ 10          | 5           |
| Residue after Ignition            | ≤ 2 ppm       | 1 ppm       |
| Chloride (Cl)                     | ≤ 0.08 ppm    | < 0.03 ppm  |
| Phosphate (PO <sub>4</sub> )      | ≤ 0.10 ppm    | < 0.03 ppm  |
| Sulfate (SO <sub>4</sub> )        | ≤ 0.2 ppm     | < 0.2 ppm   |
| Trace Impurities – Aluminum (Al)  | ≤ 40.0 ppb    | < 1.0 ppb   |
| Arsenic and Antimony (as As)      | ≤ 5.0 ppb     | < 2.0 ppb   |
| Trace Impurities – Barium (Ba)    | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Beryllium (Be) | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Bismuth (Bi)   | ≤ 20.0 ppb    | < 10.0 ppb  |
| Trace Impurities – Boron (B)      | ≤ 10.0 ppb    | < 5.0 ppb   |
| Trace Impurities – Cadmium (Cd)   | ≤ 50 ppb      | < 1 ppb     |
| Trace Impurities – Calcium (Ca)   | ≤ 50.0 ppb    | 2.3 ppb     |
| Trace Impurities – Chromium (Cr)  | ≤ 30.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Cobalt (Co)    | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Copper (Cu)    | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Gallium (Ga)   | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Germanium (Ge) | ≤ 20 ppb      | < 10 ppb    |
| Trace Impurities – Gold (Au)      | ≤ 20 ppb      | < 5 ppb     |
| Heavy Metals (as Pb)              | ≤ 100 ppb     | 100 ppb     |
| Trace Impurities – Iron (Fe)      | ≤ 40.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Lead (Pb)      | ≤ 20.0 ppb    | < 10.0 ppb  |
| Trace Impurities – Lithium (Li)   | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Magnesium (Mg) | ≤ 20 ppb      | < 1 ppb     |
| Trace Impurities – Manganese (Mn) | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Nickel (Ni)    | ≤ 20.0 ppb    | < 5.0 ppb   |

>>> Continued on page 2 >>>

Nitric Acid 69%  
CMOS

 **avantors<sup>TM</sup>**



Material No.: 9606-03  
Batch No.: 24D1062002

| Test                                | Specification | Result     |
|-------------------------------------|---------------|------------|
| Trace Impurities – Niobium (Nb)     | ≤ 50.0 ppb    | < 1.0 ppb  |
| Trace Impurities – Potassium (K)    | ≤ 50 ppb      | 16 ppb     |
| Trace Impurities – Silicon (Si)     | ≤ 50 ppb      | < 10 ppb   |
| Trace Impurities – Silver (Ag)      | ≤ 20.0 ppb    | < 1.0 ppb  |
| Trace Impurities – Sodium (Na)      | ≤ 150.0 ppb   | < 5.0 ppb  |
| Trace Impurities – Strontium (Sr)   | ≤ 30.0 ppb    | < 1.0 ppb  |
| Trace Impurities – Tantalum (Ta)    | ≤ 10.0 ppb    | < 5.0 ppb  |
| Trace Impurities – Thallium (Tl)    | ≤ 10.0 ppb    | < 5.0 ppb  |
| Trace Impurities – Tin (Sn)         | ≤ 20.0 ppb    | < 10.0 ppb |
| Trace Impurities – Titanium (Ti)    | ≤ 10.0 ppb    | < 1.0 ppb  |
| Trace Impurities – Vanadium (V)     | ≤ 10.0 ppb    | < 1.0 ppb  |
| Trace Impurities – Zinc (Zn)        | ≤ 20.0 ppb    | < 1.0 ppb  |
| Trace Impurities – Zirconium (Zr)   | ≤ 10.0 ppb    | < 1.0 ppb  |
| Particle Count – 0.5 µm and greater | ≤ 60 par/ml   | 10 par/ml  |
| Particle Count – 1.0 µm and greater | ≤ 10 par/ml   | 3 par/ml   |

>>> Continued on page 3 >>>

Nitric Acid 69%  
CMOS

 **avantors<sup>TM</sup>**



Material No.: 9606-03  
Batch No.: 24D1062002

| Test | Specification | Result |
|------|---------------|--------|
|------|---------------|--------|

For Microelectronic Use

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC



Jamie Croak  
Director Quality Operations, Bioscience Production

Nitric Acid 69%  
CMOS

 **avantorsm**



m-6162

Material No.: 9606-03  
Batch No.: 24H0162012  
Manufactured Date: 2024-06-28  
Retest Date: 2029-06-27  
Revision No.: 0

R. Date :- 04/27/2025

## Certificate of Analysis

| Test                              | Specification | Result      |
|-----------------------------------|---------------|-------------|
| Assay (HNO <sub>3</sub> )         | 69.0 – 70.0 % | 69.7 %      |
| Appearance                        | Passes Test   | Passes Test |
| Color (APHA)                      | ≤ 10          | 5           |
| Residue after Ignition            | ≤ 2 ppm       | < 1 ppm     |
| Chloride (Cl)                     | ≤ 0.08 ppm    | 0.03 ppm    |
| Phosphate (PO <sub>4</sub> )      | ≤ 0.10 ppm    | < 0.03 ppm  |
| Sulfate (SO <sub>4</sub> )        | ≤ 0.2 ppm     | < 0.2 ppm   |
| Trace Impurities – Aluminum (Al)  | ≤ 40.0 ppb    | < 1.0 ppb   |
| Arsenic and Antimony (as As)      | ≤ 5.0 ppb     | < 2.0 ppb   |
| Trace Impurities – Barium (Ba)    | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Beryllium (Be) | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Bismuth (Bi)   | ≤ 20.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Boron (B)      | ≤ 10.0 ppb    | 0.1 ppb     |
| Trace Impurities – Cadmium (Cd)   | ≤ 50 ppb      | < 1 ppb     |
| Trace Impurities – Calcium (Ca)   | ≤ 50.0 ppb    | 0.3 ppb     |
| Trace Impurities – Chromium (Cr)  | ≤ 30.0 ppb    | 0.1 ppb     |
| Trace Impurities – Cobalt (Co)    | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Copper (Cu)    | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Gallium (Ga)   | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Germanium (Ge) | ≤ 20 ppb      | < 1 ppb     |
| Trace Impurities – Gold (Au)      | ≤ 20 ppb      | < 1 ppb     |
| Heavy Metals (as Pb)              | ≤ 100 ppb     | < 50 ppb    |
| Trace Impurities – Iron (Fe)      | ≤ 40.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Lead (Pb)      | ≤ 20.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Lithium (Li)   | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Magnesium (Mg) | ≤ 20 ppb      | < 1 ppb     |
| Trace Impurities – Manganese (Mn) | ≤ 10.0 ppb    | < 1.0 ppb   |
| Trace Impurities – Nickel (Ni)    | ≤ 20.0 ppb    | < 1.0 ppb   |

>>> Continued on page 2 >>>

Nitric Acid 69%  
CMOS

 **avantors<sup>TM</sup>**



Material No.: 9606-03  
Batch No.: 24H0162012

| Test                                | Specification | Result    |
|-------------------------------------|---------------|-----------|
| Trace Impurities – Niobium (Nb)     | ≤ 50.0 ppb    | < 1.0 ppb |
| Trace Impurities – Potassium (K)    | ≤ 50 ppb      | < 1 ppb   |
| Trace Impurities – Silicon (Si)     | ≤ 50 ppb      | 1 ppb     |
| Trace Impurities – Silver (Ag)      | ≤ 20.0 ppb    | < 1.0 ppb |
| Trace Impurities – Sodium (Na)      | ≤ 150.0 ppb   | < 1.0 ppb |
| Trace Impurities – Strontium (Sr)   | ≤ 30.0 ppb    | < 1.0 ppb |
| Trace Impurities – Tantalum (Ta)    | ≤ 10.0 ppb    | < 1.0 ppb |
| Trace Impurities – Thallium (Tl)    | ≤ 10.0 ppb    | < 1.0 ppb |
| Trace Impurities – Tin (Sn)         | ≤ 20.0 ppb    | < 1.0 ppb |
| Trace Impurities – Titanium (Ti)    | ≤ 10.0 ppb    | < 1.0 ppb |
| Trace Impurities – Vanadium (V)     | ≤ 10.0 ppb    | < 1.0 ppb |
| Trace Impurities – Zinc (Zn)        | ≤ 20.0 ppb    | < 1.0 ppb |
| Trace Impurities – Zirconium (Zr)   | ≤ 10.0 ppb    | < 1.0 ppb |
| Particle Count – 0.5 µm and greater | ≤ 60 par/ml   | 13 par/ml |
| Particle Count – 1.0 µm and greater | ≤ 10 par/ml   | 5 par/ml  |

>>> Continued on page 3 >>>

Nitric Acid 69%  
CMOS

 **avantor™**



Material No.: 9606-03  
Batch No.: 24H0162012

| Test | Specification | Result |
|------|---------------|--------|
|------|---------------|--------|

For Microelectronic Use

Country of Origin: USA  
Packaging Site: Phillipsburg Mfg Ctr & DC



Jamie Croak  
Director Quality Operations, Bioscience Production





**Certified Reference Material CRM**

M6030



**CERTIFIED WEIGHT REPORT:**

Part Number: **57047**  
Lot Number: **122823**  
Description: **Silver (Ag)**

Lot #  
Solvent: 24002546 Nitric Acid

Expiration Date: 122826  
Recommended Storage: Ambient (20 °C)  
Nominal Concentration (µg/mL): 1000  
NIST Test Number: 6UTB

2% 80.0 (mL) Nitric Acid


Weight shown below was diluted to (mL): 4000.30 0.058 Balance Uncertainty Flask Uncertainty

|                |                 |
|----------------|-----------------|
|                |                 |
| Formulated By: | Benson Chan     |
| Reviewed By:   | Pedro L. Rentas |
|                | 122823          |

| Compound | SDS Information |            |                       |            | NIST SRM |
|----------|-----------------|------------|-----------------------|------------|----------|
|          | RM#             | Lot Number | Nominal Conc. (µg/mL) | Purity (%) |          |

|                        |       |           |        |         |      |      |         |         |        |     |           |          |    |      |
|------------------------|-------|-----------|--------|---------|------|------|---------|---------|--------|-----|-----------|----------|----|------|
| 1. Silver nitrate (Ag) | IN035 | J0612AGA1 | 1000.0 | 99.9996 | 0.10 | 63.7 | 6.27992 | 6.27998 | 1000.0 | 2.0 | 7761-88-8 | 10 µg/mL | NA | 3151 |
|------------------------|-------|-----------|--------|---------|------|------|---------|---------|--------|-----|-----------|----------|----|------|

[1] Spectrum No. 1 [ 14.044 sec]:58147.D# [Count] [Linear]

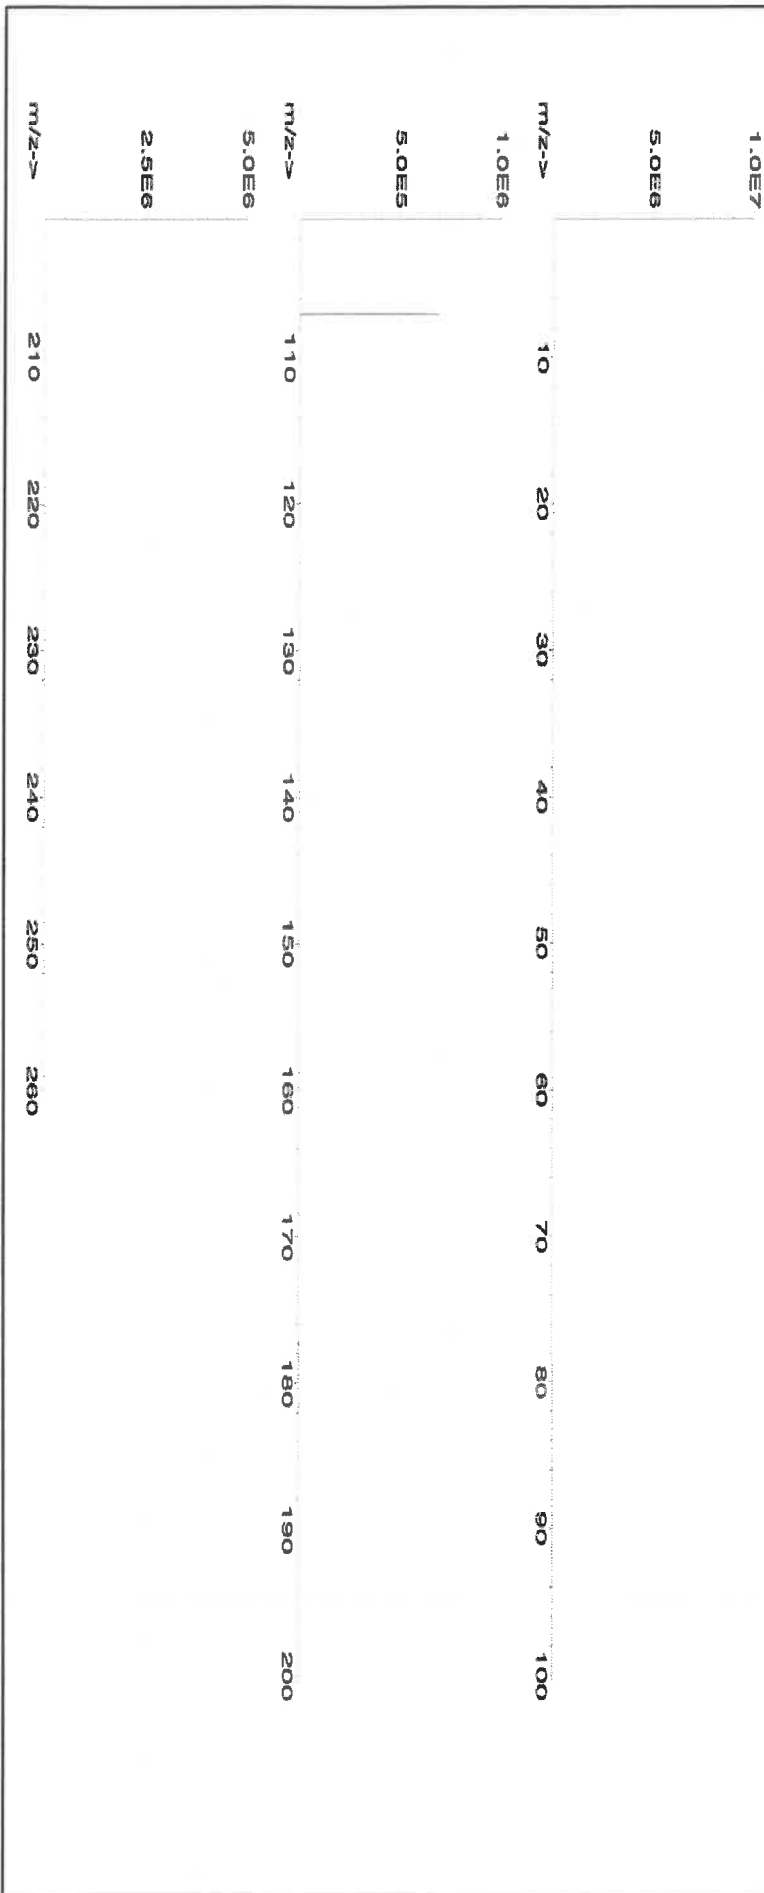



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | T     | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T)= Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

Certified by:

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 meghom deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



*R: 10/18/24*  
**Certified Reference Material CRM**



**CERTIFIED WEIGHT REPORT:**

Part Number:

**57051**

Lot #  
**24002546**

Solvent:  
**Nitric Acid**

Lot Number:

**071724**

Description:

**Antimony (Sb)**

Expiration Date:

**071727**

Recommended Storage:

**Ambient (20 °C)**

Nominal Concentration (µg/mL):

**1000**

NIST Test Number:

**6LJB**

Volume shown below was diluted to (mL):

**2000.26**

Balance Uncertainty  
**0.058**

F flask Uncertainty

2.0%

40.0  
(mL)

Nitric Acid

*Giovanni Esposito*

Formulated By:

**Giovanni Esposito**

**071724**

Reviewed By:

**Pedro L. Rentas**


**071724**

**SDS Information**

| Compound | Part Number | Lot Number | Dilution Factor | Initial Vol. (mL) | Uncertainty Pipette (mL) | Nominal Conc. (µg/mL) | Initial Conc. (µg/mL) | Final Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|
|----------|-------------|------------|-----------------|-------------------|--------------------------|-----------------------|-----------------------|---------------------|----------------------------------|------|----------------|------|----------|

1. Antimony (Sb) 58151 060324 0.1000 200.0 0.084 1000 10001.4 1000.0 2.2 7440-36-0 0.5 mg/m3 orl-rat 7000 mg/kg 3102a

[1] Spectrum No.1 [ 17.964 sec]:58051.D# [Count] [Linear]

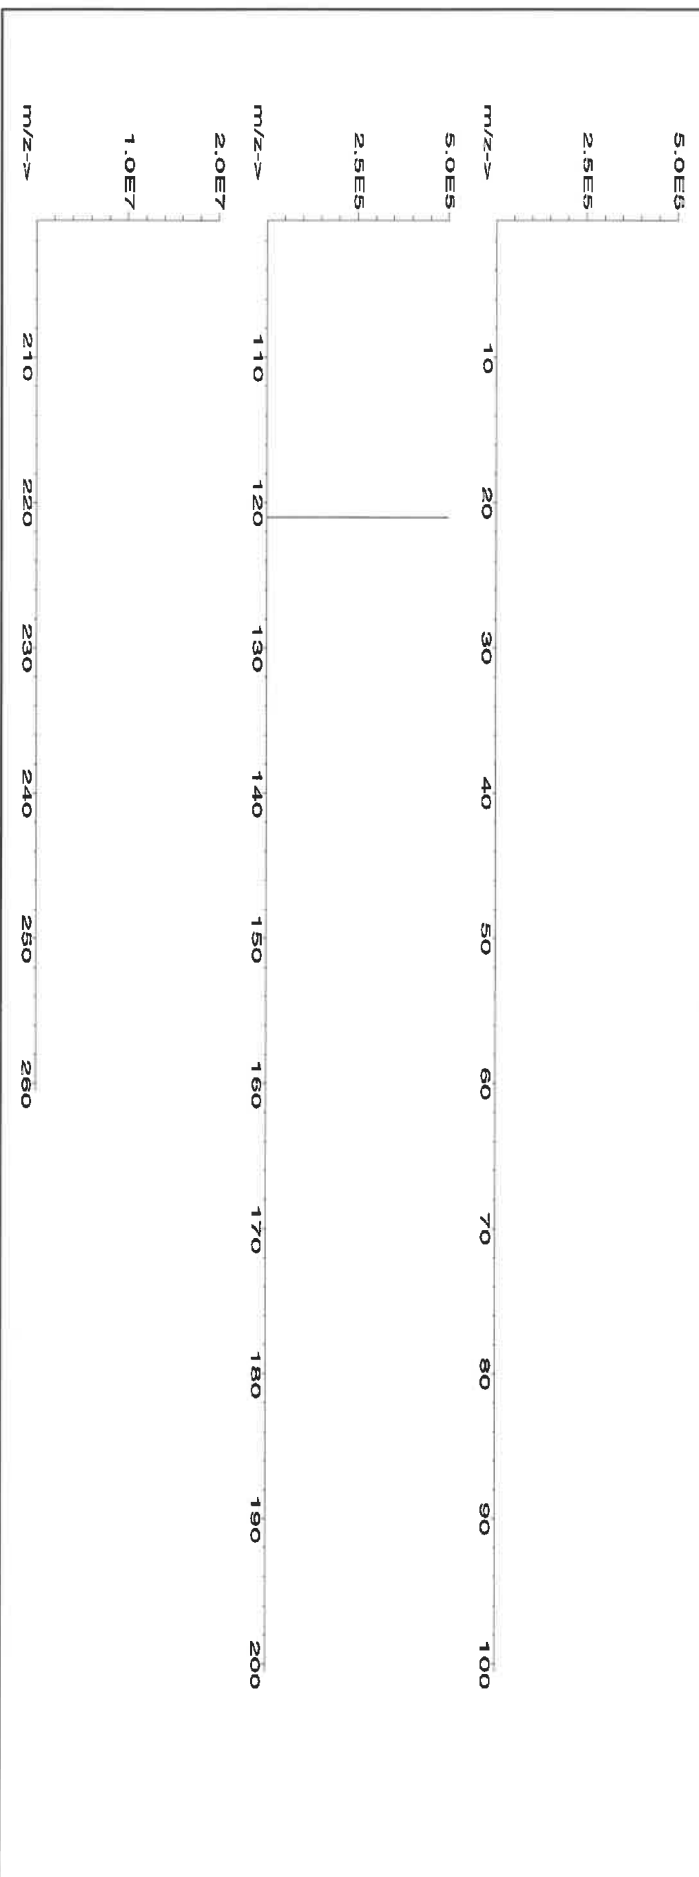



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Se | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | T     | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Bu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | <0.02 | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Th | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Tm | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Sn | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 | Ti | <0.02 | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Homogeneity: No heterogeneity was observed in the preparation of this standard.

**Certified by:**

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).



Instructions for QATS Reference Material: *ICP-AES ICS*

**QATS LABORATORY INORGANIC REFERENCE MATERIAL  
INTERFERENCE CHECK SAMPLE SET FOR ICP-AES (ICSA WITH ICSB)**

**NOTE:** These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

**APPLICATION:** For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** Read instructions carefully before opening bottle(s) and proceeding with the analyses.



M6152

**(A) SAMPLE DESCRIPTION**

Enclosed is a set of one (1) or more bottles of Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. **For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-1211" and for the ICSAB mixture use "ICSA-1211+ICSB-0710".**

**CAUTION:** The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.**

**(B) BREAKAGE OR MISSING ITEMS**

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

**QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY  
APTIM Federal Services, LLC  
2700 Chandler Avenue - Building C  
Las Vegas, NV 89120**

**(C) ANALYSIS OF SAMPLES**

The interference check sample set is to be used to verify inter-element and background correction factors of inductively-coupled plasma (ICP) spectrometers. This reference material set consists of two (2) concentrated solutions. The ICSA solution contains the four (4) interferent elements: Al, Ca, Fe, and Mg. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be,





Instructions for QATS Reference Material: ICP-AES ICS

Cd, Co, Cr, Cu, Mn, Ni, Pb, Tl, Se, V, and Zn. This instruction sheet provides the nominal values for ICP-AES Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:

**ICSA-1211, Interferents:** Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO<sub>3</sub>. Analyze this ICSA solution by ICP-AES.

**ICSB-0710, Analytes, mixed with ICSA-1211, Interferents:** Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO<sub>3</sub>. Analyze this ICSAB solution by ICP-AES.

(D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-AES ICS SOLUTION(S)

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

**Table 1. "CERTIFIED VALUES" FOR INTERFERENCE CHECK SAMPLE ICP-AES ICSA-1211, AND ICSA-1211 MIXED WITH ICSB-0710**

| Element | CRQL | Part A (µg/L) | Low Limit (µg/L) | High Limit (µg/L) | Part A +Part B (µg/L) | Low Limit (µg/L) | High Limit (µg/L) |
|---------|------|---------------|------------------|-------------------|-----------------------|------------------|-------------------|
| Al      | 200  | 255000        | 216000           | 294000            | 247000                | 209000           | 285000            |
| Sb      | 60   | (0.0)         | -60.0            | 60.0              | 618                   | 525              | 711               |
| As      | 10   | (0.0)         | -10.0            | 10.0              | 104                   | 88.4             | 120               |
| Ba      | 200  | (6.0)         | -194             | 206               | (537)                 | 337              | 737               |
| Be      | 5.0  | (0.0)         | -5.0             | 5.0               | 495                   | 420              | 570               |
| Cd      | 5.0  | (1.0)         | -4.0             | 6.0               | 972                   | 826              | 1120              |
| Ca      | 5000 | 245000        | 208000           | 282000            | 235000                | 199000           | 271000            |
| Cr      | 10   | (52.0)        | 42.0             | 62.0              | 542                   | 460              | 624               |
| Co      | 50   | (0.0)         | -50.0            | 50.0              | 476                   | 404              | 548               |
| Cu      | 25   | (2.0)         | -23.0            | 27.0              | 511                   | 434              | 588               |
| Fe      | 100  | 101000        | 85600            | 116500            | 99300                 | 84400            | 114500            |
| Pb      | 10   | (0.0)         | -10.0            | 10.0              | (49.0)                | 39.0             | 59.0              |
| Mg      | 5000 | 255000        | 216000           | 294000            | 248000                | 210000           | 286000            |
| Mn      | 15   | (7.0)         | -8.0             | 22.0              | 507                   | 430              | 584               |
| Ni      | 40   | (2.0)         | -38.0            | 42.0              | 954                   | 810              | 1100              |
| Se      | 35   | (0.0)         | -35.0            | 35.0              | (46.0)                | 11.0             | 81.0              |
| Ag      | 10   | (0.0)         | -10.0            | 10.0              | 201                   | 170              | 232               |
| Tl      | 25   | (0.0)         | -25.0            | 25.0              | (108)                 | 83.0             | 133               |
| V       | 50   | (0.0)         | -50.0            | 50.0              | 491                   | 417              | 565               |
| Zn      | 60   | (0.0)         | -60.0            | 60.0              | 952                   | 809              | 1095              |

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value  $\pm 1$  times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value  $\pm 15$  percent of the listed certified value.



QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY  
"An ISO 9001:2015 Certified Program"

R : 04/20/21

Instructions for QATS Reference Material: ICP-AES ICS

QATS LABORATORY INORGANIC REFERENCE MATERIAL  
INTERFERENCE CHECK SAMPLE SET FOR ICP-AES (ICSA WITH ICSB)

**NOTE:** These instructions are for advisory purposes only. If any apparent conflict exists between these instructions and the analytical protocol or your contract, disregard these instructions.

**APPLICATION:** For use with the CLP SFAM01.0 SOW and revisions.

**CAUTION:** Read instructions carefully before opening bottle(s) and proceeding with the analyses.



M6155

(A) **SAMPLE DESCRIPTION**

Enclosed is a set of one (1) or more bottles of Aqueous Reference Material, each composed of metals at various concentrations and prepared with nitrate salts and oxy-acids of the respective elements in a 5% nitric acid matrix. **For the reference material source in reporting ICSA and ICSAB mixture use "USEPA". For the reference material lot number for the ICSA use "ICSA-1211" and for the ICSAB mixture use "ICSA-1211+ICSB-0710".**

**CAUTION:** The bottle(s) should be protected from light during storage to ensure the stability of silver which is contained in the ICSB solution. The bottle(s) should be stored at room temperature. **Do not allow the solution(s) to freeze.**

(B) **BREAKAGE OR MISSING ITEMS**

Check the contents of the shipment carefully for any broken, leaking, or missing items. Check that the seal is intact on each bottle. Refer to the enclosed chain of custody record. Report any problems to Mr. Keith Strout, APTIM Federal Services, LLC, at (702) 895-8722. If requested, return the chain-of-custody record with appropriate annotations and signatures to the address provided below.

QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY  
APTIM Federal Services, LLC  
2700 Chandler Avenue - Building C  
Las Vegas, NV 89120

(C) **ANALYSIS OF SAMPLES**

The interference check sample set is to be used to verify inter-element and background correction factors of inductively-coupled plasma (ICP) spectrometers. This reference material set consists of two (2) concentrated solutions. The ICSA solution contains the four (4) interferent elements: Al, Ca, Fe, and Mg. The ICSB solution contains the analytes: Ag, As, Sb, Ba, Be,





**QUALITY ASSURANCE TECHNICAL SUPPORT LABORATORY**  
**"An ISO 9001:2015 Certified Program"**

**APTIM**

**Instructions for QATS Reference Material: ICP-AES ICS**

Cd, Co, Cr, Cu, Mn, Ni, Pb, Tl, Se, V, and Zn. This instruction sheet provides the nominal values for ICP-AES Part A and Part B target analytes when diluted as directed.

Using Class "A" glassware, preparation and analysis must be performed according to the following instructions:

**ICSA-1211, Interferents:** Pipet 10 mL of the ICSA solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO<sub>3</sub>. Analyze this ICSA solution by ICP-AES.

**ICSB-0710, Analytes, mixed with ICSA-1211, Interferents:** Pipet 10 mL of the ICSA solution and 10 mL of the ICSB solution into a 100 mL volumetric flask and dilute to volume with 2% v/v HNO<sub>3</sub>. Analyze this ICSAB solution by ICP-AES.

**(D) "CERTIFIED VALUE" CONCENTRATIONS OF QATS ICP-AES ICS SOLUTION(S)**

The "Certified Value" concentrations of the elements, listed in Table 1 below, were derived from statistically pooled analysis results from the following sources, if available: QATS Laboratory, CLP laboratories, Quarterly Blind (QB)/Proficiency Testing (PT) events, CLP pre-award events, and external referee laboratories.

**Table 1. "CERTIFIED VALUES" FOR INTERFERENCE CHECK SAMPLE ICP-AES ICSA-1211, AND ICSA-1211 MIXED WITH ICSB-0710**

| Element | CRQL | Part A<br>(µg/L) | Low<br>Limit<br>(µg/L) | High<br>Limit<br>(µg/L) | Part A<br>+Part B<br>(µg/L) | Low<br>Limit<br>(µg/L) | High<br>Limit<br>(µg/L) |
|---------|------|------------------|------------------------|-------------------------|-----------------------------|------------------------|-------------------------|
| Al      | 200  | 255000           | 216000                 | 294000                  | 247000                      | 209000                 | 285000                  |
| Sb      | 60   | (0.0)            | -60.0                  | 60.0                    | 618                         | 525                    | 711                     |
| As      | 10   | (0.0)            | -10.0                  | 10.0                    | 104                         | 88.4                   | 120                     |
| Ba      | 200  | (6.0)            | -194                   | 206                     | (537)                       | 337                    | 737                     |
| Be      | 5.0  | (0.0)            | -5.0                   | 5.0                     | 495                         | 420                    | 570                     |
| Cd      | 5.0  | (1.0)            | -4.0                   | 6.0                     | 972                         | 826                    | 1120                    |
| Ca      | 5000 | 245000           | 208000                 | 282000                  | 235000                      | 199000                 | 271000                  |
| Cr      | 10   | (52.0)           | 42.0                   | 62.0                    | 542                         | 460                    | 624                     |
| Co      | 50   | (0.0)            | -50.0                  | 50.0                    | 476                         | 404                    | 548                     |
| Cu      | 25   | (2.0)            | -23.0                  | 27.0                    | 511                         | 434                    | 588                     |
| Fe      | 100  | 101000           | 85600                  | 116500                  | 99300                       | 84400                  | 114500                  |
| Pb      | 10   | (0.0)            | -10.0                  | 10.0                    | (49.0)                      | 39.0                   | 59.0                    |
| Mg      | 5000 | 255000           | 216000                 | 294000                  | 248000                      | 210000                 | 286000                  |
| Mn      | 15   | (7.0)            | -8.0                   | 22.0                    | 507                         | 430                    | 584                     |
| Ni      | 40   | (2.0)            | -38.0                  | 42.0                    | 954                         | 810                    | 1100                    |
| Se      | 35   | (0.0)            | -35.0                  | 35.0                    | (46.0)                      | 11.0                   | 81.0                    |
| Ag      | 10   | (0.0)            | -10.0                  | 10.0                    | 201                         | 170                    | 232                     |
| Tl      | 25   | (0.0)            | -25.0                  | 25.0                    | (108)                       | 83.0                   | 133                     |
| V       | 50   | (0.0)            | -50.0                  | 50.0                    | 491                         | 417                    | 565                     |
| Zn      | 60   | (0.0)            | -60.0                  | 60.0                    | 952                         | 809                    | 1095                    |

The acceptance ranges for all analytes in parentheses in the above table were determined using the listed certified value  $\pm 1$  times the associated CLP SOW CRQL. The acceptance ranges for all other analytes were determined using the certified value  $\pm 15$  percent of the listed certified value.







R: 8/5/24

M6019

300 Technology Drive  
Christiansburg, VA 24073 USA  
inorganicventures.com

P: 800-669-6799/540-585-3030  
F: 540-585-3012  
info@inorganicventures.com

## 1.0 ACCREDITATION / REGISTRATION

INORGANIC VENTURES is accredited to ISO 17034, "General Requirements for the Competence of Reference Material Producers" and ISO/IEC 17025, "General Requirements for the Competence of Testing and Calibration Laboratories". Inorganic Ventures is also an ISO 9001 registered manufacturer (QSR Certificate Number QSR-1034).



## 2.0 PRODUCT DESCRIPTION

Product Code: Single Analyte Custom Grade Solution  
Catalog Number: CGSR1  
Lot Number: U2-SR730227  
Matrix: 0.1% (v/v) HNO<sub>3</sub>  
Value / Analyte(s): 1 000 µg/mL ea:  
Strontium  
Starting Material: SrCO<sub>3</sub>  
Starting Material Lot#: M2-2192  
Starting Material Purity: 99.9993%

## 3.0 CERTIFIED VALUES AND UNCERTAINTIES

Certified Value: 1001 ± 3 µg/mL  
Density: 1.000 g/mL (measured at 20 ± 4 °C)

### Assay Information:

|                        |   |
|------------------------|---|
| <b>Assay Method #1</b> | <b>998 ± 4 µg/mL</b><br>ICP Assay NIST SRM Traceable to 3153a Lot Number: K2-SR650985 |
| <b>Assay Method #2</b> | <b>1001 ± 3 µg/mL</b><br>EDTA NIST SRM 928 Lot Number: 928                            |
| <b>Assay Method #3</b> | <b>1001 ± 2 µg/mL</b><br>Calculated NIST SRM Lot Number: See Sec. 4.2                 |

- The Calculated Value is a value calculated from the weight of a starting material that has been certified directly vs. a National Institute of Standards and Technology (NIST) SRM/RM. See Sec 4.2 for balance traceability.

The following equations are used in the calculation of the certified value and the uncertainty. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.

### Characterization of CRM/RM by Two or More Methods

Certified Value,  $X_{CRM/RM}$ , where two or more methods of characterization are used is the weighted mean of the results:

$$X_{CRM/RM} = \sum (w_i) (X_i)$$

$X_i$  = mean of Assay Method  $i$  with standard uncertainty  $u_{char i}$

$w_i$  = the weighting factors for each method calculated using the inverse square of the variance:

$$w_i = (1/u_{char i}^2) / (\sum (1/u_{char i}^2))$$

$$CRM/RM \text{ Expanded Uncertainty } (k) = U_{CRM/RM} = k (u_{char}^2 + u_{bb}^2 + u_{ts}^2 + u_{ts}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{char} = [\sum (w_i)^2 (u_{char i}^2)]^{1/2}$  where  $u_{char i}$  are the errors from each characterization method

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{ts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

### Characterization of CRM/RM by One Method

Certified Value,  $X_{CRM/RM}$ , where one method of characterization is used is the mean of individual results:

$$X_{CRM/RM} = (X_a) (u_{char a})$$

$X_a$  = mean of Assay Method  $A$  with

$u_{char a}$  = the standard uncertainty of characterization Method  $A$

$$CRM/RM \text{ Expanded Uncertainty } (k) = U_{CRM/RM} = k (u_{char a}^2 + u_{bb}^2 + u_{ts}^2 + u_{ts}^2)^{1/2}$$

$k$  = coverage factor = 2

$u_{char a}$  = the errors from characterization

$u_{bb}$  = bottle to bottle homogeneity standard uncertainty

$u_{ts}$  = long term stability standard uncertainty (storage)

$u_{ts}$  = transport stability standard uncertainty

## 4.0 TRACEABILITY TO NIST

- This product is traceable to NIST via an unbroken chain of comparisons. The uncertainties for each certified value are reported, taking into account the SRM/RM uncertainty error and the measurement, weighing and volume dilution errors. In rare cases where no NIST SRM/RM are available, the term 'in-house std.' is specified.

### 4.1 Thermometer Calibration

- All thermometers are NIST traceable through thermometers that are calibrated by an accredited calibration laboratory.

### 4.2 Balance Calibration

- All analytical balances are calibrated by an accredited calibration laboratory and procedure. The weights used for testing are annually compared to master weights and are traceable to NIST.

### 4.3 Glassware Calibration

- An in-house procedure is used to calibrate all Class A glassware used in the manufacturing and quality control of CRM/RMs.

## 5.0 TRACE METALLIC IMPURITIES (TMI) DETERMINED BY ICP-MS AND ICP-OES (µg/mL)

CRM/RMs are tested for trace metallic impurities by Axial ICP-OES and ICP-MS. The result from the most sensitive method for each element, is reported below. Solutions tested by ICP-MS were analyzed in an ULPA-Filtered Clean Room. An ULPA-Filter is 99.9985% efficient for the removal of particles down to 0.3 µm.

|   |    |          |          |    |          |          |          |    |          |          |          |    |    |          |          |    |          |          |
|---|----|----------|----------|----|----------|----------|----------|----|----------|----------|----------|----|----|----------|----------|----|----------|----------|
| M | Ag | <        | 0.001980 | M  | Eu       | <        | 0.000495 | O  | Na       | 0.000200 | M        | Se | <  | 0.013862 | O        | Zn | 0.000143 |          |
| O | Al | 0.000370 | O        | Fe | 0.000410 | M        | Nb       | <  | 0.000495 | i        | Si       | <  |    |          | M        | Zr | <        | 0.000495 |
| M | As | <        | 0.000495 | M  | Ga       | <        | 0.000495 | M  | Nd       | <        | 0.000495 | M  | Sm | <        | 0.000495 |    |          |          |
| M | Au | <        | 0.000989 | M  | Gd       | <        | 0.000495 | O  | Ni       | <        | 0.007631 | M  | Sn | <        | 0.000990 |    |          |          |
| M | B  | <        | 0.039606 | M  | Ge       | <        | 0.000495 | M  | Os       | <        | 0.000494 | s  | Sr | <        |          |    |          |          |
| M | Ba | 0.006486 | M        | Hf | <        | 0.000495 | i        | P  | <        |          |          | M  | Ta | <        | 0.000495 |    |          |          |
| M | Be | <        | 0.000990 | M  | Hg       | <        | 0.000989 | M  | Pb       | <        | 0.002970 | M  | Tb | <        | 0.000495 |    |          |          |
| M | Bi | <        | 0.000495 | M  | Ho       | <        | 0.000495 | M  | Pd       | <        | 0.003957 | M  | Te | <        | 0.027724 |    |          |          |
| O | Ca | 0.004255 | M        | In | <        | 0.000495 | M        | Pr | <        | 0.000495 | M        | Th | <  | 0.000990 |          |    |          |          |
| M | Cd | 0.001339 | M        | Ir | <        | 0.000494 | M        | Pt | <        | 0.002970 | M        | Ti | <  | 0.005940 |          |    |          |          |
| M | Ce | <        | 0.004950 | O  | K        | <        | 0.008184 | M  | Rb       | <        | 0.002970 | M  | Tl | <        | 0.000495 |    |          |          |
| M | Co | <        | 0.000495 | M  | La       | <        | 0.000495 | M  | Re       | <        | 0.000495 | M  | Tm | <        | 0.000495 |    |          |          |
| O | Cr | <        | 0.003207 | O  | Li       | <        | 0.000884 | O  | Rh       | <        | 0.012829 | M  | U  | <        | 0.001485 |    |          |          |
| M | Cs | <        | 0.000990 | M  | Lu       | <        | 0.002970 | M  | Ru       | <        | 0.000989 | M  | V  | <        | 0.001980 |    |          |          |
| M | Cu | 0.000099 | O        | Mg | 0.000064 | i        | S        | <  |          |          |          | M  | W  | <        | 0.003960 |    |          |          |
| M | Dy | <        | 0.000495 | O  | Mn       | 0.000066 | M        | Sb | <        | 0.014852 | O        | Y  | <  | 0.000995 |          |    |          |          |
| M | Er | <        | 0.000495 | M  | Mo       | <        | 0.001980 | M  | Sc       | <        | 0.001980 | M  | Yb | <        | 0.000495 |    |          |          |

M - Checked by ICP-MS

O - Checked by ICP-OES

i - Spectral Interference

n - Not Checked For

s - Solution Standard Element

## 6.0 INTENDED USE

6.1 This standard is intended for the calibration of analytical instruments and validation of analytical methods as appropriate. This CRM may be used in connection with EPA Methods 6010, 6020 (all versions), Standard Methods 3120 B and USP <232> / ICH Q3D.

6.2 For products attaining traceability through Inorganic Ventures' Primary Certified Reference Materials (PCRM™) see the Limited License to Use PCRM™ in the Inorganic Ventures Terms and Conditions of Sale, <https://www.inorganicventures.com/terms-and-conditions-sale>. The Terms and Conditions contain information on the use of materials traceable to PCRM™ certified reference materials. This Limited License agreement is especially pertinent for laboratories accredited under ISO:17034.

## 7.0 INSTRUCTIONS FOR THE CORRECT USE OF THIS REFERENCE MATERIAL

### 7.1 Storage and Handling Recommendations

- Store between approximately 4° - 30° C while in sealed TCT bag.
- While stored in the sealed TCT bag, transpiration of this CRM/RM is negligible. After opening the sealed TCT bag transpiration of the CRM/RM will occur, resulting in a gradual increase in the analyte concentration(s). It is the responsibility of the user to account for this effect. When the bottle is weighed both before and after being placed in storage, the mass difference observed will be a measure of transpiration mass loss.
- After opening the sealed TCT bag, keep cap tightly sealed when not in use and store between 4° - 24° C to minimize the effects of transpiration. Use at 20° ± 4° C to minimize volumetric dilution error when using the reported density. Do not pipette from the container. Do not return removed aliquots to container.

- For more information, visit [www.inorganicventures.com/TCT](http://www.inorganicventures.com/TCT)

**Atomic Weight; Valence; Coordination Number; Chemical Form in Solution** - 87.62 +2 6 Sr(H<sub>2</sub>O)<sub>6</sub>+2

**Chemical Compatibility** - Soluble in HCl, and HNO<sub>3</sub>. Avoid H<sub>2</sub>SO<sub>4</sub>, HF and neutral to basic media. Stable with most metals and inorganic anions forming insoluble silicate, carbonate, hydroxide, oxide, fluoride, sulfate, oxalate, chromate, arsenate and tungstate in neutral aqueous media.

**Stability** - 2-100 ppb levels stable for months in 1% HNO<sub>3</sub> / LDPE container. 1-10,000 ppm solutions chemically stable for years in 1 - 3.5% HNO<sub>3</sub> / LDPE container.

**Sr Containing Samples (Preparation and Solution)** -Metal (Best dissolved in diluted HNO<sub>3</sub> ); Ores (Carbonate fusion in PtO followed by HCl dissolution); Organic Matrices (Dry ash and dissolution in dilute HCl).

**Atomic Spectroscopic Information (ICP-OES D.L.s are given as radial/axial view):**

| Technique/Line     | Estimated D.L.         | Order | Interferences (underlined indicates severe) |
|--------------------|------------------------|-------|---|
| ICP-MS 88 amu      | 1200 ppt               | N/A   | 72Ge16O, 176Yb+2, 176Lu+2 , 176Hf+2         |
| ICP-OES 407.771 nm | 0.0004 / 0.00006 µg/mL | 1     | U, Ce                                       |
| ICP-OES 421.552 nm | 0.0008 / 0.00004 µg/mL | 1     | Rb  |
| ICP-OES 460.733 nm | 0.07 / 0.003 µg/mL     | 1     | Ce  |

## 8.0 HAZARDOUS INFORMATION

- Please refer to the Safety Data Sheet for information regarding this CRM/RM.

## 9.0 HOMOGENEITY

- This solution was mixed according to an in-house procedure and is guaranteed to be homogeneous. Homogeneity data indicate that the end user should take a minimum sample size of 0.2 mL to assure homogeneity.

## 10.0 QUALITY STANDARD DOCUMENTATION

### 10.1 ISO 9001 Quality Management System Registration

- QSR Certificate Number QSR-1034

### 10.2 ISO/IEC 17025 "General Requirements for the Competence of Testing and Calibration Laboratories"

- Chemical Testing - Accredited / A2LA Certificate Number 883.01

### 10.3 ISO 17034 "General Requirements for the Competence of Reference Material Producers"

- Reference Material Producer - Accredited / A2LA Certificate Number 883.02

Inorganic Ventures, 300 Technology Drive, Christiansburg, Va. 24073, USA; Telephone: 800.669.6799; 540.585.3030, Fax: 540.585.3012; [info@inorganicventures.com](mailto:info@inorganicventures.com);

## 11.0 CERTIFICATION, LOT EXPIRATION AND PERIOD OF VALIDITY

### 11.1 Certification Issue Date

March 03, 2023

- The certification is valid within the measurement uncertainty specified provided the CRM/RM is stored and handled in accordance with instructions given in Sec 7.1. This certification is nullified if instructions in Sec 7.1 are not followed or if the CRM/RM is damaged, contaminated, or otherwise modified.

### 11.2 Lot Expiration Date

- March 03, 2028

- The date after which this CRM/RM should not be used.

- The lot expiration date reflects the period of time that the stability of a CRM/RM can be supported by long term stability studies conducted on properly stored and handled CRM/RMs. Lot expiration is limited primarily by transpiration (loss of water from the solution) and infrequently by chemical stability.

### 11.3 Period of Validity

- Sealed TCT Bag Open Date: \_\_\_\_\_

- This CRM/RM should not be used longer than one year (or six months in the case of a 30 mL bottle) from the date of opening the aluminized bag or after the date given in Sec. 11.2, whichever comes first. This is contingent upon the CRM/RM being stored and handled in accordance with the instructions given in Sec. 7.1.

## 12.0 NAMES AND SIGNATURES OF CERTIFYING OFFICERS

### Certificate Approved By:

Thomas Kozikowski  
Manager, Quality Control



### Certifying Officer:

Paul Gaines  
Chairman / Senior Technical Director





**CERTIFIED WEIGHT REPORT:**

**Part Number:** 57081  
**Lot Number:** 062724  
**Description:** Thallium (TI)

Lot #

**Solvent:** 24002546 Nitric Acid

**2%** 40.0 Nitric Acid (mL)

**Expiration Date:**

062727

**Recommended Storage:** Ambient (20 °C)

**Nominal Concentration (µg/mL):**

1000

**NIST Test Number:**

6UTB

**Weight shown below was diluted to (mL):** 2000.1

5E-05 Balance Uncertainty  
0.10 Flask Uncertainty


|                      |                        |
|----------------------|------------------------|
| <i>Aleah O'Brady</i> |                        |
| Formulated By:       | Aleah O'Brady          |
|                      | 062724                 |
| Reviewed By:         | <i>Pedro L. Renias</i> |
|                      | Pedro L. Renias        |
|                      | 062724                 |

**SDS Information**

| Compound | Lot Number | Nominal Conc. (µg/mL) | Purity (%) | Uncertainty (%) | Assay (%) | Target Weight (g) | Actual Weight (g) | Actual Conc. (µg/mL) | Expanded Uncertainty +/- (µg/mL) | CAS# | OSHA PEL (TWA) | LD50 | NIST SRM |
|----------|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|
|----------|------------|-----------------------|------------|-----------------|-----------|-------------------|-------------------|----------------------|----------------------------------|------|----------------|------|----------|

1. Thallium nitrate (TI) IN037 BCCF4399 1000 99.999 0.10 77.0 2.5975 2.5977 1000.1 2.0 10102-45-1 0.1 mg/m3 orl-mus 15mg/kg 3158

[1] Spectrum No.1 [ 14.044 sec]:57081.D# [Count] [Linear]

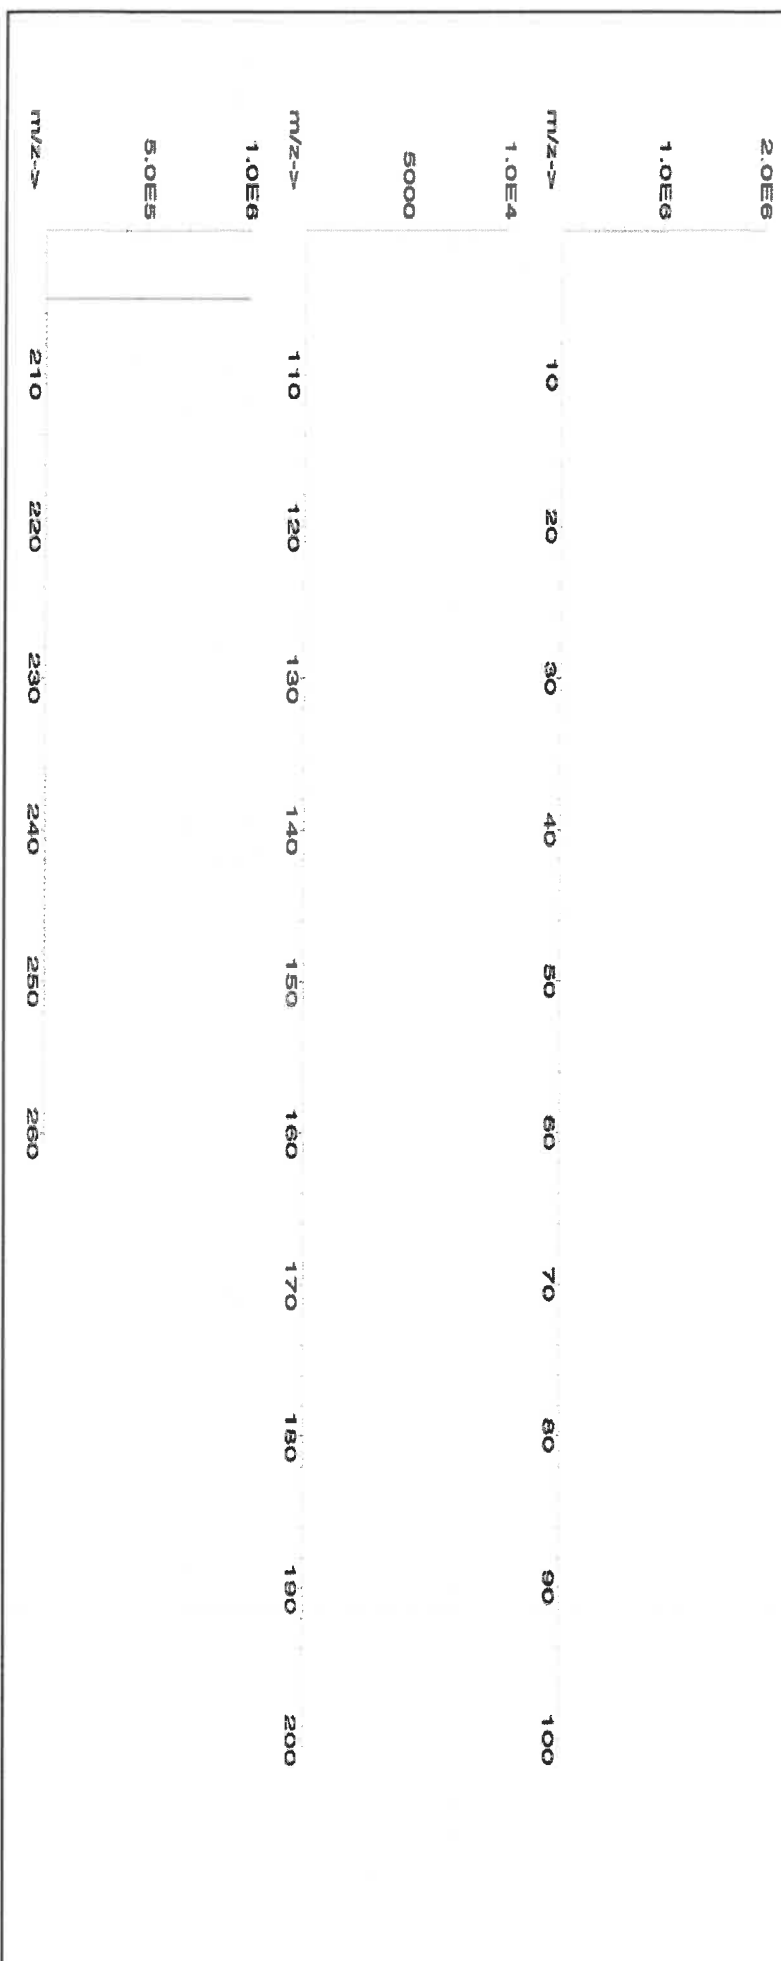



**Instrumental Analysis by Inductively Coupled Plasma Mass Spectrometry (ICP-MS):**

**Trace Metals Verification by ICP-MS (µg/mL)**

|    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |    |       |
|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|----|-------|
| Al | <0.02 | Cd | <0.02 | Dy | <0.02 | Hf | <0.02 | Li | <0.02 | Ni | <0.02 | Pt | <0.02 | Sc | <0.2  | Tb | <0.02 | W  | <0.02 |
| Sb | <0.02 | Ca | <0.2  | Er | <0.02 | Ho | <0.02 | Lu | <0.02 | Nb | <0.02 | Re | <0.02 | Si | <0.02 | Te | <0.02 | U  | <0.02 |
| As | <0.2  | Ce | <0.02 | Eu | <0.02 | In | <0.02 | Mg | <0.01 | Os | <0.02 | Rh | <0.02 | Ag | <0.02 | Tl | T     | V  | <0.02 |
| Ba | <0.02 | Cs | <0.02 | Gd | <0.02 | Ir | <0.02 | Mn | <0.02 | Pd | <0.02 | Rb | <0.02 | Na | <0.2  | Tm | <0.02 | Yb | <0.02 |
| Be | <0.01 | Cr | <0.02 | Ga | <0.02 | Fe | <0.2  | Hg | <0.2  | P  | <0.02 | Ru | <0.02 | Sr | <0.02 | Sn | <0.02 | Y  | <0.02 |
| Bi | <0.02 | Co | <0.02 | Ge | <0.02 | La | <0.02 | Mo | <0.02 | Pt | <0.02 | Sm | <0.02 | S  | <0.02 | Ti | <0.02 | Zn | <0.02 |
| B  | <0.02 | Cu | <0.02 | Au | <0.02 | Pb | <0.02 | Nd | <0.02 | K  | <0.2  | Sc | <0.02 | Ta | <0.02 |    |       | Zr | <0.02 |

(T) = Target analyte

**Physical Characterization:**

Certified by:

Homogeneity: No heterogeneity was observed in the preparation of this standard.

- \* The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- \* Purified acids, 18.2 megohm deionized water, calibrated Class A glassware and the highest purity raw materials are used in the preparation of all standards.
- \* All standard containers are meticulously cleaned prior to use.
- \* Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- \* Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- \* All Standards should be stored with caps tight and under appropriate laboratory conditions.
- \* Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, D.C. (1994).





**Certified Reference Material CRM**

M6021



ANAB ISO 17034 Accredited  
AR-1539 Certificate Number  
<https://absolutestandards.com>

**CERTIFIED WEIGHT REPORT:**

Part Number: **57023**  
Lot Number: **062424**  
Description: **Vanadium (V)**

Lot # **24002546**  
Solvent: **Nitric Acid**

2.0%

40.0 (mL)

Nitric Acid

*Aleah O'Brady*  
Formulated By: **Aleah O'Brady**  
Reviewed By: **Pedro L. Rantas**

062424

062424

Expiration Date: **062427**  
Recommended Storage: **Ambient (20 °C)**  
Nominal Concentration (µg/mL): **1000**

NIST Test Number: **6UTB**

5E-05 Balance Uncertainty  
0.06 Flask Uncertainty

Volume shown below was diluted to (mL): **2000.3**

Flask Uncertainty

Expanded

SDS Information

(Solvent Safety Info. On Attached pg.)

Uncertainty  
+/- (µg/mL)

CAS# **05814 PEL (TWA)**

LD50

NIST  
SRM

1. Ammonium metavanadate (V)

58123 021224 0.1000 200.0 0.084 1000 10000.3 1000.0 2.2 7803-55-6 0.05 mg/m3 3165

[1] Spectrum No.1 [ 34.243 sec]:58023.D# [Count] [Linear]

|        |     |     |     |     |     |     |     |     |     |     |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 2.0E6  | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |
| 1.0E6  | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |
| 2.0E7  | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |
| 1.0E7  | 10  | 20  | 30  | 40  | 50  | 60  | 70  | 80  | 90  | 100 |
| 5.0E8  | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 | 190 | 200 |
| 2.5E8  | 110 | 120 | 130 | 140 | 150 | 160 | 170 | 180 | 190 | 200 |
| m/z--> | 210 | 220 | 230 | 240 | 250 | 260 |     |     |     |     |

