

Prep Standard - Chemical Standard Summary

Order ID : Q3410

Test : TPH GC

Prepbatch ID : PB170250,

Sequence ID/Qc Batch ID: FG102425,

Standard ID :

EP2641,EP2652,PP24583,PP24596,PP24962,PP24963,PP24964,PP24965,PP24966,PP24967,PP24968,

Chemical ID :

E3875,E3930,E3931,E3951,E3964,E3972,E3973,E3980,P 11957,P11961,P13220,P13221,P13483,P13484,P13485,P13486,P13491,P13938,P13945,

Extractions STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
2017	1:1 ACETONE/METHYLENE CHLORIDE	EP2641	09/16/2025	03/16/2026	Evelyn Huang	None	None	Riteshkumar Patel
09/16/2025								

FROM 8000.00000ml of E3972 + 8000.00000ml of E3973 = Final Quantity: 16000.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3923	Baked Sodium Sulfate	EP2652	10/10/2025	01/28/2026	Evelyn Huang	Extraction_SC ALE_2	None	Riteshkumar Patel
(EX-SC-2)								

FROM 4000.00000gram of E3875 = Final Quantity: 4000.000 gram

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3609	20 PPM DRO SPIKE SOLUTION (RESTEK)	PP24583	05/16/2025	11/16/2025	Rahul Chavli	None	None	Yogesh Patel
								05/22/2025

FROM 0.70000ml of P13945 + 1.30000ml of P13938 + 48.00000ml of E3930 = Final Quantity: 50.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
147	20 PPM DRO Surrogate Spike Solution	PP24596	05/20/2025	11/20/2025	Abdul Mirza	None	None	Yogesh Patel
								05/22/2025

FROM 1.00000ml of P13483 + 1.00000ml of P13484 + 1.00000ml of P13485 + 1.00000ml of P13486 + 196.00000ml of E3931 = Final Quantity: 200.000 ml

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
433	100/100 PPM DRO (Restek)	PP24962	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 1.00000ml of P11957 + 1.00000ml of P11961 + 1.00000ml of P13491 = Final Quantity: 10.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3796	100/100 PPM DRO STD (CPI)	PP24963	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 1.00000ml of P13220 + 1.00000ml of P13221 + 1.00000ml of P13491 + 7.00000ml of E3964 = Final Quantity: 10.000 ml

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
435	50 PPM ICC DRO STD (Restek)	PP24964	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 0.50000ml of E3973 + 0.50000ml of PP24962 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
437	20 PPM ICC DRO STD (Restek)	PP24965	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 0.80000ml of E3973 + 0.20000ml of PP24962 = Final Quantity: 1.000 ml

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
438	10 PPM ICC DRO STD (Restek)	PP24966	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 0.90000ml of E3973 + 0.10000ml of PP24962 = Final Quantity: 1.000 ml

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
439	5 PPM ICC DRO STD (Restek)	PP24967	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 0.90000ml of E3973 + 0.10000ml of PP24964 = Final Quantity: 1.000 ml

Pest/Pcb STANDARD PREPARATION LOG

<u>Recipe ID</u>	<u>NAME</u>	<u>NO.</u>	<u>Prep Date</u>	<u>Expiration Date</u>	<u>Prepared By</u>	<u>ScaleID</u>	<u>PipetteID</u>	<u>Supervised By</u>
3797	50 PPM DRO ICV STD (CPI)	PP24968	10/02/2025	04/02/2026	Yogesh Patel	None	None	Abdul Mirza
								10/10/2025

FROM 0.50000ml of E3973 + 0.50000ml of PP24963 = Final Quantity: 1.000 ml

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
PCI Scientific Supply, Inc.	PC19631-100 / SODIUM SULFATE, ANHYDROUS, PEST GRADE, 1	417203	01/28/2026	07/28/2025 / RUPESH	01/29/2025 / Rajesh	E3875

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	25A0262002	02/20/2026	05/02/2025 / RUPESH	03/09/2025 / RUPESH	E3930

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	25A0262002	02/20/2026	05/02/2025 / RUPESH	03/09/2025 / RUPESH	E3931

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-3382-05 / Sand, Purified (cs/4x2.5kg)	25A2756718	12/31/2028	07/09/2025 / RUPESH	04/28/2020 / RUPESH	E3951

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	25C1262005	04/16/2026	08/14/2025 / RUPESH	03/06/2025 / RUPESH	E3964

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9254-03 / Acetone, Ultra Resi (cs/4x4L)	24H1462005	05/24/2027	09/16/2025 / Evelyn	09/04/2025 / Riteshkumar	E3972

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	25C1262005	04/16/2026	09/15/2025 / Riteshkumar	09/15/2025 / Riteshkumar	E3973

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Seidler Chemical	BA-9644-A4 / Methylene Chloride,U-Resi, Cycle-Tainer (215L)	25C1262005	04/16/2026	10/10/2025 / RUPESH	10/10/2025 / RUPESH	E3980

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	04/02/2026	10/02/2025 / yogesh	07/11/2022 / Yogesh	P11957

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0186840	04/02/2026	10/02/2025 / yogesh	07/11/2022 / Yogesh	P11961

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
CPI International	Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml	514983	10/02/2026	10/02/2025 / yogesh	01/31/2024 / Ankita	P13220

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
CPI International	Z-110400-05-01 / TRPH Standard (C8-C40), 500 mg/L, 1 ml	514983	10/02/2026	10/02/2025 / yogesh	01/31/2024 / Ankita	P13221

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	11/20/2025	05/20/2025 / Abdul	07/24/2024 / yogesh	P13483

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	11/20/2025	05/20/2025 / Abdul	07/24/2024 / yogesh	P13484

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	11/20/2025	05/20/2025 / Abdul	07/24/2024 / yogesh	P13485

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	11/20/2025	05/20/2025 / Abdul	07/24/2024 / yogesh	P13486

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Absolute Standards, Inc.	72072 / n-Tetracosane-d50, 1000 ug/ml	101122	04/02/2026	10/02/2025 / yogesh	07/24/2024 / yogesh	P13491

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0217113	11/16/2025	05/16/2025 / Rahul	03/07/2025 / yogesh	P13938

CHEMICAL RECEIPT LOG BOOK

Supplier	ItemCode / ItemName	Lot #	Expiration Date	Date Opened / Opened By	Received Date / Received By	Chemtech Lot #
Restek	31266 / Florida TRPH Standard	A0217113	11/16/2025	05/16/2025 / Rahul	03/07/2025 / yogesh	P13945



**PRODUCTOS
QUÍMICOS
MONTERREY, S.A. DE C.V.**

MIRADOR 201, COL. MIRADOR
MONTERREY, N.L. MÉXICO
CP 64070
TEL +52 81 13 52 67 67
www.pqm.com.mx

CERTIFICATE OF ANALYSIS

PRODUCT :	SODIUM SULFATE CRYSTALS ANHYDROUS		
QUALITY :	ACS (CODE RMB3375)	FORMULA :	Na ₂ SO ₄
SPECIFICATION NUMBER:	6399	RELEASE DATE:	MAY/23/2024
LOT NUMBER :	417203		

TEST	SPECIFICATIONS	LOT VALUES
Assay (Na ₂ SO ₄)	Min. 99.0%	99.8 %
pH of a 5% solution at 25°C	5.2 - 9.2	6.2
Insoluble matter	Max. 0.01%	0.001 %
Loss on ignition	Max. 0.5%	0.1 %
Chloride (Cl)	Max. 0.001%	<0.001 %
Nitrogen compounds (as N)	Max. 5 ppm	<5 ppm
Phosphate (PO ₄)	Max. 0.001%	<0.001 %
Heavy metals (as Pb)	Max. 5 ppm	<5 ppm
Iron (Fe)	Max. 0.001%	<0.001 %
Calcium (Ca)	Max. 0.01%	0.001 %
Magnesium (Mg)	Max. 0.005%	0.001 %
Potassium (K)	Max. 0.008%	0.001 %
Extraction-concentration suitability	Passes test	Passes test
Appearance	Passes test	Passes test
Identification	Passes test	Passes test
Solubility and foreign matter	Passes test	Passes test
Retained on US Standard No. 10 sieve	Max. 1%	0.2 %
Retained on US Standard No. 60 sieve	Min. 94%	96.2 %
Through US Standard No. 60 sieve	Max. 5%	3.5 %
Through US Standard No. 100 sieve	Max. 10%	0.1 %

COMMENTS

QC: PhC Irma Belmares

If you need further details, please call our factory or contact our local distributor.

RE-02-01, Ed. 3

E 3875

Methylene Chloride
ULTRA RESI-ANALYZED
For Organic Residue Analysis
(dichloromethane)



Material No.: 9266-A4
Batch No.: 25A0262002
Manufactured Date: 2024-11-21
Expiration Date: 2026-02-20
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	≤ 10	4
Assay (CH ₂ Cl ₂) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8 \%$	99.9 %
Color (APHA)	≤ 10	10
Residue after Evaporation	≤ 1.0 ppm	0.8 ppm
Titration Acid (μ eq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	$\leq 0.02 \%$	$< 0.01 \%$

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States
Packaging Site: Phillipsburg Mfg Ctr & DC

E3930

Jamie Croak
Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA, 19087, U.S.A. Phone 610.386.1700

Methylene Chloride
ULTRA RESI-ANALYZED
For Organic Residue Analysis
(dichloromethane)



Material No.: 9266-A4
Batch No.: 25A0262002
Manufactured Date: 2024-11-21
Expiration Date: 2026-02-20
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	≤ 10	4
Assay (CH ₂ Cl ₂) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8\%$	99.9%
Color (APHA)	≤ 10	10
Residue after Evaporation	≤ 1.0 ppm	0.8 ppm
Titration Acid (μ eq/g)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	$\leq 0.02\%$	$< 0.01\%$

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States
Packaging Site: Phillipsburg Mfg Ctr & DC

E3930

Jamie Croak
Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA, 19087, U.S.A. Phone 610.386.1700



Material	BDH9274-2.5KG
Material Description	BDH SAND STDD OTTAWA W+I 2.5KG
Grade	NOT APPLICABLE
Batch	25A2756718
Reassay Date	12/31/2028
CAS Number	14808-60-7
Molecular Formula	SiO ₂
Molecular Mass	60.09
Date of Manufacture	12/05/2024
Storage	Room Temperature

Characteristics	Specifications	Measured Values
Appearance	Beige granules.	Beige granules.
Moisture	<= 0.1 %	0.1 %
Particle Size 30-40 mesh	>= 80 %	99 %
CUSTOMER PART # BDH9274-2.5KG		

Received on 1/12/25.

E3951

Internal ID #: 793

Signature	Additional Information
<p>We certify that this batch conforms to the specifications listed above.</p> <p>This document has been electronically produced and is valid without a signature.</p> <p>Leona Edwardson, Quality Control Sr. Manager - Solon VWR Chemicals, LLC. 28600 Fountain Parkway, Solon OH 44139 USA</p>	<p>Analysis may have been rounded to significant digits in specification limits</p> <p>Product meets analytical specifications of the grades listed.</p>

Methylene Chloride
ULTRA RESI-ANALYZED
For Organic Residue Analysis
(dichloromethane)



Material No.: 9266-A4
Batch No.: 25C1262005
Manufactured Date: 2025-01-15
Expiration Date: 2026-04-16
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	≤ 10	1
Assay (CH ₂ Cl ₂) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8\%$	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Titration Acid (μ eq/g)	≤ 0.3	<0.1
Chloride (Cl)	≤ 10 ppm	<5 ppm
Water (by KF, coulometric)	$\leq 0.02\%$	<0.01 %

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States
Packaging Site: Phillipsburg Mfg Ctr & DC

Received on .

E 3964

Jamie Croak
Director Quality Operations, Bioscience Production

Acetone
BAKER RESI-ANALYZED® Reagent
For Organic Residue Analysis

avantor™



Material No.: 9254-03

Batch No.: 24H1462005

Manufactured Date: 2024-05-24

Expiration Date: 2027-05-24

Revision No.: 0

Certificate of Analysis

Test	Specification	Result
Assay ((CH ₃) ₂ CO) (by GC, corrected for water)	>= 99.4 %	99.8 %
Color (APHA)	<= 10	5
Residue after Evaporation	<= 1.0 ppm	0.2 ppm
Substances Reducing Permanganate	Passes Test	Passes Test
Titration Acid (μeq/g)	<= 0.3	0.2
Titration Base (μeq/g)	<= 0.6	<0.1
Water (H ₂ O)	<= 0.5 %	0.2 %
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	<= 5	<1
ECD Sensitive Impurities (as Heptachlor Epoxide) Single Peak (pg/mL)	<= 10	1

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States
Packaging Site: Phillipsburg Mfg Ctr & DC

E3972

Jamie Croak
Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials LLC

Methylene Chloride
ULTRA RESI-ANALYZED
For Organic Residue Analysis
(dichloromethane)



Material No.: 9266-A4
Batch No.: 25C1262005
Manufactured Date: 2025-01-15
Expiration Date: 2026-04-16
Revision No.: 0

Certificate of Analysis

Test	Specification	Result
FID-Sensitive Impurities (as 2-Octanol) Single Impurity Peak (ng/mL)	≤ 5	1
ECD Sensitive Impurities (as HeptachlorEpoxide) Single Peak (pg/mL)	≤ 10	1
Assay (CH_2Cl_2) (by GC, exclusive of preservative, corrected for water)	$\geq 99.8\%$	100.0 %
Color (APHA)	≤ 10	5
Residue after Evaporation	≤ 1.0 ppm	0.1 ppm
Titration Acid ($\mu\text{eq/g}$)	≤ 0.3	< 0.1
Chloride (Cl)	≤ 10 ppm	< 5 ppm
Water (by KF, coulometric)	$\leq 0.02\%$	$< 0.01\%$

For Laboratory, Research, or Manufacturing Use
MEETS SPECIFICATIONS WITHIN THE EXPIRATION PERIOD

Country of Origin: United States
Packaging Site: Phillipsburg Mfg Ctr & DC

REC. on 10/10/25
RJ

E3980

Jamie Croak
Director Quality Operations, Bioscience Production

For questions on this Certificate of Analysis please contact Technical Services at 855.282.6867 or +1.610.386.1700

Avantor Performance Materials, LLC

100 Matsonford Rd, Suite 200, Radnor, PA, 19087, U.S.A. Phone 610.386.1700



CERTIFIED REFERENCE MATERIAL

110 Benner Circle


Belleville, PA 16823-8812

Tel: (800)356-1688

Fax: (814)353-1309

www.restek.com

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31266

Lot No.: A0186840

Description : Florida TRPH Standard

Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : July 31, 2029

Storage: 25°C nominal

Handling: Sonicate prior to use.

Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)	
1	n-Octane (C8) CAS # 111-65-9 Purity 99%	505.0 µg/mL	+/- 2.9995 µg/mL +/- 12.5465 µg/mL +/- 15.0390 µg/mL	Gravimetric Unstressed Unstressed Stressed
2	n-Decane (C10) CAS # 124-18-5 Purity 99%	503.0 µg/mL	+/- 2.9877 µg/mL +/- 12.4968 µg/mL +/- 14.9795 µg/mL	Gravimetric Unstressed Unstressed Stressed
3	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	503.5 µg/mL	+/- 2.9906 µg/mL +/- 12.5092 µg/mL +/- 14.9944 µg/mL	Gravimetric Unstressed Unstressed Stressed
4	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	505.0 µg/mL	+/- 2.9995 µg/mL +/- 12.5465 µg/mL +/- 15.0390 µg/mL	Gravimetric Unstressed Unstressed Stressed
5	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	504.7 µg/mL	+/- 2.9978 µg/mL +/- 12.5390 µg/mL +/- 15.0301 µg/mL	Gravimetric Unstressed Unstressed Stressed
6	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	504.4 µg/mL	+/- 2.9960 µg/mL +/- 12.5316 µg/mL +/- 15.0212 µg/mL	Gravimetric Unstressed Unstressed Stressed
7	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	503.5 µg/mL	+/- 2.9906 µg/mL +/- 12.5092 µg/mL +/- 14.9944 µg/mL	Gravimetric Unstressed Unstressed Stressed

P11948 } 7.8
P11962 } 07/11/16

8	n-Docosane (C22) CAS # 629-97-0 Purity 99%	(Lot MKCL8918)	504.5 µg/mL	+/- 2.9966 +/- 12.5340 +/- 15.0241	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
9	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	(Lot MKCN2863)	503.5 µg/mL	+/- 2.9906 +/- 12.5092 +/- 14.9944	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
10	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	(Lot MKCD4540)	504.0 µg/mL	+/- 2.9936 +/- 12.5216 +/- 15.0093	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
11	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	(Lot BCCG0084)	504.5 µg/mL	+/- 2.9966 +/- 12.5340 +/- 15.0241	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
12	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	(Lot MKCN9321)	505.0 µg/mL	+/- 2.9995 +/- 12.5465 +/- 15.0390	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
13	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	(Lot BCBW0661)	505.0 µg/mL	+/- 2.9995 +/- 12.5465 +/- 15.0390	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
14	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	(Lot OML4N)	504.5 µg/mL	+/- 2.9966 +/- 12.5340 +/- 15.0241	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
15	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	(Lot U25B014)	504.0 µg/mL	+/- 2.9936 +/- 12.5216 +/- 15.0093	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
16	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	(Lot 0000127235)	504.4 µg/mL	+/- 2.9960 +/- 12.5316 +/- 15.0212	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
17	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	(Lot PADGI)	504.7 µg/mL	+/- 2.9978 +/- 12.5390 +/- 15.0301	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed

Solvent: Hexane
CAS # 110-54-3
Purity 99%

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

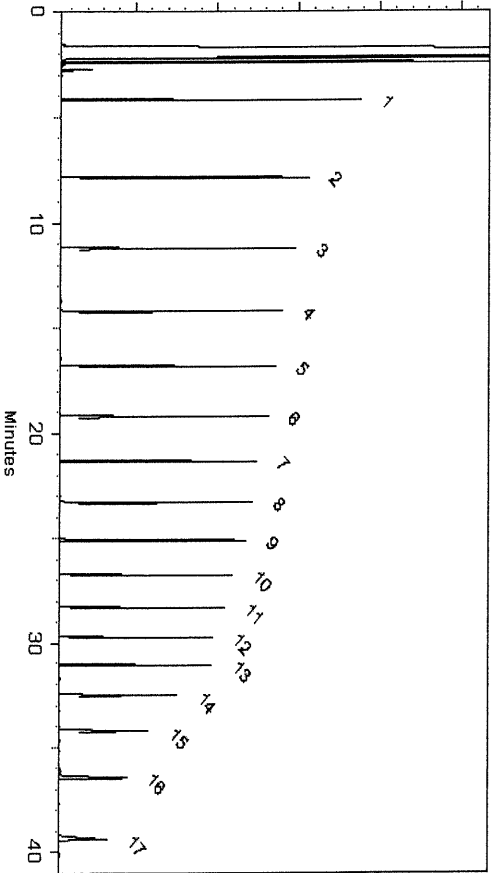

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Brittany Federinko

Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022

Balance: 1128360905

Christie Mills

Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-US for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-US.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



CERTIFIED REFERENCE MATERIAL

110 Benner Circle


Belleville, PA 16823-8812

Tel: (800)356-1688

Fax: (814)353-1309

www.restek.com

Certificate of Analysis



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31266 Lot No.: A0186840

Description : Florida TRPH Standard

Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : July 31, 2029

Storage: 25°C nominal

Handling: Sonicate prior to use.

Ship: Ambient

CERTIFIED VALUES

Elution Order	Compound	Grav. Conc. (weight/volume)	Expanded Uncertainty (95% C.L.; K=2)	
1	n-Octane (C8) CAS # 111-65-9 Purity 99%	505.0 µg/mL	+/- 2.9995 +/- 12.5465 +/- 15.0390	Gravimetric Unstressed Stressed
2	n-Decane (C10) CAS # 124-18-5 Purity 99%	503.0 µg/mL	+/- 2.9877 +/- 12.4968 +/- 14.9795	Gravimetric Unstressed Stressed
3	n-Dodecane (C12) CAS # 112-40-3 Purity 99%	503.5 µg/mL	+/- 2.9906 +/- 12.5092 +/- 14.9944	Gravimetric Unstressed Stressed
4	n-Tetradecane (C14) CAS # 629-59-4 Purity 99%	505.0 µg/mL	+/- 2.9995 +/- 12.5465 +/- 15.0390	Gravimetric Unstressed Stressed
5	n-Hexadecane (C16) CAS # 544-76-3 Purity 98%	504.7 µg/mL	+/- 2.9978 +/- 12.5390 +/- 15.0301	Gravimetric Unstressed Stressed
6	n-Octadecane (C18) CAS # 593-45-3 Purity 97%	504.4 µg/mL	+/- 2.9960 +/- 12.5316 +/- 15.0212	Gravimetric Unstressed Stressed
7	n-Eicosane (C20) CAS # 112-95-8 Purity 99%	503.5 µg/mL	+/- 2.9906 +/- 12.5092 +/- 14.9944	Gravimetric Unstressed Stressed

P11948 } 7.8
P11962 } 07/11/16

8	n-Docosane (C22) CAS # 629-97-0 Purity 99%	(Lot MKCL8918)	504.5 µg/mL	+/- 2.9966 +/- 12.5340 +/- 15.0241	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
9	n-Tetracosane (C24) CAS # 646-31-1 Purity 99%	(Lot MKCN2863)	503.5 µg/mL	+/- 2.9906 +/- 12.5092 +/- 14.9944	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
10	n-Hexacosane (C26) CAS # 630-01-3 Purity 99%	(Lot MKCD4540)	504.0 µg/mL	+/- 2.9936 +/- 12.5216 +/- 15.0093	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
11	n-Octacosane (C28) CAS # 630-02-4 Purity 99%	(Lot BCCG0084)	504.5 µg/mL	+/- 2.9966 +/- 12.5340 +/- 15.0241	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
12	n-Triacontane (C30) CAS # 638-68-6 Purity 99%	(Lot MKCN9321)	505.0 µg/mL	+/- 2.9995 +/- 12.5465 +/- 15.0390	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
13	n-Dotriacontane (C32) CAS # 544-85-4 Purity 99%	(Lot BCBW0661)	505.0 µg/mL	+/- 2.9995 +/- 12.5465 +/- 15.0390	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
14	n-Tetratriacontane (C34) CAS # 14167-59-0 Purity 99%	(Lot OML4N)	504.5 µg/mL	+/- 2.9966 +/- 12.5340 +/- 15.0241	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
15	n-Hexatriacontane (C36) CAS # 630-06-8 Purity 99%	(Lot U25B014)	504.0 µg/mL	+/- 2.9936 +/- 12.5216 +/- 15.0093	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
16	n-Octatriacontane (C38) CAS # 7194-85-6 Purity 97%	(Lot 0000127235)	504.4 µg/mL	+/- 2.9960 +/- 12.5316 +/- 15.0212	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed
17	n-Tetracontane (C40) CAS # 4181-95-7 Purity 98%	(Lot PADGI)	504.7 µg/mL	+/- 2.9978 +/- 12.5390 +/- 15.0301	µg/mL µg/mL µg/mL	Gravimetric Unstressed Stressed

Solvent: Hexane
CAS # 110-54-3
Purity 99%

Column:

30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:

hydrogen-constant pressure 10 psi.

Temp. Program:

40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)

Inj. Temp:


250°C

Det. Temp:

330°C

Det. Type:

FID

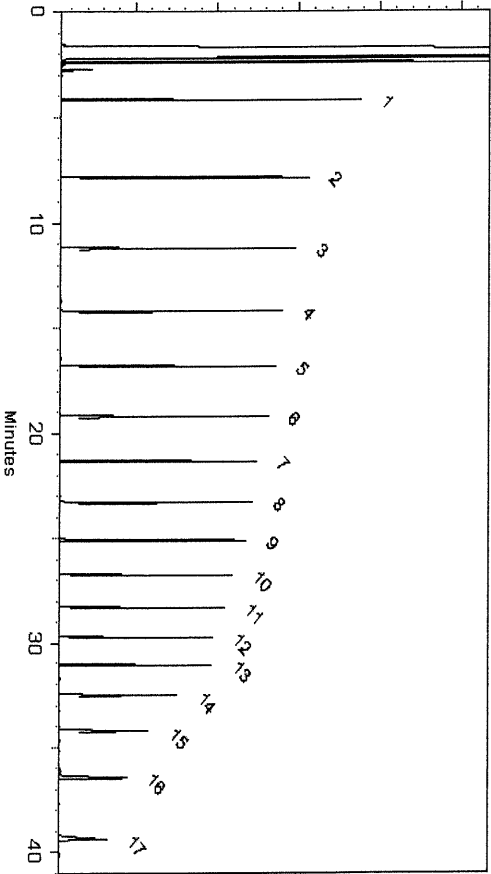

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.

Brittany Federinko

Brittany Federinko - Operations Tech I

Date Mixed: 29-Jun-2022

Balance: 1128360905

Christie Mills

Christie Mills - Operations Tech II - ARM QC

Date Passed: 01-Jul-2022

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/μECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified combined stressed uncertainty value (includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ stressed} = k \sqrt{U_{gravimetric}^2 + U_{homogeneity}^2 + U_{storage\ stability}^2 + U_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- It is important to note that the shipping stability uncertainty was obtained under temperature extremes for specific time intervals; therefore, the certified combined stressed uncertainty value should only be applied to the product if it was stored at non-standard temperature conditions up to and including 7 days. Contact Restek Technical Service at www.restek.com/Contact-US for use recommendations if your shipment was in-transit for more than 7 days at non-standard temperature conditions.
- Apply the certified combined unstressed uncertainty value if the product was received under standard shipping conditions. Apply the certified combined stressed uncertainty value if the product was received under non-standard conditions as specified below.

Label Conditions	Standard Conditions	Non-Standard Conditions
25°C Nominal (Room Temperature)	< 60°C	≥ 60°C up to 7 days
10°C or colder (Refrigerate)	< 40°C	≥ 40°C up to 7 days
0°C or colder (Freezer) -20°C or colder (Deep Freezer)	< 25°C	≥ 25°C up to 7 days

- Separate (not combined) uncertainty values for gravimetric uncertainty are also displayed on the certificate, if needed, separate homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty values are available by contacting Restek Technical Service at www.restek.com/Contact-US.
- The packaged amount is the minimum sample size for which uncertainty is valid. The ampules are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampules. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.



5580 Skylane Blvd
Santa Rosa, CA 95403

Manufacturer's Quality System
Audited & Registered
by TUV USA to ISO 9001:2015

(707)525-5788
(800)878-7654 Toll Free
(707)545-7901 Fax

Date Received: _____

Certificate of Analysis

Page 1 of 1

Catalog No.: Lot No.: Storage:

Z-110400-05 514983 ≤-10 Degrees C

Solvent:

Hexane

Exp. Date:

11/20/2028

Description:

TRPH Standard (C8-C40), 500 mg/L, 1 ml

-01

Compound

CAS No.

Purity (%)

Compound Lot No.

Concentration, mg/L

decane (C10)

124-18-5

99.7

415.7.2P

498.5 ± 6.92

docosane (C22)

629-97-0

98.8

420.9.1P

499.4 ± 6.93

dodecane (C12)

112-40-3

99.7

416.9.3P

502 ± 6.97

dotriacontane (C32)

544-85-4

97

425.9.2.2P

499.6 ± 8.53

eicosane (C20)

112-95-8

99.8

419.7.1P

501 ± 6.95

hexacosane (C26)

630-01-3

99.3

422.7.2.1P

501 ± 6.95

hexatriacontane (C36)

630-06-8

98

427.29.1.1P

499.3 ± 8.53

n-hexadecane (C16)

544-76-3

99.45

368.27.1.1P

498.7 ± 6.91

octacosane (C28)

630-02-4

99.1

423.24.1P

500.5 ± 6.95

n-octadecane (C18)

593-45-3

99.5

418.29.1P

499.5 ± 6.92

octane (C8)

111-65-9

99.4

385.7.2.1P

498.5 ± 6.92

octatriacontane (C38)

7194-85-6

95

428.1.2P

500.2 ± 6.94

tetracontane (C40)

4181-95-7

97

429.7.2P

499.6 ± 6.93

n-tetracosane (C24)

646-31-1

99.5

421.7.1P

499.5 ± 6.93

n-tetradecane (C14)

629-59-4

99.3

417.9.1P

500 ± 6.94

tetratriacontane (C34)

14167-59-0

96.1

426.7.2.2P

499.7 ± 8.53

triacontane (C30)

638-68-6

99.5

424.7.1.1P

500 ± 6.94

Let the standard warm to room temperature and sonicate before opening.

P13215

↓

P13224

AJ
01131124

*Not a certified value

Andrea Schaible

Andrea Schaible
Chemist

Certified By: _____

All weights are traceable through N. I. S. T. Test No. 822/264157-00.
Concentration (correct for purity) and uncertainty (95% confidence) values
listed are determined gravimetrically.



5580 Skylane Blvd
Santa Rosa, CA 95403

Manufacturer's Quality System
Audited & Registered
by TUV USA to ISO 9001:2015

(707)525-5788
(800)878-7654 Toll Free
(707)545-7901 Fax

Date Received: _____

Certificate of Analysis

Page 1 of 1

Catalog No.: Lot No.: Storage:

Z-110400-05 514983 ≤-10 Degrees C

Solvent:

Hexane

Exp. Date:

11/20/2028

Description:

TRPH Standard (C8-C40), 500 mg/L, 1 ml

-01

Compound

CAS No.

Purity (%)

Compound Lot No.

Concentration, mg/L

decane (C10)

124-18-5

99.7

415.7.2P

498.5 ± 6.92

docosane (C22)

629-97-0

98.8

420.9.1P

499.4 ± 6.93

dodecane (C12)

112-40-3

99.7

416.9.3P

502 ± 6.97

dotriacontane (C32)

544-85-4

97

425.9.2.2P

499.6 ± 8.53

eicosane (C20)

112-95-8

99.8

419.7.1P

501 ± 6.95

hexacosane (C26)

630-01-3

99.3

422.7.2.1P

501 ± 6.95

hexatriacontane (C36)

630-06-8

98

427.29.1.1P

499.3 ± 8.53

n-hexadecane (C16)

544-76-3

99.45

368.27.1.1P

498.7 ± 6.91

octacosane (C28)

630-02-4

99.1

423.24.1P

500.5 ± 6.95

n-octadecane (C18)

593-45-3

99.5

418.29.1P

499.5 ± 6.92

octane (C8)

111-65-9

99.4

385.7.2.1P

498.5 ± 6.92

octatriacontane (C38)

7194-85-6

95

428.1.2P

500.2 ± 6.94

tetracontane (C40)

4181-95-7

97

429.7.2P

499.6 ± 6.93

n-tetracosane (C24)

646-31-1

99.5

421.7.1P

499.5 ± 6.93

n-tetradecane (C14)

629-59-4

99.3

417.9.1P

500 ± 6.94

tetatriacontane (C34)

14167-59-0

96.1

426.7.2.2P

499.7 ± 8.53

triacontane (C30)

638-68-6

99.5

424.7.1.1P

500 ± 6.94

Let the standard warm to room temperature and sonicate before opening.

P 13215

↓

P 13224

AJ
01131124

*Not a certified value

Andrea Schaible

Andrea Schaible
Chemist

Certified By: _____

All weights are traceable through N. I. S. T. Test No. 822/264157-00.
Concentration (correct for purity) and uncertainty (95% confidence) values
listed are determined gravimetrically.

ABSOLUTE STANDARDS, INC.

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within $\pm 0.5\%$ of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a $K = 2$ (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2



Absolute Standards, Inc. • 44 Rossotto Drive • Hamden, CT 06514
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com
Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019



ABSOLUTE STANDARDS, INC.

ISO - 17034

Understanding the Certified Weight Report

Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.

Absolute Standards, Inc.
800-368-1131
www.absolutestandards.com

Certified Reference Material CRM

ISO 17034 Accredited
Scope: http://AbsoluteStandards.com

CERTIFIED WEIGHT REPORT

Part # 10009R
Lot # 070716
Shelf Life Description: CLP Priority Pollutant Internal Standards
GC/MS Calibration - 6 components
070721
Expiration Date: Ambient (20 °C)
Recommended Storage: 4000
Nominal Concentration (µg/mL): 822-275872-11
NIST Test ID#: 5E-05 Balance Uncertainty
0.058 Mass Uncertainty

Solvent(s): Methylene chloride
Lot# 78782

Formulated By: Paul Barron
Reviewed By: Pedro L. Rentes

070716
070716

Weight(s) shown below were combined and diluted to (mL): 500.0

Compound	SMW	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight (µg)	Actual Weight (µg)	Actual Conc (µg/mL)	Expanded Uncertainty (µg/mL)	CAS#	OSHA PEL (TWA)	LD50
1. 1,4-Dichlorobenzene-d4	118	PR-1845M07287CB1	4000	98	0.2	2.04093	2.04335	4004.7	15.4	2055-02-1	N/A	or-rat 500mg/kg
2. Naphthalene-d8	223	PR-2339M031612HP1	4000	99	0.2	2.02032	2.02084	4001.0	15.2	1146-85-2	10 ppm (50mg/m3/8h)	or-rat 400mg/kg
3. Acenaphthene-d10	2	PR-25444	4000	99	0.2	2.02032	2.02245	4004.2	15.2	15067-28-2	N/A	or-rat 500mg/kg
4. Phenanthrene-d10	248	PR-2305M081711PM1	4000	98	0.2	2.04093	2.04135	4000.8	15.4	1517-25-2	N/A	N/A
5. Chrysene-d12	92	I-19290	4000	98	0.2	2.04093	2.04150	4001.3	15.4	1719-03-5	N/A	N/A
6. Perylene-d12	247	PR-24113	4000	98	0.2	2.04093	2.04155	4001.2	15.4	1503-58-3	N/A	N/A

Run 35, "P10009R L070716 [4000µg/mL in MeCl2]"
Run Length: 40.00 min, 23900 points at 10 points/second.
Created: Sat, Jul 9, 2016 at 1:54:53 PM.
Sampled: Sequence "070716-GC/MS", Method "GC-MS".
Analyzed using Method "GC-MS".

Comments:
GC-MS Analysis by Melissa Siciric
Column ID SPB-5 30 meter x 0.53mm x 1.5um Film Thickness.
Flow rates: Total Flow = 300 mL/min, Helium (carrier) = 0.5 mL, Helium (make-up) = 25 mL.
Hydrogen (detector) = 30 mL, Air (detector) = 300 mL, Oven Temp 1 = 50°C (1 min).
Rise = 10°C/min, Oven Temp 2 = 300°C (14 min), Total Run Time = 40 Minutes, Injector Temp = 250°C.
FID Temp = 300°C, FID Signal = sData Channel 1.
Gas Chromatograph = HP 5890, Auto Sampler = HP 7673, Standard Injection = 0.5 µL, Range = 4

Peak No. Name FID RT (min)

1	1,4-Dichlorobenzene-d4	8.34
2	Naphthalene-d8	8.98
3	Acenaphthene-d10	12.97
4	Phenanthrene-d10	16.37
5	Chrysene-d12	22.62
6	Perylene-d12	25.75

Printed: 5/8/2019, 12:55:50 PM

Part # 10009R Lot # 041219

Formulator
Reviewer

Actual
Concentration
Uncertainty
Values

Health &
Safety

3rd Party
Comparison

For More Information, Contact:

StephenArpie@AbsoluteStandards.com

Page 2 of 2



CERTIFIED WEIGHT REPORT

Part Number: **72072**
Lot Number: **101122**
Description: **n-Tetracosane-d50**

Solvent(s):
Methylene chloride
Lot#
105345


Expiration Date: **101132**
Recommended Storage: **Ambient (20 °C)**
Nominal Concentration (µg/mL): **1000**
NIST Test ID#: **6UB3**
Weight(s) shown below were combined and diluted to (mL): **200.0**
5E-05 Balance Uncertainty
0.058 Flask Uncertainty

P13437
13496
07/24/24
X.F.

Formulated By:	<i>Prashant Chauhan</i>	101122
Reviewed By:	<i>Pedro L. Rentas</i>	101122
DATE		DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity (%)	Assay (%D)	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)	LD50
1. n-Tetracosane-d50	2072	PR-26606	1000	98.7	0.2	99.0	0.20471	0.20482	1000.6	4.1	16416-32-3	N/A

Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B = 250°C, Detector B = 275°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by: Candice Warren.

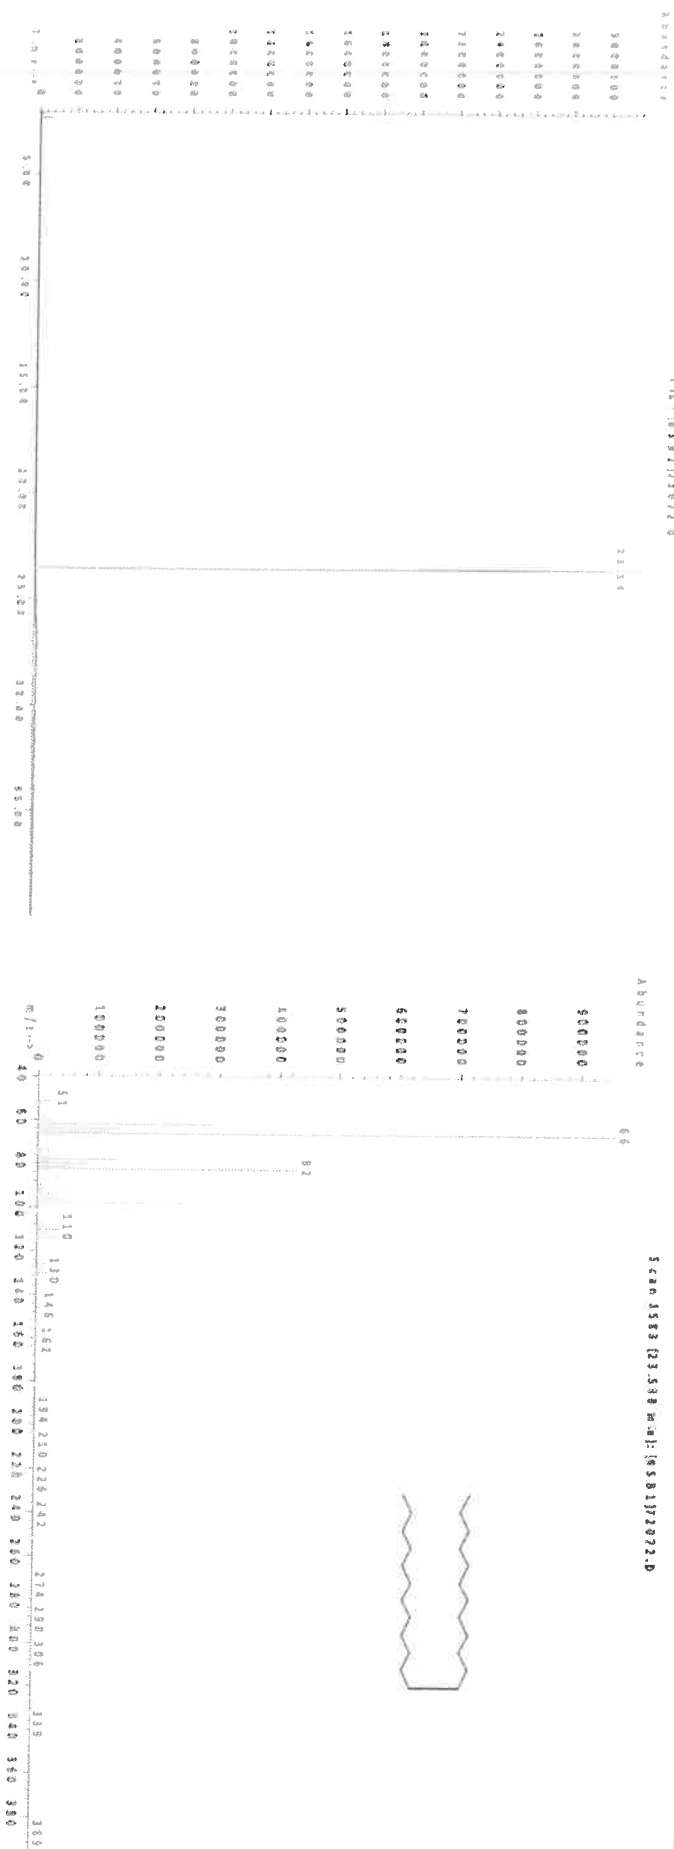

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

ABSOLUTE STANDARDS, INC.

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within $\pm 0.5\%$ of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a $K = 2$ (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2



Absolute Standards, Inc. • 44 Rossotto Drive • Hamden, CT 06514
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com
Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019



ABSOLUTE STANDARDS, INC.

ISO - 17034

Understanding the Certified Weight Report

Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.

Absolute Standards, Inc.
800-368-1131
www.absolutestandards.com

Certified Reference Material CRM

ISO 17034 Accredited
Scope: http://AbsoluteStandards.com

CERTIFIED WEIGHT REPORT

Part # 10009R
Lot # 070716
Shelf Life Description: CLP Priority Pollutant Internal Standards
GC/MS Calibration - 6 components
070721
Expiration Date: Ambient (20 °C)
Recommended Storage: 4000
Nominal Concentration (µg/mL): 822-275872-11
NIST Test ID#:
Weight(s) shown below were combined and diluted to (mL): 500.0
Balance Uncertainty: 0.058
Peak Uncertainty:

Solvent(s): Methylene chloride
Lot# 78782

Formulated By: Paul Barron
Reviewed By: Pedro L. Rentes

DATE: 070716
DATE: 070716

MSDS Information
(Solvent Safety Info. On Attached pg.)

Compound	SMW	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty (%)	Target Weight (µg)	Actual Weight (µg)	Actual Conc (µg/mL)	Expanded Uncertainty (µg/mL)	CAS#	OSHA PEL (TWA)	LD50
1. 1,4-Dichlorobenzene-d4	118	PR-1845M07287CB1	4000	98	0.2	2.04093	2.04335	4004.7	15.4	2055-02-1	N/A	or-nr 500mg/kg
2. Naphthalene-d8	223	PR-2339M031612HP1	4000	99	0.2	2.02032	2.02084	4001.0	15.2	1146-85-2	10 ppm (50mg/m3/8h)	or-nr 400mg/kg
3. Acenaphthene-d10	2	PR-25444	4000	99	0.2	2.02032	2.02245	4004.2	15.2	15067-28-2	N/A	or-nr 500mg/kg
4. Phenanthrene-d10	248	PR-2305M081711PM1	4000	98	0.2	2.04093	2.04135	4000.8	15.4	1517-25-2	N/A	N/A
5. Chrysene-d12	92	I-19290	4000	98	0.2	2.04093	2.04150	4001.3	15.4	1719-03-5	N/A	N/A
6. Perylene-d12	247	PR-24113	4000	98	0.2	2.04093	2.04155	4001.2	15.4	1503-58-3	N/A	N/A

Run 35, "P10009R L070716 [4000µg/mL in MeCl2]"
Run Length: 40.00 min, 23900 points at 10 points/second.
Created: Sat, Jul 9, 2016 at 1:54:53 PM.
Sampled: Sequence "070716-GC/MS", Method "GC-MS".
Analyzed using Method "GC-MS".

Comments:
GC-MS Analysis by Melissa Siciric
Column ID SPB-5 30 meter x 0.53mm x 1.5um Film Thickness.
Flow rates: Total Flow = 300 mL/min, Helium (carrier) = 0.5 mL, Helium (make-up) = 25 mL.
Hydrogen (detector) = 30 mL, Air (detector) = 300 mL, Oven Temp 1 = 50°C (1 min).
Rise = 10°C/min, Oven Temp 2 = 300°C (14 min), Total Run Time = 40 Minutes, Injector Temp = 250°C.
FID Temp = 300°C, FID Signal = sData Channel 1.
Gas Chromatograph = HP 5890, Auto Sampler = HP 7673, Standard Injection = 0.5 µL, Range = 4

Peak Data:

Peak No.	Name	FID RT (min)
1	1,4-Dichlorobenzene-d4	6.34
2	Naphthalene-d8	8.98
3	Acenaphthene-d10	12.97
4	Phenanthrene-d10	16.37
5	Chrysene-d12	22.62
6	Perylene-d12	25.75

Qualitative Quantitative

3rd Party Comparison

Analyte	Sup/Abs Dev (%)
1,4-Dichlorobenzene-d4	2.55
Naphthalene-d8	2.43
Acenaphthene-d10	2.74
Phenanthrene-d10	0.65
Chrysene-d12	1.93
Perylene-d12	-1.72
Total	-0.55

Printed: 5/8/2019, 12:55:50 PM

For More Information, Contact:

StephenArpie@AbsoluteStandards.com

Page 2 of 2



CERTIFIED WEIGHT REPORT

Part Number: **72072**
Lot Number: **101122**
Description: **n-Tetracosane-d50**

Solvent(s):
Methylene chloride
Lot#
105345

Expiration Date: **101132**
Recommended Storage: **Ambient (20 °C)**
Nominal Concentration (µg/mL): **1000**
NIST Test ID#: **6UB3**
Weight(s) shown below were combined and diluted to (mL): **200.0**
5E-05 Balance Uncertainty
0.058 Flask Uncertainty

P13437
13436
07/24/24
X.F.

Formulated By:	<i>Prashant Chauhan</i>	101122
Reviewed By:	<i>Pedro L. Rentas</i>	101122
	Pedro L. Rentas	DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity (%)	Assay (%D)	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)	LD50
1. n-Tetracosane-d50	2072	PR-26606	1000	98.7	0.2	99.0	0.20471	0.20482	1000.6	4.1	16416-32-3	N/A

Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B = 250°C, Detector B = 275°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by: Candice Warren.



- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1996).

ABSOLUTE STANDARDS, INC.

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within $\pm 0.5\%$ of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a $K = 2$ (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2



Absolute Standards, Inc. • 44 Rossotto Drive • Hamden, CT 06514
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com
Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019



ABSOLUTE STANDARDS, INC.

ISO - 17034

Understanding the Certified Weight Report

Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.

Absolute Standards, Inc.
800-368-1131
www.absolutestandards.com

Certified Reference Material CRM

ISO 17034 Accredited
Scope: http://AbsoluteStandards.com

CERTIFIED WEIGHT REPORT

Part # 10009R
Lot # 070716
Shelf Life Description: CLP Priority Pollutant Internal Standards
GC/MS Calibration - 6 components
070721
Expiration Date: Ambient (20 °C)
Recommended Storage: 4000
Nominal Concentration (µg/mL): 822-275872-11
NIST Test ID#: 5E-08 Balance Uncertainty
0.058 Mass Uncertainty

Solvent(s): Methylene chloride
Lot# 78782

Formulated By: Paul Barron
Reviewed By: Pedro L. Rentes

070716
070716

Weight(s) shown below were combined and diluted to (mL): 500.0

Compound	SMW	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight (µg)	Actual Weight (µg)	Actual Conc (µg/mL)	Expanded Uncertainty (µg/mL)	CAS#	MSDS Information (Solvent Safety Info. On Attached pg.)	OSHA PEL (TWA)	LD50
1. 1,4-Dichlorobenzene-d4	118	PR-1845M07287CB1	4000	98	0.2	2.04093	2.04335	4004.7	15.4	2055-02-1	N/A	en-ra 500mg/kg	
2. Naphthalene-d8	223	PR-2339M031612HP1	4000	99	0.2	2.02032	2.02084	4001.0	15.2	1146-85-2	10 ppm (50mg/m3/8h)	en-ra 400mg/kg	
3. Acenaphthene-d10	2	PR-25444	4000	99	0.2	2.02032	2.02245	4004.2	15.2	15067-28-2	N/A	en-ra 500mg/kg	
4. Phenanthrene-d10	248	PR-2305M081711PM1	4000	98	0.2	2.04093	2.04135	4000.8	15.4	1517-25-2	N/A	N/A	
5. Chrysene-d12	92	I-19290	4000	98	0.2	2.04093	2.04150	4001.3	15.4	1719-03-5	N/A	N/A	
6. Perylene-d12	247	PR-24113	4000	98	0.2	2.04093	2.04155	4001.2	15.4	1503-58-3	N/A	N/A	

Run 35, "P10009R L070716 [4000µg/mL in MeCl2]"
Run Length: 40.00 min, 23900 points at 10 points/second.
Created: Sat, Jul 9, 2016 at 1:54:53 PM.
Sampled: Sequence "070716-GC/MS", Method "GC-MS".
Analyzed using Method "GC-MS".

Comments:
GC-MS Analysis by Melissa Siciric
Column ID SPB-5 30 meter x 0.53mm x 1.5um Film Thickness.
Flow rates: Total Flow = 300 mL/min, Helium (carrier) = 0.5 mL, Helium (make-up) = 25 mL.
Hydrogen (detector) = 30 mL, Air (detector) = 300 mL, Oven Temp 1 = 50°C (1 min).
Rise = 10°C/min, Oven Temp 2 = 300°C (14 min), Total Run Time = 40 Minutes, Injector Temp = 250°C.
FID Temp = 300°C, FID Signal = aDaq Channel 1.
Gas Chromatograph = HP 5890, Auto Sampler = HP 7673, Standard Injection = 0.5 µL, Range = 4

Peak No. Name FID RT (min)

1	1,4-Dichlorobenzene-d4	8.34
2	Naphthalene-d8	8.98
3	Acenaphthene-d10	12.97
4	Phenanthrene-d10	16.37
5	Chrysene-d12	22.62
6	Perylene-d12	25.75

Printed: 5/8/2019, 12:55:50 PM

Part # 10009R Lot # 041219 1 of 2

Formulator
Reviewer

Actual
Concentration
Uncertainty
Values

Health &
Safety

3rd Party
Comparison

For More Information, Contact:

StephenArpie@AbsoluteStandards.com

Page 2 of 2



CERTIFIED WEIGHT REPORT

Part Number: **72072**
Lot Number: **101122**
Description: **n-Tetracosane-d50**

Solvent(s):
Methylene chloride
Lot#
105345


Expiration Date: **101132**
Recommended Storage: **Ambient (20 °C)**
Nominal Concentration (µg/mL): **1000**
NIST Test ID#: **6UB3**
Weight(s) shown below were combined and diluted to (mL): **200.0**
5E-05 Balance Uncertainty
0.058 Flask Uncertainty

P13437
13496
07/24/24
X.F.

Formulated By:	<i>Prashant Chauhan</i>	101122
Reviewed By:	<i>Pedro L. Rentas</i>	101122
DATE		DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity (%)	Assay (%D)	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)	LD50
----------	-----	------------	----------------------	------------	------------------------	------------	------------------	------------------	---------------------	------------------------------------	--	------

1. n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A
Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B = 250°C, Detector B = 275°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by: Candice Warren.

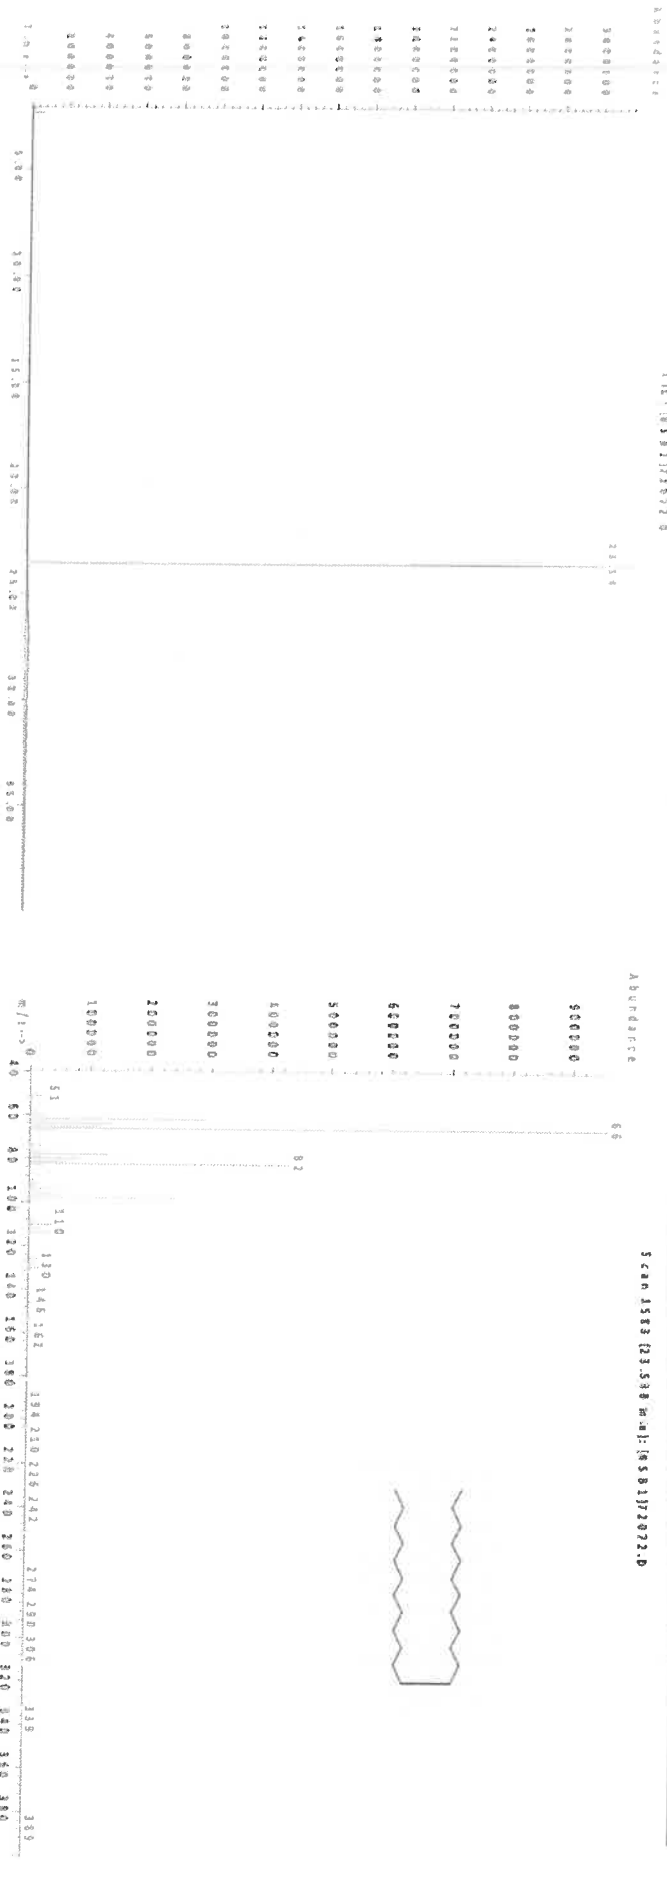

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty References: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1996).

ABSOLUTE STANDARDS, INC.

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within $\pm 0.5\%$ of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a $K = 2$ (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2



Absolute Standards, Inc. • 44 Rossotto Drive • Hamden, CT 06514
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com
Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019



ABSOLUTE STANDARDS, INC.

ISO - 17034

Understanding the Certified Weight Report

Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.

Absolute Standards, Inc.
800-368-1131
www.absolutestandards.com

Certified Reference Material CRM

ISO 17034 Accredited
Scope: http://AbsoluteStandards.com

CERTIFIED WEIGHT REPORT

Part # 10009R
Lot # 070716
Shelf Life 070716

Part Number: 10009R
Lot Number: 070716
Description: CLP Priority Pollutant Internal Standards
GC/MS Calibration - 6 components
070716
Expiration Date: Ambient (20 °C)
Recommended Storage: 4000
Nominal Concentration (µg/mL): 822-275872-11
NIST Test ID#: 5E-05 Balance Uncertainty
0.058 Mass Uncertainty

Solvent(s): Methylene chloride
Lot# 78782

Formulated By: Paul Barron
Reviewed By: Pedro L. Rentes

070716
070716

Weight(s) shown below were combined and diluted to (mL): 500.0

Compound	SMW	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight (µg)	Actual Weight (µg)	Actual Conc (µg/mL)	Expanded Uncertainty (µg/mL)	CAS#	MSDS Information (Solvent Safety Info. On Attached pg.)	OSHA PEL (TWA)	LD50
1. 1,4-Dichlorobenzene-d4	118	PR-1845M07287CB1	4000	98	0.2	2.04093	2.04335	4004.7	15.4	2055-02-1	N/A	N/A	or-rat 500mg/kg
2. Naphthalene-d8	223	PR-2339M031612HP1	4000	99	0.2	2.02032	2.02084	4001.0	15.2	1146-85-2	10 ppm (50mg/m3/8h)	N/A	or-rat 400mg/kg
3. Acenaphthene-d10	2	PR-25444	4000	99	0.2	2.02032	2.02245	4004.2	15.2	15067-28-2	N/A	N/A	or-rat 500mg/kg
4. Phenanthrene-d10	248	PR-2305M081711PM1	4000	98	0.2	2.04093	2.04135	4000.8	15.4	1517-25-2	N/A	N/A	N/A
5. Chrysene-d12	92	I-19290	4000	98	0.2	2.04093	2.04150	4001.3	15.4	1719-03-5	N/A	N/A	N/A
6. Perylene-d12	247	PR-24113	4000	98	0.2	2.04093	2.04155	4001.2	15.4	1503-58-3	N/A	N/A	N/A

Run 35, "P10009R L070716 [4000µg/mL in MeCl2]"

Run Length: 40.00 min, 23900 points at 10 points/second.
Created: Sat, Jul 9, 2016 at 1:54:53 PM.
Sampled: Sequence "070716-GC/MS", Method "GC-MS".
Analyzed using Method "GC-MS".

Comments:
GC-MS Analysis by Melissa Siciric
Column ID SPB-5 30 meter x 0.53mm x 1.5um Film Thickness.
Flow rates: Total Flow = 300 mL/min, Helium (carrier) = 0.5 mL, Helium (make-up) = 25 mL.
Hydrogen (detector) = 30 mL, Air (detector) = 300 mL, Oven Temp 1 = 50°C (1 min).
Rise = 10°C/min, Oven Temp 2 = 300°C (14 min), Total Run Time = 40 Minutes, Injector Temp = 250°C.
FID Temp = 300°C, FID Signal = sData Channel 1.
Gas Chromatograph = HP 5890, Auto Sampler = HP 7673, Standard Injection = 0.5 µL, Range = 4

Peak No. Name FID RT (min)

1	1,4-Dichlorobenzene-d4	6.34
2	Naphthalene-d8	8.98
3	Acenaphthene-d10	12.97
4	Phenanthrene-d10	16.37
5	Chrysene-d12	22.62
6	Perylene-d12	25.75

Printed: 5/8/2019, 12:55:50 PM

Formulator
Reviewer

Actual
Concentration
Uncertainty
Values

Health &
Safety

3rd Party
Comparison

For More Information, Contact:

StephenArpie@AbsoluteStandards.com

Page 2 of 2



CERTIFIED WEIGHT REPORT

Part Number: **72072**
Lot Number: **101122**
Description: **n-Tetracosane-d50**

Solvent(s):
Methylene chloride
Lot#
105345

Expiration Date: **101132**
Recommended Storage: **Ambient (20 °C)**
Nominal Concentration (µg/mL): **1000**
NIST Test ID#: **6UB3**
Weight(s) shown below were combined and diluted to (mL): **200.0**
5E-05 Balance Uncertainty
0.058 Flask Uncertainty

P13437
13436
07/24/24
X.F.

Formulated By:	<i>Prashant Chauhan</i>	101122
Reviewed By:	<i>Pedro L. Rentas</i>	101122
	Pedro L. Rentas	DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity (%)	Assay (%D)	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)	LD50
1. n-Tetracosane-d50	2072	PR-26606	1000	98.7	0.2	99.0	0.20471	0.20482	1000.6	4.1	16416-32-3	N/A

Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B = 250°C, Detector B = 275°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by: Candice Warren.



- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1996).

ABSOLUTE STANDARDS, INC.

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within $\pm 0.5\%$ of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within $\pm 5\%$ unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a $K = 2$ (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.

Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2



Absolute Standards, Inc. • 44 Rossotto Drive • Hamden, CT 06514
Voice: 800-368-1131 • Fax: 800-410-2577 • eMail: StephenArpie@AbsoluteStandards.com
Document Identification: Certificate of Analysis Rev 14, Date Issued: 05/30/2019



ABSOLUTE STANDARDS, INC.

ISO - 17034

Understanding the Certified Weight Report

Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.

Absolute Standards, Inc.
800-368-1131
www.absolutestandards.com

Certified Reference Material CRM

ISO 17034 Accredited
Scope: http://AbsoluteStandards.com

CERTIFIED WEIGHT REPORT

Part # 10009R
Lot # 070716
Shelf Life Description: CLP Priority Pollutant Internal Standards
GC/MS Calibration - 6 components
070721
Expiration Date: Ambient (20 °C)
Recommended Storage: 4000
Nominal Concentration (µg/mL): 822-275872-11
NIST Test ID#: 5E-05 Balance Uncertainty
0.058 Mass Uncertainty

Solvent(s): Methylene chloride
Lot# 78782

Formulated By: Paul Barron
Reviewed By: Pedro L. Rentes

070716
070716

Weight(s) shown below were combined and diluted to (mL): 500.0

Compound	SMW	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight (µg)	Actual Weight (µg)	Actual Conc (µg/mL)	Expanded Uncertainty (µg/mL)	CAS#	OSHA PEL (TWA)	LD50
1. 1,4-Dichlorobenzene-d4	118	PR-1845M07287CB1	4000	98	0.2	2.04093	2.04335	4004.7	15.4	2055-02-1	N/A	or-rat 500mg/kg
2. Naphthalene-d8	223	PR-2339M031612HP1	4000	99	0.2	2.02032	2.02084	4001.0	15.2	1146-85-2	10 ppm (50mg/m3/8h)	or-rat 400mg/kg
3. Acenaphthene-d10	2	PR-25444	4000	99	0.2	2.02032	2.02245	4004.2	15.2	15067-28-2	N/A	or-rat 500mg/kg
4. Phenanthrene-d10	248	PR-2305M081711PM1	4000	98	0.2	2.04093	2.04135	4000.8	15.4	1517-25-2	N/A	N/A
5. Chrysene-d12	92	I-19290	4000	98	0.2	2.04093	2.04150	4001.3	15.4	1719-03-5	N/A	N/A
6. Perylene-d12	247	PR-24113	4000	98	0.2	2.04093	2.04155	4001.2	15.4	1503-58-3	N/A	N/A

Run 35, "P10009R L070716 [4000µg/mL in MeCl2]"
Run Length: 40.00 min, 23900 points at 10 points/second.
Created: Sat, Jul 9, 2016 at 1:54:53 PM.
Sampled: Sequence "070716-GC/MS2", Method "GC-MS2".
Analyzed using Method "GC-MS2".

Comments:
GC-MS2 Analysis by Melissa Siciric
Column ID SPB-5 30 meter x 0.53mm x 1.5um Film Thickness.
Flow rates: Total Flow = 300 mL/min, Helium (carrier) = 0.5 mL, Helium (make-up) = 25 mL.
Hydrogen (detector) = 30 mL, Air (detector) = 300 mL, Oven Temp 1 = 50°C (1 min).
Rise = 10°C/min, Oven Temp 2 = 300°C (14 min). Total Run Time = 40 Minutes. Injector Temp = 250°C.
FID Temp = 300°C, FID Signal = sData Channel 1.
Gas Chromatograph = HP 5890, Auto Sampler = HP 7673, Standard Injection = 0.5 µL, Range = 4

Peak No. Name FID RT (min)

1	1,4-Dichlorobenzene-d4	8.34
2	Naphthalene-d8	8.98
3	Acenaphthene-d10	12.97
4	Phenanthrene-d10	16.37
5	Chrysene-d12	22.62
6	Perylene-d12	25.75

Printed: 5/8/2019, 12:55:50 PM

Part # 10009R Lot # 041219 1 of 2

Formulator
Reviewer

Actual
Concentration
Uncertainty
Values

Health &
Safety

3rd Party
Comparison

For More Information, Contact:

StephenArpie@AbsoluteStandards.com

Page 2 of 2



CERTIFIED WEIGHT REPORT

Part Number: **72072**
Lot Number: **101122**
Description: **n-Tetracosane-d50**

Solvent(s):
Methylene chloride
Lot#
105345


Expiration Date: **101132**
Recommended Storage: **Ambient (20 °C)**
Nominal Concentration (µg/mL): **1000**
NIST Test ID#: **6UB3**
Weight(s) shown below were combined and diluted to (mL): **200.0**
5E-05 Balance Uncertainty
0.058 Flask Uncertainty

P13437
13496
07/24/24
X.F.

Formulated By:	<i>Prashant Chauhan</i>	101122
Reviewed By:	<i>Pedro L. Rentas</i>	101122
DATE		DATE

Compound	Lot	Nominal Conc (µg/mL)	Purity (%)	Uncertainty (%)	Assay (%)	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (±) (µg/mL)	SDS Information (Solvent Safety Info. On Attached pg.)	LD50
RM#	Number									CAS#	OSHA PEL (TWA)

1. n-Tetracosane-d50 2072 PR-26606 1000 98.7 0.2 99.0 0.20471 0.20482 1000.6 4.1 16416-32-3 N/A N/A
Method GC8MSD-3.M: Column:SPB-5 (30m X 0.25mm ID X 0.25µm film thickness) Temp 1 = 50°C (1min.), Temp 2 = 300°C (9min.), Rate = 10°C/min., Injector B = 250°C, Detector B = 275°C, Split Ratio = 100:1, Scan Rate = 2. Analysis performed by: Candice Warren.

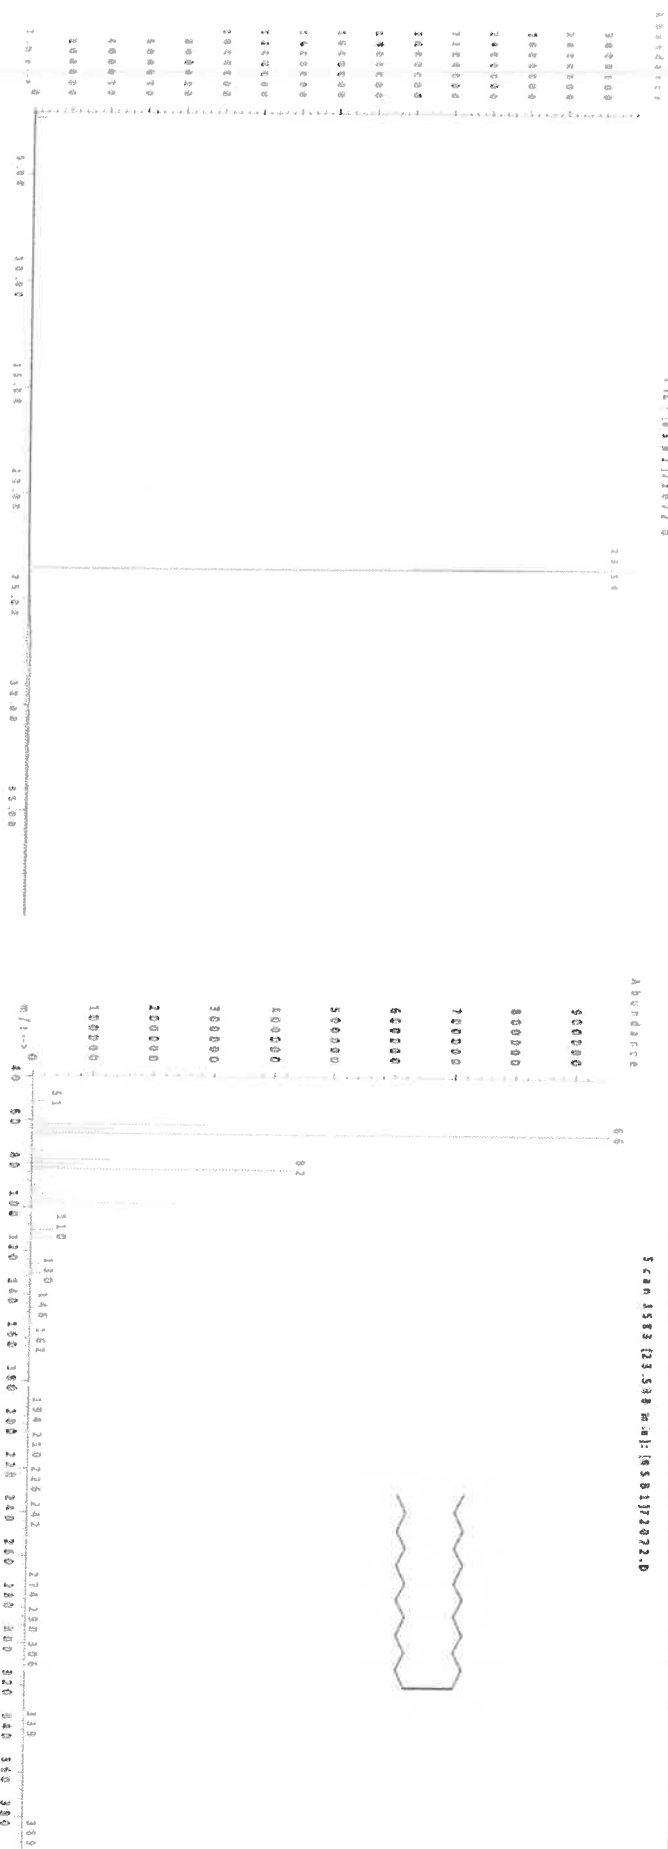

- The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
- Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
- Standards are certified (±) 0.5% of the stated value, unless otherwise stated.
- All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
- Uncertainty Reference: Taylor, B.N., and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31266

Lot No.: A0217113

Description : Florida TRPH Standard

Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : October 31, 2031

Storage: 25°C nominal

Handling: Sonicate prior to use.

Ship: Ambient

P031937
*
P031946
Y.P.
03/07/25

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBR0789	99%	502.0 µg/mL	+/- 12.9685
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	501.5 µg/mL	+/- 12.9555
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	502.5 µg/mL	+/- 12.9814
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	500.5 µg/mL	+/- 12.9297
5	n-Hexadecane (C16)	544-76-3	SHBR0669	99%	500.0 µg/mL	+/- 12.9168
6	n-Octadecane (C18)	593-45-3	UB5NG	99%	500.5 µg/mL	+/- 12.9297
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	500.0 µg/mL	+/- 12.9177
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	500.5 µg/mL	+/- 12.9297
9	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	500.5 µg/mL	+/- 12.9297
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	502.0 µg/mL	+/- 12.9685
11	n-Octacosane (C28)	630-02-4	BCCJ4566	99%	501.0 µg/mL	+/- 12.9426
12	n-Triacontane (C30)	638-68-6	MKCV7007	98%	499.8 µg/mL	+/- 12.9116
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	500.0 µg/mL	+/- 12.9168
14	n-Tetratriacontane (C34)	14167-59-0	D3MZN	99%	501.5 µg/mL	+/- 12.9555
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	500.5 µg/mL	+/- 12.9297
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	500.2 µg/mL	+/- 12.9209
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.5 µg/mL	+/- 13.0072

Solvent: Hexane
CAS # 110-54-3
Purity 99%

Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:
hydrogen-constant pressure 10 psi.

Temp. Program:
40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)


Inj. Temp:
250°C

Det. Temp:
330°C

Det. Type:
FID

Split Vent:
2 ml/min.


Inj. Vol
1µl

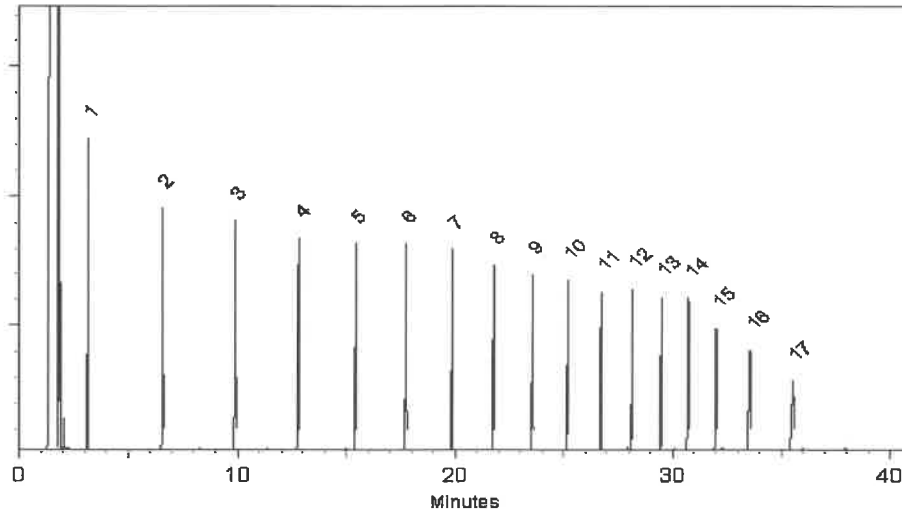

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.


Josh McCloskey - Operations Technician I

Date Mixed: 26-Sep-2024 **Balance Serial #** 1128353505


Jennifer Pollino - Operations Tech III - ARM QC

Date Passed: 10-Oct-2024

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.



110 Benner Circle
Bellefonte, PA 16823-8812
Tel: 1-814-353-1300
Fax: 1-814-353-1309

www.restek.com

CERTIFIED REFERENCE MATERIAL

Certificate of Analysis

chromatographic plus



FOR LABORATORY USE ONLY-READ SDS PRIOR TO USE.

This Reference Material is intended for Laboratory Use Only as a standard for the qualitative and/or quantitative determination of the analyte(s) listed.

Catalog No. : 31266

Lot No.: A0217113

Description : Florida TRPH Standard

Florida TRPH Standard 500µg/mL, Hexane, 1mL/ampul

Container Size : 2 mL

Pkg Amt: > 1 mL

Expiration Date : October 31, 2031

Storage: 25°C nominal

Handling: Sonicate prior to use.

Ship: Ambient

P031937
*
P031946
Y.P.
03/07/25

CERTIFIED VALUES

Elution Order	Compound	CAS #	Lot #	Purity	Grav. Conc. (weight/volume)	Expanded Uncertainty * (95% C.L.; K=2)
1	n-Octane (C8)	111-65-9	SHBR0789	99%	502.0 µg/mL	+/- 12.9685
2	n-Decane (C10)	124-18-5	SHBQ1342	99%	501.5 µg/mL	+/- 12.9555
3	n-Dodecane (C12)	112-40-3	SHBP7054	99%	502.5 µg/mL	+/- 12.9814
4	n-Tetradecane (C14)	629-59-4	STBL0465	99%	500.5 µg/mL	+/- 12.9297
5	n-Hexadecane (C16)	544-76-3	SHBR0669	99%	500.0 µg/mL	+/- 12.9168
6	n-Octadecane (C18)	593-45-3	UB5NG	99%	500.5 µg/mL	+/- 12.9297
7	n-Eicosane (C20)	112-95-8	MKCN8767	97%	500.0 µg/mL	+/- 12.9177
8	n-Docosane (C22)	629-97-0	MKCQ3882	99%	500.5 µg/mL	+/- 12.9297
9	n-Tetracosane (C24)	646-31-1	MKCS9978	99%	500.5 µg/mL	+/- 12.9297
10	n-Hexacosane (C26)	630-01-3	MKCQ4814	99%	502.0 µg/mL	+/- 12.9685
11	n-Octacosane (C28)	630-02-4	BCCJ4566	99%	501.0 µg/mL	+/- 12.9426
12	n-Triacontane (C30)	638-68-6	MKCV7007	98%	499.8 µg/mL	+/- 12.9116
13	n-Dotriacontane (C32)	544-85-4	BCBW0661	99%	500.0 µg/mL	+/- 12.9168
14	n-Tetratriacontane (C34)	14167-59-0	D3MZN	99%	501.5 µg/mL	+/- 12.9555
15	n-Hexatriacontane (C36)	630-06-8	Z27H018	99%	500.5 µg/mL	+/- 12.9297
16	n-Octatriacontane (C38)	7194-85-6	0000145137	96%	500.2 µg/mL	+/- 12.9209
17	n-Tetracontane (C40)	4181-95-7	OKEGA	99%	503.5 µg/mL	+/- 13.0072

Solvent: Hexane
CAS # 110-54-3
Purity 99%

Quality Confirmation Test

Column:
30m x 0.25mm x 0.25µm
Rtx-5 (cat.#10223)

Carrier Gas:
hydrogen-constant pressure 10 psi.

Temp. Program:
40°C (hold 2 min.) to 330°C
@ 10°C/min. (hold 10 min.)


Inj. Temp:
250°C

Det. Temp:
330°C

Det. Type:
FID

Split Vent:
2 ml/min.


Inj. Vol
1µl

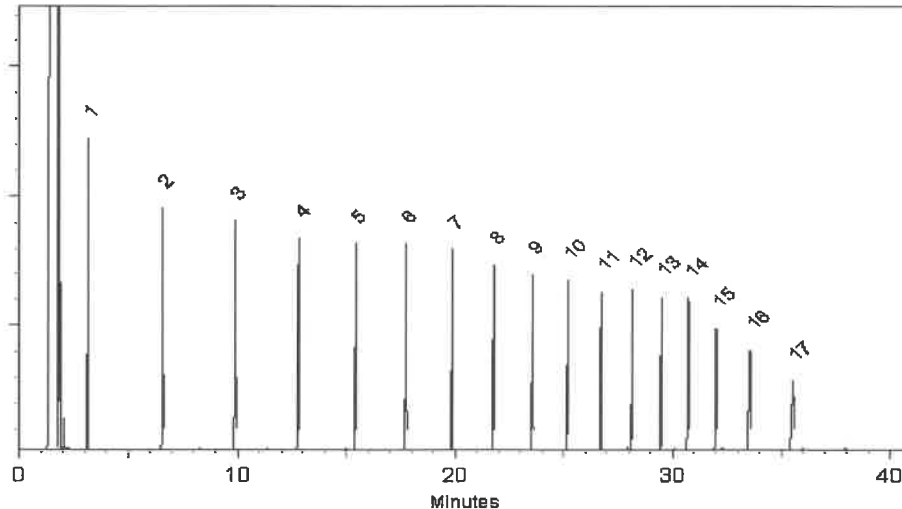

This chromatogram represents a general set of testing conditions chosen for product acceptance. For optimal results in your lab, conditions should be adjusted for your specific instrument, method, and application.


Josh McCloskey - Operations Technician I

Date Mixed: 26-Sep-2024 **Balance Serial #** 1128353505


Jennifer Pollino - Operations Tech III - ARM QC

Date Passed: 10-Oct-2024

Manufactured under Restek's ISO 9001:2015
Registered Quality System
Certificate #FM 80397

General Certified Reference Material Notes

Expiration Notes:

- Expiration date valid for unopened ampul stored in compliance with the recommended conditions.
- Uncertainty, concentration, and expiration of the CRM are based on the unopened product being stored according to the recommended condition found in the storage field.

Purity Notes:

- Purity and/or chemical identity are determined by one or more of the following techniques: GC/FID, HPLC, GC/ μ ECD, GC/MS, LC/MS, RI, and/or melting point.
- Compounds with a listed purity of less than 99% have been weight corrected to compensate for impurities and/or salts. A correction factor is used to calculate the amount of compound necessary to achieve the desired concentration of the parent compound in solution.
- Purity of isomeric compounds is reported as the sum of the isomers.
- Purity values are rounded to the nearest whole number.

Certified Uncertainty Value Notes:

- The uncertainties are determined in accordance with ISO 17034 and Guide 35. The certified expanded uncertainty value includes gravimetric uncertainty, homogeneity between-ampul uncertainty, storage stability uncertainty and shipping stability uncertainty and were combined using the following formula:

$$U_{combined\ uncertainty} = k \sqrt{u_{gravimetric}^2 + u_{homogeneity}^2 + u_{storage\ stability}^2 + u_{shipping\ stability}^2}$$

k is a coverage factor of 2, which gives a level of confidence of approximately 95%.

- The packaged amount is the minimum sample size for which uncertainty is valid. The ampuls are over-filled to ensure that the minimum packaged amount can be sufficiently transferred.

Manufacturing Notes:

- Concentration is based upon gravimetric preparation using either a balance whose calibration has been verified daily using NIST traceable weights, and/or dilutions with Class A glassware.

Handling Notes:

- Stability of the unopened product, when stored in compliance with the recommended conditions, is guaranteed through the expiration displayed on the product label and certificate. Contact Restek for additional opened product stability information, with the knowledge/understanding that open product stability is subject to the specific handling and environmental conditions to which the product is exposed. For your convenience Restek supplies deactivated vials with most standards packed in 2mL ampuls. Larger volume deactivated vials are available through Restek as a custom ordered item. Additionally, Restek sells DMDCS for the purpose of glassware deactivation as catalog number 31861, which includes complete instructions.
- If any undissolved material is visible inside the ampul, sonicate the unopened ampul until the material is completely dissolved.

